

Sentence-Task Similarity Evaluation between Texts and Models

* ~~Gibt eine erforderliche Frage an~~

Purpose of this study

This survey collects judgements on how well individual sentences from process descriptions correspond to individual tasks in BPMN models. Your ratings will serve as the ground truth data for creating and evaluating automated Model2Text similarity methods.

The survey is completely anonymous, and no personally identifiable information will be collected or stored. No Google sign-in or other account registration is required to participate.

Assignment

For each sentence-task pair, assign a whole-number score from 0 to 5 indicating how similar the sentences and tasks are.

0

not similar

1

very weak
similarity

2

weak similarity

3

moderate
similarity

4

strong similarity

5

very strong
similarity

General Information for the Survey



What this survey is

- Rating the *degree* of similarity between a sentence and a task element
- A graded, continuous judgement using the full 0 to 5 scale
- An individual assessment of each task, for every sentence



What this survey is not

- Not about process logic or the order of tasks in the model
- Not a binary "match / no match" decision
- Not about picking the single best-matching task per sentence

Why the full scale matters

Text similarity is rarely binary. Except in cases of complete overlap, a sentence and a task will almost always fall somewhere in between. Using only the extreme values (0 or 5) discards meaningful rankings that are essential for the Model2Text similarity methods. Please use the full scale as precisely as possible and re-read each task carefully before assigning your score, even if a sentence appears straightforward.

To help you rate consistently, some examples and their explanations are listed below. Please read them carefully before beginning the ratings.

Example	Explanation	Similarity
<u>Sentence:</u> A specialist evaluates whether the claim is legitimate. <u>Task:</u> Assess Claim	– "evaluates" and "Assess" are synonyms – "claim" is syntactically identical and used in the same context	high
<u>Sentence:</u> The system sends a confirmation to the customer. <u>Task:</u> Notify Applicant	– Both imply a notification, but the person receiving it and the exact action are slightly different	medium
<u>Sentence:</u> The invoice is archived after payment. <u>Task:</u> Schedule Interview	– completely different activities	low

Note

The sentences and tasks are drawn from an established dataset and may contain names or abbreviations that are not immediately transparent. These are not that important for your task. So, if you encounter an unfamiliar term, please treat it as a generic placeholder.


Please rate how similar each Task of the BPMN model is to the given Sentence, using a scale of 0 (not similar) to 5 (very strong similarity).

Model 1 (Overview):

Sentence 1: The INQ transmits the transaction data request to the IP.

Sentence 2: The IP checks the request of the INQ.

Sentence 3: The IP answers the question of the INQ depending on the outcome of the examination, i.e. Transmission of data or rejection.

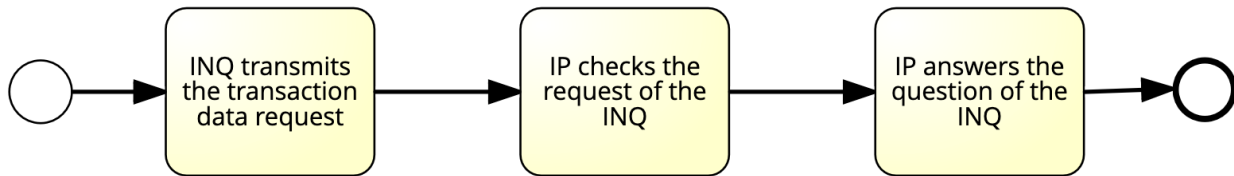

1. **Sentence 1:** the inq transmits the transaction data request to the ip *

Markieren Sie nur ein Oval pro Zeile.

	0	1	2	3	4	5
inq transmits the transaction data request	☐	☐	☐	☐	☐	☐
ip checks the request of the inq	☐	☐	☐	☐	☐	☐
ip answers the question of the inq	☐	☐	☐	☐	☐	☐

2. **Sentence 2:** the ip checks the request of the inq *

Markieren Sie nur ein Oval pro Zeile.

	0	1	2	3	4	5
inq transmits the transaction data request	☐	☐	☐	☐	☐	☐
ip checks the request of the inq	☐	☐	☐	☐	☐	☐
ip answers the question of the inq	☐	☐	☐	☐	☐	☐

3. **Sentence 3:** the ip answers the question of the inq depending on the outcome of the examination, i.e. transmission of data or rejection *

Markieren Sie nur ein Oval pro Zeile.

	0	1	2	3	4	5
inq transmits the transaction data request	☐	☐	☐	☐	☐	☐
ip checks the request of the inq	☐	☐	☐	☐	☐	☐
ip answers the question of the inq	☐	☐	☐	☐	☐	☐

Please rate how similar each Task of the BPMN model is to the given Sentence, using a scale of 0 (not similar) to 5 (very strong similarity).


Model 2 (Overview):

Sentence 1: A customer submits a complaint through the support portal.

Sentence 2: The support team then investigates the problem.

Sentence 3: If the issue is straightforward, an answer is transmitted to the customer rapidly.

Sentence 4: In complex cases, the managers hold a meeting first, and the specialists subsequently fix the problem.

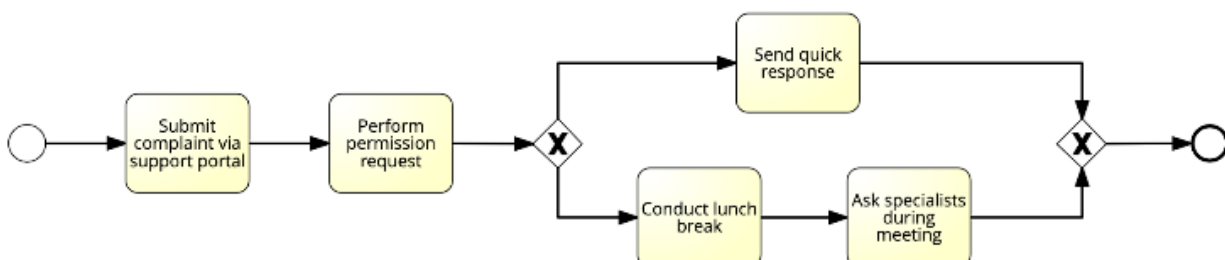

4. **Sentence 1:** a customer submits a complaint through the support portal *

Markieren Sie nur ein Oval pro Zeile.

	0	1	2	3	4	5
submit complaint via support portal	☐	☐	☐	☐	☐	☐
perform permission request	☐	☐	☐	☐	☐	☐
send quick response	☐	☐	☐	☐	☐	☐
conduct lunch break	☐	☐	☐	☐	☐	☐
ask specialists during meeting	☐	☐	☐	☐	☐	☐

5. **Sentence 2:** the support team then investigates the problem *

Markieren Sie nur ein Oval pro Zeile.

	0	1	2	3	4	5
submit complaint via support portal	☐	☐	☐	☐	☐	☐
perform permission request	☐	☐	☐	☐	☐	☐
send quick response	☐	☐	☐	☐	☐	☐
conduct lunch break	☐	☐	☐	☐	☐	☐
ask specialists during meeting	☐	☐	☐	☐	☐	☐

6. **Sentence 3:** if the issue is straightforward, an answer is transmitted to the customer rapidly

*

Markieren Sie nur ein Oval pro Zeile.

	0	1	2	3	4	5
submit complaint via support portal	☐	☐	☐	☐	☐	☐
perform permission request	☐	☐	☐	☐	☐	☐
send quick response	☐	☐	☐	☐	☐	☐
conduct lunch break	☐	☐	☐	☐	☐	☐
ask specialists during meeting	☐	☐	☐	☐	☐	☐

7. **Sentence 4:** in complex cases, the managers hold a meeting first, and the specialists subsequently fix the problem

*

Markieren Sie nur ein Oval pro Zeile.

	0	1	2	3	4	5
submit complaint via support portal	☐	☐	☐	☐	☐	☐
perform permission request	☐	☐	☐	☐	☐	☐
send quick response	☐	☐	☐	☐	☐	☐
conduct lunch break	☐	☐	☐	☐	☐	☐
ask specialists during meeting	☐	☐	☐	☐	☐	☐

Thank you for your participation!

Dieser Inhalt wurde nicht von Google erstellt und wird von Google auch nicht unterstützt.

Google

