




## 1. Зайдите в Профиль -> Настройки (Settings)

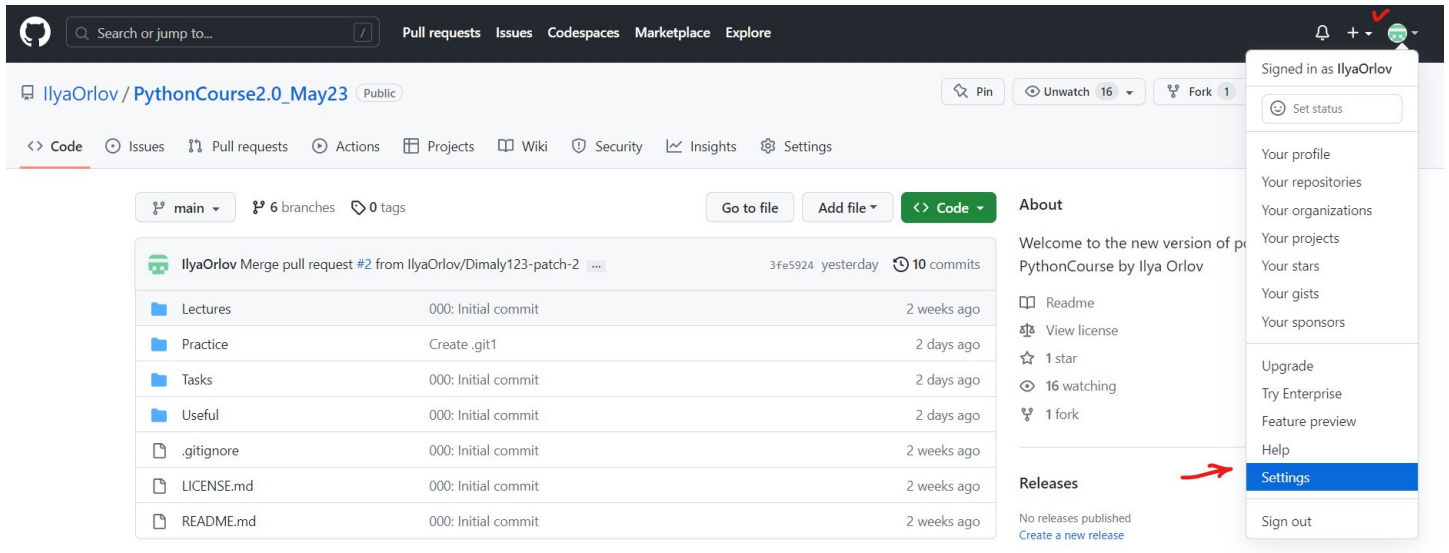

## 2. Внизу слева (надо прокрутить экран вниз) найдите настройки разработчика (Developer settings) и перейдите в них.

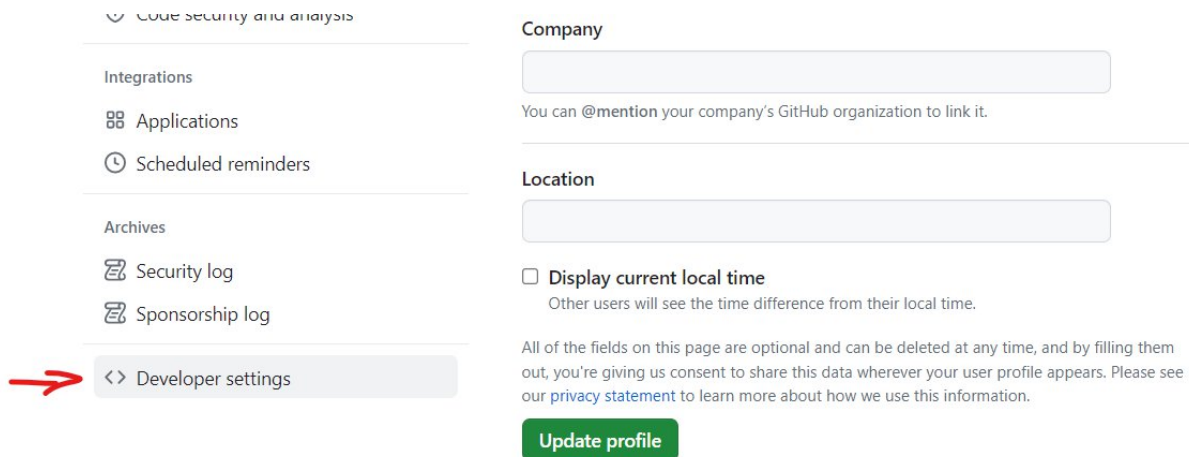


## 3. Перейдите в Personal access tokens -> Tokens (classic).

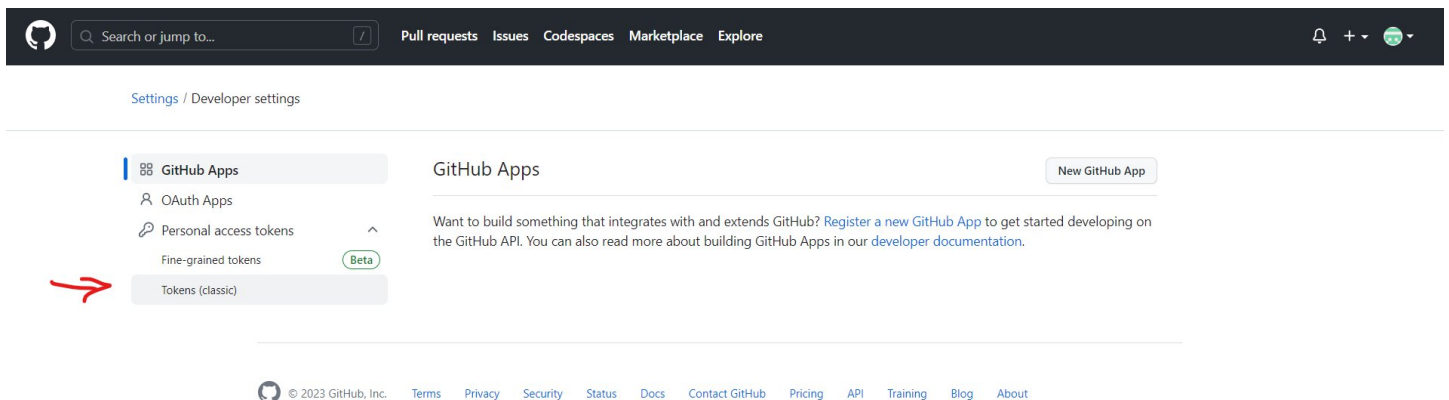


4. Нажмите кнопку Generate new token -> Generate new token (classic).

Settings / Developer settings

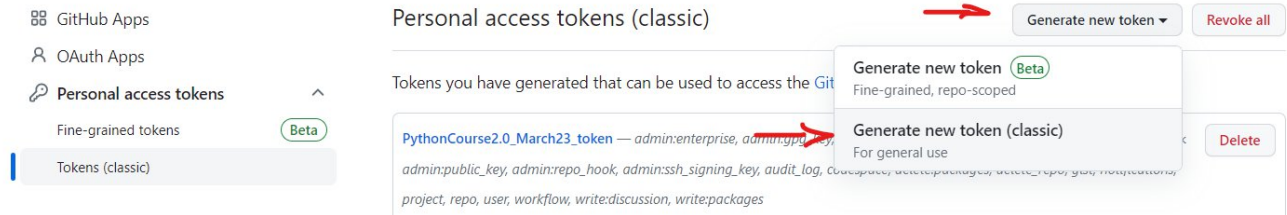

5. Придумайте название токена и запишите его (на английском) в поле Note, укажите Expiration — No expiration (либо конечный срок, но не меньше 90 дней) и проставьте галочки во всех полях ниже.

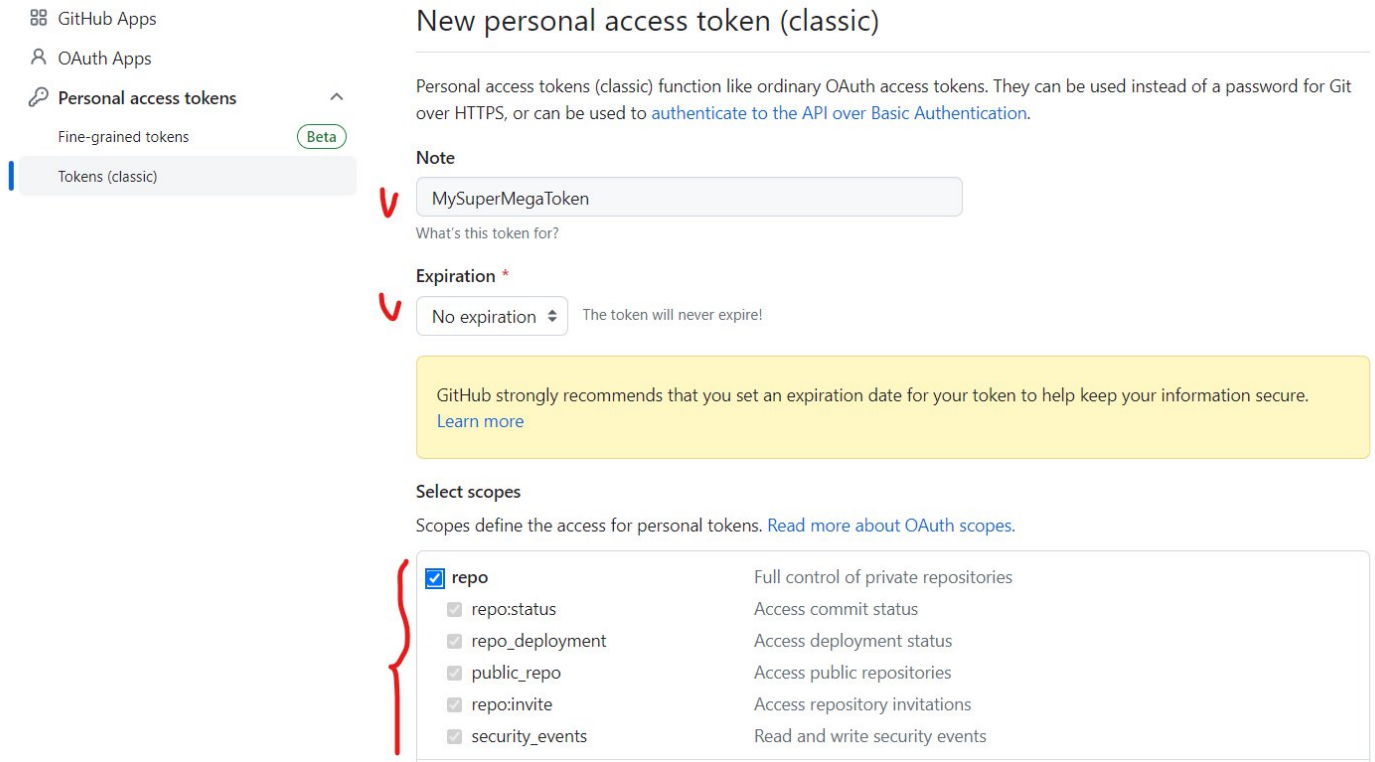

6. Нажмите кнопку Generate token.

<input checked="" type="checkbox"/> <b>admin:enterprise</b>	Full control of enterprises
<input checked="" type="checkbox"/> manage_runners:enterprise	Manage enterprise runners and runner groups
<input checked="" type="checkbox"/> manage_billing:enterprise	Read and write enterprise billing data
<input checked="" type="checkbox"/> read:enterprise	Read enterprise profile data
<input checked="" type="checkbox"/> <b>audit_log</b>	Full control of audit log
<input checked="" type="checkbox"/> read:audit_log	Read access of audit log
<input checked="" type="checkbox"/> <b>codespace</b>	Full control of codespaces
<input checked="" type="checkbox"/> codespace:secrets	Ability to create, read, update, and delete codespace secrets
<input checked="" type="checkbox"/> <b>project</b>	Full control of projects
<input checked="" type="checkbox"/> read:project	Read access of projects
<input checked="" type="checkbox"/> <b>admin:pgp_key</b>	Full control of public user GPG keys
<input checked="" type="checkbox"/> write:pgp_key	Write public user GPG keys
<input checked="" type="checkbox"/> read:pgp_key	Read public user GPG keys
<input checked="" type="checkbox"/> <b>admin:ssh_signing_key</b>	Full control of public user SSH signing keys
<input checked="" type="checkbox"/> write:ssh_signing_key	Write public user SSH signing keys
<input checked="" type="checkbox"/> read:ssh_signing_key	Read public user SSH signing keys

**Generate token** Cancel

7. Скопируйте токен и вставьте по месту требования (в Git Bash или PyCharm).

Settings / Developer settings

GitHub Apps

OAuth Apps

Personal access tokens

Fine-grained tokens Beta

Tokens (classic)

Personal access tokens (classic)

Generate new token ▼ Revoke all

Tokens you have generated that can be used to access the GitHub API.

Make sure to copy your personal access token now. You won't be able to see it again!

✓ ghp\_k9lGcGa7YMsBkH9DpwV8CR1WM89wKF1Gg366

Delete