

pgAdmin 4

File Object Tools Edit View Window Help

Welcome uni/postgres@PostgreSQL 17 X

uni/postgres@PostgreSQL 17

Query Query History

```
CREATE OR REPLACE PROCEDURE insert_flight(
    p_flight_id INT,
    p_sch_departure_time TIMESTAMP,
    p_sch_arrival_time TIMESTAMP,
    p_departing_airport_id INT,
    p_arriving_airport_id INT,
    p_departing_gate TEXT,
    p_arriving_gate VARCHAR(50),
    p_airline_id INT,
    p_act_departure_time TIMESTAMP DEFAULT NULL,
    p_act_arrival_time TIMESTAMP DEFAULT NULL
)
LANGUAGE plpgsql
AS $$
BEGIN
    INSERT INTO flights(
        flight_id,
        sch_departure_time,
        sch_arrival_time,
        departing_airport_id,
        arriving_airport_id,
        departing_gate,
        arriving_gate,
        airline_id,
        act_departure_time,
        act_arrival_time
    )
    VALUES (
        p_flight_id,
        p_sch_departure_time,
        p_sch_arrival_time,
        p_departing_airport_id,
        p_arriving_airport_id,
        p_departing_gate,
        p_arriving_gate,
        p_airline_id,
        p_act_departure_time,
        p_act_arrival_time
    );
END;
```

Data Output Messages Notifications

CREATE PROCEDURE

Query returned successfully in 36 msec.

Total rows: Query complete 00:00:00.036

8°C Partly cloudy

Полиск

pgAdmin 4

File Object Tools Edit View Window Help

Welcome uni/postgres@PostgreSQL 17 X

uni/postgres@PostgreSQL 17

Query Query History

Query returned successfully in 36 msec. X

CRLF

28.11.2025

pgAdmin 4

File Object Tools Edit View Window Help

Welcome uni/postgres@PostgreSQL 17 X

uni/postgres@PostgreSQL 17

Query Query History

```
);
);

CREATE OR REPLACE PROCEDURE update_flight_times(
    p_flight_id INT,
    p_act_departure_time TIMESTAMP DEFAULT NULL,
    p_act_arrival_time TIMESTAMP DEFAULT NULL
)
LANGUAGE plpgsql
AS $$
BEGIN
    UPDATE flights
    SET
        act_departure_time = COALESCE(p_act_departure_time, act_departure_time),
        act_arrival_time = COALESCE(p_act_arrival_time, act_arrival_time),
        updated_at = NOW()
    WHERE flight_id = p_flight_id;
END;
$$;
CALL update_flight_times(1001, '2025-12-01 10:25', NULL);--vilet
CALL update_flight_times(1001, NULL, '2025-12-01 12:40');

CREATE OR REPLACE FUNCTION flights1_from_airport(
```

Data Output Messages Notifications

CREATE PROCEDURE

Query returned successfully in 27 msec.

Total rows: Query complete 00:00:00.027

8°C Partly cloudy

Полиск

pgAdmin 4

File Object Tools Edit View Window Help

Welcome uni/postgres@PostgreSQL 17 X


uni/postgres@PostgreSQL 17

Query Query History

Query returned successfully in 27 msec. X

CRLF Ln 60

28.11.2025

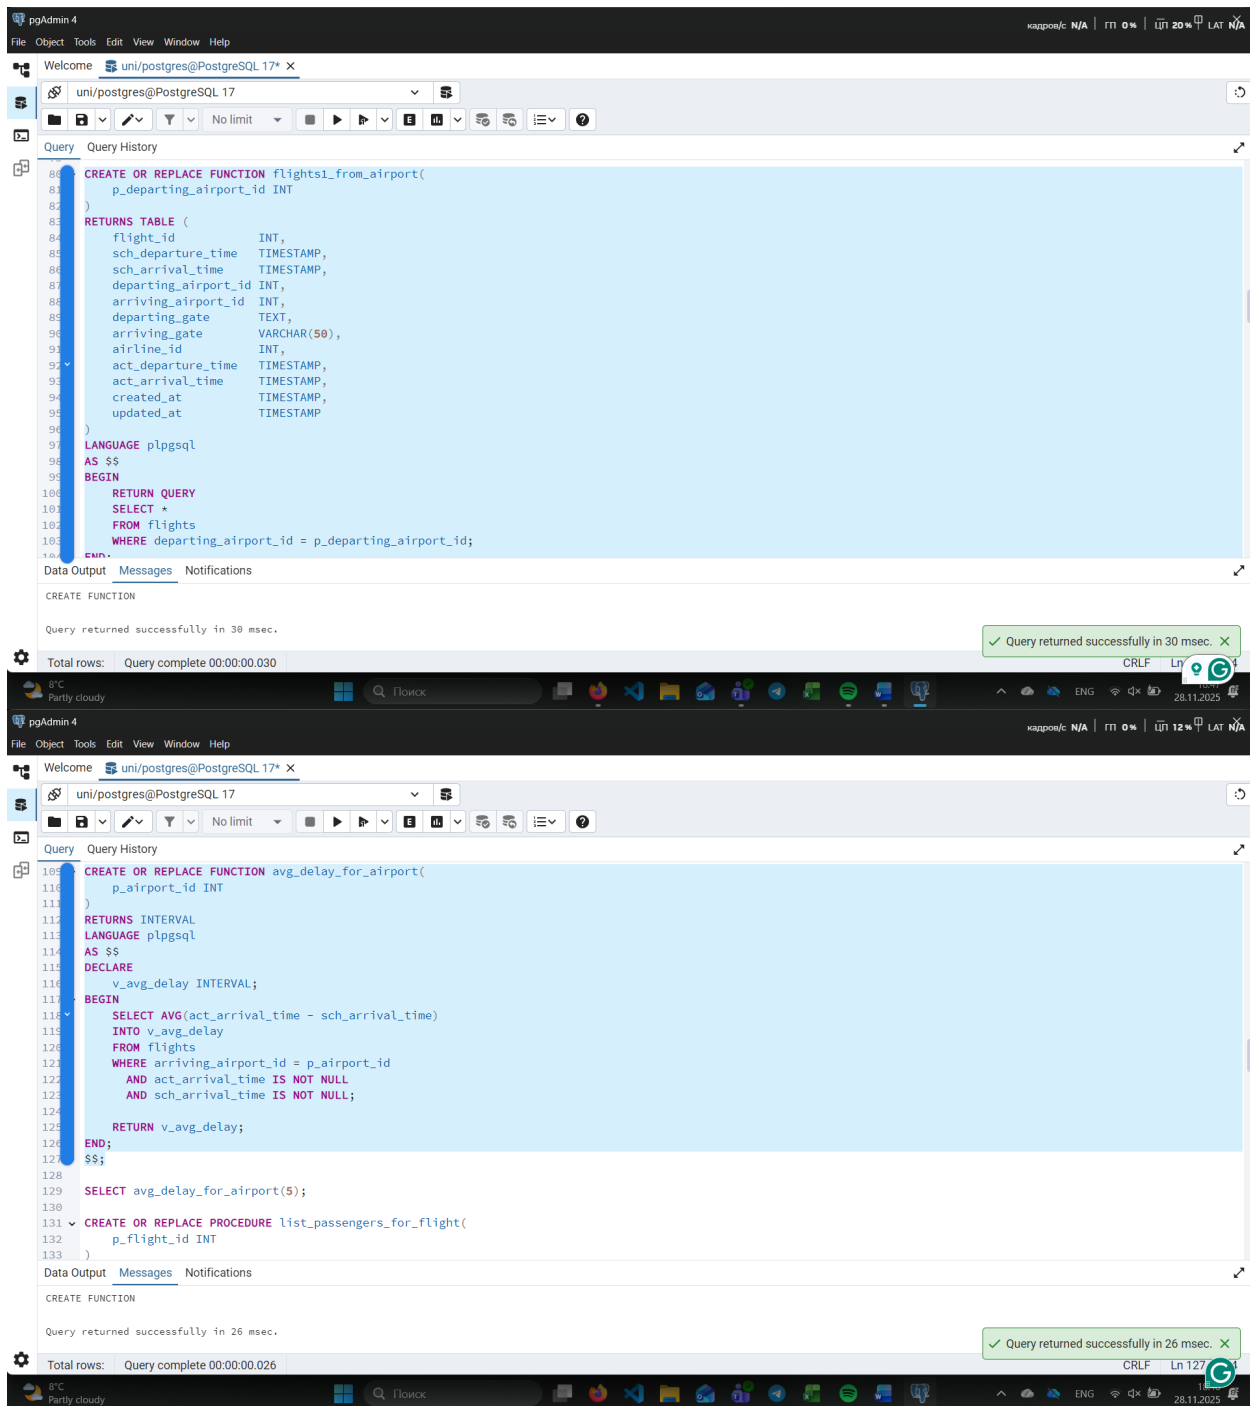

pgAdmin 4

Welcome uni/postgres@PostgreSQL 17* X

uni/postgres@PostgreSQL 17

Query Query History

```
128 SELECT avg_delay_for_airport(5);
129
130
131 CREATE OR REPLACE PROCEDURE list_passengers_for_flight(
132     p_flight_id INT
133 )
134 LANGUAGE plpgsql
135 AS $$
136 BEGIN
137     SELECT p.*
138     FROM passengers p
139     JOIN booking b
140         ON b.passenger_id = p.passenger_id
141     JOIN booking_flight bf
142         ON bf.booking_id = b.booking_id
143     WHERE bf.flight_id = p_flight_id;
144 END;
145 $$;
146
147 CALL list_passengers_for_flight(1001);
148
149
150 CREATE OR REPLACE PROCEDURE top_passenger_by_flights()
151 LANGUAGE plpgsql
152 AS $$
```

Data Output Messages Notifications

CREATE PROCEDURE

Query returned successfully in 28 msec.

✓ Query returned successfully in 28 msec. X

Total rows: Query complete 00:00:00.028 CRLF Ln 145

8°C Partly cloudy Поиск

pgAdmin 4

Welcome uni/postgres@PostgreSQL 17* X

uni/postgres@PostgreSQL 17

Query Query History

```
147 CALL list_passengers_for_flight(1001);
148
149
150 CREATE OR REPLACE PROCEDURE top_passenger_by_flights()
151 LANGUAGE plpgsql
152 AS $$
153 BEGIN
154     SELECT p.passenger_id,
155            p.first_name,
156            p.last_name,
157            COUNT(bf.flight_id) AS flights_taken
158     FROM passengers p
159     JOIN booking b
160         ON b.passenger_id = p.passenger_id
161     JOIN booking_flight bf
162         ON bf.booking_id = b.booking_id
163     GROUP BY p.passenger_id, p.first_name, p.last_name
164     ORDER BY flights_taken DESC
165     LIMIT 1;
166 END;
167 $$;
168
169 CALL top_passenger_by_flights();
170
171
```

Data Output Messages Notifications

CREATE PROCEDURE

Query returned successfully in 40 msec.

✓ Query returned successfully in 40 msec. X

Total rows: Query complete 00:00:00.040 CRLF Ln 168

8°C Partly cloudy Поиск

pgAdmin 4

Welcome uni/postgres@PostgreSQL 17* X

uni/postgres@PostgreSQL 17

Query Query History

pgAdmin 4

File Object Tools Edit View Window Help

Welcome uni/postgres@PostgreSQL 17* X

uni/postgres@PostgreSQL 17

Query Query History

```
171 CREATE OR REPLACE PROCEDURE flights_delayed_more_than_24h()
172 LANGUAGE plpgsql
173 AS $$
174 BEGIN
175     SELECT *
176     FROM flights
177     WHERE act_departure_time IS NOT NULL
178           AND sch_departure_time IS NOT NULL
179           AND act_departure_time - sch_departure_time > INTERVAL '24 hours';
180 END;
181 $$;
182
183 CALL flights_delayed_more_than_24h();
184
185 CREATE OR REPLACE FUNCTION count_flights_for_each_airline()
186 RETURNS TABLE (
187     airline_id INT,
188     flights_count BIGINT
189 )
190 LANGUAGE plpgsql
191 AS $$
192 BEGIN
193     RETURN QUERY
194     Data Output Messages Notifications
195     CREATE PROCEDURE
196
197     Query returned successfully in 27 msec.
```

Total rows: Query complete 00:00:00.027

8°C Partly cloudy

pgAdmin 4

File Object Tools Edit View Window Help

Welcome uni/postgres@PostgreSQL 17* X

uni/postgres@PostgreSQL 17

Query Query History

```
182 $$;
183
184 CALL flights_delayed_more_than_24h();
185
186 CREATE OR REPLACE FUNCTION count_flights_for_each_airline()
187 RETURNS TABLE (
188     airline_id INT,
189     flights_count BIGINT
190 )
191 LANGUAGE plpgsql
192 AS $$
193 BEGIN
194     RETURN QUERY
195     SELECT airline_id,
196           COUNT(*) AS flights_count
197     FROM flights
198     GROUP BY airline_id;
199 END;
200 $$;
201
202 select * from count_flights_for_each_airline();
203
204 CREATE OR REPLACE PROCEDURE avg_ticket_price_for_flight(
205
206     Data Output Messages Notifications
207     CREATE FUNCTION
208
209     Query returned successfully in 29 msec.
```

Total rows: Query complete 00:00:00.029

8°C Partly cloudy

pgAdmin 4

File Object Tools Edit View Window Help

Welcome uni/postgres@PostgreSQL 17* X

uni/postgres@PostgreSQL 17

Query Query History

```
182 $$;
183
184 CALL flights_delayed_more_than_24h();
185
186 CREATE OR REPLACE FUNCTION count_flights_for_each_airline()
187 RETURNS TABLE (
188     airline_id INT,
189     flights_count BIGINT
190 )
191 LANGUAGE plpgsql
192 AS $$
193 BEGIN
194     RETURN QUERY
195     SELECT airline_id,
196           COUNT(*) AS flights_count
197     FROM flights
198     GROUP BY airline_id;
199 END;
200 $$;
201
202 select * from count_flights_for_each_airline();
203
204 CREATE OR REPLACE PROCEDURE avg_ticket_price_for_flight(
205
206     Data Output Messages Notifications
207     CREATE FUNCTION
208
209     Query returned successfully in 29 msec.
```

Total rows: Query complete 00:00:00.029

8°C Partly cloudy

pgAdmin 4

File Object Tools Edit View Window Help

Welcome uni/postgres@PostgreSQL 17* X

uni/postgres@PostgreSQL 17

Query Query History

```
182 $$;
183
184 CALL flights_delayed_more_than_24h();
185
186 CREATE OR REPLACE FUNCTION count_flights_for_each_airline()
187 RETURNS TABLE (
188     airline_id INT,
189     flights_count BIGINT
190 )
191 LANGUAGE plpgsql
192 AS $$
193 BEGIN
194     RETURN QUERY
195     SELECT airline_id,
196           COUNT(*) AS flights_count
197     FROM flights
198     GROUP BY airline_id;
199 END;
200 $$;
201
202 select * from count_flights_for_each_airline();
203
204 CREATE OR REPLACE PROCEDURE avg_ticket_price_for_flight(
205
206     Data Output Messages Notifications
207     CREATE FUNCTION
208
209     Query returned successfully in 29 msec.
```

Total rows: Query complete 00:00:00.029

8°C Partly cloudy

pgAdmin 4 | Welcome | uni/postgres@PostgreSQL 17* X

uni/postgres@PostgreSQL 17

Query Query History

```
200 END;
201 $$;
202
203 select * from count_flights_for_each_airline();
204
205
206 CREATE OR REPLACE PROCEDURE avg_ticket_price_for_flight(
207     p_flight_id INT
208 )
209 LANGUAGE plpgsql
210 AS $$
211 BEGIN
212     SELECT bf.flight_id,
213            AVG(b.ticket_price) AS avg_ticket_price
214     FROM booking_flight bf
215     JOIN booking b
216     ON b.booking_id = bf.booking_id
217     WHERE bf.flight_id = p_flight_id
218     GROUP BY bf.flight_id;
219 END;
220 $$;
221
222 CALL avg_ticket_price_for_flight(1001);
223
```

Data Output Messages Notifications

CREATE PROCEDURE

Query returned successfully in 39 msec.

Total rows: Query complete 00:00:00.039

Query returned successfully in 39 msec. X

pgAdmin 4 | Welcome | uni/postgres@PostgreSQL 17* X

uni/postgres@PostgreSQL 17

Query Query History

```
223
224
225
226 CREATE OR REPLACE PROCEDURE most_expensive_flight()
227 LANGUAGE plpgsql
228 AS $$
229 BEGIN
230     SELECT f.flight_id,
231            f.departing_airport_id,
232            f.arriving_airport_id,
233            MAX(b.ticket_price) AS max_ticket_price
234     FROM flights f
235     JOIN booking_flight bf
236     ON bf.flight_id = f.flight_id
237     JOIN booking b
238     ON b.booking_id = bf.booking_id
239     GROUP BY f.flight_id, f.departing_airport_id, f.arriving_airport_id
240     ORDER BY max_ticket_price DESC
241     LIMIT 1;
242 END;
243 $$;
244
245 CALL most_expensive_flight();
246
247
```

Data Output Messages Notifications

CREATE PROCEDURE

Query returned successfully in 29 msec.

Total rows: Query complete 00:00:00.029

Query returned successfully in 29 msec. X