


Chat

Recall the overall workflow for retrieval augmented generation (RAG):

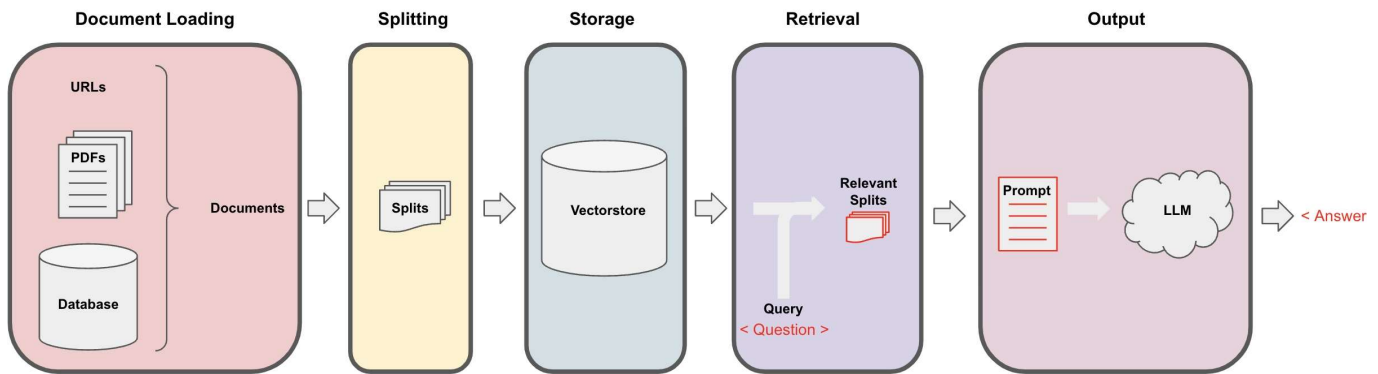

We discussed Document Loading and Splitting as well as Storage and Retrieval .

We then showed how Retrieval can be used for output generation in Q+A using RetrievalQA chain.

```

In [18]: import os
import openai
import sys
sys.path.append('../..')

import panel as pn # GUI
pn.extension()

from dotenv import load_dotenv, find_dotenv
_ = load_dotenv(find_dotenv()) # read local .env file

openai.api_key = os.environ['OPENAI_API_KEY']
  
```

The code below was added to assign the openai LLM version filmed until it is deprecated, currently in Sept 2023. LLM responses can often vary, but the responses may be significantly different when using a different model version.

```

In [19]: import datetime
current_date = datetime.datetime.now().date()
if current_date < datetime.date(2023, 9, 2):
    llm_name = "gpt-3.5-turbo-0301"
else:
    llm_name = "gpt-3.5-turbo"
print(llm_name)
  
```

gpt-3.5-turbo-0301

If you wish to experiment on LangChain plus platform :

- Go to [langchain plus platform \(https://www.langchain.plus/\)](https://www.langchain.plus/) and sign up
- Create an api key from your account's settings
- Use this api key in the code below

```
In [20]: #import os
#os.environ["LANGCHAIN_TRACING_V2"] = "true"
#os.environ["LANGCHAIN_ENDPOINT"] = "https://api.langchain.plus"
#os.environ["LANGCHAIN_API_KEY"] = "..."
```

```
In [21]: from langchain.vectorstores import Chroma
from langchain.embeddings.openai import OpenAIEmbeddings
persist_directory = 'docs/chroma/'
embedding = OpenAIEmbeddings()
vectordb = Chroma(persist_directory=persist_directory, embedding_function=e
```

```
In [22]: question = "What are major topics for this class?"
docs = vectordb.similarity_search(question,k=3)
len(docs)
```

3

```
In [23]: from langchain.chat_models import ChatOpenAI
llm = ChatOpenAI(model_name=llm_name, temperature=0)
llm.predict("Hello world!")
```

'Hello there! How can I assist you today?'

```
In [24]: # Build prompt
from langchain.prompts import PromptTemplate
template = """Use the following pieces of context to answer the question at
{context}
Question: {question}
Helpful Answer: """
QA_CHAIN_PROMPT = PromptTemplate(input_variables=["context", "question"], te

# Run chain
from langchain.chains import RetrievalQA
question = "Is probability a class topic?"
qa_chain = RetrievalQA.from_chain_type(llm,
                                      retriever=vectordb.as_retriever(),
                                      return_source_documents=True,
                                      chain_type_kwargs={"prompt": QA_CHAI

result = qa_chain({"query": question})
result["result"]
```

'Yes, probability is assumed to be a prerequisite for this class. The instructor assumes familiarity with basic probability and statistics, and will go over some of the prerequisites in the discussion sections as a refresher course. Thanks for asking!'

Memory

```
In [25]: from langchain.memory import ConversationBufferMemory
memory = ConversationBufferMemory(
    memory_key="chat_history",
    return_messages=True
)
```

ConversationalRetrievalChain

```
In [26]: from langchain.chains import ConversationalRetrievalChain
retriever=vectordb.as_retriever()
qa = ConversationalRetrievalChain.from_llm(
    llm,
    retriever=retriever,
    memory=memory
)
```

```
In [27]: question = "Is probability a class topic?"
result = qa({"question": question})
```

```
In [28]: result['answer']
```

'Yes, probability is a topic that will be assumed to be familiar to students in this class. The instructor assumes that students have a basic understanding of probability and statistics, and will go over some of the prerequisites as a refresher course in the discussion sections.'

```
In [29]: question = "why are those prerequisites needed?"
result = qa({"question": question})
```

Retrying langchain.chat_models.openai.ChatOpenAI.completion_with_retry.<locals>._completion_with_retry in 1.0 seconds as it raised ServiceUnavailableError: The server is overloaded or not ready yet..

```
In [30]: result['answer']
```

'The reason for needing those prerequisites in the class is that the instructor assumes that all students have a basic knowledge of computer science and knowledge of the basic computer skills and principles. This includes knowing about big-O notation and other basic computer science concepts.'

Create a chatbot that works on your documents

```
In [31]: from langchain.embeddings.openai import OpenAIEmbeddings
from langchain.text_splitter import CharacterTextSplitter, RecursiveCharacterTextSplitter
from langchain.vectorstores import DocArrayInMemorySearch
from langchain.document_loaders import TextLoader
from langchain.chains import RetrievalQA, ConversationalRetrievalChain
from langchain.memory import ConversationBufferMemory
from langchain.chat_models import ChatOpenAI
from langchain.document_loaders import TextLoader
from langchain.document_loaders import PyPDFLoader
```

The chatbot code has been updated a bit since filming. The GUI appearance also varies depending on the platform it is running on.

```
In [32]: def load_db(file, chain_type, k):
    # load documents
    loader = PyPDFLoader(file)
    documents = loader.load()
    # split documents
    text_splitter = RecursiveCharacterTextSplitter(chunk_size=1000, chunk_overlap=200)
    docs = text_splitter.split_documents(documents)
    # define embedding
    embeddings = OpenAIEmbeddings()
    # create vector database from data
    db = DocArrayInMemorySearch.from_documents(docs, embeddings)
    # define retriever
    retriever = db.as_retriever(search_type="similarity", search_kwargs={"k": k})
    # create a chatbot chain. Memory is managed externally.
    qa = ConversationalRetrievalChain.from_llm(
        llm=ChatOpenAI(model_name=llm_name, temperature=0),
        chain_type=chain_type,
        retriever=retriever,
        return_source_documents=True,
        return_generated_question=True,
    )
    return qa
```



```

In [33]: import panel as pn
import param

class cbfs(param.Parameterized):
    chat_history = param.List([])
    answer = param.String("")
    db_query = param.String("")
    db_response = param.List([])

    def __init__(self, **params):
        super(cbfs, self).__init__(**params)
        self.panels = []
        self.loaded_file = "docs/cs229_lectures/MachineLearning-Lecture01.p
        self.qa = load_db(self.loaded_file, "stuff", 4)

    def call_load_db(self, count):
        if count == 0 or file_input.value is None: # init or no file speci
            return pn.pane.Markdown(f"Loaded File: {self.loaded_file}")
        else:
            file_input.save("temp.pdf") # Local copy
            self.loaded_file = file_input.filename
            button_load.button_style="outline"
            self.qa = load_db("temp.pdf", "stuff", 4)
            button_load.button_style="solid"
            self.clr_history()
            return pn.pane.Markdown(f"Loaded File: {self.loaded_file}")

    def convchain(self, query):
        if not query:
            return pn.WidgetBox(pn.Row('User:', pn.pane.Markdown("", width=
            result = self.qa({"question": query, "chat_history": self.chat_hist
            self.chat_history.extend([(query, result["answer"])]])
            self.db_query = result["generated_question"]
            self.db_response = result["source_documents"]
            self.answer = result['answer']
            self.panels.extend([
                pn.Row('User:', pn.pane.Markdown(query, width=600)),
                pn.Row('ChatBot:', pn.pane.Markdown(self.answer, width=600, sty
            ])
            inp.value = '' #clears loading indicator when cleared
            return pn.WidgetBox(*self.panels, scroll=True)

    @param.depends('db_query ', )
    def get_lquest(self):
        if not self.db_query :
            return pn.Column(
                pn.Row(pn.pane.Markdown(f"Last question to DB:", styles={'b
                pn.Row(pn.pane.Str("no DB accesses so far"))
            )
        return pn.Column(
            pn.Row(pn.pane.Markdown(f"DB query:", styles={'background-color
            pn.pane.Str(self.db_query )
        )

    @param.depends('db_response', )
    def get_sources(self):
        if not self.db_response:

```

```
        return
    rlist=[pn.Row(pn.pane.Markdown(f"Result of DB lookup:", styles={'ba
    for doc in self.db_response:
        rlist.append(pn.Row(pn.pane.Str(doc)))
    return pn.WidgetBox(*rlist, width=600, scroll=True)

@param.depends('convchain', 'clr_history')
def get_chats(self):
    if not self.chat_history:
        return pn.WidgetBox(pn.Row(pn.pane.Str("No History Yet")), width=600, scroll=True)
    rlist=[pn.Row(pn.pane.Markdown(f"Current Chat History variable", styles={'ba
    for exchange in self.chat_history:
        rlist.append(pn.Row(pn.pane.Str(exchange)))
    return pn.WidgetBox(*rlist, width=600, scroll=True)

def clr_history(self, count=0):
    self.chat_history = []
    return
```

Create a chatbot

```
In [34]: cb = cbfs()

file_input = pn.widgets.FileInput(accept='.pdf')
button_load = pn.widgets.Button(name="Load DB", button_type='primary')
button_clearhistory = pn.widgets.Button(name="Clear History", button_type='')
button_clearhistory.on_click(cb.clr_history)
inp = pn.widgets.TextInput( placeholder='Enter text here...')

bound_button_load = pn.bind(cb.call_load_db, button_load.param.clicks)
conversation = pn.bind(cb.convchain, inp)

jpg_pane = pn.pane.Image( './img/convchain.jpg')

tab1 = pn.Column(
    pn.Row(inp),
    pn.layout.Divider(),
    pn.panel(conversation, loading_indicator=True, height=300),
    pn.layout.Divider(),
)
tab2= pn.Column(
    pn.panel(cb.get_lquest),
    pn.layout.Divider(),
    pn.panel(cb.get_sources ),
)
tab3= pn.Column(
    pn.panel(cb.get_chats),
    pn.layout.Divider(),
)
tab4=pn.Column(
    pn.Row( file_input, button_load, bound_button_load),
    pn.Row( button_clearhistory, pn.pane.Markdown("Clears chat history. Can
pn.layout.Divider(),
    pn.Row(jpg_pane.clone(width=400))
)
dashboard = pn.Column(
    pn.Row(pn.pane.Markdown('# ChatWithYourData_Bot')),
    pn.Tabs(('Conversation', tab1), ('Database', tab2), ('Chat History', ta
)
dashboard
```


ChatWithYourData_Bot

Conversation Database Chat History Configure

Enter text here...

User: hi

ChatBot: Hello! How can I assist you today?

Feel free to copy this code and modify it to add your own features. You can try alternate memory and retriever models by changing the configuration in `load_db` function and the `convchain` method. [Panel](https://panel.holoviz.org/) (<https://panel.holoviz.org/>) and [Param](https://param.holoviz.org/) (<https://param.holoviz.org/>) have many useful features and widgets you can use to extend the GUI.

Acknowledgments

Panel based chatbot inspired by Sophia Yang, [github](https://github.com/sophiamyang/tutorials-LangChain) (<https://github.com/sophiamyang/tutorials-LangChain>)

