

← Back to dashboard

API DOCUMENTATION




Single Sign-On integration for eGov partners.

API documentation Integration Credentials Usage

eGov SSO — Integration Guide

Let citizens sign in to your service with their **eGovPH** account. eGov SSO was designed for **in-app integration**: your service is made available *inside* the eGovPH app, the citizen is already signed in, and eGovPH hands your backend an `exchange_code`. You redeem it for the citizen's profile — no login screen, no password, no OTP on your side.

Whole integration = two calls from your backend:

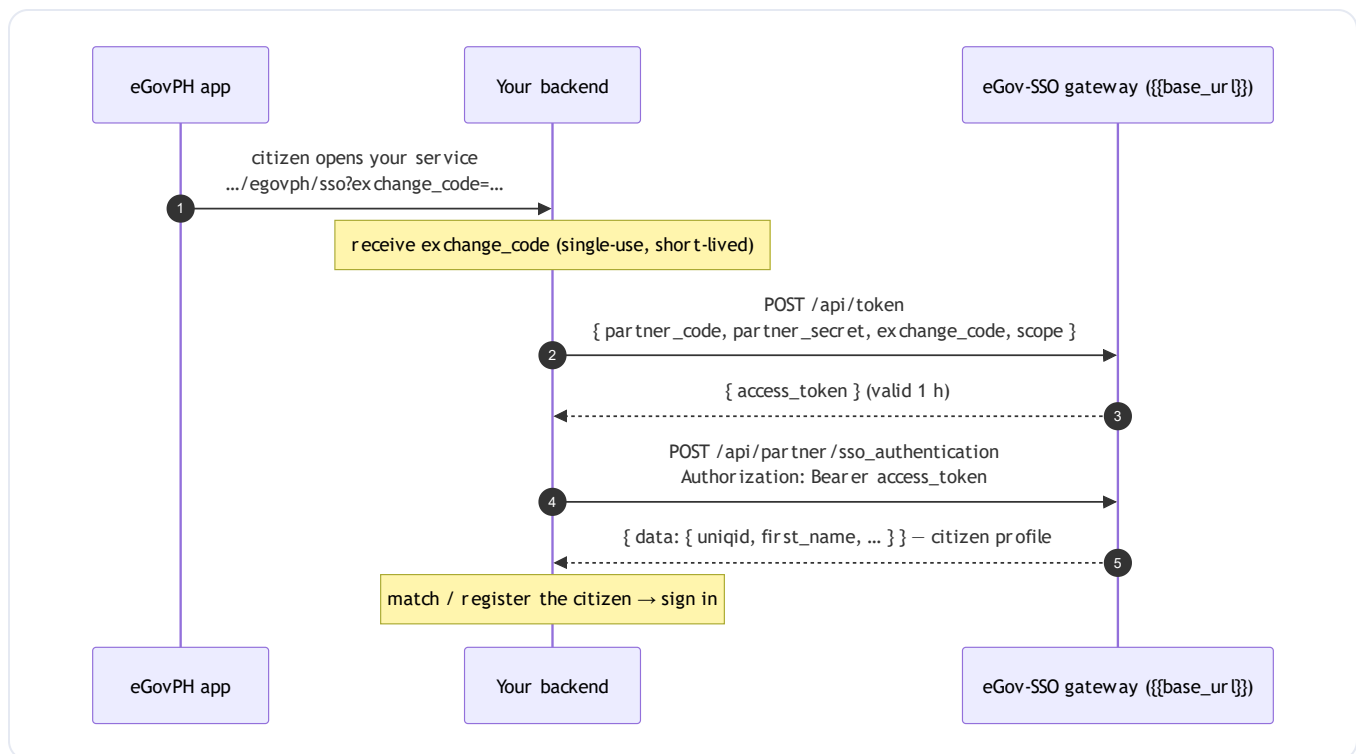

Quick start (recommended path)

1. Get your credential

On the developer portal, open the **eGov SSO** catalog and click **Generate credential**. You get, **once**:

partner_code	your partner identifier for this gateway (safe to expose in a browser)
partner_secret	server-side only — never in a browser or mobile binary
base_url	the gateway base for every call — shown as <code>{{base_url}}</code> below

One active credential per developer; revoke and regenerate if it leaks.

2. Give eGovPH your SSO base URL

eGovPH opens your service with the authentication parameter appended:

```
https://your-service.example/egovph/sso?exchange_code=<code>
```

Your backend receives the `exchange_code` (single-use, short-lived — redeem it right away).

3. Exchange the code for a token

POST `{{base_url}}/api/token`

```
{
  "partner_code": "{{partner_code}}",
  "partner_secret": "{{partner_secret}}",
  "exchange_code": "802d20idlNst3YNSVjuMKWV9q7LVESCI",
  "scope": "SSO_AUTHENTICATION"
}
```

→ 200

```
{
  "access_token": "..."
}
```

The token is issued by the gateway, valid **1 hour**, only usable through the gateway. Free of charge.

4. Fetch the citizen profile

POST `{{base_url}}/api/partner/sso_authentication` with header `Authorization: Bearer <access_token>` and body `{}`

→ 200

```
{
  "status": 200,
  "data": {
    "uniqid": "...",
    "first_name": "Juan",
  }
}
```

```

    "last_name": "Dela Cruz",
    "birth_date": "1990-01-15",
    "email": "juan.delacruz@example.com",
    "mobile": "+639171234567",
    "...": "..."
  }
}

```

Fields depend on what the citizen consented to share (full shape in the API reference). **1 credit** per completed request.

5. Sign the citizen in

Match an existing account by `uniqid` (fall back to name + birthdate), bind the `uniqid`, and log them in; register new citizens automatically from the profile. Because they arrive already authenticated, your service shows **no** login/registration or profile-management screens of its own.

That's it. Test it with the **sandbox** (see *Good to know*).

Login as eGov widget (fallback)

If your system must keep its **own login screen outside eGovPH**, embed the **Login as eGov** widget. It runs the citizen's mobile/email → OTP → eGov PIN screens against your gateway using only your `partner_code`, then hands your page the `exchange_code` — continue at Quick start step 3 on your backend. These calls are free of charge.

```

<div id="egov-login"></div>

<script src="https://widgets.e.gov.ph/v1.0.0/egov-login.min.js"></script>

<script>
  EgovLogin.render({
    target: '#egov-login',
    partnerCode: '{{partner_code}}', // your gateway partner_code
    host: '{{base_url}}', // your gateway base URL (from your credential), e.g. https://.../egov-
    partnerName: 'Project Name',
    onSuccess: ({ exchangeCode }) => {
      // Send the code to YOUR backend here
      console.log(exchangeCode)
    },
  });
</script>

```

Option	Description
partnerCode	your gateway <code>partner_code</code> — the only credential the browser ever sees
host	your gateway base URL — the <code>base_url</code> from your credential

*Pin the widget version in the script URL (`v1.0.0`). Never put `partner_secret` or an `access_token` in the page. Can't embed a script? See **Appendix A** for the four underlying calls.*

Good to know

Sandbox — test accounts

Sandbox citizens for the **widget / OTP flow** (`type = MOBILE_NUMBER` ; the OTP and PIN are fixed — no SMS is actually sent):

username	Name	otp	pin
+639090000001	JOSE CRUZ DELA PEÑA III	123456	000000
+639090000002	PEDRO DELA CRUZ II	123456	000000
+639090000003	JOHN GARCIA REYES JR	123456	000000
+639090000004	JOSIELYN RAMOS MENDOZA	123456	000000
+639090000005	RONALYN SANTOS FLORES	123456	000000

For the **Quick start (Mode A)** path, pick a test account on the eGov SSO catalog page and use **Generate exchange code** — it mints a fresh, single-use `exchange_code` for that account, which you feed straight into step 3 (no eGovPH round-trip needed).

Every call you make shows in your **Gateway Logs** on the portal (secrets and personal data masked).

Credits

Call	Charge
<code>api/token</code> , and the widget's OTP/PIN calls	Free
<code>api/partner/sso_authentication</code> (profile)	1 credit per completed request

Free calls still need an account with credits remaining (`429 quota_exceeded` when exhausted — ask an administrator for a top-up).

Errors

Status	Cause
403 { "error": "forbidden" }	bad <code>partner_code</code> / <code>partner_secret</code> , revoked credential, or account not approved
401 { "error": "unauthorized" }	missing / invalid / expired <code>access_token</code> — repeat step 3
429 { "error": "quota_exceeded", "meta": { allowance, used, remaining } }	no credits remaining

Status	Cause
502 / 504	eGovPH unreachable or timed out — retry with backoff



✓ Before you go live

- ☐ Your SSO base URL is served over **HTTPS**. Any valid certificate is fine for the hackathon (Let's Encrypt, your host's TLS, an HTTPS tunnel while developing); production / listing inside eGovPH needs a proper certificate on your own domain.
- ☐ Citizens are **auto-logged-in** on arrival; existing users matched by `uniqid`, new users registered from the profile.
- ☐ **No own login/registration or profile/password screens** — sessions and profile changes are eGovPH's.
- ☐ Profile data mapped accurately (name, birthdate, address, email, mobile).
- ☐ **Mobile responsive** — no overlapping/distorted layout on phones and tablets, feature parity, fast load.
- ☐ `partner_secret` and `access_token` live **only on your server**; credentials regenerated if ever exposed.

Full eGovPH partner requirements: **Appendix B**.

Appendix A — Login as eGov endpoints (what the widget calls)

Use these only if you cannot embed the widget. All `POST` JSON to `{{base_url}}`, with **only your** `partner_code` in the body — no secret, no bearer. Free of charge. Everything except `partner_code` is passed to eGovPH verbatim and the response comes back verbatim. Bad `partner_code` on A2–A4 → 403 forbidden (A1 answers `is_code_valid: 0` instead). Never store the citizen's OTP or PIN.

A1. Check partner access

`POST {{base_url}}/api/partner/check_access`

```
{
  "partner_code": "{{partner_code}}"
}
```

→ 200

```
{
  "is_code_valid": 1
}
```

0 = unknown/revoked code or unapproved account — never an error, so use it as a probe.

A2. Send an OTP

POST {{base_url}}/api/otp_generate

```
{
  "partner_code": "{{partner_code}}",
  "username": "+639090000001",
  "type": "MOBILE_NUMBER"
}
```

type : MOBILE_NUMBER or EMAIL . → 200 echoes the request.

A3. Validate the OTP

POST {{base_url}}/api/otp_validate

```
{
  "partner_code": "{{partner_code}}",
  "username": "+639090000001",
  "type": "MOBILE_NUMBER",
  "otp": "123456"
}
```

→ 200

```
{
  "otp_validation_token": "0XE20odmJaREqf3SnVg9Ws7fwFMPtVr1"
}
```

A4. Authenticate with the eGov PIN

POST {{base_url}}/api/authenticate

```
{
  "partner_code": "{{partner_code}}",
  "username": "+639090000001",
  "pin": "000000",
  "otp_validation_token": "0XE20odmJaREqf3SnVg9Ws7fwFMPtVr1"
}
```

→ 201

```
{
  "exchange_code": "802d20idlNst3YNSVjuMKWV9q7LVESCI",
}
```

```
"shared_data": ["Fullname", "Birthdate", "Address", "Sex", "Email", "Nationality", "Mobile",  
}
```

Then Quick start step 3 with the `exchange_code`.

Appendix B — eGovPH partner requirements

Core technical requirements

- **HTTPS (active SSL certificate)** — mandatory for end-to-end data security (see *Before you go live* for what qualifies during the hackathon).
- **Mobile responsiveness** — required to optimize user experience across all devices.
- **Base URL for SSO** — partners must provide a base URL where eGovPH can append the authentication parameter (`exchange_code`). Example: `https://test_website.com/egovph/sso?exchange_code=text_exchange_code`

SSO implementation logic

- **Existing users** — match using `uniqid` or personal details (name, birthdate). Bind the `uniqid` to streamline future logins and auto-authenticate.
- **New users** — automatically register using the provided SSO details, guide them through onboarding if additional info is needed, and auto-authenticate.

UI / UX requirements

Disable or hide on the agency website: login & registration pages; profile & password management pages; external links (e.g., app download pages).

Integration checklist

- **SSO functionality** — data sync (name, birthdate, address, email, contact number mapped accurately); auto-login on successful SSO authentication; profile locking (updates only through eGovPH); no manual login/logout (sessions managed via eGovPH).
- **Mobile responsiveness** — layout (no overlapping or distorted text/images); screen fitting across smartphone and tablet sizes; performance & feature parity (fast load, intuitive navigation, full features on mobile).

Expected outcome

Full integration allows authenticated users to access system features seamlessly without needing separate logins or profile management on the partner website.