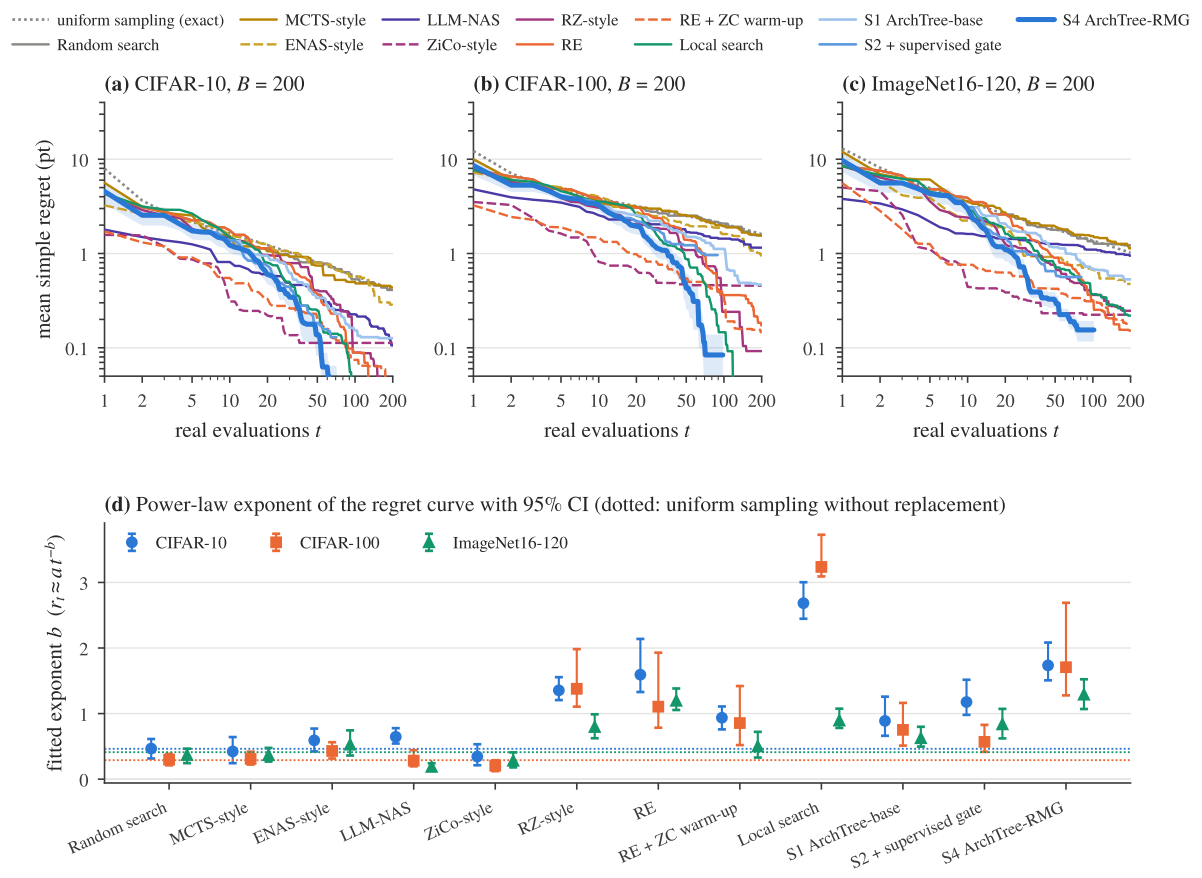
uniform sampling (exact)
Random search
MCTS-style
ENAS-style
LLM-NAS
ZiCo-style
RZ-style
RE
RE + ZC warm-up
Local search
S1 ArchTree-base
S2 + supervised gate
S4 ArchTree-RMG
(a) CIFAR-10, B = 200
(b) CIFAR-100, B = 200
(c) ImageNet16-120, B = 200
mean simple regret (pt)
real evaluations t
(d) Power-law exponent of the regret curve with 95% CI (dotted: uniform sampling without replacement)
CIFAR-10
CIFAR-100
ImageNet16-120
fitted exponent b (r_t ≈ a t^-b)
Random search
MCTS-style
ENAS-style
LLM-NAS
ZiCo-style
RZ-style
RE
RE + ZC warm-up
Local search
S1 ArchTree-base
S2 + supervised gate
S4 ArchTree-RMG