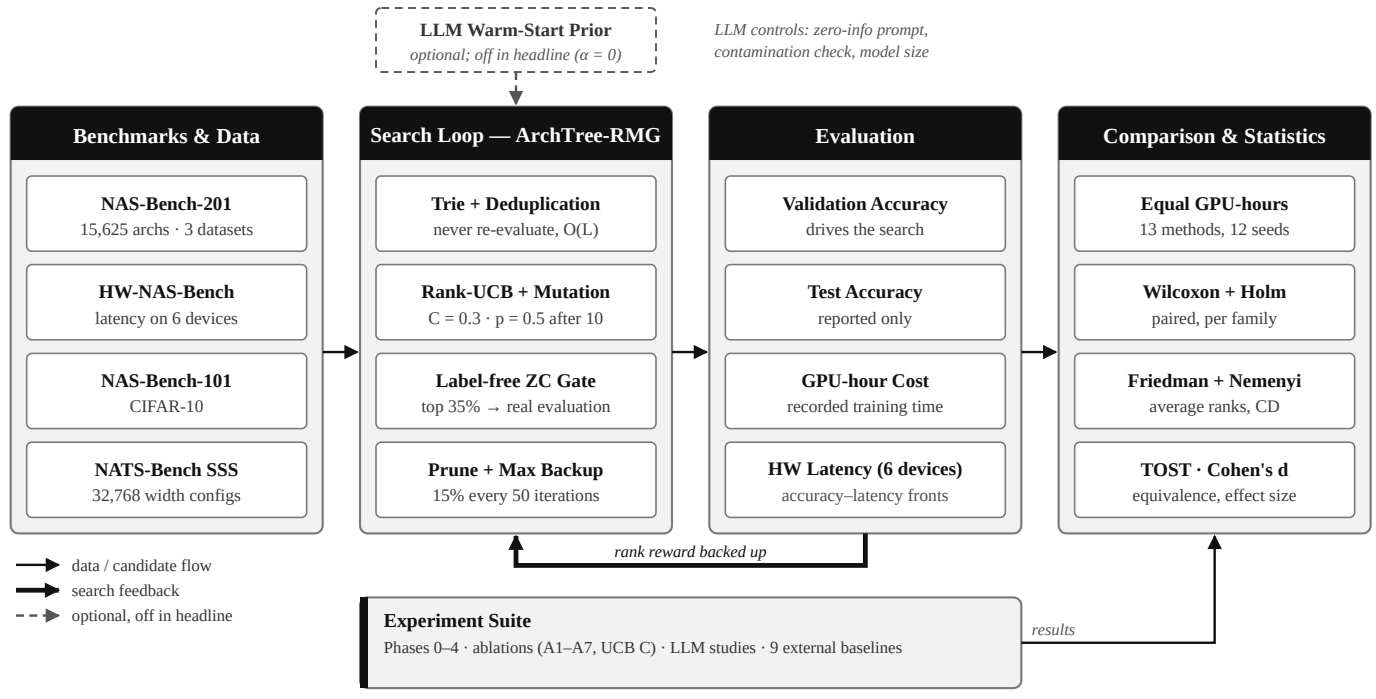

LLM Warm-Start Prior
optional; off in headline (α = 0)
LLM controls: zero-info prompt, contamination check, model size
Benchmarks & Data
NAS-Bench-201
15,625 archs · 3 datasets
HW-NAS-Bench
latency on 6 devices
NAS-Bench-101
CIFAR-10
NATS-Bench SSS
32,768 width configs
Search Loop — ArchTree-RMG
Trie + Deduplication
never re-evaluate, O(L)
Rank-UCB + Mutation
C = 0.3 · p = 0.5 after 10
Label-free ZC Gate
top 35% → real evaluation
Prune + Max Backup
15% every 50 iterations
Evaluation
Validation Accuracy
drives the search
Test Accuracy
reported only
GPU-hour Cost
recorded training time
HW Latency (6 devices)
accuracy–latency fronts
Comparison & Statistics
Equal GPU-hours
13 methods, 12 seeds
Wilcoxon + Holm
paired, per family
Friedman + Nemenyi
average ranks, CD
TOST · Cohen's d
equivalence, effect size
rank reward backed up
data / candidate flow
search feedback
optional, off in headline
Experiment Suite
Phases 0–4 · ablations (A1–A7, UCB C) · LLM studies · 9 external baselines
results