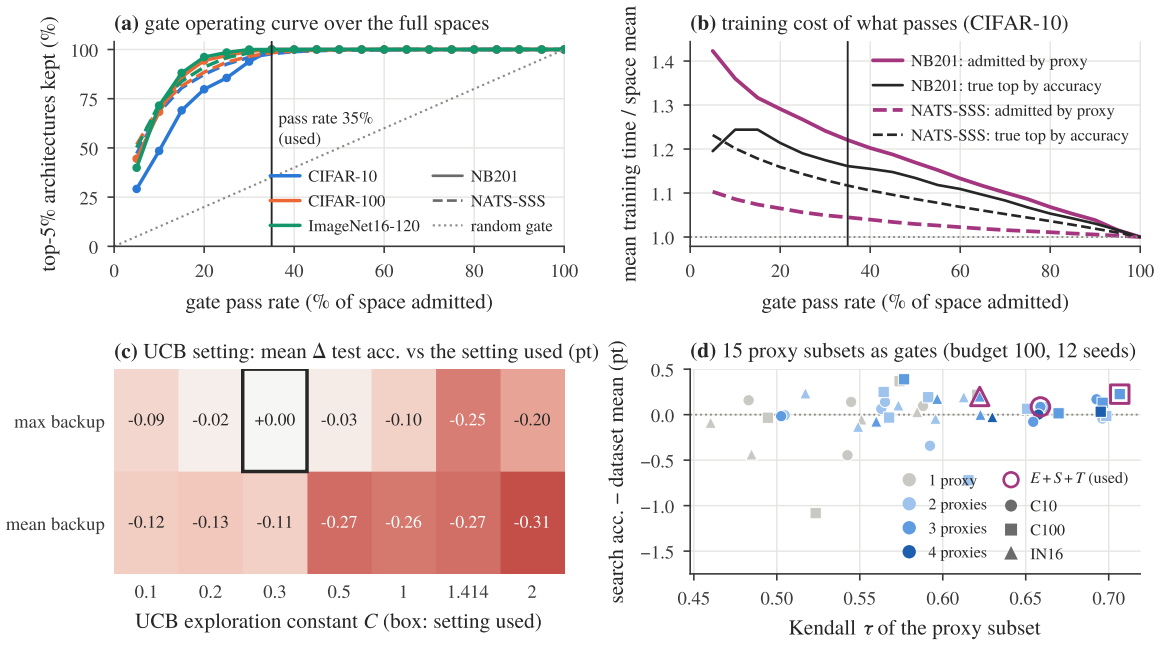
(a) gate operating curve over the full spaces
top-5% architectures kept (%)
gate pass rate (% of space admitted)
pass rate 35% (used)
CIFAR-10
CIFAR-100
ImageNet16-120
NB201
NATS-SSS
random gate
(b) training cost of what passes (CIFAR-10)
mean training time / space mean
gate pass rate (% of space admitted)
NB201: admitted by proxy
NB201: true top by accuracy
NATS-SSS: admitted by proxy
NATS-SSS: true top by accuracy
(c) UCB setting: mean Δ test acc. vs the setting used (pt)
max backup
mean backup
-0.09 -0.02 +0.00 -0.03 -0.10 -0.25 -0.20
-0.12 -0.13 -0.11 -0.27 -0.26 -0.27 -0.31
0.1 0.2 0.3 0.5 1 1.414 2
UCB exploration constant C (box: setting used)
(d) 15 proxy subsets as gates (budget 100, 12 seeds)
search acc. − dataset mean (pt)
1 proxy
2 proxies
3 proxies
4 proxies
E + S + T (used)
C10
C100
IN16
Kendall τ of the proxy subset