

## Sourcecode

### Homepage.php

```
<!DOCTYPE html>

<head>

    <title>Start Quizz now!</title>

    <link href="style.css" rel = "stylesheet" type = "text/css" >

</head>

<body>


<?php

    if(!empty($_POST)){

        $ans1 = $_POST['ans1'];

        $ans2 = $_POST['ans2'];

        $correct = 0;

        if($ans1 == 'break'){

            $correct++;

        }

        else{

            echo "<p> Incorrect.</p>";

        }


        if($ans2 == 'while'){

            $correct++;

        }

    }
```

```
else{  
  
    echo "<p> Incorrect.</p>";  
  
}
```

```
echo "<p> You got $correct correct! </p>";
```

```
$grade = ($correct / 2) * 100;
```

```
echo "<p> Your grade is: $grade";
```

```
}else{
```

```
    echo "<p> Please take the quizz.</p>";
```

```
}
```

```
?>
```

```
<h1>Welcome to the ICS2606 Quiz!</h1>
```

```
<form action = "quiz.php" method = "post">
```

```
<div class="question_1">
```

```
    <p>_____ statement ends execution of the current for, while, do-while, or switch  
structure.</p>
```

```
    <input type="text" name="ans1">
```

```
</div>
```

```
<div class="question_2">
```

```
    <p>_____ loop tells the PHP to execute the nested statements repeatedly, as long as the while  
expression evaluates to TRUE.</p>
```

<input type="text" name="ans2">

</div>

<div class="question\_3">

<p>\_\_\_\_\_is an array of environment information</p>

<input type="radio" name="question3" value="answa">A.) \$\_ENV <br>

<input type="radio" name="question3" value="answb">B.) \$\_COOKIE <br>

<input type="radio" name="question3" value="answc">C.) \$\_FILES <br>

<input type="radio" name="question3" value="answd">D.) \$GLOBALS <br>

</div>

<div class="question\_4">

<p>\_\_\_\_\_ removes the leading slashes for escape sequences in strings</p>

<input type="radio" name="question4" value="answa">A.) trim ( ) <br>

<input type="radio" name="question4" value="answb">B.) preg\_match ( ) <br>

<input type="radio" name="question4" value="answc">C.) stripslashes ( ) <br>

<input type="radio" name="question4" value="answd">D.) remove ( ) <br>

</div>

<div class="question\_5">

<p>\$\_POST contains values of forms that are submitted using the post method</p>

<input type="radio" name="question5" value="answa"> True <br>

<input type="radio" name="question5" value="answb"> False <br>

<div class="question\_6">

<p>The for loop truth expression is checked at the end of each iteration instead of in the beginning.</p>

<input type="radio" name="question6" value="answa"> True <br>

<input type="radio" name="question6" value="answb"> False <br>

</div>

<div class="submit\_area">

<input type="submit" id="submit">

</div>

</form>

</body>

</html>

Log.php

<!DOCTYPE html>

<head>

<title>Login</title>

<link href="style.css" rel = "stylesheet" type = "text/css" >

</head>

<body>

<div id = "main"></div>

<h2>Login</h2>

<form method = "post">

<label> User Name</label>

```
<input type="text" name = "username" class = "text" placeholder="User Name" autocomplete =  
"off" required><br>
```

```
<label> Password</label>
```

```
<input type="password" name = "password" class = "text" placeholder="Password"  
autocomplete = "off" required><br>
```

```
<button type="submit" name = "submit" >Login</button>
```

```
</form>
```

```
</body>
```

```
</html>
```

```
<?php
```

```
if (isset($_POST['submit'])) {
```

```
    $un = $_POST['username'];
```

```
    $pw = $_POST['password'];
```

```
    if($un == 'ICS2608' && $pw == 'correct'){
```

```
        header ("location: homepage.php");
```

```
        exit();
```

```
    }
```


```
    else
```

```
        echo "Invalid Username or Password";
```

```
}
```

?>

## Quizresults.php

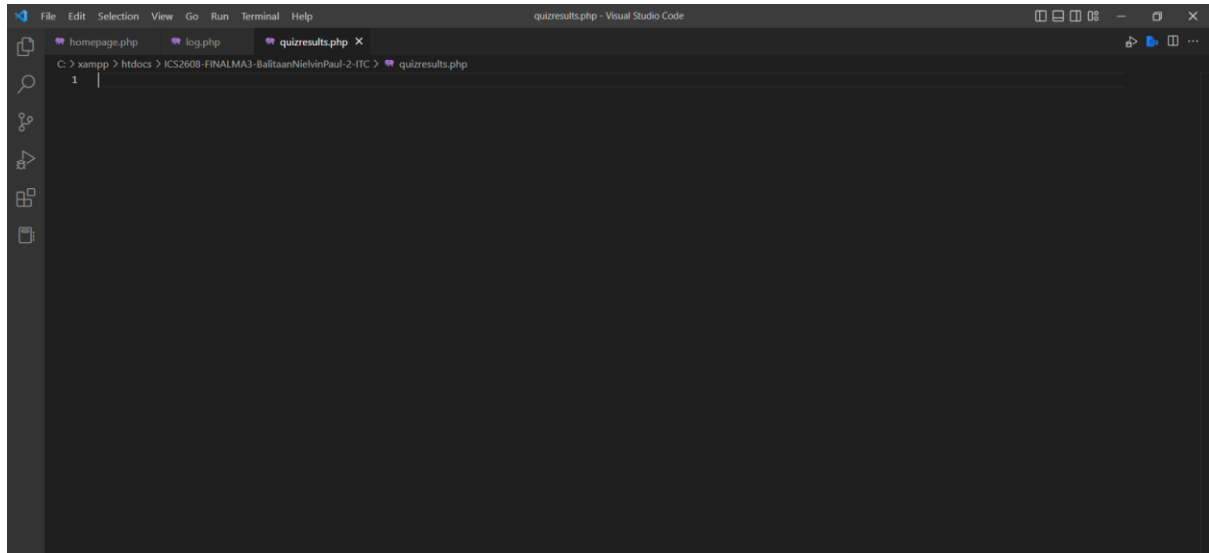

## Style.css

