

Infra

Imahn Shekhzadeh
`imahn.shekhzadeh@unige.ch`

December 16, 2023

Contents

1. Bash	5
2. Linux	7
2.1. Opening Programs from CLI	8
3. Docker	9
3.1. Installation	9
3.2. Basics	9
3.3. Dockerfile	9
3.4. Docker images	11
3.5. Docker containers	11
3.5.1. Basics	11
3.5.2. Passing Arguments	12
3.5.3. Listing & Stopping	13
4. Anaconda	15
4.1. Installation of Environments	15
4.2. Export	15
4.3. Installation & Removal of Packages	15
4.4. Usage in VSCode	16
5. CUDA	17
6. Python	19
6.1. Config File & JSON Files	19
6.2. Jupyter Notebooks	19
6.3. Map (Built-In Function)	19
6.4. PyTorch	20
7. AWS S3	23
7.1. Installation & Configuration	23
7.2. AWS Credentials (Profiles)	23
7.3. Buckets	24
7.3.1. Creation	24
7.3.2. Listings	24
7.3.3. File Copying	24
7.3.4. Directory Copying	25
7.3.5. Directory/File Deletion	25
7.4. Cloudpathlib	25
8. Git	27
8.1. Merging	27
8.2. Merge Conflicts	27
8.3. Checking History	28
8.4. Removing a File/Folder	29
8.5. Renaming a Repository	29

- 8.6. Restore File 29
 - 8.7. Remote URL 29
 - 8.8. Repo Change 29
- 9. Remote Development 31
 - 9.1. Connection 31
 - 9.2. Troubleshooting 31
- 10.Jax 33
 - A. .bashrc 35
 - B. Amazing Programs, Extensions, Plugins & Packages 45
 - C. VSCode 47
 - C.1. Recommended Extensions 47
 - C.2. Debugging 47
 - C.3. settings.json 47
 - C.4. Fix Unresolved Python Imports 47
 - C.5. Opening a Duplicate Workspace 47
 - C.6. settings.json 48

Note

The commands in this document might only run through if you use the .bashrc file provided in App. A

1. Bash

- Downloading file from URL and allowing for redirects,

```
1 curl -Lo output.out https://url.com
```

- For this directory structure,

```
1 infra_upd.tex
2 infra_upd.log
3 infra_upd.aux
4 infra_upd.out
5 infra_upd.pdf
```

rename *all* of them via

```
1 for file in infra_upd.*; do mv "$file" "${file/infra_upd/infra}"; done
```

What happens is called a [substring replacement](#).

- Appending line to file,

```
1 echo "this is a line" | tee -a output.out # -a: appending, important
```

- Checking whether provided string (e.g. via an argument) is empty or not (typically used within conditional statements):

```
1 test_sth() {
2     local env_name="$1" # bash starts counting indices from 1
3
4     if [ -z "$env_name" ]; then # spacing after '[' and before ']' needed
5         echo "The string is empty."
6         return 1 # return value of 1 indicates error
7     fi
8 }
```

Listing 1.1: Check (e.g. in if-clause) whether string is empty or not

- For retrieving all but the first argument,

```
1 test_sth(){
2     shift
3
4     echo "all provided args (except the first): $@"
5 }
```

- And of course there is nothing stopping us from doing this $N \geq 1$ -times ... Pseudocode:

1. Bash

```
1 test_sth(){
2     shift
3     ...
4     shift
5
6     echo "all provided args (except the first N): $@"
7 }
```

If N arguments are not provided, this is **not** a problem, the code will still run through.

- Finding out the size of a file or directory,

```
1 du -hs <path_to_file_or_dir> # du -hs file.ext
2
3 # for shorter summary (single quotation strings required)
4 du -hs <path_to_file_or_dir> | awk '{print $1}'
```

- Creating new directory including all parent directories,

```
1 mkdir -p <dir>
```

`-p` option is safe, since if directory is already existent, no error will be outputted.

- Searching for files with specific extension, e.g. `.ext`:

```
1 find . -name "*.ext"
2 # find . -name "*.png"
```

Note that this can be nicely combined with `grep`.

- In Bash, `[[]]` over `[]` is preferred, since `[[]]` is safer and more capable within Bash scripts. Within `[]`, where word splitting and filename expansion do occur, it is good practice to double-quote variables. But it is safe to omit the double-quotes for e.g. `$#` within `[[]]`.
- Unzipping a file via the CLI,

```
1 unzip /path/to/file.zip -d /path/to/destination
```

- Opening a file and automatically scrolling to the bottom,

```
1 less +G /path/to/file.ext
```

- Comparing the contents of two directories,

```
1 diff -r --color directory1 directory2 # '-r' for recursive comparison
2 diff -rq --color directory1 directory2 # '-q' suppresses the output of
   differences and only shows which files differ
```

Ignoring files only existent in one of the directories (which treats absent files as empty),

```
1 diff -rq --color --unidirectional-new-file directory1 directory2
```

2. Linux

- Under Ubuntu, listing *all* available kernels,

```
1 dpkg --get-architecture | grep linux-image
```

Listing 2.1: Find kernel versions in Ubuntu

Finding the currently *active* kernel version,

```
1 uname -a
```

Listing 2.2: Current kernel versions in Ubuntu

The *-a* option stands for *appending*, otherwise *tee* overwrites *output.out* (if existent).

- Better colors in CLI:
 1. Use monokai color scheme, i.e. dark gray background (#272822) with light peach color for the text (#F8F8F2)
 2. File paths are still displayed in blue, which is suboptimal, to change the color to the better readable cyan-blue color, click on the three horizontal lines in the CLI, then on **Preferences**, then choose the currently active color, switch to the **Colors** tab, then go to **Palette**, click on the blue color & instead use the color #66D9EF

where *-h* stands for human readability and *-s* for summarizing.

- Retrieving the number of available CPU resources,

```
1 echo "$(nproc)"
```

- It is possible to use colored outputs in Bash. Check the bash function *str_diff* in App. A. (Note that the *-e* option is mandatory to enable interpretation of the backslash escapes).

- Print day and time from CLI,

```
1 echo "$(date +%d_%m_%y-%H_%M_%S)"
2 # echo "$(date +%dp%mp%y-%Hp%Mp%S)"
```

- Seeing the resource consumption,

```
1 htop
```

- If you did an *sshfs* and the connection hung up, kill the connection via

```
1 fusermount -zu /path/to/dir
```

2.1. Opening Programs from CLI

- Opening the settings from CLI,

```
1  gnome-control-center
```

- Opening VSCode from CLI:

```
1  code path_to_file/file_name.ext
```

If a VSCode editor is already open, use the *-n* flag to open the file in a new editor:

```
1  code -n path_to_file/file_name.ext
```

A folder can also be opened directly:

```
1  code path_to_dir
```

Listing 2.3: Opening VSCode dir from CLI

- Opening LibreOffice from CLI:

```
1  libreoffice --writer path_to_dir/filename.odt
```

- Opening an image via the CLI:

```
1  eog /path/to/your/image.jpg
```


3. Docker

3.1. Installation

- Follow this great tutorial by DigitalOcean.
- To use NVIDIA GPUs (both in PyTorch & Jax), install the NVIDIA Container Toolkit
- Once done with the installation of the NVIDIA Container Toolkit, proceed with the configuration. During the configuration, it will be necessary to restart the docker daemon, which you can achieve as follows:

```
1 sudo systemctl restart docker
```

3.2. Basics

- Interactive start of containers:

```
1 d ps -a # find out ID (also docker container name)
2 d start -i ID
```

- Copying files from local system to docker container and vice versa; **run both commands from local CLI**

```
1 d cp file_name container_ID:/target_dir # local -> docker
2 d cp container_ID:/file_name dir_name # docker -> local
```

3.3. Dockerfile

- When you find the command for pulling a docker image on <https://hub.docker.com>, e.g.

```
1 d pull ubuntu:jammy-20231004
```

then in the Dockerfile, just write

```
1 FROM ubuntu:jammy-20231004
```

When no tag is specified, by default the *latest* one will be taken. However, using the *latest* tag can potentially cause issues with reproducibility and consistency, because you might pull a different version of the image at different times without knowing it if the latest tag gets updated. **For more predictable builds, it is advised to use a specific version tag.**

- Note that the structure of the *docker pull* command is

```
1 d pull [OPTIONS] NAME[:TAG|@DIGEST]
```

3. Docker

In general, the *NAME* is in the format *repository/image*. If *repository* is not specified, Docker assumes the image is located in the default DockerHub library repository. However, many images (like PyTorch) are hosted under a specific user or organization's namespace on DockerHub, rather than the top-level library. That's why the command for the docker pull (for the latest tag) reads

```
1 d pull pytorch/pytorch
```

- If using a Docker image like *pytorch/pytorch:latest*, conda is already installed. In this case, the default environment is named *base*, which is a common practice in Docker images with conda – unless otherwise stated.
- Copying local scripts into docker container,

```
1 COPY relative/path/to/script.py .
```

From the documentation:

Multiple `<src>` resources may be specified but the paths of files and directories will be interpreted as relative to the source of the context of the build.

It is also important to put the `.` at the end, since it represents the destination in the Docker image where the file should be copied. The dot `.` refers to the current working directory inside the Docker image, which is determined by the `WORKDIR` command in the Dockerfile. If `WORKDIR` is not set, it defaults to the root directory (`/`) of the image.

Also, each time the script `relative/path/to/script.py` changes, the Dockerfile needs to be rebuilt – **however, a cached version will be used, which speeds things up.**

- Copying local dirs into docker container,

```
1 COPY relative/path/to/dir/ .
```

- Running a Dockerfile,

```
1 d build -f file_name -t img_name .
2 d build -f file_name -t img_name:tag_name . # tag name optional, but
      recommended, e.g. 1.0 (no quotes required)
3 # d build -f file_name --no-cache -t [...] # forcing to rebuild from
      scratch, no cached version is used (only do if really required)
```

where `img_name` will be the name of the newly created image, `tag_name` the tag name and `file_name` the name of the docker file.

- Via

```
1 EXPOSE custom-port-number
2 # EXPOSE 80
```

it is possible to expose a port. Note that port exposure is related to network access. Note that even though network access might not be needed, there is still no harm in exposing a port (since an exposure of the port does not make the docker container more vulnerable).

3.4. Docker images

- A Dockerfile does not necessarily need to have the name *Dockerfile*. To pass another name when building the img, do

```
1 d build -f custom_docker_file .
```

The `.` specifies the context of the build, which is the current directory in this case. **I would recommend running this command from the same dir in which `custom_docker_file` is located.**

- Check all available Docker images via

```
1 d images
```

- Cleaning up dangling docker images (these are the entries with *<none>* in the repository or tag name in the output of the previous algo):

```
1 d image prune -f
```

- Removing a Docker image – **only do this when finished with using the image**

```
1 d image rm Image_name:Tag
2 # d container rm <container_id> # in case some containers are using the
   image
```

3.5. Docker containers

3.5.1. Basics

- Running Docker images – without being able to utilize NVIDIA GPUs:

```
1 d run -it img_name # if 'tag_name' was not provided
2 d run -it img_name:tag_name # if 'tag_name' was provided during build (
   recommended)
```

- Running Docker images & utilizing GPUs:

```
1 d run --gpus all -it img_name
2 d run --gpus all -it img_name:tag_name # recommended
```

- To mount a local file to the container at runtime, do

```
1 d run -v /absolute/path/to/script.py:/path/to/workdir/script.py --gpus all
   -it img_name
2 d run -v /absolute/path/to/script.py:/path/to/workdir/script.py --gpus all
   -it img_name:tag_name # recommended, provide 'img_name' & 'tag_name'
```

The mounting expects **absolute** file paths on the side of the host machine.

- Note that you can include the bash command **pwd** to avoid having to manually pass absolute paths for the mounting

```
1 d run -v $(pwd)/script.py:/path/to/workdir/script.py --gpus all -it
   img_name:tag_name # recommended, provide 'img_name' & 'tag_name'
```

3. Docker

If you need the container to reflect changes made to the scripts on the host without rebuilding the image every time, you would use the `-v` flag to mount the directory. If the scripts won't change, or you don't need to reflect changes in real-time, you don't need to mount the directory, as the necessary scripts have already been copied into the image during the build process.

- It is also possible to directly mount directories:

```
1 d run -v $(pwd)/dir_path:/path/to/workdir --gpus all -it img_name:tag_name
```

Note that the specified directory from the host is mounted into the container at the specified mount point. If there are any existing files or directories in the container at the mount point, they become obscured by the mount.

- In several cases it can be useful to remove the docker container right after execution: When you...
 - ...are running many short-lived containers, like during development or testing,
 - ...want to avoid manual cleanup of stopped containers later on,
 - ...are running containers for one-off tasks that do not need to persist any state after they are finished.

In this case,

```
1 d run --rm -v $(pwd)/dir_path:/path/to/workdir --gpus all -it img_name:tag_name
```

- It is also possible to mount two separate host directories to two separate directories within the container,

```
1 d run --rm -v $(pwd)/dir_path1:/path/to/workdir1 -v $(pwd)/dir_path2:/path/to/workdir2 --gpus all -it img_name:tag_name
```

This will not cause any overwriting as each `-v` flag creates a unique mount point inside the container.

- Finding out the python version of the Docker image

```
1 d run -it --rm img_name:tag_name python3 --version
```

This command will immediately remove the container after execution.

3.5.2. Passing Arguments

It is possible to pass arguments when running a docker container.

1. Assuming you have a bash script *run_scripts.sh*, in which a Python script, e.g.

```
1 #!/bin/sh
2 isort /app/scripts/*.py
3 black /app/scripts/*.py
4
5 python3 -B /app/scripts/test_script.py
6 python3 -B /app/scripts/test_anil.py
```

Modify this bash script s.t. any arguments passed to the CLI when running the docker container are picked up,

```

1 python3 -B /app/scripts/test_anil.py "$@"
2 # python3 -B /app/scripts/test_script.py "$@" # alternative

```

2. Rebuild (!) the docker image.

3. Now run the docker container as follows:

```

1 d run --rm -v $(pwd)/dir_path:/path/to/workdir --gpus all -it img_name:
  tag_name arg1 arg2
2 # d run --rm -v $(pwd)/dir_path:/path/to/workdir --gpus all -it img_name:
  tag_name --n_ways 1 --k_shots 1 # example

```

3.5.3. Listing & Stopping

- Listing all running containers,

```

1 d ps

```

Listing only the container ID (of all running containers),

```

1 d ps -q

```

- Stopping a running container,

```

1 d stop container-ID

```

- Stopping a running container and removing it,

```

1 d stop container-ID && d rm container-ID

```


4. Anaconda

- Retrieving information about currently activated conda environment,

```
1 conda info
```

- Listing all installed environments,

```
1 conda env list
```

4.1. Installation of Environments

- Installing conda with specific python version,

```
1 # only 'myenv' needs to be specified (quotation marks necessary)
2 env_name="myenv" && conda create -n "$env_name" python=3.11.3 -y && conda
  activate "$env_name"
```

As of Oct 16, I wouldn't recommend installing python 3.12.0 yet — I got a lot of unmet dependency problems when trying to install torch 2.1 with NVIDIA Cuda version 11.8 afterwards.

- Installation of conda environment from bash file:

```
1 conda deactivate # go into base environment
2 source conda/filename.sh
3 touch .env
```

- Completely remove conda environment,

```
1 conda deactivate && conda remove -n custom-env-name --all -y
```

4.2. Export

- Exporting an .yaml-file to share with others for reproducibility,

```
1 conda env export > environment.yml
```

- Line “Prefix:” at end of .yaml file can be safely deleted, for details cf. [here](#)

4.3. Installation & Removal of Packages

- Installation of packages from pyproject.toml file,

```
1 pip install -e .
```

- Installing specific conda package version,

4. Anaconda

```
1 conda install -c conda-forge custom-pkg-name -y
2 # conda install -c conda-forge cloudpathlib=0.15.1 -y
```

- Removing list of packages from conda environment,

```
1 conda remove -n custom-env-name pkg1 pkg2 ... pkgN -y
2 # conda remove -n google_jax matplotlib -y
```

4.4. Usage in VSCode

- Selecting a conda environment in VSCode, do **Ctrl + Shift + P** and type `Python: select interpreter`.

5. CUDA

- When you need to find out the CUDA version installed, install `nvidia-cuda-toolkit`, but do NOT reboot. After its use, immediately remove this package and any package installed alongside with it!
- In case NVIDIA drivers do not allow for boot into Ubuntu, e.g. because you did not uninstall the `nvidia-cuda-toolkit` package,
 1. Boot into an older kernel version of Linux (in order to get there, do a "hard" reboot, and then go into "Advanced options for Ubuntu", and choose an older kernel version).
 2. Once booted into the older kernel version, I removed 'nvidia-cuda-toolkit' and rebooted.
 3. After a few more hard reboots and booting into the older kernel version, at some point, the newer kernel version was picked up and worked again.
 4. Now to fix the monitors (because dual-monitor setup didn't work), I had to open the program "Additional Drivers" and change the driver from the open-source version to an NVIDIA proprietary one.
 5. Then I had to install CUDA according to these instructions.
 6. For PyTorch to recognize the GPU, I had to reboot.

6. Python

6.1. Config File & JSON Files

- When using `argparse` in combination with a JSON configuration file, the JSON keys need to match the long option names specified in `parser.add_argument()` method calls. The `argparse` module itself does not automatically recognize abbreviated forms from a JSON file.

6.2. Jupyter Notebooks

- Converting jupyter notebooks into PDFs,

```
1 for nb in /path/one/Notebook1.ipynb /path/two/Notebook2.ipynb [...]
2 do
3     jupyter nbconvert --to pdf "$nb"
4 done
```

Wildcarding notation would also work,

```
1 # optionally: 'output_dir="[...]"'
2
3 for nb in *.ipynb; do
4     nb_name="${nb%.ipynb}"
5     jupyter nbconvert --to pdf "$nb" # '--output "$output_dir/$nb_name.pdf"'
6 done
```

6.3. Map (Built-In Function)

- Function signature:

```
1 map(function, iterable, *iterables)
```

Description provided in the documentation:

Return an iterator that applies function to every item of iterable, yielding the results. If additional iterables arguments are passed, function must take that many arguments and is applied to the items from all iterables in parallel. With multiple iterables, the iterator stops when the shortest iterable is exhausted. For cases where the function inputs are already arranged into argument tuples, see *itertools.starmap()*.

- Example usage: Natively multiplying Python lists elementwise,

```
1 from typing import List
2
3 def multiply(x: List, y: List):
4     return x * y
5
6 list_one = [i for i in range(1000)]
```

```

7 list_two = [j for j in range(1000, 2000)]
8 result = list(map(multiply, list_one, list_two)) # 'map' is a built-in
          function, do not use '(list_one, list_two)' in this case

```

- Example usage: Converting NumPy arrays into PyTorch tensors,

```

1 a = np.array([1, 2, 3, 4])
2 tensor_list = list(map(torch.from_numpy, (a,))) # list containing tensor,
          use of additional brackets necessary

```

- Example usage: Converting NumPy arrays into PyTorch tensors,

```

1 a = np.array([1, 2, 3, 4])
2 b = np.array([5, 6, 7, 8])
3 a, b = map(torch.from_numpy, (a, b)) # tuple unpacking

```

6.4. PyTorch

Leaf Tensors

- If `requires_grad=False`, then the tensor will be leaf by convention. If `requires_grad=True`, then the tensor will be leaf if it was created directly by the user and is **not** the result of an operation, e.g. `.to(device)` when the tensor is on `cpu` and `device="cuda:0"`.
- However, by definition, leaf tensors themselves do not have a **gradient function** `.grad_fn` because they are not the result of a differentiable operation applied to other tensors, i.e. `grad_fn` on such tensors will return `None`. The gradient function in neural network libraries like PyTorch or TensorFlow is associated with tensors that are outputs of differentiable operations.
- The `.grad` attribute on leaf tensors that require gradients, i.e. those for which `requires_grad=True`, stores the gradient computed during backpropagation. (For leaf tensors that have `requires_grad=False`, calling the `.grad` attribute outputs `None`.) Note that for non-leaf tensors, calling `.grad` results in a `UserWarning`, since non-leaf tensors are generally intermediate results in the computation graph, and their gradients are usually not needed once the gradients of the leaf tensors have been obtained. However, there are cases where those gradients are needed, which can be enforced by setting `retain_grad=True` on those tensors,

```

1 x = torch.tensor([1., 2., 3.], requires_grad=True, device=torch.device("
   cuda:0"))
2
3 # fwd pass
4 y = x**2
5
6 # retain gradients
7 y.retain_grad()
8
9 # backward pas
10 y.sum().backward()
11
12 # access gradients
13 y.grad # 'torch.tensor([1., 1., 1.], device="cuda:0")'

```

Note that in the example of this code snippet, doing `y.grad` means that we access the gradient of the scalar loss function `y.sum()` — on which we performed `.backward()`. Correspondingly, doing `x.grad` implies the gradient of the scalar loss function `y.sum()` with respect to `x`.

- In general, it is **not** possible to perform **in-place** operations on leaf tensors for which `requires_grad=True`, since PyTorch dynamically builds a computational graph during the forward pass, which is used during backpropagation to calculate the gradients. If leaf tensors that have `requires_grad=True` are changed in-place, then the values used during the forward pass are changed, which will affect the gradient calculations in the backward pass. However, note that when no gradients are required for the operations, e.g. when performing parameter updates manually, one can use the context manager `with torch.no_grad()`, in which case in-place operations on leaf tensors **can** be performed, since inside the context manager, `requires_grad=False`.

Autograd & Backward

- The function `torch.autograd.grad()` computes the gradient. If the gradient of a scalar (loss function) wrt a (weight) matrix is taken, then the output will also be a matrix, where each element corresponds to the partial derivative of the scalar (loss function) wrt to the (weight) matrix element.
- `torch.autograd.grad()` is particularly useful if more direct control over the gradient computation is desired, in particular compared to `.backward()`.
- Note that the default behavior of `.backward()` accumulates gradients in the `.grad` attribute of tensors,

```

1      x = torch.tensor([1., 2., 3.], requires_grad=True, device=torch.device("
      cuda:0"))
2
3      # fwd pass
4      y = 2 * x
5
6      # first backward pass
7      y.sum().backward(retain_graph=True)
8      print(f"Gradients of 'x' after first backward pass: {x.grad}") # 'torch.
      tensor([2., 2., 2.])'
9
10     # second backward pass
11     y.sum().backward()
12     print(f"Gradients of 'x' after second backward pass: {x.grad}") # 'torch.
      tensor([4., 4., 4.])', notice how gradients have accumulated

```

However, this behavior can be suppressed by simply zeroing the gradients, i.e. `x.grad.zero_()` — note that `x.grad` returns a tensor, and `<tensor>.zero_()` is a general PyTorch function that sets all elements in-place to 0.

7. AWS S3

7.1. Installation & Configuration

1. Installation instructions
2. The CLI will display the path under which the *aws* package was installed, but it might be sufficient to simply run

```
1 aws
```

Double check by running

```
1 which aws
```

3. After installation, configuration is necessary. For this run

```
1 aws configure
```

You can leave these fields empty:

```
1 Default region name [None]:  
2 Default output format [None]:
```

A configuration file will be saved under

```
1 ~/.aws/credentials
```

4. In the case you are a member of UNIGE, you can obtain the AWS access key ID and the secret access key as follows:

```
1 echo -n "$user_name" | base64 # the '-n' is important in this context  
2 echo -n "$passwd" | md5sum
```

where `$user_name` and `$passwd` need to be provided

Otherwise, you need login to the AWS Management Console.

5. To test the configuration was successful, do this:

```
1 aws s3 ls --endpoint-url https://your-custom-s3-endpoint.com
```

where you replace the endpoint-url `https://your-custom-s3-endpoint.com` with yours.

7.2. AWS Credentials (Profiles)

- It is possible to use several profiles in the file `~/.aws/credentials`.
- For example,

7. AWS S3

```
1 [default]
2 aws_access_key_id = YOUR_DEFAULT_ACCESS_KEY
3 aws_secret_access_key = YOUR_DEFAULT_SECRET_KEY
4
5 [profile1]
6 aws_access_key_id = ANOTHER_ACCESS_KEY_ID
7 aws_secret_access_key = ANOTHER_SECRET_ACCESS_KEY
8
9 [profile2]
10 aws_access_key_id = YET_ANOTHER_ACCESS_KEY_ID
11 aws_secret_access_key = YET_ANOTHER_SECRET_ACCESS_KEY
```

Using specific profile when running `aws cli` commands via `--profile` option in the command:

```
1 aws s3 --profile profile1 [...]
2 # aws s3 --profile default [...]
```

7.3. Buckets

One can have several buckets.

7.3.1. Creation

- Creating a new bucket,

```
1 aws s3api create-bucket --bucket custom-bucket-name --endpoint-url https://
  custom-s3-endpoint.com --profile default
```

7.3.2. Listings

- Directly “folder” contents of an s3 bucket,

```
1 aws s3 ls s3://custom-bucket-name --recursive --endpoint-url https://custom
  -s3-endpoint.com --profile default # '--recursive' optional
```

- Showing file contents,

```
1 aws s3 ls s3://custom-bucket-name/prefix/ --recursive --endpoint-url https
  ://custom-s3-endpoint.com --profile default # '--recursive' optional
```

Note that the `/` at the end of the prefix (“folder”) is necessary.

7.3.3. File Copying

- Local machine → S3:

```
1 aws s3 cp path/to/custom_file.ext s3://custom-bucket-name/path/to/
  custom_file.ext --endpoint-url https://custom-s3-endpoint.com --profile
  default
```

- S3 → local machine:

```
1 aws s3 cp s3://custom-bucket-name/path/to/s3_file.ext custom/destination --
  endpoint-url https://custom-s3-endpoint.com --profile default
```


7.3.4. Directory Copying

- Local machine → S3:

```
1 aws s3 sync path/to/dir s3://custom-bucket-name/path/to --endpoint-url
2 https://custom-s3-endpoint.com --profile default
```

7.3.5. Directory/File Deletion

- Deleting a folder (which is essentially a prefix in S3) and its contents in an S3 bucket,

```
1 aws s3 rm s3://your-bucket-name/path-to-your-folder --recursive --endpoint-
  url https://custom-s3-endpoint.com --profile default
```

- Deleting a file,

```
1 aws s3 rm s3://your-bucket-name/path-to-your-file.out --recursive --
  endpoint-url https://custom-s3-endpoint.com --profile default
```

7.4. Cloudpathlib


- When you use the cloudpathlib module, and you want to specify a profile, do this:

```
1 from cloudpathlib import S3Path, S3Client
2
3 # Create an S3 client with a specific AWS profile
4 s3_client = S3Client(
5     aws_access_key_id=aws_access_key_id,
6     aws_secret_access_key=aws_secret_access_key,
7     endpoint_url=endpoint_url,
8     profile_name="profile1", # specify profile here
9 )
10
11 # Make 'client' default:
12 client.set_as_default_client()
```


8. Git


8.1. Merging

- Assuming the following commit history is given,

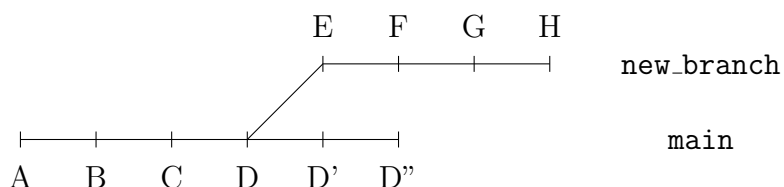


when merging `main` and `new_branch`, the commits D and D'' will be either auto-merged or there will be a merge conflict.

- Assuming the following commit history is given,

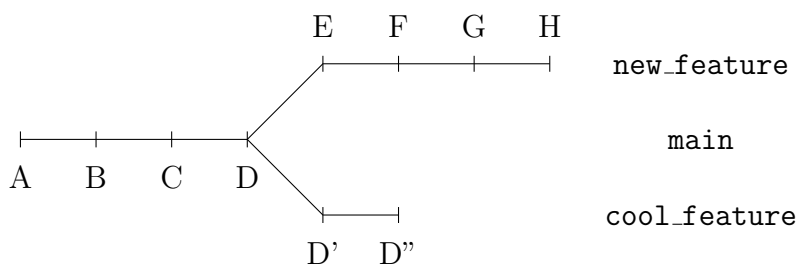

Merging `main` with `new_feature` would result in a fast-forward,



- Merging `new_feature` into `main`,

```
1 git switch main
2 git merge new_feature
```

8.2. Merge Conflicts

- Resolving a merge conflict,

```
1 git mergetool
```

- Confirm with Enter that you want to use vimdiff as default editing tool. vimdiff display will resemble the following structure:

```
1 | LOCAL | BASE | REMOTE |
2 |         MERGED
```

If file did not already exist in BASE, then we need this view:

8. Git

```
1 | LOCAL | MERGED | REMOTE |
```

LOCAL – Current branch

BASE – Common ancestor (how did the file look like before both changes?)

REMOTE – File that I am merging into the current branch

MERGED – Merge result

3. It is probably easiest to take the merged view and edit it directly. In the vim editor, an entire line can be deleted by pressing D (no control before!). If I instead wanted the changes from either LOCAL, BASE or REMOTE, you have to do one of these,

```
1 :diffg L0
2 :diffg BA
3 :diffg L0
```

Of course, the merged view can also be edited directly.

4. Type

```
1 :wqa
```

into vim. Afterwards, do not forget to commit and push. And if you want, do

```
1 git clean -f
```

Locally restore file,

```
1 git restore --source commit-SHA file
2 git restore --source HEAD file
```

5. `git restore` does not overwrite HEAD, though. For that, a push would be necessary. It can sometimes also be useful to run dry merges to proactively check for conflicts during a merge; for this, run

```
1 git merge --no-commit --no-ff branch-name
```

Afterwards, type

```
1 git merge --abort
```

to abort, and no changes will occur. Only for a fast-forward, do

```
1 git merge branch_to_be_merged --ff-only
```

8.3. Checking History

- Viewing the history of commits,

```
1 git log
```

- Viewing a specific file,

```
1 git show <commit-hash>:<file-name>
2 # git show 123abc:example.txt
```

8.4. Removing a File/Folder

- To remove a file/folder that is already tracked, adding it to `.gitignore` won't remove it (though this also needs to happen). For this, do:

```
1 git rm --cached <file>
2 git rm -r --cached <folder>
```

- Adding the file/folder to `.gitignore` is still a good idea, though, since the file/dir won't be removed locally with the commands.

8.5. Renaming a Repository

After having renamed the repository remotely, go to the locally cloned version of the repository and do

```
1 git remote set-url origin https://github.com/username/new-repo-name.git
```

double-check via

```
1 git remote -v
```

which lists the remote names and their URLs. No force push or the alike is necessary for the changes to take place.

8.6. Restore File

Resetting specific file to state of previous commit,

```
1 git restore --source=<commit-hash> <file-path>
2 # git restore --source=HEAD <file_path>
```

Replace `<commit-hash>` with the commit SHA and `<file-path>` with the path to the file. This change is local and you would need to commit it if you want it to be reflected in the repository history.

8.7. Remote URL

Obtaining the remote URL,

```
1 git remote get-url origin
2 git remote get-url origin | sed 's/\.git$//' # optional: trim output
```

8.8. Repo Change

Moving all files from `branch-to-move` to `branch-to-merge-into` and preserving the commit history — do all of this while in the old repo,

```
1 git remote -v # check existing remotes
2 git remote add <target> https://target-repo-url.git # add new remote
3 # git remote add new-remote url
4 git push target branch-to-move:branch-to-merge-into
```

Do all of this in the old repo. If issue emerges during the last step, reclone the new repo and check whether this solves the issue.

9. Remote Development

9.1. Connection

1. When connecting two machines remotely, install this extension on local machine (also directly in VSCode possible),
2. open VSCode on local machine,
3. press F1-button, choose “Remote-SSH: Connect to Host...” and type for the SSH host (optionally save it in the SSH config file) the same as in Algo. (B),
4. enter the passwd for the remote SSH host.

9.2. Troubleshooting

- If you find you are getting a permission error for saving a file on the remote machine (in VSCode when doing the local coding), try

```
1  sudo chown custom-username path/to/custom/script.ext
```

The `custom-username` here refers to the username on the remote machine.

10. Jax

Try to install via pip first. Only if this doesn't work use conda!

- Putting a Jax array onto a specific device,

```
1 import jax
2 from jax import devices, device_put, numpy as jnp
3
4 x = device_put(jnp.arange(10), device=devices("cpu")[0]) # NOTE: put '[0]'
5 # x = device_put(jnp.arange(10), device=devices("gpu")[0]) # NOTE: put
6 # '[0]'
7 print(f"Device: {x.device_buffer.device()}")
```

- Dtype specification,

```
1 x = jnp.array([1, 2, 3], dtype=jnp.float32)
2 print(f"Dtype: {x.dtype}")
```

- Device inference,

```
1 x.device_buffer.device() # x: Jax array
```

- Making a Jax array out of a Python list or a NUMPY array (do not use for tensors),

```
1 from jax import numpy as jnp
2
3 a = jnp.array([1., 2., 3.])
4 b = jnp.array(np.array([1., 2., 3.]))
```

- jit (just-in-time compilation): sets up a function with XLA (extended linear algebra): check out the NB `test__jit-compil.ipynb`. Using jit,

```
1 import jax
2 from jax import numpy as jnp
3
4 @jax.jit
5 def selu(x: jnp.array, lamb: float = 1., alpha: float = 0.):
6     return lamb * jnp.where(x > 0, x, alpha * (jnp.exp(x) - 1.0))
```


A. .bashrc

```
1  ca() {
2      local conda_out="$(conda env list | grep -E "$env_name" | head -n 1 | awk '{
3          print $1}')"
4
5      # check non-emptiness
6      if [ -z "$1" ]; then
7          echo "Usage: ca <env_name>"
8          return 1
9      fi
10
11     # check env existence
12     if [ ! -z "$conda_out" ]; then
13         conda activate "$1"
14     else
15         echo "Conda environment '$env_name' does not exist." # single quotes (') only
16         for display
17         return 1
18     fi
19 }
20
21 # ----- CONDA -----
22
23 # activate conda environment
24 # usage: 'ca custom-env-name'
25 ca() {
26     conda activate "$@"
27 }
28
29 # deactivate currently activated conda environment
30 cod() {
31     conda deactivate
32 }
33
34 # List all available conda envs:
35 cel() {
36     conda env list
37 }
38
39 # remove conda environment
40 # usage: 'crme ant-migrate-dev'
41 crme() {
42
43     # check number of passed arguments via '$#'
44     if [[ $# -ne 1 ]]; then
```

A. .bashrc

```
44     echo "NOTE: Exactly one argument needs to be provided"
45 else
46     conda deactivate && conda remove -n "$1" --all -y
47 fi
48
49 }
50
51 # alias for 'conda__remove_packages'
52 # usage (e.g.): 'crm myenv pkg1 pkg2'
53 crm() {
54     conda__remove_packages "$@"
55 }
56
57 # remove conda packages from environment
58 # usage (e.g.): 'conda__remove_packages myenv pkg1 pkg2'
59 conda__remove_packages() {
60
61     # define local variables first
62     local env_name="$1"
63     local conda_out="$(conda env list | grep -E "$env_name" | head -n 1 | awk '{
64         print $1}')"
65
66     # forget first argument (which is saved in 'env_name')
67     shift
68
69     # check non-emptiness
70     if [ -z "$env_name" ]; then
71         echo "Usage: conda__remove_packages <env_name> [package1] [package2] ... [
72             packageN]"
73         return 1
74     fi
75
76     # check env existence
77     if [ ! -z "$conda_out" ]; then
78         conda remove -n "$env_name" "$@" -y
79         echo "Package(s) '$@' removed from environment '$env_name'"
80     else
81         echo "Conda environment '$env_name' does not exist." # single quotes (') only
82         for display
83         return 1
84     fi
85
86 }
87
88 # ----- AWS -----
89
90 # helper function
91 get__profile_endpoint_url() {
92
93     # check if the first argument contains "https://"
94     if [[ "$1" == https://* ]]; then
95         local endpoint_url="$1"
```

```

93
94     # if there's a second argument, it's the profile
95     if [ -n "$2" ]; then
96         local profile="$2"
97     fi
98
99     elif [ -n "$1" ]; then
100
101         # if the first argument doesn't contain "https://", it's the profile
102         local profile="$1"
103     fi
104
105     echo "$1 $2"
106
107 }
108
109 # define default vals and update based on provided args
110 update__profile_url() {
111     local endpoint_url="https://kalousis.s3.unige.ch"
112     local profile="default"
113
114     # update 'endpoint_url' and 'profile' if provided
115     if [[ "$2" == https://* ]]; then
116         read endpoint_url profile <<< $(get__profile_endpoint_url "$2" "$3")
117     else
118         read profile <<< $(get__profile_endpoint_url "$2" "$3") # for 'endpoint_url',
119                             default val will be taken
120     fi
121
122     echo "$endpoint_url $profile"
123 }
124
125 # listing
126 # example usages (only bucket name provided):
127 # 'lal path'
128 # 'lal path default'
129 # 'lal path https://kalousis.s3.unige.ch'
130 # 'lal path https://kalousis.s3.unige.ch default'
131 lal() {
132     local path="$1"
133
134     read endpoint_url profile <<< $(update__profile_url "$2" "$3")
135
136     $(which aws) s3 ls s3://"${path}" --recursive --endpoint-url "$endpoint_url" --
137         profile "$profile"
138 }
139
140 # removing prefixes/files
141 # example usages (only bucket name provided):
142 # 'larm path'
143 # 'larm path default'
144 # 'larm path https://kalousis.s3.unige.ch'

```

A. .bashrc

```
143 # 'larm path https://kalousis.s3.unige.ch default'
144 larm() {
145     local path="$1"
146
147     read endpoint_url profile <<< $(update__profile_url "$2" "$3")
148
149     command_output=$(($(which aws) s3 rm s3://"${path}" --recursive --endpoint-url "
150         ${endpoint_url}" --profile "${profile}")
151
152     if [[ -z "$command_output" ]]; then
153         # no use of '--recursive', which shouldn't be used for single file deletion
154         $(which aws) s3 rm s3://"${path}" --endpoint-url "${endpoint_url}" --profile "
155             ${profile}"
156     fi
157 }
158
159 # ----- GIT -----
160
161 # list all local and remote branches
162 lb() {
163     git branch -a
164 }
165
166 # create remote branch
167 # usage:
168 # 'lbc new-branch'
169 lbc() {
170     local branch_name="$1"
171
172     git branch $(branch_name) && git push origin $(branch_name)
173 }
174
175 # delete remote branch
176 lbd() {
177     local branch="$1"
178     local exists__in_local=$(git branch --list "${branch}")
179
180     if [[ -z ${exists__in_local} ]]; then
181         git push origin --delete "${branch}" && git clean -f
182     else
183         git branch -D "${branch}"
184     fi
185 }
186
187 # switch branches and create if non-existent
188 lsw() {
189     if git rev-parse --verify "$1" >/dev/null 2>&1; then
190         git switch "$1"
191     else
192         git switch -c "$1"
```

```

193 }
194
195 # cloning
196 # example usage:
197 # 'lcl git@github.com:ImahnShekhzadeh/infra.git '
198 # 'lcl git@github.com:ImahnShekhzadeh/infra.git infra'
199 # 'lcl git@github.com:ImahnShekhzadeh/infra.git infra main'
200 lcl() {
201     local dir_name="${2:-$(pwd)}"
202     local branch_name="${3:-main}"
203
204     git clone "$1" "$dir_name" && cd "$dir_name" && lsw "$branch_name"
205 }
206
207 # example usage: 'lsta 2' or 'lsta'
208 lsta() {
209     local stash_index=${1:-0} # Default to 0 if no argument provided
210
211     # Check if the provided argument is an integer
212     if ! [[ $stash_index =~ ^[0-9]+$ ]]; then
213         echo "The provided index is not a valid integer."
214         return 1
215     fi
216
217     # Check if the stash index exists
218     if ! git rev-parse --verify stash@{$stash_index} >/dev/null 2>&1; then
219         echo "No stash found at index $stash_index"
220         return 1
221     fi
222
223     # If all checks pass, apply the stash
224     git stash apply "stash@{$stash_index}" --index
225 }
226
227 # Forward commands to 'git stash'
228 lst() {
229     git stash "$@"
230 }
231
232 # Stash files, if arguments are provided, they are ignored
233 lstf() {
234     git stash --include-untracked
235 }
236
237 # https://stackoverflow.com/questions/19595067/git-add-commit-and-push-commands-in-one
238 # https://stackoverflow.com/questions/14763608/use-conditional-in-bash-script-to-check-string-argument
239 # if-else statements in bash: https://linuxhandbook.com/if-else-bash/
240 # example usage: lgit "bit" "add ..."
241 lpush() {
242

```

A. .bashrc

```
243 (
244 # use subshell to change directory to Git root and perform actions
245 cd "$(git rev-parse --show-toplevel)" || exit
246 git add . && git commit -a -m "$1" && git push origin $(bname) && llog
247 )
248
249 }
250
251
252 # https://stackoverflow.com/questions/3236871/how-to-return-a-string-value-
    from-a-bash-function
253 bname() {
254     branch=$(git branch --show-current)
255     echo $branch
256 }
257
258 lupd() {
259     git fetch origin $(bname) && git log HEAD..origin/$(bname) --oneline
260 }
261
262 lpull() {
263     git pull origin $(bname)
264 }
265
266 ldiff() {
267     git status "$@" && git diff --color "$@"
268 }
269
270 lforce() {
271     git push origin $(bname) --force
272 }
273
274 llog() {
275     git log
276 }
277
278 lrm() {
279     git rm -r "$@"
280 }
281
282 lreb() {
283     # Set default value to 5:
284     num1=${1:-5}
285     git rebase -i HEAD~$num1
286 }
287
288 # Reset entire repo to state of 'HEAD', or reset specific file to a specific
    commit hash.
289 lres() {
290     if [[ $# -eq 0 ]] || [[ $# -eq 1 ]]; then
291         local commit_hash=${1:-HEAD}
292         git reset --hard "$commit_hash"
```



```

293 elif [ $# -eq 2 ]; then
294     local commit_hash="$1"
295     local file_path="$2"
296     git restore --source="$commit_hash" "$file_path"
297 else
298     echo "Usage: lres [commit_hash file_path]"
299 fi
300 }
301
302 lsh(){
303     git show "$@"
304 }
305
306 # usage:
307 # 'lmv file1 file2 file3 [...] /path/to/target_dir'
308 # 'lmv source_dir target_dir'
309 lmv() {
310     # convert the arguments to an array
311     local args=("$@")
312
313     # get the last element of the array
314     local target_dir="${args[-1]}"
315
316     if [[ ! -d "$target_dir" ]]; then
317         mkdir -p "$target_dir" || {
318             echo "Target directory does not exist: $target_dir" >&2
319             return 1
320         }
321     fi
322
323     # shift the arguments so that last argument ('target_dir') is dropped
324     unset args[-1]
325
326     # now, loop through all the remaining arguments
327     for path in "${args[*]}; do
328         if [[ -e "$path" ]]; then
329             if [[ -d "$path" ]]; then
330                 # move each item in the directory individually
331                 for item in "$path"/*; do
332                     git mv "$item" "$target_dir"
333                 done
334
335                 # remove the now-empty source dir
336                 rmdir "$path"
337             else
338                 # if it's a file, just move it
339                 git mv "$path" "$target_dir"
340             fi
341         else
342             echo "File does not exist: $path" >&2
343         fi
344     done

```

A. .bashrc

```
345 }
346
347 # ----- PROTONVPN -----
348
349 p() {
350     protonvpn-cli "$@"
351 }
352
353 # ----- MISCELLANEOUS -----
354
355 # pdflatex
356 pd() {
357     /usr/bin/pdflatex "$@"
358 }
359
360 # convert input notebook to PDF
361 jconv() {
362     jupyter nbconvert --to pdf "$1"
363 }
364
365 # 'less' with ANSI escape characters
366 less() {
367     /usr/bin/less -R "$@"
368 }
369
370 diff() {
371     /usr/bin/diff --color "$@"
372 }
373
374 # overload 'shred' func, allow (recursive) shredding of dirs/files
375 # multiple files/dirs can be provided, mixing allowed
376 # usage (e.g.): 'shred 10 <file_name>'
377 # shred <file_name>
378 # shred <dir_path>
379 # shred <file_name> <dir_path>
380 shred() {
381
382     # check whether first argument is a number
383     if [[ "$1" =~ ^[0-9]+$ ]]; then
384         local iterations="$1"
385         shift
386     else
387         iterations=5 # default
388     fi
389
390     # check file/dir existences
391     for path in "$@"; do
392         if check_existence "$path"; then
393             # check whether passed input is directory or not
394             if [[ -d "$path" ]]; then
395                 echo "Files to be shredded in $path:"
396                 find "$path" -type f -print0 | xargs -0 ls -ld
```

```

397     fi
398 else
399     echo "Error occurred in check_existence for file/dir: $path"
400     return 1
401 fi
402 done
403
404 # prompt user for confirmation
405 read -rp "Do you wish to proceed with shredding all files in $@ for
    $iterations iterations? (yes/no): " confirmation
406
407 if [[ $confirmation = [yY] || $confirmation = [yY][eE][sS] ]]; then
408     for path in "$@"; do
409         if [[ -d "$path" ]]; then
410             # shred all files within the directory
411             find "$path" -type f -exec /usr/bin/shred -uz -n "$iterations" {} \;
412             rm -rf "$path"
413             echo "All files in '$path' have been shredded for $iterations iterations."
414         elif [[ -f "$path" ]]; then
415             # shred the individual file
416             /usr/bin/shred -uz -n "$iterations" "$path"
417             echo "File '$path' has been shredded for $iterations iterations."
418         fi
419     done
420 else
421     echo "Shredding aborted."
422 fi
423 }
424
425 # shortcut for clearing terminal output
426 c() {
427     clear
428 }
429
430 # shortcuts for exiting terminal
431 q() {
432     exit
433 }
434
435 e() {
436     q
437 }
438
439 # tailscale
440 ts() {
441     tailscale status "$@"
442 }
443
444 # xournalpp (https://github.com/xournalpp/xournalpp)
445 xopp() {
446     xournalpp "$@"
447 }

```

A. .bashrc

```
448
449 # strings comparison
450 # usage (e.g.): 'str_diff "blub1" "blub1"' or 'str_diff blub1 blub1'
451 # or 'str_diff $(echo "hey") $(echo "hey")'
452 # NOTE: exactly two arguments need to be provided
453 str_diff() {
454
455     # check number of passed arguments via '$#'
456     if [[ $# -ne 2 ]]; then
457         echo "NOTE: Exactly two arguments need to be provided"
458         return 1 # return non-zero exit code to indicate error
459     else
460
461         # compare strings
462         if [[ $1 == $2 ]]; then
463             echo -e "Strings '$1' and '$2' \033[92mmatch\033[0m"
464         else
465             echo -e "Strings '$1' and '$2' do \033[91mNOT\033[0m match"
466         fi
467     fi
468 }
469
470
471 # ----- DOCKER -----
472 d() {
473     docker "$@"
474 }
475
476 # ----- CHATGPT -----
477
478 # https://github.com/kardolus/chatgpt-cli/tree/main
479 gpt(){
480     chatgpt -i
481 }
482
483 export OPENAI_KEY=[...]
484
485 # ----- ALWAYS EXECUTE -----
486
487
488 add_bit
```

B. Amazing Programs, Extensions, Plugins & Packages

- <https://etherpad.org/>
- <https://github.com/charmbracelet/gh>
- <https://github.com/0xacx/chatGPT-shell-cli>
- <https://github.com/kardolus/chatgpt-cli/tree/main>

– For setting the right model (cf. here for all available models),

```
1 chatgpt --set-model gpt-4-1106-preview --set-max-tokens 128000
```

– Usage:

```
1 chatgpt -i
```

- <https://tailscale.com/download/>

– Once installation is complete, the command

```
1 sudo tailscale up
```

should be run to login, though this command will also display after installation in the CLI. The signing in should happen via GitHub. To be able to use Tailscale from a new device, it must be added as a device under <https://login.tailscale.com/admin/machines>. Once this is done, open a CLI and type

```
1 ssh name@ip_address # find out <name> and <ip_address> via tailscale  
   console  
2 # ssh ellie@100.xx.xxx.xx
```

NOTE that if the file already exists locally, it will be overwritten.

– For file copying (e.g. from the host machine to the currently used machine), do this

```
1 scp name@ip_address:/path/to/remote_file.ext /local/path # find out <  
   name> and <ip_address> via tailscale console  
2 # ssh ellie@100.xx.xxx.xx
```

For directory copying,

```
1 scp -r name@ip_address:/path/to/remote_dir /local/path # find out <  
   name> and <ip_address> via tailscale console  
2 # ssh ellie@100.xx.xxx.xx
```

- <https://tailscale.com/kb/1080/cli/> (no separate installation necessary, only tailscale needs to be installed)
 - Finding out the IPv4 address of the currently active machine,

```
1 tailscale ip -4
```

– Finding out the IPv4 address of another machine connected via the Tailscale network,

```
1 tailscale ip -4 custom-name  
2 # tailscale ip -4 ellie
```

- <https://github.com/aws/aws-cli>
- <https://github.com/termcolor/termcolor>

- **LibreOffice dark theme,**

Tools → Options → LibreOffice → Application Colors → Custom Colors → General
→ Document Background, choose a dark color.

C. VSCode

C.1. Recommended Extensions

- <https://marketplace.visualstudio.com/items?itemName=ms-vscode-remote.vscode-remote-ex>
- <https://marketplace.visualstudio.com/items?itemName=Gruntfuggly.todo-tree>

C.2. Debugging

- Stepping into external code with Python debugger, tutorial [here](#)
- Creating a JSON file, [here](#) some instructions

C.3. settings.json

Opening the file,

1. press **Ctrl + Shift + P** to the Command Palette,
2. type **Open User Settings (JSON)** and select it to open the `settings.json` file.

C.4. Fix Unresolved Python Imports

- If you run a docker container where a conda environment is installed (with packages that you do not have locally), then VSCode will show those imports as unresolved. To fix this, open the `settings.json` file, cf. App. C.3, and add the following setting:

```
1  "python.analysis.diagnosticSeverityOverrides": {  
2    "reportMissingImports": "none"  
3  }
```

Incorporating this into the `settings.json` file is shown in App. C.6.

- Note that if you have an SSH connection to another machine going on, e.g. in the **Remote Development** extension, putting the above lines into the `settings.json` file will not have an immediate effect, for this the SSH connection needs to be restarted.

C.5. Opening a Duplicate Workspace

1. press **Ctrl + Shift + P** to open the Command Palette,
2. then type **Workspaces: Duplicate As Workspace in New Window**

C.6. settings.json

Contents of settings.json,

```
1  {
2    "workbench.colorTheme": "Default Dark Modern",
3    "telemetry.telemetryLevel": "off",
4    "editor.wordWrap": "wordWrapColumn",
5    "editor.wordWrapColumn": 79,
6    "workbench.editor.enablePreview": false,
7    "gitlens.telemetry.enabled": false,
8    "notebook.lineNumbers": "on",
9    "explorer.confirmDragAndDrop": false,
10   "window.zoomLevel": 1,
11   "python.analysis.diagnosticSeverityOverrides": {
12     "reportMissingImports": "none"
13   },
14   "todo-tree.general.tags": [
15     "BUG",
16     "HACK",
17     "FIXME",
18     "TODO",
19     "NOTE",
20     "XXX",
21     "[ ]",
22     "[x]"
23   ],
24
25   "files.associations": {"*.log": "plaintext"},
26   "[plaintext]": {"editor.wordWrap": "off"},
27   "[shellscript]": {"editor.wordWrap": "off"},
28   "workbench.editor.tabSizing": "shrink"
29 }
```