

# Infra

Imahn Shekhzadeh  
imahn.shekhzadeh@unige.ch

December 15, 2023

## Contents

<b>1</b>	<b>Baobab/Yggdrasil</b>	<b>3</b>
<b>2</b>	<b>Bash</b>	<b>4</b>
<b>3</b>	<b>Linux</b>	<b>6</b>
3.1	Opening Programs from CLI . . . . .	6
<b>4</b>	<b>Anaconda</b>	<b>8</b>
4.1	Installation of Environments . . . . .	8
4.2	Export . . . . .	8
4.3	Installation & Removal of Packages . . . . .	8
4.4	Usage in VSCode . . . . .	8
4.5	PyTorch . . . . .	9
<b>5</b>	<b>CUDA</b>	<b>10</b>
<b>6</b>	<b>Docker</b>	<b>11</b>
6.1	Installation . . . . .	11
6.2	Basics . . . . .	11
6.3	Dockerfile . . . . .	11
6.4	Docker images . . . . .	12
6.5	Docker containers . . . . .	13
6.5.1	Basics . . . . .	13
6.5.2	Passing Arguments . . . . .	14
6.5.3	Listing & Stopping . . . . .	15
6.6	Pushing to DockerHub & HPC . . . . .	15
<b>7</b>	<b>Python</b>	<b>16</b>
7.1	Config File & JSON Files . . . . .	16
7.2	Jupyter Notebooks . . . . .	16
7.3	Map (Built-In Function) . . . . .	16
7.4	PyTorch . . . . .	17
7.4.1	Leaf Tensors . . . . .	17
7.4.2	Autograd & Backward . . . . .	18

<b>8</b>	<b>AWS S3</b>	<b>19</b>
8.1	Installation & Configuration . . . . .	19
8.2	AWS Credentials (Profiles) . . . . .	19
8.3	Buckets . . . . .	20
8.3.1	Creation . . . . .	20
8.3.2	Listings . . . . .	20
8.3.3	File Copying . . . . .	20
8.3.4	Directory Copying . . . . .	20
8.3.5	Directory/File Deletion . . . . .	21
8.4	Cloudpathlib . . . . .	21
<b>9</b>	<b>Git</b>	<b>22</b>
9.1	Merging . . . . .	22
9.2	Merge Conflicts . . . . .	22
9.3	Checking History . . . . .	23
9.4	Removing a File/Folder . . . . .	23
9.5	Renaming a Repository . . . . .	24
9.6	Restore File . . . . .	24
9.7	Branches . . . . .	24
9.7.1	Remote Branch Creation . . . . .	24
9.7.2	Delete Branches . . . . .	24
9.7.3	List Branches . . . . .	24
9.7.4	Remote URL . . . . .	25
9.7.5	Repo Change . . . . .	25
<b>10</b>	<b>Remote Development</b>	<b>26</b>
10.1	Connection . . . . .	26
10.2	Troubleshooting . . . . .	26
<b>11</b>	<b>Jax</b>	<b>27</b>
<b>A</b>	<b>.bashrc</b>	<b>28</b>
<b>B</b>	<b>Amazing Programs, Extensions, Plugins &amp; Packages</b>	<b>38</b>
<b>C</b>	<b>VSCode</b>	<b>39</b>
C.1	Recommended Extensions . . . . .	39
C.2	settings.json . . . . .	39
C.3	Fix Unresolved Python Imports . . . . .	39
C.4	Opening a Duplicate Workspace . . . . .	39
C.5	settings.json . . . . .	39
<b>D</b>	<b>LibreOffice</b>	<b>41</b>
D.1	Dark Theme . . . . .	41
<b>E</b>	<b>UNIGE-specific</b>	<b>42</b>

## Note

The commands in this document might only run through if you use the *.bashrc* file provided in App. A

# 1 Baobab/Yggdrasil

- To connect to Baobab from your local machine, just type into a terminal:

```
1 eval $(ssh-agent)
2 ssh-add /home/imahn/.ssh/id_ed25519_unige_hpc
3 ssh shekhza2@login2.baobab.hpc.unige.ch
4 # ssh shekhza2@login1.yggdrasil.hpc.unige.ch
```

- Scp into yggdrasil:

```
1 scp file shekhza2@login1.yggdrasil.hpc.unige.ch:/home/users/s/shekhza2/
2 # scp -r folder_name shekhza2@login1.yggdrasil.hpc.unige.ch:/home/users/s/
   shekhza2/
```

- To see all the machines that are occupied, just type

```
1 squeue
2 squeue -p cms-uhh # partition
3 squeue -u shekhza2 # user
```

Listing 1: Squeue commands

- To find out about your conda environment, just type (e.g. whether you use Anaconda2 or Anaconda3)

```
1 conda info
```

- 

```
1 pip install ipykernel
2 python -m ipykernel install --user --name <environment_name> --display-name
   "customStuff"
```

## 2 Bash

- Downloading file from URL and allowing for redirects,

```
1 curl -Lo output.out https://url.com
```

- For this directory structure,

```
1 infra_upd.tex
2 infra_upd.log
3 infra_upd.aux
4 infra_upd.out
5 infra_upd.pdf
```

rename *all* of them via

```
1 for file in infra_upd.*; do mv "$file" "${file/infra_upd/infra}"; done
```

What happens is called a [substring replacement](#).

- Appending line to file,

```
1 echo "this is a line" | tee -a output.out # -a: appending, important
```

- Checking whether provided string (e.g. via an argument) is empty or not (typically used within conditional statements):

```
1 test_sth() {
2     local env_name="$1" # bash starts counting indices from 1
3
4     if [ -z "$env_name" ]; then # spacing after '[' and before ']' needed
5         echo "The string is empty."
6         return 1 # return value of 1 indicates error
7     fi
8 }
```

Listing 2: Check (e.g. in if-clause) whether string is empty or not

- For retrieving all but the first argument,

```
1 test_sth(){
2     shift
3
4     echo "all provided args (except the first): $@"
5 }
```

- And of course there is nothing stopping us from doing this  $N \geq 1$ -times ... Pseudocode:

```
1 test_sth(){
2     shift
3     ...
4     shift
5
6     echo "all provided args (except the first N): $@"
7 }
```

If  $N$  arguments are not provided, this is **not** a problem, the code will still run through.

- Example for an alias:

```
1  # forward output
2  ts(){
3      test_sth "$@"
4  }
```

- Finding out the size of a file or directory,

```
1  du -hs <path_to_file_or_dir> # du -hs file.ext
2
3  # for shorter summary (single quotation strings required)
4  du -hs <path_to_file_or_dir> | awk '{print $1}'
```

- When you want to create a new directory and you want all parent directories to be created as well (assuming they don't already exist), do

```
1  mkdir -p <dir>
```

The `-p` option is safe, since if the directory is already existent, no error will be outputted

- Searching for all files with a specific extension, e.g. `.ext`:

```
1  find . -name "*.ext"
2  # find . -name "*.png"
```

Note that this can be nicely combined with `grep`.

- In Bash, using `[[ ]]` instead of `[ ]` is preferred, since `[[ ]]` is safer and more capable within Bash scripts. Also, within `[ ]` (where word splitting and filename expansion do occur), it's good practice to double-quote your variables. But it's safe to omit the double-quotes for e.g. `##` within `[[ ]]`.
- Unzipping a file via the CLI,

```
1  unzip /path/to/file.zip -d /path/to/destination
```

- Opening a file and automatically scrolling to the bottom,

```
1  less +G /path/to/file.ext
```

- Comparing the contents of two directories,

```
1  diff -r --color directory1 directory2 # '-r' for recursive comparison
2  diff -rq --color directory1 directory2 # '-q' suppresses the output of
    differences and only shows which files differ
```

Ignoring files only existent in one of the directories (which treats absent files as empty),

```
1  diff -rq --color --unidirectional-new-file directory1 directory2
```

## 3 Linux

- Under Ubuntu, listing *all* available kernels,

```
1 dpkg --get-architecture | grep linux-image
```

Listing 3: Find kernel versions in Ubuntu

Finding the currently *active* kernel version,

```
1 uname -a
```

Listing 4: Current kernel versions in Ubuntu

The *-a* option stands for *appending*, otherwise *tee* overwrites *output.out* (if existent).

- Better colors in CLI:
  1. Use monokai color scheme, i.e. dark gray background (#272822) with light peach color for the text (#F8F8F2)
  2. File paths are still displayed in blue, which is suboptimal, to change the color to the better readable cyan-blue color, click on the three horizontal lines in the CLI, then on **Preferences**, then choose the currently active color, switch to the **Colors** tab, then go to **Palette**, click on the blue color & instead use the color #66D9EF

where *-h* stands for human readability and *-s* for summarizing.

- Retrieving the number of available CPU resources,

```
1 echo "$(nproc)"
```

- It is possible to use colored outputs in Bash. Check the bash function *str\_diff* in App. A. (Note that the *-e* option is mandatory to enable interpretation of the backslash escapes).
- Print day and time from CLI,

```
1 echo "$(date +%d_%m_%y-%H_%M_%S)"  
2 # echo "$(date +%dp%mp%y-%Hp%Mp%S)"
```

- Seeing the resource consumption,

```
1 htop
```

- If you did an *sshfs* and the connection hung up, kill the connection via

```
1 fusermount -zu /path/to/dir
```

### 3.1 Opening Programs from CLI

- Opening the settings from CLI,

```
1 gnome-control-center
```

- Opening VSCode from CLI:

```
1 code path_to_file/file_name.ext
```

If a VSCode editor is already open, use the *-n* flag to open the file in a new editor:

```
1 code -n path_to_file/file_name.ext
```

A folder can also be opened directly:

```
1 code path_to_dir
```

Listing 5: Opening VSCode dir from CLI

- Opening LibreOffice from CLI:

```
1 libreoffice --writer path_to_dir/filename.odt
```

- Opening an image via the CLI:

```
1 eog /path/to/your/image.jpg
```

## 4 Anaconda

### 4.1 Installation of Environments

- Installing conda with specific python version,

```
1 # only 'myenv' needs to be specified (quotation marks necessary)
2 env_name="myenv" && conda create -n "$env_name" python=3.11.3 -y && conda
   activate "$env_name"
```

As of Oct 16, I wouldn't recommend installing python 3.12.0 yet (I got a lot of unmet dependency problems when trying to install torch 2.1 with NVIDIA Cuda version 11.8 afterwards).

- Installation of conda environment from bash file:

```
1 conda deactivate # go into base environment
2 source conda/filename.sh
3 touch .env
```

- Completely remove conda environment,

```
1 conda deactivate && conda remove -n custom-env-name --all -y
```

### 4.2 Export

- Exporting an yml-file to share with others for reproducibility,

```
1 conda env export > environment.yml
```

At the end of the file, there will be a line starting with "Prefix:", you can safely delete it, for details see [here](#)

### 4.3 Installation & Removal of Packages

- Installation of packages from *pyproject.toml* file,

```
1 pip install -e .
```

- Installing specific conda package version:

```
1 conda install -c conda-forge custom-pkg-name -y
2 # conda install -c conda-forge cloudpathlib=0.15.1 -y
```

- Removing list of packages from conda environment:

```
1 conda remove -n custom-env-name pkg1 pkg2 ... pkgN -y
2 # conda remove -n google_jax matplotlib -y
```

### 4.4 Usage in VSCode

- Selecting a conda environment in VSCode, do Ctrl + Shift + P and type *Python: select interpreter*.
- Stepping into external code with Python debugger: <https://stackoverflow.com/questions/53594900/visual-studio-code-python-debugging-step-into-the-code-of-external-function>



- Creating a JSON file, here some instructions: <https://code.visualstudio.com/docs/python/debugging>
- Listing all installed environments,

```
1  conda env list
```

## 4.5 PyTorch

- Checking whether gpu version of PyTorch is installed, from python shell (**for this, activate the right conda env first!**):

```
1  import os
2
3  import torch
4
5  if __name__ == "__main__":
6      os.path.dirname(torch.__file__)
```

Afterwards, do

```
1  ls -larht <path_from_prev_alg> | grep -E "cuda"
```

- If you had installed PyTorch via conda instead of pip, then this is easier, where the *-E* means we are searching for extended regular expressions (**again activate the right conda env first!**):

```
1  conda list | grep -E "torch|pytorch"
2  # or 'conda list | grep -E "torch|pytorch"'
```

## 5 CUDA

- When you need to find out the CUDA version installed, install *nvidia-cuda-toolkit*, but do NOT reboot. After its use, immediately remove this package and any package installed alongside with it!
- In case NVIDIA drivers do not allow for boot into Ubuntu (e.g. because you did not uninstall the *nvidia-cuda-toolkit* package):
  1. Boot into an older kernel version of Linux (in order to get there, do a "hard" reboot, and then go into "Advanced options for Ubuntu", and choose an older kernel version).
  2. Once booted into the older kernel version, I removed 'nvidia-cuda-toolkit' and rebooted.
  3. After a few more hard reboots and booting into the older kernel version, at some point, the newer kernel version was picked up and worked again.
  4. Now to fix the monitors (because dual-monitor setup didn't work), I had to open the program "Additional Drivers" and change the driver from the open-source version to an NVIDIA proprietary one.
  5. Then I had to install CUDA according to <https://docs.nvidia.com/cuda/cuda-installation-guide/index.html> again.
  6. For PyTorch to recognize the GPU, I had to reboot.

## 6 Docker

### 6.1 Installation

- Follow this great tutorial by DigitalOcean.
- To use NVIDIA GPUs (both in PyTorch & Jax), install the NVIDIA Container Toolkit
- Once done with the installation of the NVIDIA Container Toolkit, proceed with the configuration. During the configuration, it will be necessary to restart the docker daemon, which you can achieve as follows:

```
1 sudo systemctl restart docker
```

### 6.2 Basics

- Interactive start of containers:

```
1 d ps -a # find out ID (also docker container name)
2 d start -i ID
```

- Copying files from local system to docker container and vice versa; **run both commands from local CLI**

```
1 d cp file_name container_ID:/target_dir # local -> docker
2 d cp container_ID:/file_name dir_name # docker -> local
```

### 6.3 Dockerfile

- When you find the command for pulling a docker image on <https://hub.docker.com>, e.g.

```
1 d pull ubuntu:jammy-20231004
```

then in the Dockerfile, just write

```
1 FROM ubuntu:jammy-20231004
```

When no tag is specified, by default the *latest* one will be taken. However, using the *latest* tag can potentially cause issues with reproducibility and consistency, because you might pull a different version of the image at different times without knowing it if the latest tag gets updated. **For more predictable builds, it is advised to use a specific version tag.**

- Note that the structure of the *docker pull* command is

```
1 d pull [OPTIONS] NAME[:TAG|@DIGEST]
```

In general, the *NAME* is in the format *repository/image*. If *repository* is not specified, Docker assumes the image is located in the default DockerHub library repository. However, many images (like PyTorch) are hosted under a specific user or organization's namespace on DockerHub, rather than the top-level library. That's why the command for the docker pull (for the latest tag) reads

```
1 d pull pytorch/pytorch
```

- If using a Docker image like *pytorch/pytorch:latest*, conda is already installed. In this case, the default environment is named *base*, which is a common practice in Docker images with conda – unless otherwise stated.
- Copying local scripts into docker container,

```
1 COPY relative/path/to/script.py .
```

From the documentation:

Multiple `<src>` resources may be specified but the paths of files and directories will be interpreted as relative to the source of the context of the build.

It is also important to put the `.` at the end, since it represents the destination in the Docker image where the file should be copied. The dot `.` refers to the current working directory inside the Docker image, which is determined by the `WORKDIR` command in the Dockerfile. If `WORKDIR` is not set, it defaults to the root directory (`/`) of the image.

Also, each time the script *relative/path/to/script.py* changes, the Dockerfile needs to be rebuilt – **however, a cached version will be used, which speeds things up.**

- Copying local dirs into docker container,

```
1 COPY relative/path/to/dir/ .
```

- Running a Dockerfile:

```
1 d build -f file_name -t img_name .
2 d build -f file_name -t img_name:tag_name . # tag name optional, but
      recommended, e.g. 1.0 (no quotes required)
3 # d build -f file_name --no-cache -t [...] # forcing to rebuild from
      scratch, no cached version is used (only do if really required)
```

where *Image\_name* will be the name of the newly created image, *Tag\_name* the tag name and *file\_name* the name of the docker file.

- Via

```
1 EXPOSE custom-port-number
2 # EXPOSE 80
```

it is possible to expose a port. Note that port exposure is related to network access. Note that even though network access might not be needed, there is still no harm in exposing a port (since an exposure of the port does not make the docker container more vulnerable).

## 6.4 Docker images

- A Dockerfile does not necessarily need to have the name *Dockerfile*. To pass another name when building the img, do

```
1 d build -f custom_docker_file .
```

The `.` specifies the context of the build, which is the current directory in this case. **I would recommend running this command from the same dir in which *custom\_docker\_file* is located.**

- Check all available Docker images via

```
1 d images
```

- Cleaning up dangling docker images (these are the entries with *<none>* in the repository or tag name in the output of the previous algo):

```
1 d image prune -f
```

- Removing a Docker image – **only do this when finished with using the image**

```
1 d image rm Image_name:Tag
2 # d container rm <container_id> # in case some containers are using the
   image
```

## 6.5 Docker containers

### 6.5.1 Basics

- Running Docker images – without being able to utilize NVIDIA GPUs:

```
1 d run -it img_name # if 'tag_name' was not provided
2 d run -it img_name:tag_name # if 'tag_name' was provided during build (
   recommended)
```

- Running Docker images & utilizing GPUs:

```
1 d run --gpus all -it img_name
2 d run --gpus all -it img_name:tag_name # recommended
```

- To mount a local file to the container at runtime, do

```
1 d run -v /absolute/path/to/script.py:/path/to/workdir/script.py --gpus all
   -it img_name
2 d run -v /absolute/path/to/script.py:/path/to/workdir/script.py --gpus all
   -it img_name:tag_name # recommended, provide 'img_name' & 'tag_name'
```

The mounting expects **absolute** file paths on the side of the host machine.

- Note that you can include the bash command **pwd** to avoid having to manually pass absolute paths for the mounting

```
1 d run -v $(pwd)/script.py:/path/to/workdir/script.py --gpus all -it
   img_name:tag_name # recommended, provide 'img_name' & 'tag_name'
```

If you need the container to reflect changes made to the scripts on the host without rebuilding the image every time, you would use the *-v* flag to mount the directory. If the scripts won't change, or you don't need to reflect changes in real-time, you don't need to mount the directory, as the necessary scripts have already been copied into the image during the build process.

- It is also possible to directly mount directories:

```
1 d run -v $(pwd)/dir_path:/path/to/workdir --gpus all -it img_name:tag_name
```

Note that the specified directory from the host is mounted into the container at the specified mount point. If there are any existing files or directories in the container at the mount point, they become obscured by the mount.

- In several cases it can be useful to remove the docker container right after execution: When you...
  - ...are running many short-lived containers, like during development or testing,
  - ...want to avoid manual cleanup of stopped containers later on,
  - ...are running containers for one-off tasks that do not need to persist any state after they are finished.

In this case,

```
1 d run --rm -v $(pwd)/dir_path:/path/to/workdir --gpus all -it img_name:tag_name
```

- It is also possible to mount two separate host directories to two separate directories within the container,

```
1 d run --rm -v $(pwd)/dir_path1:/path/to/workdir1 -v $(pwd)/dir_path2:/path/to/workdir2 --gpus all -it img_name:tag_name
```

This will not cause any overwriting as each `-v` flag creates a unique mount point inside the container.

- Finding out the python version of the Docker image

```
1 d run -it --rm img_name:tag_name python3 --version
```

This command will immediately remove the container after execution.

### 6.5.2 Passing Arguments

It is possible to pass arguments when running a docker container.

1. Assuming you have a bash script *run\_scripts.sh*, in which a Python script, e.g.

```
1 #!/bin/sh
2 isort /app/scripts/*.py
3 black /app/scripts/*.py
4
5 python3 -B /app/scripts/test_script.py
6 python3 -B /app/scripts/test_anil.py
```

Modify this bash script s.t. any arguments passed to the CLI when running the docker container are picked up,

```
1 python3 -B /app/scripts/test_anil.py "$@"
2 # python3 -B /app/scripts/test_script.py "$@" # alternative
```

2. Rebuild (!) the docker image.
3. Now run the docker container as follows:

```
1 d run --rm -v $(pwd)/dir_path:/path/to/workdir --gpus all -it img_name:tag_name arg1 arg2
2 # d run --rm -v $(pwd)/dir_path:/path/to/workdir --gpus all -it img_name:tag_name --n_ways 1 --k_shots 1 # example
```

### 6.5.3 Listing & Stopping

- Listing all running containers,

```
1 d ps
```

Listing only the container ID (of all running containers),

```
1 d ps -q
```

- Stopping a running container,

```
1 d stop container-ID
```

- Stopping a running container and removing it,

```
1 d stop container-ID && d rm container-ID
```

## 6.6 Pushing to DockerHub & HPC

1. First login to Docker via

```
1 d login -u user_name -p password
```

2. Then follow the instructions from this tutorial (from minute 17:05 on)
3. And then follow the HPC tutorial from UNIGE

## 7 Python

### 7.1 Config File & JSON Files

- When using `argparse` in combination with a JSON configuration file, the JSON keys need to match the long option names specified in `parser.add_argument()` method calls. The `argparse` module itself does not automatically recognize abbreviated forms from a JSON file.

### 7.2 Jupyter Notebooks

- Converting jupyter notebooks into PDFs,

```
1 for nb in /path/one/Notebook1.ipynb /path/two/Notebook2.ipynb [...]
2 do
3     jupyter nbconvert --to pdf "$nb"
4 done
```

Wildcarding notation would also work,

```
1 # optionally: 'output_dir="[...]"'
2
3 for nb in *.ipynb; do
4     nb_name="${nb%.ipynb}"
5     jupyter nbconvert --to pdf "$nb" # '--output "$output_dir/$nb_name.pdf"'
6 done
```

### 7.3 Map (Built-In Function)

- Function signature:

```
1 map(function, iterable, *iterables)
```

Description provided in the documentation:

Return an iterator that applies function to every item of iterable, yielding the results. If additional iterables arguments are passed, function must take that many arguments and is applied to the items from all iterables in parallel. With multiple iterables, the iterator stops when the shortest iterable is exhausted. For cases where the function inputs are already arranged into argument tuples, see *itertools.starmap()*.

- Example usage: Natively multiplying Python lists elementwise,

```
1 from typing import List
2
3 def multiply(x: List, y: List):
4     return x * y
5
6 list_one = [i for i in range(1000)]
7 list_two = [j for j in range(1000, 2000)]
8 result = list(map(multiply, list_one, list_two)) # 'map' is a built-in
           function, do not use '(list_one, list_two)' in this case
```

- Example usage: Converting NumPy arrays into PyTorch tensors,



```

1 a = np.array([1, 2, 3, 4])
2 tensor_list = list(map(torch.from_numpy, (a,))) # list containing tensor,
           use of additional brackets necessary

```

- Example usage: Converting NumPy arrays into PyTorch tensors,

```

1 a = np.array([1, 2, 3, 4])
2 b = np.array([5, 6, 7, 8])
3 a, b = map(torch.from_numpy, (a, b)) # tuple unpacking

```

## 7.4 PyTorch

### 7.4.1 Leaf Tensors

- If `requires_grad=False`, then the tensor will be leaf by convention. If `requires_grad=True`, then the tensor will be leaf if it was created directly by the user and is **not** the result of an operation, e.g. `.to(device)` when the tensor is on `cpu` and `device="cuda:0"`.
- However, by definition, leaf tensors themselves do not have a **gradient function** `.grad_fn` because they are not the result of a differentiable operation applied to other tensors, i.e. `grad_fn` on such tensors will return `None`. The gradient function in neural network libraries like PyTorch or TensorFlow is associated with tensors that are outputs of differentiable operations.
- The `.grad` attribute on leaf tensors that require gradients, i.e. those for which `requires_grad=True`, stores the gradient computed during backpropagation. (For leaf tensors that have `requires_grad=False`, calling the `.grad` attribute outputs `None`.) Note that for non-leaf tensors, calling `.grad` results in a `UserWarning`, since non-leaf tensors are generally intermediate results in the computation graph, and their gradients are usually not needed once the gradients of the leaf tensors have been obtained. However, there are cases where those gradients are needed, which can be enforced by setting `retain_grad=True` on those tensors,

```

1 x = torch.tensor([1., 2., 3.], requires_grad=True, device=torch.device("
           cuda:0"))
2
3 # fwd pass
4 y = x**2
5
6 # retain gradients
7 y.retain_grad()
8
9 # backward pas
10 y.sum().backward()
11
12 # access gradients
13 y.grad # 'torch.tensor([1., 1., 1.], device="cuda:0")'

```

Note that in the example of this code snippet, doing `y.grad` means that we access the gradient of the scalar loss function `y.sum()` — on which we performed `.backward()`. Correspondingly, doing `x.grad` implies the gradient of the scalar loss function `y.sum()` with respect to `x`.

- In general, it is **not** possible to perform **in-place** operations on leaf tensors for which `requires_grad=True`, since PyTorch dynamically builds a computational graph during the forward pass, which is used during backpropagation to calculate the gradients. If leaf tensors

that have `requires_grad=True` are changed in-place, then the values used during the forward pass are changed, which will affect the gradient calculations in the backward pass. However, note that when no gradients are required for the operations, e.g. when performing parameter updates manually, one can use the context manager `with torch.no_grad()`, in which case in-place operations on leaf tensors **can** be performed, since inside the context manager, `requires_grad=False`.

### 7.4.2 Autograd & Backward

- The function `torch.autograd.grad()` computes the gradient. If the gradient of a scalar (loss function) wrt a (weight) matrix is taken, then the output will also be a matrix, where each element corresponds to the partial derivative of the scalar (loss function) wrt to the (weight) matrix element.
- `torch.autograd.grad()` is particularly useful if more direct control over the gradient computation is desired, in particular compared to `.backward()`.
- Note that the default behavior of `.backward()` accumulates gradients in the `.grad` attribute of tensors,

```
1     x = torch.tensor([1., 2., 3.], requires_grad=True, device=torch.device("
      cuda:0"))
2
3     # fwd pass
4     y = 2 * x
5
6     # first backward pass
7     y.sum().backward(retain_graph=True)
8     print(f"Gradients of 'x' after first backward pass: {x.grad}") # 'torch.
      tensor([2., 2., 2.])'
9
10    # second backward pass
11    y.sum().backward()
12    print(f"Gradients of 'x' after second backward pass: {x.grad}") # 'torch.
      tensor([4., 4., 4.])', notice how gradients have accumulated
```

However, this behavior can be suppressed by simply zeroing the gradients, i.e. `x.grad.zero_()` — note that `x.grad` returns a tensor, and `<tensor>.zero_()` is a general PyTorch function that sets all elements in-place to 0.

## 8 AWS S3

### 8.1 Installation & Configuration

1. Installation instructions
2. The CLI will display the path under which the *aws* package was installed, but it might be sufficient to simply run

```
1 aws
```

Double check by running

```
1 which aws
```

3. After installation, configuration is necessary. For this run

```
1 aws configure
```

You can leave these fields empty:

```
1 Default region name [None]:  
2 Default output format [None]:
```

A configuration file will be saved under

```
1 ~/.aws/credentials
```

4. In the case you are a member of UNIGE, you can obtain the AWS access key ID and the secret access key as follows:

```
1 echo -n "$user_name" | base64 # the '-n' is important in this context  
2 echo -n "$passwd" | md5sum
```

where `$user_name` and `$passwd` need to be provided

Otherwise, you need login to the AWS Management Console.

5. **To test the configuration was successful, do this:**

```
1 aws s3 ls --endpoint-url https://your-custom-s3-endpoint.com
```

where you replace the endpoint-url `https://your-custom-s3-endpoint.com` with yours.

### 8.2 AWS Credentials (Profiles)

- It is possible to use several profiles in the file `~/.aws/credentials`.
- For example:

```
1 [default]  
2 aws_access_key_id = YOUR_DEFAULT_ACCESS_KEY  
3 aws_secret_access_key = YOUR_DEFAULT_SECRET_KEY  
4  
5 [profile1]  
6 aws_access_key_id = ANOTHER_ACCESS_KEY_ID  
7 aws_secret_access_key = ANOTHER_SECRET_ACCESS_KEY  
8
```

```

9  [profile2]
10 aws_access_key_id = YET_ANOTHER_ACCESS_KEY_ID
11 aws_secret_access_key = YET_ANOTHER_SECRET_ACCESS_KEY

```

Using specific profile when running `aws cli` commands via `--profile` option in the command:

```

1  aws s3 --profile profile1 [...]
2  # aws s3 --profile default [...]

```

## 8.3 Buckets

One can have several buckets.

### 8.3.1 Creation

- To create a new bucket:

```

1  aws s3api create-bucket --bucket custom-bucket-name --endpoint-url https://
    custom-s3-endpoint.com --profile default

```

### 8.3.2 Listings

- Directly “folder” contents of an s3 bucket,

```

1  aws s3 ls s3://custom-bucket-name --recursive --endpoint-url https://custom
    -s3-endpoint.com --profile default # '--recursive' optional

```

- Showing file contents,

```

1  aws s3 ls s3://custom-bucket-name/prefix/ --recursive --endpoint-url https
    ://custom-s3-endpoint.com --profile default # '--recursive' optional

```

Note that the `/` at the end of the prefix (“folder”) is necessary.

### 8.3.3 File Copying

- Local machine → S3:

```

1  aws s3 cp path/to/custom_file.ext s3://custom-bucket-name/path/to/
    custom_file.ext --endpoint-url https://custom-s3-endpoint.com --profile
    default

```

- S3 → local machine:

```

1  aws s3 cp s3://custom-bucket-name/path/to/s3_file.ext custom/destination --
    endpoint-url https://custom-s3-endpoint.com --profile default

```

### 8.3.4 Directory Copying

- Local machine → S3:

```

1  aws s3 sync path/to/dir s3://custom-bucket-name/path/to --endpoint-url
2  https://custom-s3-endpoint.com --profile default

```

### 8.3.5 Directory/File Deletion

- Deleting a folder (which is essentially a prefix in S3) and its contents in an S3 bucket,

```
1  aws s3 rm s3://your-bucket-name/path-to-your-folder --recursive --endpoint-  
    url https://custom-s3-endpoint.com --profile default
```

- Deleting a file,

```
1  aws s3 rm s3://your-bucket-name/path-to-your-file.out --recursive --  
    endpoint-url https://custom-s3-endpoint.com --profile default
```

## 8.4 Cloudpathlib


- When you use the cloudpathlib module, and you want to specify a profile, do this:

```
1  from cloudpathlib import S3Path, S3Client  
2  
3  # Create an S3 client with a specific AWS profile  
4  s3_client = S3Client(  
5      aws_access_key_id=aws_access_key_id,  
6      aws_secret_access_key=aws_secret_access_key,  
7      endpoint_url=endpoint_url,  
8      profile_name="profile1", # specify profile here  
9  )  
10  
11 # Make 'client' default:  
12 client.set_as_default_client()
```

## 9 Git


### 9.1 Merging

- Assuming the following commit history is given,

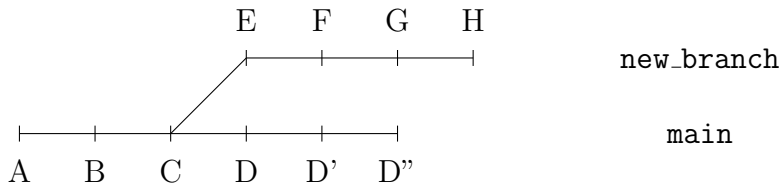


when merging `main` and `new_branch`, the commits `D` and `D''` will be either auto-merged or there will be a merge conflict.

- Assuming the following commit history is given,

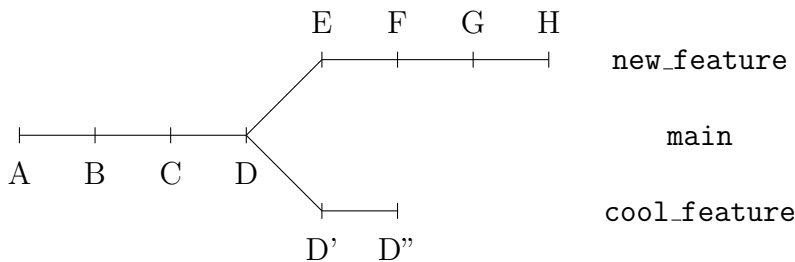

Merging `main` with `new_feature` would result in a fast-forward,



- Merging `new_feature` into `main`,

```
1 git switch main
2 git merge new_feature
```

### 9.2 Merge Conflicts

To resolve a merge conflict, type

```
1 git mergetool
```

Afterwards, confirm with Enter that you want to use vimdiff as default editing tool. The vimdiff display will now resemble the following structure:

```
1 | LOCAL | BASE | REMOTE | MERGED
```

If the file has not already existed in `BASE`, then we need this view:

```
1 | LOCAL | MERGED | REMOTE |
2 LOCAL -- Current branch
3 BASE -- Common ancestor (how did the file look like before both changes?)
4 REMOTE -- File that I am merging into the current branch
5 MERGED -- Merge result
```

It is probably easiest to take the merged view and edit it directly. In the vim editor, an entire line can be deleted by pressing `D` (no control before!). If I instead wanted the changes from either `LOCAL`, `BASE` or `REMOTE`, you have to do one of these,

```
1 :diffg L0
2 :diffg BA
3 :diffg L0
```

Of course, the merged view can also be edited directly. Regardless of the chosen method, type

```
1 :wqa
```

into vim. Afterwards, do not forget to commit and push. And if you want, do

```
1 git clean -f
```

Locally restore file

```
1 git restore --source commit-SHA file
2 git restore --source HEAD file
```

`git restore` does not overwrite HEAD, though. For that, a push would be necessary.

It can sometimes also be useful to run dry merges to proactively check for conflicts during a merge; for this, run

```
1 git merge --no-commit --no-ff branch-name
```

Afterwards, type

```
1 git merge --abort
```

to abort, and no changes will occur. If you only want to do a fast-forward, do

```
1 git merge branch_to_be_merged --ff-only
```

## 9.3 Checking History

- Viewing the history of commits,

```
1 git log
```

- Viewing a specific file,

```
1 git show <commit-hash>:<file-name>
2 # git show 123abc:example.txt
```

## 9.4 Removing a File/Folder

- To remove a file/folder that is already tracked, adding it to `.gitignore` won't remove it (though this also needs to happen). For this, do:

```
1 git rm --cached <file>
2 git rm -r --cached <folder>
```

- Adding the file/folder to `.gitignore` is still a good idea, though, since the file/dir won't be removed locally with the commands.

## 9.5 Renaming a Repository

1. Rename the repository remotely first (by going to your repository's URL),
2. then go to the locally cloned version of the repository and do

```
1 git remote set-url origin <new-url>
2 # git remote set-url origin https://github.com/username/new-repo-name.git
```

3. and finally

```
1 git remote -v
```

which lists the remote names and their URLs.

## 9.6 Restore File

Resetting specific file to state of previous commit,

```
1 git restore --source=<commit-hash> <file-path>
2 # git restore --source=HEAD <file_path>
```

Replace `<commit-hash>` with the commit SHA and `<file-path>` with the path to the file. This change is local and you would need to commit it if you want it to be reflected in the repository history.

## 9.7 Branches

### 9.7.1 Remote Branch Creation

Creating a local branch and then pushing it remotely,

```
1 git push origin <local-branch>
2 # git push origin code-dev
```

### 9.7.2 Delete Branches

- Local git branch,

```
1 git branch -d <branch_name>
2 # git branch -d testing
```

- Regardless of merge status,

```
1 git branch -D <branch_name>
2 # git branch -D testing
```

- Remote branch,

```
1 git push origin --delete <branch_name>
2 # git push origin --delete testing
```

### 9.7.3 List Branches

Listing all local and remote branches,

```
1 git branch -a
```



### 9.7.4 Remote URL

Obtaining the remote URL,

```
1 git remote get-url origin
2 git remote get-url origin | sed 's/\.git$//' # optional: trim output
```

### 9.7.5 Repo Change

Moving all files from `branch-to-move` to `branch-to-merge-into` and preserving the commit history — do all of this while in the old repo,

```
1 git remote -v # check existing remotes
2 git remote add <target> https://target-repo-url.git # add new remote
3 # git remote add new-remote url
4 git push target branch-to-move:branch-to-merge-into
```

Do all of this in the old repo. If issue emerges during the last step, reclone the new repo and check whether this solves the issue.

## 10 Remote Development

### 10.1 Connection

1. When connecting two machines remotely, install this extension on local machine (also directly in VSCode possible),
2. open VSCode on local machine,
3. press F1-button, choose “Remote-SSH: Connect to Host...” and type for the SSH host (optionally save it in the SSH config file) the same as in Algo. (B),
4. enter the passwd for the remote SSH host.

### 10.2 Troubleshooting

- If you find you are getting a permission error for saving a file on the remote machine (in VSCode when doing the local coding), try

```
1  sudo chown custom-username path/to/custom/script.ext
```

The `custom-username` here refers to the username on the remote machine.

# 11 Jax

Try to install via pip first. Only if this doesn't work use conda!

- To put a Jax array onto a specific device, use this:

```
1 import jax
2 from jax import devices, device_put, numpy as jnp
3
4 x = device_put(jnp.arange(10), device=devices("cpu")[0]) # NOTE: put '[0]'
5 # x = device_put(jnp.arange(10), device=devices("gpu")[0]) # NOTE: put
   '[0]'
6 print(f"Device: {x.device_buffer.device()}")
```

- Specifying the dtype of an array:

```
1 x = jnp.array([1, 2, 3], dtype=jnp.float32)
2 print(f"Dtype: {x.dtype}")
```

- To find out the device of a Jax array, use this:

```
1 x.device_buffer.device() # x: Jay array
```

- To make a Jax array out of a Python list or a NUMPY array (do not use for tensors):

```
1 from jax import numpy as jnp
2
3 a = jnp.array([1., 2., 3.])
4 b = jnp.array(np.array([1., 2., 3.]))
```

- jit (just-in-time compilation): sets up a function with XLA (extended linear algebra): check out the NB *test\_jit-compil.ipynb*. To use jit, do this:

```
1 import jax
2 from jax import numpy as jnp
3
4 @jax.jit
5 def selu(x: jnp.array, lamb: float = 1., alpha: float = 0.):
6     return lamb * jnp.where(x > 0, x, alpha * (jnp.exp(x) - 1.0))
```

## A .bashrc

```
1 ca() {
2     local conda_out="$(conda env list | grep -E "$env_name" | head -n 1 | awk '{
3         print $1}')"
4
5     # check non-emptiness
6     if [ -z "$1" ]; then
7         echo "Usage: ca <env_name>"
8         return 1
9     fi
10
11    # check env existence
12    if [ ! -z "$conda_out" ]; then
13        conda activate "$1"
14    else
15        echo "Conda environment '$env_name' does not exist." # single quotes (')
16        only for display
17        return 1
18    fi
19
20 }
21
22 # ----- CONDA -----
23
24 # activate conda environment
25 # usage: 'ca custom-env-name'
26 ca() {
27     conda activate "$@"
28 }
29
30 # deactivate currently activated conda environment
31 cod() {
32     conda deactivate
33 }
34
35 # List all available conda envs:
36 cel() {
37     conda env list
38 }
39
40 # remove conda environment
41 # usage: 'crme ant-migrate-dev'
42 crme() {
43
44     # check number of passed arguments via '$#'
45     if [[ $# -ne 1 ]]; then
46         echo "NOTE: Exactly one argument needs to be provided"
47     else
48         conda deactivate && conda remove -n "$1" --all -y
49     fi
50 }
```

```

49 }
50
51 # alias for 'conda__remove_packages'
52 # usage (e.g.): 'crm myenv pkg1 pkg2'
53 crm() {
54     conda__remove_packages "$@"
55 }
56
57 # remove conda packages from environment
58 # usage (e.g.): 'conda__remove_packages myenv pkg1 pkg2'
59 conda__remove_packages() {
60
61     # define local variables first
62     local env_name="$1"
63     local conda_out="$(conda env list | grep -E "$env_name" | head -n 1 | awk '{
64         print $1}')"
65
66     # forget first argument (which is saved in 'env_name')
67     shift
68
69     # check non-emptiness
70     if [ -z "$env_name" ]; then
71         echo "Usage: conda__remove_packages <env_name> [package1] [package2] ... [
72             packageN]"
73         return 1
74     fi
75
76     # check env existence
77     if [ ! -z "$conda_out" ]; then
78         conda remove -n "$env_name" "$@" -y
79         echo "Package(s) '$@" removed from environment '$env_name'"
80     else
81         echo "Conda environment '$env_name' does not exist." # single quotes (')
82             only for display
83         return 1
84     fi
85 }
86
87 # ----- AWS -----
88
89 # helper function
90 get__profile_endpoint_url() {
91
92     # check if the first argument contains "https://"
93     if [[ "$1" == https://* ]]; then
94         local endpoint_url="$1"
95
96         # if there's a second argument, it's the profile
97         if [ -n "$2" ]; then
98             local profile="$2"
99         fi
100     fi

```

```

98
99 elif [ -n "$1" ]; then
100
101     # if the first argument doesn't contain "https://", it's the profile
102     local profile="$1"
103 fi
104
105 echo "$1 $2"
106
107 }
108
109 # define default vals and update based on provided args
110 update__profile_url() {
111     local endpoint_url="https://kalousis.s3.unige.ch"
112     local profile="default"
113
114     # update 'endpoint_url' and 'profile' if provided
115     if [[ "$2" == https://* ]]; then
116         read endpoint_url profile <<< $(get__profile_endpoint_url "$2" "$3")
117     else
118         read profile <<< $(get__profile_endpoint_url "$2" "$3") # for 'endpoint_url'
119         # ', default val will be taken
120     fi
121
122     echo "$endpoint_url $profile"
123 }
124
125 # listing
126 # example usages (only bucket name provided):
127 # 'lal path'
128 # 'lal path default'
129 # 'lal path https://kalousis.s3.unige.ch'
130 # 'lal path https://kalousis.s3.unige.ch default'
131 lal() {
132     local path="$1"
133
134     read endpoint_url profile <<< $(update__profile_url "$2" "$3")
135
136     $(which aws) s3 ls s3://"$path" --recursive --endpoint-url "$endpoint_url" --
137     profile "$profile"
138 }
139
140 # removing prefixes/files
141 # example usages (only bucket name provided):
142 # 'larm path'
143 # 'larm path default'
144 # 'larm path https://kalousis.s3.unige.ch'
145 # 'larm path https://kalousis.s3.unige.ch default'
146 larm() {
147     local path="$1"
148
149     read endpoint_url profile <<< $(update__profile_url "$2" "$3")

```

```

148
149 command_output=$(($(which aws) s3 rm s3://" $path" --recursive --endpoint-url "
    $endpoint_url" --profile "$profile"))
150
151 if [[ -z "$command_output" ]]; then
152     # no use of '--recursive', which shouldn't be used for single file deletion
153     $(which aws) s3 rm s3://" $path" --endpoint-url "$endpoint_url" --profile "
        $profile"
154 fi
155 }
156
157 # ----- GIT -----
158
159 # list all local and remote branches
160 lb() {
161     git branch -a
162 }
163
164 # delete remote branch
165 lbd() {
166     git push origin --delete "$@"
167 }
168
169 # switch branches and create if non-existent
170 lsw() {
171     if git rev-parse --verify "$1" >/dev/null 2>&1; then
172         git switch "$1"
173     else
174         git switch -c "$1"
175     fi
176 }
177
178 # cloning
179 # example usage:
180 # 'lcl git@github.com:ImahnShekhzadeh/infra.git '
181 # 'lcl git@github.com:ImahnShekhzadeh/infra.git infra'
182 # 'lcl git@github.com:ImahnShekhzadeh/infra.git infra main'
183 lcl() {
184     local dir_name="${2:-$(pwd)}"
185     local branch_name="${3:-main}"
186
187     git clone "$1" "$dir_name" && cd "$dir_name" && lsw "$branch_name"
188 }
189
190 # example usage: 'lsta 2' or 'lsta'
191 lsta() {
192     local stash_index=${1:-0} # Default to 0 if no argument provided
193
194     # Check if the provided argument is an integer
195     if ! [[ $stash_index =~ ^[0-9]+$ ]]; then
196         echo "The provided index is not a valid integer."
197         return 1

```

```

198     fi
199
200     # Check if the stash index exists
201     if ! git rev-parse --verify stash@{$stash_index} >/dev/null 2>&1; then
202         echo "No stash found at index $stash_index"
203         return 1
204     fi
205
206     # If all checks pass, apply the stash
207     git stash apply "stash@{$stash_index}" --index
208 }
209
210 # Forward commands to 'git stash'
211 lst() {
212     git stash "$@"
213 }
214
215 # Stash files, if arguments are provided, they are ignored
216 lstf() {
217     git stash --include-untracked
218 }
219
220 # https://stackoverflow.com/questions/19595067/git-add-commit-and-push-
221 #   commands-in-one
222 # https://stackoverflow.com/questions/14763608/use-conditional-in-bash-script-
223 #   to-check-string-argument
224 # if-else statements in bash: https://linuxhandbook.com/if-else-bash/
225 # example usage: lgit "bit" "add ..."
226 lpush() {
227     (
228         # use subshell to change directory to Git root and perform actions
229         cd "$(git rev-parse --show-toplevel)" || exit
230         git add . && git commit -a -m "$1" && git push origin $(bname) && llog
231     )
232 }
233
234 # https://stackoverflow.com/questions/3236871/how-to-return-a-string-value-
235 #   from-a-bash-function
236 bname() {
237     branch=$(git branch --show-current)
238     echo $branch
239 }
240
241 lupd() {
242     git fetch origin $(bname) && git log HEAD..origin/$(bname) --oneline
243 }
244
245 lpull() {
246     git pull origin $(bname)

```



```

247 }
248
249 ldiff() {
250     git status "$@" && git diff --color "$@"
251 }
252
253 lforce() {
254     git push origin $(bname) --force
255 }
256
257 llog() {
258     git log
259 }
260
261 lrm() {
262     git rm -r "$@"
263 }
264
265 lreb() {
266     # Set default value to 5:
267     num1=${1:-5}
268     git rebase -i HEAD~$num1
269 }
270
271 # Reset entire repo to state of 'HEAD', or reset specific file to a specific
    commit hash.
272 lres() {
273     if [[ $# -eq 0 ]] || [[ $# -eq 1 ]]; then
274         local commit_hash=${1:-HEAD}
275         git reset --hard "$commit_hash"
276     elif [ $# -eq 2 ]; then
277         local commit_hash="$1"
278         local file_path="$2"
279         git restore --source="$commit_hash" "$file_path"
280     else
281         echo "Usage: lres [commit_hash file_path]"
282     fi
283 }
284
285 lsh(){
286     git show "$@"
287 }
288
289 # usage:
290 # 'lmv file1 file2 file3 [...] /path/to/target_dir'
291 # 'lmv source_dir target_dir'
292 lmv() {
293     # convert the arguments to an array
294     local args=("$@")
295
296     # get the last element of the array
297     local target_dir="${args[-1]}"

```

```

298
299 if [[ ! -d "$target_dir" ]]; then
300     mkdir -p "$target_dir" || {
301         echo "Target directory does not exist: $target_dir" >&2
302         return 1
303     }
304 fi
305
306 # shift the arguments so that last argument ('target_dir') is dropped
307 unset args[-1]
308
309 # now, loop through all the remaining arguments
310 for path in "${args[*]}"; do
311     if [[ -e "$path" ]]; then
312         if [[ -d "$path" ]]; then
313             # move each item in the directory individually
314             for item in "$path"/*; do
315                 git mv "$item" "$target_dir"
316             done
317
318             # remove the now-empty source dir
319             rmdir "$path"
320         else
321             # if it's a file, just move it
322             git mv "$path" "$target_dir"
323         fi
324     else
325         echo "File does not exist: $path" >&2
326     fi
327 done
328 }
329
330 # ----- PROTONVPN -----
331
332 p() {
333     protonvpn-cli "$@"
334 }
335
336 # ----- MISCELLANEOUS -----
337
338 # pdflatex
339 pd() {
340     /usr/bin/pdflatex "$@"
341 }
342
343 # convert input notebook to PDF
344 jconv() {
345     jupyter nbconvert --to pdf "$1"
346 }
347
348 # 'less' with ANSI escape characters
349 less() {

```

```

350 /usr/bin/less -R "$@"
351 }
352
353 diff() {
354 /usr/bin/diff --color "$@"
355 }
356
357 # overload 'shred' func, allow (recursive) shredding of dirs/files
358 # multiple files/dirs can be provided, mixing allowed
359 # usage (e.g.): 'shred 10 <file_name>'
360 # shred <file_name>
361 # shred <dir_path>
362 # shred <file_name> <dir_path>
363 shred() {
364
365 # check whether first argument is a number
366 if [[ "$1" =~ ^[0-9]+$ ]]; then
367     local iterations="$1"
368     shift
369 else
370     iterations=5 # default
371 fi
372
373 # check file/dir existences
374 for path in "$@"; do
375     if check_existence "$path"; then
376         # check whether passed input is directory or not
377         if [[ -d "$path" ]]; then
378             echo "Files to be shredded in $path:"
379             find "$path" -type f -print0 | xargs -0 ls -ld
380         fi
381     else
382         echo "Error occurred in check_existence for file/dir: $path"
383         return 1
384     fi
385 done
386
387 # prompt user for confirmation
388 read -rp "Do you wish to proceed with shredding all files in $@ for
    $iterations iterations? (yes/no): " confirmation
389
390 if [[ $confirmation = [yY] || $confirmation = [yY][eE][sS] ]]; then
391     for path in "$@"; do
392         if [[ -d "$path" ]]; then
393             # shred all files within the directory
394             find "$path" -type f -exec /usr/bin/shred -uz -n "$iterations" {} \;
395             rm -rf "$path"
396             echo "All files in '$path' have been shredded for $iterations iterations."
397         elif [[ -f "$path" ]]; then
398             # shred the individual file
399             /usr/bin/shred -uz -n "$iterations" "$path"
400             echo "File '$path' has been shredded for $iterations iterations."

```

```

401     fi
402 done
403 else
404     echo "Shredding aborted."
405 fi
406 }
407
408 # shortcut for clearing terminal output
409 c() {
410     clear
411 }
412
413 # shortcuts for exiting terminal
414 q() {
415     exit
416 }
417
418 e() {
419     q
420 }
421
422 # tailscale
423 ts() {
424     tailscale status "$@"
425 }
426
427 # xournalpp (https://github.com/xournalpp/xournalpp)
428 xopp() {
429     xournalpp "$@"
430 }
431
432 # strings comparison
433 # usage (e.g.): 'str_diff "blub1" "blub1"' or 'str_diff blub1 blub1'
434 # or 'str_diff $(echo "hey") $(echo "hey")'
435 # NOTE: exactly two arguments need to be provided
436 str_diff() {
437
438     # check number of passed arguments via '$#'
439     if [[ $# -ne 2 ]]; then
440         echo "NOTE: Exactly two arguments need to be provided"
441         return 1 # return non-zero exit code to indicate error
442     else
443
444         # compare strings
445         if [[ $1 == $2 ]]; then
446             echo -e "Strings '$1' and '$2' \033[92mmatch\033[0m"
447         else
448             echo -e "Strings '$1' and '$2' do \033[91mNOT\033[0m match"
449         fi
450     fi
451 }
452

```

```
453
454
455 # ----- DOCKER -----
456 d() {
457     docker "$@"
458 }
459
460 # ----- CHATGPT -----
461
462 # https://github.com/kardolus/chatgpt-cli/tree/main
463 gpt(){
464     chatgpt -i
465 }
466
467 export OPENAI_KEY=[...]
468
469 # ----- ALWAYS EXECUTE -----
470
471 add_bit
```

## B Amazing Programs, Extensions, Plugins & Packages

- <https://github.com/charmbracelet/gh>
- <https://github.com/0xacx/chatGPT-shell-cli>
- <https://github.com/kardolus/chatgpt-cli/tree/main>

- For setting the right model (cf. here for all available models),

```
1 chatgpt --set-model gpt-4-1106-preview --set-max-tokens 128000
```

- Usage:

```
1 chatgpt -i
```

- <https://tailscale.com/download/>

- Once installation is complete, the command

```
1 sudo tailscale up
```

should be run to login, though this command will also display after installation in the CLI. The signing in should happen via GitHub. To be able to use Tailscale from a new device, it must be added as a device under <https://login.tailscale.com/admin/machines>. Once this is done, open a CLI and type

```
1 ssh name@ip_address # find out <name> and <ip_address> via tailscale  
   console  
2 # ssh ellie@100.xx.xxx.xx
```

NOTE that if the file already exists locally, it will be overwritten.

- For file copying (e.g. from the host machine to the currently used machine), do this

```
1 scp name@ip_address:/path/to/remote_file.ext /local/path # find out <  
   name> and <ip_address> via tailscale console  
2 # ssh ellie@100.xx.xxx.xx
```

For directory copying,

```
1 scp -r name@ip_address:/path/to/remote_dir /local/path # find out <  
   name> and <ip_address> via tailscale console  
2 # ssh ellie@100.xx.xxx.xx
```

- <https://tailscale.com/kb/1080/cli/> (no separate installation necessary, only tailscale needs to be installed)

- Finding out the IPv4 address of the currently active machine,

```
1 tailscale ip -4
```

- Finding out the IPv4 address of another machine connected via the Tailscale network,

```
1 tailscale ip -4 custom-name  
2 # tailscale ip -4 ellie
```

- <https://github.com/aws/aws-cli>
- <https://github.com/termcolor/termcolor>

## C VSCode

### C.1 Recommended Extensions

- <https://marketplace.visualstudio.com/items?itemName=ms-vscode-remote.vscode-remote-ex>
- <https://marketplace.visualstudio.com/items?itemName=Gruntfuggly.todo-tree>

### C.2 settings.json

Opening the file,

1. press **Ctrl + Shift + P** to the Command Palette,
2. type **Open User Settings (JSON)** and select it to open the `settings.json` file.

### C.3 Fix Unresolved Python Imports

- If you run a docker container where a conda environment is installed (with packages that you do not have locally), then VSCode will show those imports as unresolved. To fix this, open the `settings.json` file, cf. App. C.2, and add the following setting:

```
1  "python.analysis.diagnosticSeverityOverrides": {  
2    "reportMissingImports": "none"  
3  }
```

Incorporating this into the `settings.json` file is shown in App. C.5.

- Note that if you have an SSH connection to another machine going on, e.g. in the **Remote Development** extension, putting the above lines into the `settings.json` file will not have an immediate effect, for this the SSH connection needs to be restarted.

### C.4 Opening a Duplicate Workspace

1. press **Ctrl + Shift + P** to the Command Palette,
2. then type **Workspaces: Duplicate As Workspace in New Window**

### C.5 settings.json

Contents of `settings.json`,

```
1  {  
2    "workbench.colorTheme": "Default Dark Modern",  
3    "telemetry.telemetryLevel": "off",  
4    "editor.wordWrap": "wordWrapColumn",  
5    "editor.wordWrapColumn": 79,  
6    "workbench.editor.enablePreview": false,  
7    "gitlens.telemetry.enabled": false,  
8    "notebook.lineNumbers": "on",  
9    "explorer.confirmDragAndDrop": false,  
10   "window.zoomLevel": 1,  
11   "python.analysis.diagnosticSeverityOverrides": {  
12     "reportMissingImports": "none"  
13   },  
14 }
```

```
14     "todo-tree.general.tags": [  
15         "BUG",  
16         "HACK",  
17         "FIXME",  
18         "TODO",  
19         "NOTE",  
20         "XXX",  
21         "[ ]",  
22         "[x]"  
23     ],  
24  
25     "files.associations": {"*.log": "plaintext"},  
26     "[plaintext]": {"editor.wordWrap": "off"},  
27     "[shellscript]": {"editor.wordWrap": "off"},  
28     "workbench.editor.tabSizing": "shrink"  
29 }
```



## D LibreOffice

### D.1 Dark Theme

Go to Tools → Options → LibreOffice → Application Colors → Custom Colors → General → Document Background and choose a dark color.

## **E UNIGE-specific**

- Setting up UNIGE e-mail in TB