

Language System

General


Set up

To use the Language System, the main scene must include the “Language System Installer” script with the proper configuration.

Create Configuration


On the project folder press right click > Create > Universe > Language System > LanguageConfig.

The configuration requires a default Language. We will see how to create it in the next step.

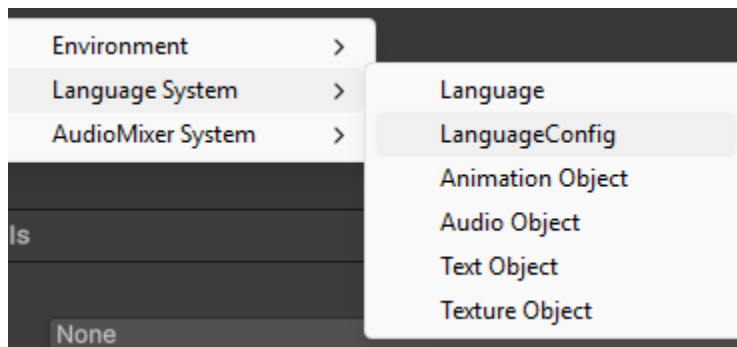

Create Languages

On the project folder press right click > Create > Universe > Language System > Language. You must create the language objects. A “Language” scriptable object is required for each language needed.



Create Assets depending of the language

We can create different assets that depend on the language:

- Audio
- Text
- Texture
- Video (AVPro Video Needed)

These objects will have a list of languages and the asset that will change depending on the selected language. To use them, add the component “LanguageX” where X = Audio, Text, Video, or Texture, and assign the created scriptable object.

Audio System

Audio in scenes

To add audio that plays from a specific scene, there are two options:

- Audio Launcher: Configure its priority layer. If it's set to “Ignore”, the audio will not be interrupted by another. If it's set to any other layer, it will fade out when another audio with equal or higher priority plays. The clip played is the one in the default Audio Source component.
- Language Audio: Works like the Audio Launcher but includes an audio object where each language's clip is configured.


Persistent Audio

The Persistent Audio script allows an audio clip to keep playing even if the scene is unloaded. When the audio finishes, the object will be destroyed if the scene that contained it has been unloaded.

Note: Persistent audio should not have any visual components, since the containing scene may be unloaded.

Timelines

To add a language audio object to a Timeline, add a “Timeline Language Audio Track”. In this track, you can add an audio clip and configure the following:

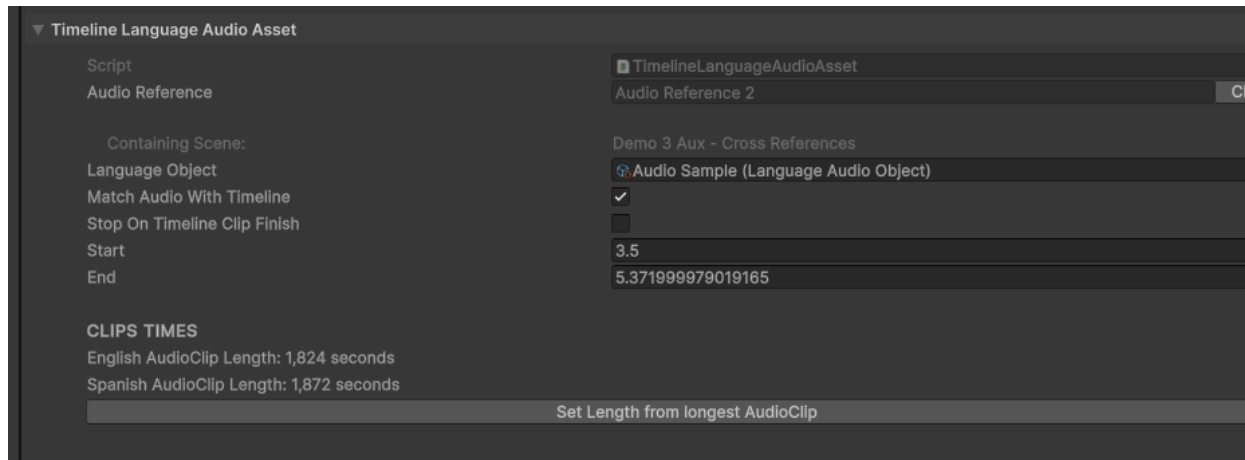


You'll need a reference to the Audio Launcher that will trigger the clip. This Audio Launcher must contain a GUID Component that allows cross-scene references - meaning it doesn't need to be in the same scene as the Timeline.

- Match Audio With Timeline: The audio priority will not be taken into account.
- Stop On Timeline Clip Finish: When the Timeline clip stops, the audio will stop too

The "Set Length from Longest AudioClip" button sets the Timeline clip length to match the longest clip in the "Language Audio Object".

This is an example of an Audio Launcher object used to assign the Audio Source to the Timeline. The Timeline track manages the language, so this object doesn't need to be a Language Audio, it can be just an Audio Launcher.

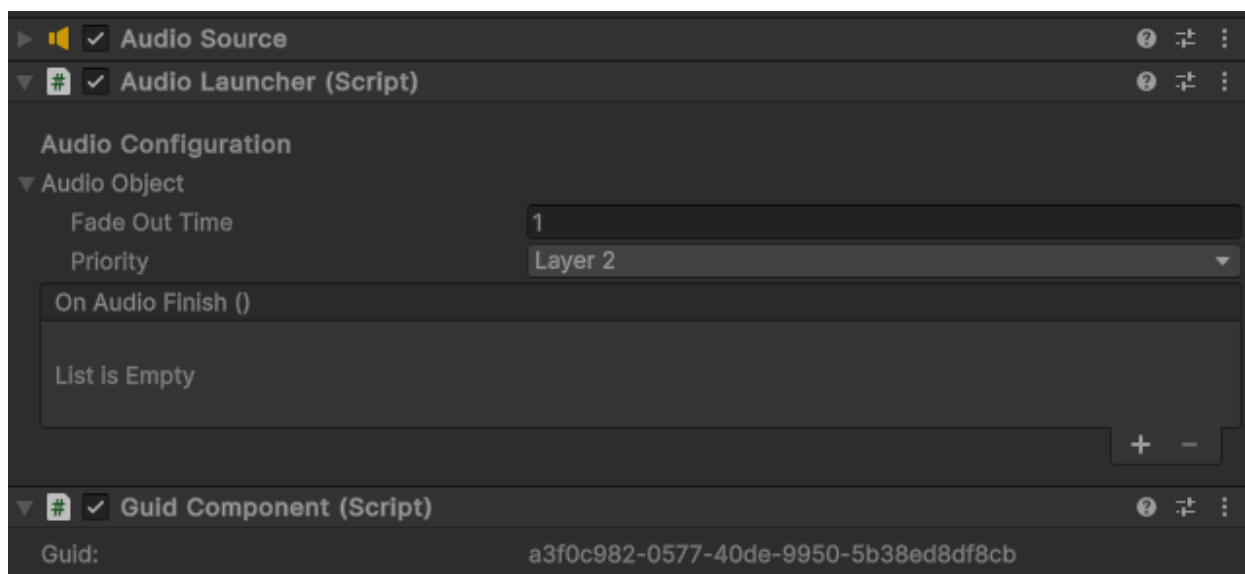


Videos



AVPro video is a dependencie to use this part of Language System.

<https://assetstore.unity.com/packages/tools/video/avpro-video-v3-core-edition-278893>

Add "AVPRO" to Define Symbols.

1. Go to project settings > Player > Other Settings > Scripting Define Symbols
2. Add AVPRO
3. Press Apply

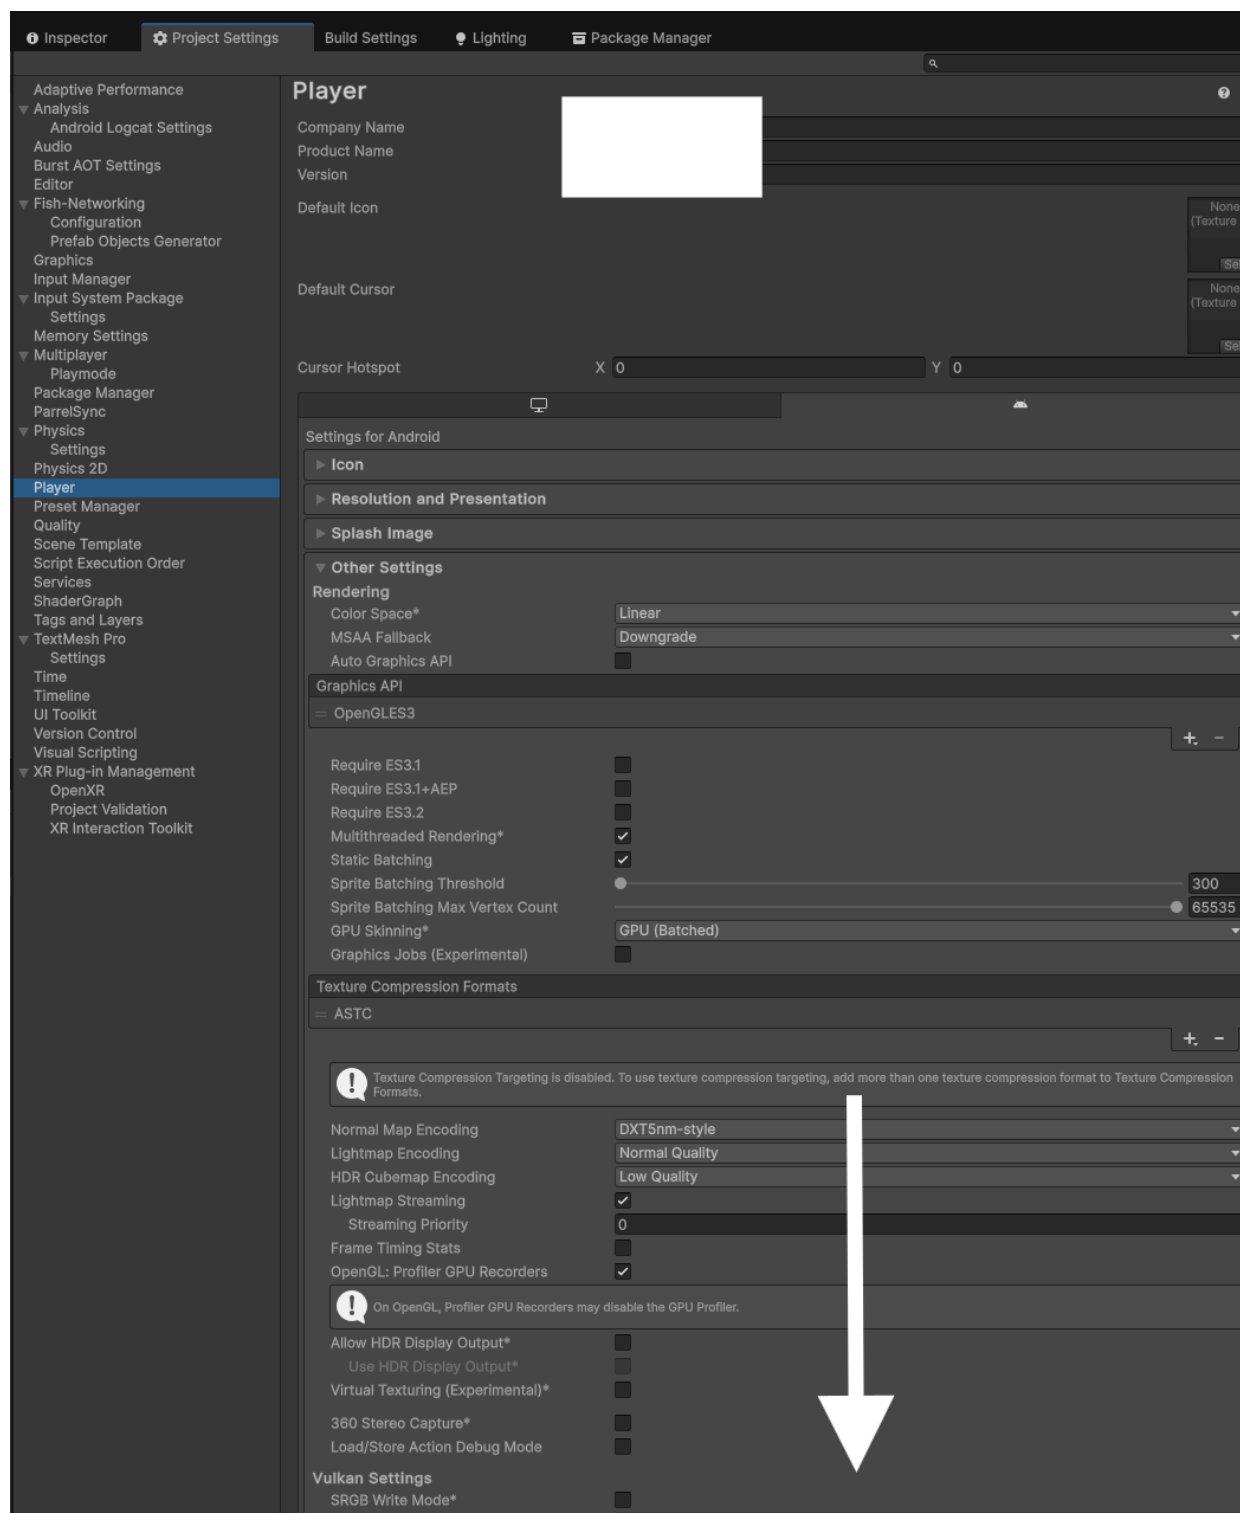

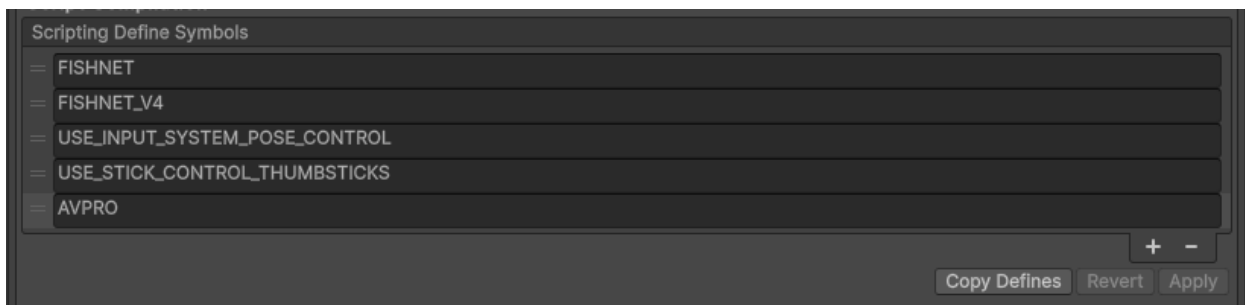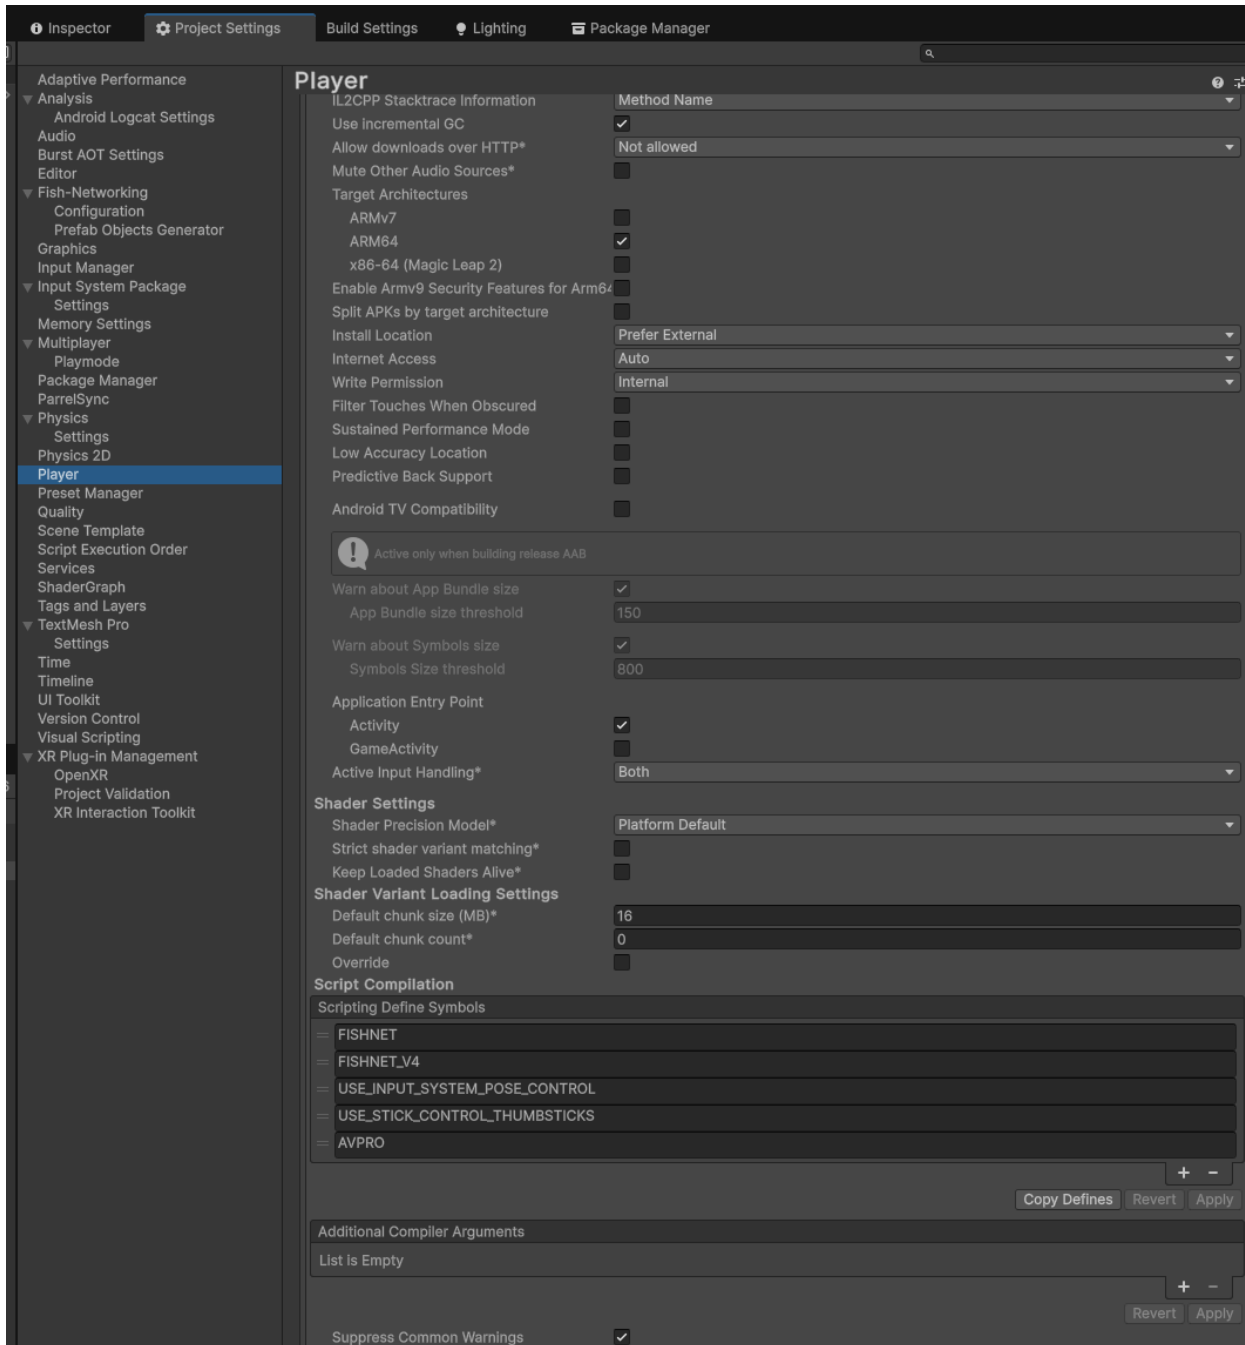

Set up

- Add videos to the Persistent data path
- Create a Video Reference. The path will be relative to the Persistent Data Path.


Persistent Data Path:

The **persistent data path** (`Application.persistentDataPath`) is the platform-specific, app- and user-scoped directory that Unity guarantees is **writable at runtime** and **survives across game sessions and updates**. It's where you save things like player saves, config files, or caches you want to keep. (It's typically removed when the app is uninstalled.)

- Windows: under the user profile, e.g., `AppData/LocalLow/<Company>/<Product>`
- Android (headset): `/sdcard/Android/data/PackageName/files`
 - Note: Package name normally is: `com.company.project`

Example:

This video object has one video for each language.

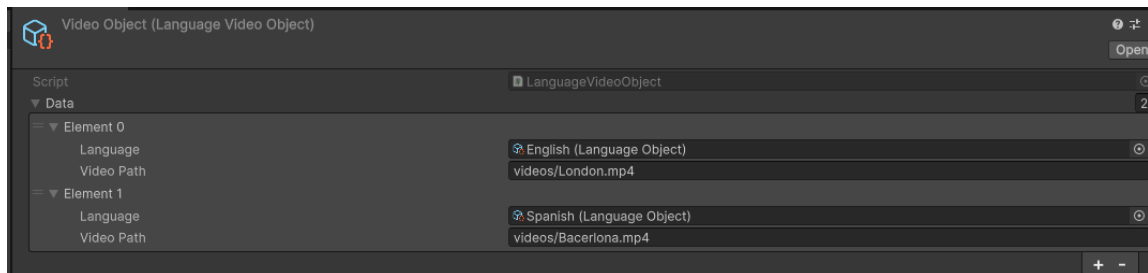

It's necessary to have the videos in PersistentDataPath/videos

The videos are:

- London.mp4
- Barcelona.mp4

Textures

It is possible to change a texture depending on the language.

1. In an object with a renderer, add script LanguageTexture.
2. Set parameter to change (usually `_MainTex`).
3. Add Texture object (how to create it is explained in the section: Create Assets depending of the language).

