Jobs

Generated by Talend Integration Cloud Hybrid Edition

Project Name	POC	GENERATION DATE	Apr 20, 2018 5:19:04 PM
AUTHOR	Patel, Viral	Talend Integration Cloud VERSION	6.5.1.20180116_1512

Summary

Project Description
Description
Preview Picture
Settings
Context List
Component List
Components Description

Project Description

Properties	Values
Name	POC
Language	java

Description	

Description

Properties	Values
Name	jo_Inventory_master_SN
Author	Patel, Viral
Version	0.1
Purpose	
Status	
Description	
Creation	Apr 17, 2018 3:00:03 PM
Modification	Apr 17, 2018 4:40:48 PM

Preview Picture

Settings

Extra settings
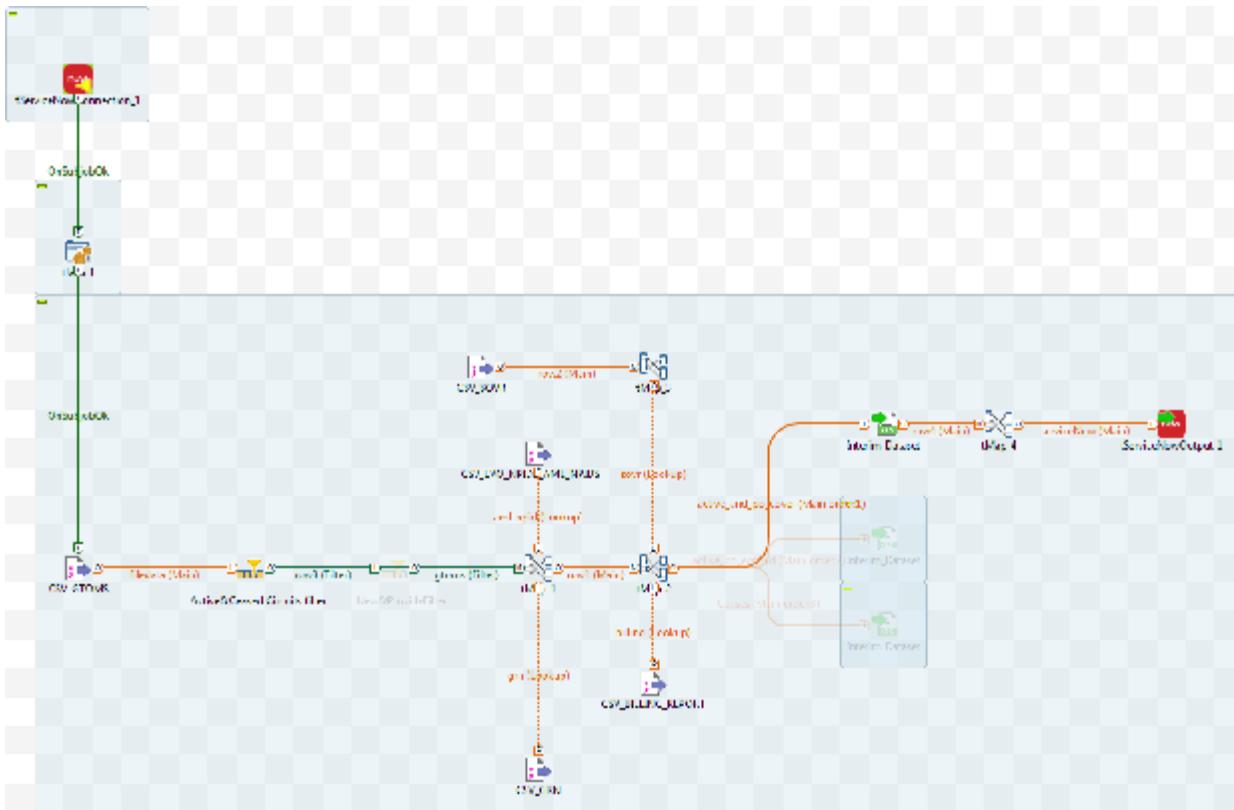
Name	Value
COMP_DEFAULT_FILE_DIR	
Multi thread execution	false
Implicit tContextLoad	false

Status & Logs

Name	Value
Use statistics (tStatCatcher)	false
Use logs (tLogCatcher)	false
Use volumetrics (tFlowMeterCatcher)	false
On Console	false
On Files	false
On Databases	false
Catch components statistics	false
Catch runtime errors	true
Catch user errors	true
Catch user warnings	true

Context List

ContextDefault

Name	Prompt	Need Prompt?	Type	Value	Source
sn_Pwd	sn_Pwd?	false	id_Password	************	Inventory_Context_G

| sn_URL | sn_URL? | false | id_String | https://vodafonedev7.service-now.com/ | Inventory_Context_G |
| sn_User | sn_User? | false | id_String | talend.integration.user | | Inventory_Context_G |

Contextlocal

Name	Prompt	Need Prompt?	Type	Value	Source
sn_Pwd	sn_Pwd?	false	id_Password	****	Inventory_Context_G
sn_URL	sn_URL?	false	id_String	https://vodafonedev7.service-now.com/	Inventory_Context_G
sn_User	sn_User?	false	id_String	viral.patel2@vodafone.com	Inventory_Context_G

Component List

Component Name	Component Type
tFileInputDelimited_1	tFileInputDelimited
tFileInputDelimited_2	tFileInputDelimited
tFileInputDelimited_3	tFileInputDelimited
tFileInputDelimited_4	tFileInputDelimited
tFileInputDelimited_5	tFileInputDelimited
tFileOutputExcel_1	tFileOutputExcel

tFilterRow_7	tFilterRow
tJava_1	tJava
tMap_1	tMap
tMap_2	tMap
tMap_3	tMap
tMap_4	tMap
tServiceNowConnection_1	tServiceNowConnection
tServiceNowOutput_1	tServiceNowOutput

Components Description

Component   tFileInputDelimited

	UNIQUE NAME	tFileInputDelimited_1	INPUT(S)	tJava_1
	LABEL	CSV_GTOMS	OUTPUT(S)	tFilterRow_7

Component Parameters:

Properties	Values
Unique Name	tFileInputDelimited_1
Component Name	tFileInputDelimited
Version	0.102 (ALPHA)

Family	File/Input
Start	false
Startable	true
SUBTREE_START	true
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFileInputDelimited
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	D:\Talend\Talend-Studio-20180116_1512-V6.5.1\configura
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false

Property Type	repository: DELIM:CSV_GTOMS
File name/Stream	"C:/Users/VRAJ/Documents/vodafone/DF_POC/files/DF/En
CSV options	true
Row Separator	"\n"
CSV Row Separator	"\n"
Field Separator	","
Escape char	"\""
Text enclosure	"\""
Header	1
Footer	0
Limit	
Skip empty rows	false
Uncompress as zip file	false
Die on error	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	repository: DELIM:CSV_GTOMS - GTOMS_Metadata
Schema	repository: DELIM:CSV_GTOMS - GTOMS_Metadata

!!!TEMP_DIR.NAME!!!	"C:/talendstudio/workspace"
Advanced separator (for numbers)	false
Thousands separator	","
Decimal separator	"."
Extract lines at random	false
Number of lines	10
Trim all columns	true
Check column to trim	[{SCHEMA_COLUMN=GTOMS_Ref, TRIM=false}, {SCHE{SCHEMA_COLUMN=A_End_Country, TRIM=false}, {SCH{SCHEMA_COLUMN=B_End_Country, TRIM=false}, {SCH{SCHEMA_COLUMN=Order_Type, TRIM=false}, {SCHEMTRIM=false}, {SCHEMA_COLUMN=COMS_Ref, TRIM=fals{SCHEMA_COLUMN=Status, TRIM=false}, {SCHEMA_COTRIM=false}, {SCHEMA_COLUMN=Date_Tail_Ordered, T{SCHEMA_COLUMN=D_RFS, TRIM=false}, {SCHEMA_CTRIM=false}, {SCHEMA_COLUMN=Circuit_Speed, TRIM={SCHEMA_COLUMN=Customer, TRIM=false}]
Check each row structure against schema	false
Check date	false
Encoding	"US-ASCII"
Split row before field	false
Permit hexadecimal (0xNNN) or octal (0NNNN) for numeric types	false

Decode table	[{SCHEMA_COLUMN=GTOMS_Ref, DECODE=false}, {SC
	{SCHEMA_COLUMN=A_End_Country, DECODE=false}, {
	{SCHEMA_COLUMN=B_End_Country, DECODE=false}, {
	{SCHEMA_COLUMN=Order_Type, DECODE=false}, {SCH
	{SCHEMA_COLUMN=GSR_Ref, DECODE=false}, {SCHE
	{SCHEMA_COLUMN=Msp_Order, DECODE=false}, {SCH
	{SCHEMA_COLUMN=DPC_Owner, DECODE=false}, {SCI
	{SCHEMA_COLUMN=Date_Tail_Ordered, DECODE=false
	{SCHEMA_COLUMN=D_RFS, DECODE=false}, {SCHEM/
	{SCHEMA_COLUMN=Cct_Thirdparty, DECODE=false}, {S
	{SCHEMA_COLUMN=Order_Type_2, DECODE=false}, {S

!!!DESTINATION.NAME!!!	
Min column number of optimize code	100
Label format	CSV_GTOMS
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for GTOMS_Metadata :

Column	Key	Type	Length	Precision	Nullable	Comment
GTOMS_Ref	false	Integer	2		true	
A_End_City	false	String	9		true	

A_End_Country	false	String	14		true	
B_End_City	false	String	9		true	
B_End_Country	false	String	7		true	
Product	false	String	21		true	
Order_Type	false	String	9		true	
GSOS_Ref	false	String	47		true	
GSR_Ref	false	String	54		true	
COMS_Ref	false	String	31		true	
Msp_Order	false	String	50		true	
Status	false	String	10		true	
DPC_Owner	false	String	19		true	
Carrier	false	String	27		true	
Date_Tail_Ordered	false	java.util.Date	10		true	
Date_Tail_Delivered	false	java.util.Date	10		true	
D_RFS	false	java.util.Date	10		true	
Cctid	false	String	50		true	
Cct_Thirdparty	false	String	50		true	

Circuit_Speed	false	String	20		true	
Order_Type_2	false	String	4		true	
Customer	false	String	50		true	

Original Function Parameters:
Component   tFileInputDelimited

	UNIQUE NAME	tFileInputDelimited_2	INPUT(S)	none
	LABEL	CSV_SOVR	OUTPUT(S)	tMap_3

Component Parameters:

Properties	Values
Unique Name	tFileInputDelimited_2
Component Name	tFileInputDelimited
Version	0.102 (ALPHA)
Family	File/Input
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true

DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFileInputDelimited
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	D:\Talend\Talend-Studio-20180116_1512-V6.5.1\configura
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DELIM:CSV_SOVR
File name/Stream	"C:/Users/VRAJ/Documents/vodafone/DF_POC/files/DF/Er Poc_10042018.csv"
CSV options	true
Row Separator	"\n"
CSV Row Separator	"\n"
Field Separator	","

Escape char	"\""
Text enclosure	"\""
Header	1
Footer	0
Limit	
Skip empty rows	false
Uncompress as zip file	false
Die on error	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	repository: DELIM:CSV_SOVR - metadata
Schema	repository: DELIM:CSV_SOVR - metadata
!!!TEMP_DIR.NAME!!!	"C:/talendstudio/workspace"
Advanced separator (for numbers)	true
Thousands separator	","
Decimal separator	"."
Extract lines at random	false
Number of lines	10

Trim all columns	true
Check column to trim	[{SCHEMA_COLUMN=Service_Order, TRIM=false}, {SCHI {SCHEMA_COLUMN=SO_Type, TRIM=false}, {SCHEMA_ {SCHEMA_COLUMN=SO_Item_Status, TRIM=false}, {SCI {SCHEMA_COLUMN=SO_Created_By, TRIM=false}, {SCI {SCHEMA_COLUMN=SO_Item_Net_Value, TRIM=false}, {SCHEMA_COLUMN=PR_Number, TRIM=false}, {SCHEM {SCHEMA_COLUMN=PR_Created_By, TRIM=false}, {SCI {SCHEMA_COLUMN=PO_Number, TRIM=false}, {SCHEM {SCHEMA_COLUMN=PO_Release_Indicator, TRIM=false} TRIM=false}, {SCHEMA_COLUMN=PO_Value, TRIM=false {SCHEMA_COLUMN=Release_Completed_On, TRIM=fals TRIM=false}, {SCHEMA_COLUMN=SO_Item_Creation_Da {SCHEMA_COLUMN=PO_Item_Number, TRIM=false}, {S({SCHEMA_COLUMN=SO_Customer_Number, TRIM=false TRIM=false}, {SCHEMA_COLUMN=SO_Customer_NPID, TRIM=false}, {SCHEMA_COLUMN=OPSD, TRIM=false}, {: {SCHEMA_COLUMN=PO_Deletion_Status, TRIM=false}, { {SCHEMA_COLUMN=Person_Responsible_VW, TRIM=fa TRIM=false}, {SCHEMA_COLUMN=Actual__Vendor, TRIM {SCHEMA_COLUMN=Rejection_Text, TRIM=false}]
Check each row structure against schema	false
Check date	false
Encoding	"US-ASCII"
Split row before field	false
Permit hexadecimal (0xNNN) or octal (0NNNN) for numeric types	false

Decode table	[{SCHEMA_COLUMN=Service_Order, DECODE=false}, {S {SCHEMA_COLUMN=SO_Type, DECODE=false}, {SCHE {SCHEMA_COLUMN=SO_Item_Status, DECODE=false}, {SCHEMA_COLUMN=SO_Created_By, DECODE=false}, { DECODE=false}, {SCHEMA_COLUMN=SO_Item_Net_Val {SCHEMA_COLUMN=SO_Item_Currency, DECODE=false {SCHEMA_COLUMN=PR_Created_On, DECODE=false}, {SCHEMA_COLUMN=PR_Creator_Name, DECODE=false {SCHEMA_COLUMN=Vendor, DECODE=false}, {SCHEMA {SCHEMA_COLUMN=PO_Subject_to_release, DECODE= DECODE=false}, {SCHEMA_COLUMN=PO_Currency, DE {SCHEMA_COLUMN=Release_Completed_On, DECODE= DECODE=false}, {SCHEMA_COLUMN=SO_Item_Creation {SCHEMA_COLUMN=PO_Item_Number, DECODE=false} DECODE=false}, {SCHEMA_COLUMN=SO_Customer_Nu {SCHEMA_COLUMN=SO_Customer_Name, DECODE=fa DECODE=false}, {SCHEMA_COLUMN=SO_Requisitioner, DECODE=false}, {SCHEMA_COLUMN=OPED, DECODE= DECODE=false}, {SCHEMA_COLUMN=PO_Rejection_Co {SCHEMA_COLUMN=Person_Responsible_VW, DECODE DECODE=false}, {SCHEMA_COLUMN=Actual__Vendor, D DECODE=false}, {SCHEMA_COLUMN=Rejection_Text, D
!!!DESTINATION.NAME!!!	
Min column number of optimize code	100
Label format	CSV_SOVR
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for metadata :

Column	Key	Type	Length	Precision	Nullable	Comment
Service_Order	false	Integer	12		true	
SO_Item_No	false	Integer	2		true	
SO_Type	false	String	4		true	
SO_Header_Status	false	String	3		true	
SO_Item_Status	false	String	3		true	
SO_Created_On	false	java.util.Date	10		true	
SO_Created_By	false	String	8		true	
SO_Creator_Name	false	String	27		true	
SO_Item_Net_Value	false	String	11		true	
SO_Item_Currency	false	String	3		true	
PR_Number	false	Long	10		true	
PR_Created_On	false	java.util.Date	10		true	
PR_Created_By	false	String	8		true	
PR_Creator_Name	false	String	27		true	
PO_Number	false	String	10		true	
Vendor	false	String	9		true	

PO_Release_Indicator	false	String	8		true	
PO_Subject_to_release	false	String	1		true	
PO_Value	false	String	11		true	
PO_Currency	false	String	3		true	
Release_Completed_On	false	String	10		true	
Approval_pending_with	false	String			true	
SO_Item_Creation_Date	false	String	10		true	
PO_Item_Number	false	Integer	2		true	
SO_Vendor_Name	false	String	35		true	
SO_Customer_Number	false	Long	10		true	
SO_Customer_Name	false	String	26		true	
SO_Customer_NPID	false	String	26		true	
SO_Requisitioner	false	String	8		true	
OPSD	false	java.util.Date	10		true	
OPED	false	java.util.Date	10		true	
PO_Deletion_Status	false	String			true	
PO_Rejection_Code	false	String			true	

Person_Responsible_VW	false	String			true	
Company_Code	false	String	4		true	
Actual__Vendor	false	String			true	
Actual_PO	false	String			true	
Rejection_Text	false	String			true	

Original Function Parameters:
Component   tFileInputDelimited

	UNIQUE NAME	tFileInputDelimited_3	INPUT(S)	none
	LABEL	CSV_GRN	OUTPUT(S)	tMap_1

Component Parameters:

Properties	Values
Unique Name	tFileInputDelimited_3
Component Name	tFileInputDelimited
Version	0.102 (ALPHA)
Family	File/Input
Start	false
Startable	true
SUBTREE_START	false

END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFileInputDelimited
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	D:\Talend\Talend-Studio-20180116_1512-V6.5.1\configura
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DELIM:CSV_GRN
File name/Stream	"C:/Users/VRAJ/Documents/vodafone/DF_POC/files/DF/En
CSV options	true
Row Separator	"\n"

CSV Row Separator	"\n"
Field Separator	","
Escape char	"\""
Text enclosure	"\""
Header	1
Footer	0
Limit	
Skip empty rows	false
Uncompress as zip file	false
Die on error	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	repository: DELIM:CSV_GRN - metadata
Schema	repository: DELIM:CSV_GRN - metadata
!!!TEMP_DIR.NAME!!!	"C:/talendstudio/workspace"
Advanced separator (for numbers)	true
Thousands separator	","
Decimal separator	"."

Extract lines at random	false
Number of lines	10
Trim all columns	true
Check column to trim	[{SCHEMA_COLUMN=Select_Operation, TRIM=false}, {SC {SCHEMA_COLUMN=Operation_ID, TRIM=false}, {SCHEI {SCHEMA_COLUMN=Company_Code, TRIM=false}, {SCH {SCHEMA_COLUMN=Work_Center_ID_Description, TRIM TRIM=false}, {SCHEMA_COLUMN=Operation_User_Statu TRIM=false}, {SCHEMA_COLUMN=OPED, TRIM=false}, {: {SCHEMA_COLUMN=Number_of_Recurring, TRIM=false} {SCHEMA_COLUMN=PO_Number, TRIM=false}, {SCHEM {SCHEMA_COLUMN=PO_Line_Item_Material_ID, TRIM=f {SCHEMA_COLUMN=PO_Line_Item_Material_Description {SCHEMA_COLUMN=PO_Line_Item_Quantity, TRIM=fals TRIM=false}, {SCHEMA_COLUMN=PO_Line_Item_Final_I {SCHEMA_COLUMN=Received_Quantity, TRIM=false}, {S {SCHEMA_COLUMN=GRN_Quantity, TRIM=false}, {SCHE {SCHEMA_COLUMN=Reason_for_Traffic_Light, TRIM=fal TRIM=false}, {SCHEMA_COLUMN=Service_Order_Descri {SCHEMA_COLUMN=Service_Notification_Type, TRIM=fa TRIM=false}, {SCHEMA_COLUMN=Service_Notification_D {SCHEMA_COLUMN=Functional_Location_ID, TRIM=false TRIM=false}, {SCHEMA_COLUMN=Code_Group___Codin {SCHEMA_COLUMN=Coding___CWW_Prime_Product_ID TRIM=false}, {SCHEMA_COLUMN=NPID_ID_in_SO, TRIN TRIM=false}, {SCHEMA_COLUMN=Main_Work_Center, T {SCHEMA_COLUMN=Main_Work_Center_Description, TR {SCHEMA_COLUMN=Maintenance_Planning_Plant, TRIM {SCHEMA_COLUMN=Service_Order_Header_User_Statu {SCHEMA_COLUMN=Service_Order_Header_User_Statu {SCHEMA_COLUMN=Service_Order_Created_On, TRIM= TRIM=false}, {SCHEMA_COLUMN=Service_Order_Create {SCHEMA_COLUMN=Service_Order_Changed_On, TRIM {SCHEMA_COLUMN=Service_Order_Changed_By, TRIM: {SCHEMA_COLUMN=Service_Order_Changed_By__Mail_ {SCHEMA_COLUMN=Service_Order_Basic_Start_Date, T {SCHEMA_COLUMN=Service_Order_Basic_End_Date, TH {SCHEMA_COLUMN=GSR__External_System_Reference {SCHEMA_COLUMN=GTOMS__External_System_Refere {SCHEMA_COLUMN=Mozart__External_System_Referen {SCHEMA_COLUMN=Clarify__External_System_Referenc {SCHEMA_COLUMN=SPT__External_System_Reference_ TRIM=false}]

Check each row structure against schema	false
Check date	false
Encoding	"UTF-8"
Split row before field	false
Permit hexadecimal (0xNNN) or octal (0NNNN) for numeric types	false

Decode table	[{SCHEMA_COLUMN=Select_Operation, DECODE=false} DECODE=false}, {SCHEMA_COLUMN=Operation_ID, DEC DECODE=false}, {SCHEMA_COLUMN=Company_Code, I DECODE=false}, {SCHEMA_COLUMN=Work_Center_ID_ {SCHEMA_COLUMN=Operation_User_Status, DECODE= {SCHEMA_COLUMN=Operation_User_Status_Description DECODE=false}, {SCHEMA_COLUMN=OPED, DECODE= {SCHEMA_COLUMN=Number_of_Recurring, DECODE=fa {SCHEMA_COLUMN=PO_Number, DECODE=false}, {SCI {SCHEMA_COLUMN=PO_Line_Item_Material_ID, DECOL {SCHEMA_COLUMN=PO_Line_Item_Material_Description {SCHEMA_COLUMN=PO_Line_Item_Quantity, DECODE= DECODE=false}, {SCHEMA_COLUMN=PO_Line_Item_Fir {SCHEMA_COLUMN=Received_Quantity, DECODE=false DECODE=false}, {SCHEMA_COLUMN=GRN_Quantity, DI DECODE=false}, {SCHEMA_COLUMN=Reason_for_Traffi {SCHEMA_COLUMN=Service_Order_Type, DECODE=fals DECODE=false}, {SCHEMA_COLUMN=Service_Notificatic {SCHEMA_COLUMN=Service_Notification_ID, DECODE= {SCHEMA_COLUMN=Service_Notification_Description, DI {SCHEMA_COLUMN=Functional_Location_ID, DECODE= {SCHEMA_COLUMN=Functional_Location_Description, DI {SCHEMA_COLUMN=Code_Group___Coding___CWW_F {SCHEMA_COLUMN=Coding___CWW_Prime_Product_IL {SCHEMA_COLUMN=Code_Description, DECODE=false} {SCHEMA_COLUMN=NPID_Name_in_SO, DECODE=fals DECODE=false}, {SCHEMA_COLUMN=Main_Work_Cente {SCHEMA_COLUMN=Maintenance_Planning_Plant, DEC({SCHEMA_COLUMN=Service_Order_Header_User_Statu {SCHEMA_COLUMN=Service_Order_Header_User_Statu {SCHEMA_COLUMN=Service_Order_Created_On, DECO {SCHEMA_COLUMN=Service_Order_Created_By, DECOI {SCHEMA_COLUMN=Service_Order_Created_By__Mail_ {SCHEMA_COLUMN=Service_Order_Changed_On, DEC({SCHEMA_COLUMN=Service_Order_Changed_By, DECC {SCHEMA_COLUMN=Service_Order_Changed_By__Mail_ {SCHEMA_COLUMN=Service_Order_Basic_Start_Date, C {SCHEMA_COLUMN=Service_Order_Basic_End_Date, DI {SCHEMA_COLUMN=GSR__External_System_Reference {SCHEMA_COLUMN=GTOMS__External_System_Refere {SCHEMA_COLUMN=Mozart__External_System_Referen {SCHEMA_COLUMN=Clarify__External_System_Referenc {SCHEMA_COLUMN=SPT__External_System_Reference, DECODE=false}]
!!!DESTINATION.NAME!!!	

Min column number of optimize code	100
Label format	CSV_GRN
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for metadata :

Column	Key	Type	Length	Precision	Nullable	Comment
Select_Operation	false	String	5		true	
Service_Order_ID	false	Integer	10		true	
Operation_ID	false	Integer	2		true	
Related_Operation_ID	false	String	2		true	
Company_Code	false	String	4		true	
Work_Center_ID	false	String	7		true	
Work_Center_ID_Description	false	String	39		true	

Operation_User_Status	false	String	3		true
Operation_User_Status_Description	false	String	9		true
OPSD	false	java.util.Date	10		true
OPED	false	java.util.Date	10		true
Recurring	false	String	3		true
Number_of_Recurring	false	Integer	2		true
PO_Vendor	false	String	9		true
PO_Number	false	String	10		true
PO_Line_Item	false	Integer	2		true
PO_Line_Item_Material_ID	false	String	9		true
PO_Line_Item_Material_Description	false	String	32		true
PO_Line_Item_Quantity	false	Integer	2		true
PO_Line_Item_UOM	false	String	2		true
PO_Line_Item_Final_Delivery	false	String	1		true
Received_Quantity	false	Float	6	4	true
Outstanding_Quantity	false	Float	5	4	true
GRN_Quantity	false	Float	5	4	true

Traffic_Light	false	String		true	
Reason_for_Traffic_Light	false	String	68	true	
Service_Order_Type	false	String	4	true	
Service_Order_Description	false	String	19	true	
Service_Notification_Type	false	String	2	true	
Service_Notification_ID	false	Integer	9	true	
Service_Notification_Description	false	String		true	
Functional_Location_ID	false	String	10	true	
Functional_Location_Description	false	String	26	true	
Code_Group___Coding___CWW_Prime_Product	false	String	5	true	
Coding___CWW_Prime_Product_ID	false	Integer	4	true	
Code_Description	false	String	20	true	
NPID_ID_in_SO	false	String	15	true	
NPID_Name_in_SO	false	String	17	true	
Main_Work_Center	false	String	8	true	
Main_Work_Center_Description	false	String	34	true	
Maintenance_Planning_Plant	false	String	4	true	

Service_Order_Header_User_Status	false	String	3		true
Service_Order_Header_User_Status_Descrip	false	String	16		true
Service_Order_Created_On	false	java.util.Date	10		true
Service_Order_Created_By	false	String	8		true
Service_Order_Created_By__Mail_	false	String	32		true
Service_Order_Changed_On	false	java.util.Date	10		true
Service_Order_Changed_By	false	String	12		true
Service_Order_Changed_By__Mail_	false	String	36		true
Service_Order_Basic_Start_Date	false	java.util.Date	10		true
Service_Order_Basic_End_Date	false	java.util.Date	10		true
GSR__External_System_Reference_	false	String	16		true
GTOMS__External_System_Reference_	false	String	5		true
Mozart__External_System_Reference_	false	String	17		true
Clarify__External_System_Reference_	false	String	14		true
SPT__External_System_Reference_	false	Integer	6		true
GRN_processor	false	String			true

Original Function Parameters:
Component   tFileInputDelimited

	UNIQUE NAME	tFileInputDelimited_4	INPUT(S)	none
	LABEL	CSV_EVO_NPIDS_AML_NPIDS	OUTPUT(S)	tMap_1

Component Parameters:

Properties	Values
Unique Name	tFileInputDelimited_4
Component Name	tFileInputDelimited
Version	0.102 (ALPHA)
Family	File/Input
Start	false
Startable	true
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFileInputDelimited
Update components	true

IREPORT_PATH	
JAVA_LIBRARY_PATH	D:\Talend\Talend-Studio-20180116_1512-V6.5.1\configura
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DELIM:CSV_EVO_NPIDS_AML_NPIDS
File name/Stream	"C:/Users/VRAJ/Documents/vodafone/DF_POC/files/DF/Er
CSV options	true
Row Separator	"\n"
CSV Row Separator	"\n"
Field Separator	","
Escape char	"\""
Text enclosure	"\""
Header	1
Footer	0

Limit	
Skip empty rows	false
Uncompress as zip file	false
Die on error	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	repository: DELIM:CSV_EVO_NPIDS_AML_NPIDS - CSV_
Schema	repository: DELIM:CSV_EVO_NPIDS_AML_NPIDS - CSV_
!!!TEMP_DIR.NAME!!!	"C:/talendstudio/workspace"
Advanced separator (for numbers)	false
Thousands separator	","
Decimal separator	"."
Extract lines at random	false
Number of lines	10
Trim all columns	true
Check column to trim	[{SCHEMA_COLUMN=Customer_Number, TRIM=false}, {S {SCHEMA_COLUMN=PID, TRIM=false}, {SCHEMA_COLU
Check each row structure against schema	false

Check date	false
Encoding	"US-ASCII"
Split row before field	false
Permit hexadecimal (0xNNN) or octal (0NNNN) for numeric types	false
Decode table	[{SCHEMA_COLUMN=Customer_Number, DECODE=false {SCHEMA_COLUMN=PID, DECODE=false}, {SCHEMA_C DECODE=false}]
!!!DESTINATION.NAME!!!	
Min column number of optimize code	100
Label format	CSV_EVO_NPIDS_AML_NPIDS
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for CSV_EVO_NPIDS_AML_NPIDS :

Column	Key	Type	Length	Precision	Nullable	Comment

Customer_Number	false	String	10		true	
Customer_Name_1	false	String	35		true	
PID	false	String	10		true	
EVO_NPID	false	String	10		true	
AML_NPID	false	String	10		true	

Original Function Parameters:
Component   tFileInputDelimited

	UNIQUE NAME	tFileInputDelimited_5	INPUT(S)	none
	LABEL	CSV_BILLING_REPORT	OUTPUT(S)	tMap_2

Component Parameters:

Properties	Values
Unique Name	tFileInputDelimited_5
Component Name	tFileInputDelimited
Version	0.102 (ALPHA)
Family	File/Input
Start	false
Startable	true
SUBTREE_START	false

END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFileInputDelimited
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	D:\Talend\Talend-Studio-20180116_1512-V6.5.1\configura
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	repository: DELIM:CSV_Billing_Report
File name/Stream	"C:/Users/VRAJ/Documents/vodafone/DF_POC/files/DF/Er T-Mobile SingTel Sybase SFR.csv"
CSV options	true
Row Separator	"\n"

CSV Row Separator	"\n"
Field Separator	","
Escape char	"\""
Text enclosure	"\""
Header	1
Footer	0
Limit	
Skip empty rows	false
Uncompress as zip file	false
Die on error	false
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	repository: DELIM:CSV_Billing_Report - metadata
Schema	repository: DELIM:CSV_Billing_Report - metadata
!!!TEMP_DIR.NAME!!!	"C:/talendstudio/workspace"
Advanced separator (for numbers)	false
Thousands separator	","
Decimal separator	"."

Extract lines at random	false
Number of lines	10
Trim all columns	true
Check column to trim	[{SCHEMA_COLUMN=GCID, TRIM=false}, {SCHEMA_CC TRIM=false}, {SCHEMA_COLUMN=Start_Date, TRIM=fals {SCHEMA_COLUMN=Account_Id, TRIM=false}, {SCHEM/ {SCHEMA_COLUMN=Site_Id, TRIM=false}, {SCHEMA_CC {SCHEMA_COLUMN=Invoice_No_, TRIM=false}, {SCHEM {SCHEMA_COLUMN=Amount, TRIM=false}, {SCHEMA_C {SCHEMA_COLUMN=Charge_Frequency, TRIM=false}, {S {SCHEMA_COLUMN=Charge_Description, TRIM=false}, {S {SCHEMA_COLUMN=Product_Type, TRIM=false}, {SCHE {SCHEMA_COLUMN=Annual_Rental, TRIM=false}, {SCHE TRIM=false}, {SCHEMA_COLUMN=Charge_Type_Descrip {SCHEMA_COLUMN=Charge___Credit_Start_Date, TRIM {SCHEMA_COLUMN=Charge___Credit_End_Date, TRIM= TRIM=false}]
Check each row structure against schema	false
Check date	false
Encoding	"US-ASCII"
Split row before field	false
Permit hexadecimal (0xNNN) or octal (0NNNN) for numeric types	false

Decode table	[{SCHEMA_COLUMN=GCID, DECODE=false}, {SCHEMA_ {SCHEMA_COLUMN=GSR, DECODE=false}, {SCHEMA_ {SCHEMA_COLUMN=End_Date, DECODE=false}, {SCHE {SCHEMA_COLUMN=Account_Name, DECODE=false}, {S {SCHEMA_COLUMN=Site_Name, DECODE=false}, {SCH {SCHEMA_COLUMN=Invoice_Currency, DECODE=false}, {SCHEMA_COLUMN=Charge_Type, DECODE=false}, {SC DECODE=false}, {SCHEMA_COLUMN=Unit_Quantity, DE {SCHEMA_COLUMN=Charge_Description, DECODE=fals DECODE=false}, {SCHEMA_COLUMN=Product_Type, DE DECODE=false}, {SCHEMA_COLUMN=Annual_Rental, DI {SCHEMA_COLUMN=Annual_Rental_Currency, DECODE {SCHEMA_COLUMN=Charge_Type_Description, DECOD {SCHEMA_COLUMN=Charge___Credit_Start_Date, DECC {SCHEMA_COLUMN=Charge___Credit_End_Date, DECC DECODE=false}]
!!!DESTINATION.NAME!!!	
Min column number of optimize code	100
Label format	CSV_BILLING_REPORT
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for metadata :

Column	Key	Type	Length	Precision	Nullable	Comment

GCID	false	String	3		true	
CID	false	Integer	6		true	
GSR	false	String	17		true	
Start_Date	false	String	11		true	
End_Date	false	String	11		true	
Account_Id	false	Integer	4		true	
Account_Name	false	String	10		true	
Site_Id	false	String	50		true	
Site_Name	false	String	89		true	
Invoice_No_	false	Integer	6		true	
Invoice_Currency	false	String	3		true	
Amount	false	Float	7	4	true	
Charge_Type	false	String	16		true	
Charge_Frequency	false	String	7		true	
Unit_Quantity	false	Integer	1		true	
Charge_Description	false	String	97		true	
Customer_Ref_	false	String	34		true	

Product_Type	false	Integer	4		true	
C2_Ref	false	String	14		true	
Annual_Rental	false	Float	7	3	true	
Annual_Rental_Currency	false	String	3		true	
Charge_Type_Description	false	String			true	
Charge___Credit_Start_Date	false	String	11		true	
Charge___Credit_End_Date	false	String			true	
Site_Country	false	String	14		true	

Original Function Parameters:
Component   tFileOutputExcel

	UNIQUE NAME	tFileOutputExcel_1	INPUT(S)	tMap_2
	LABEL	Interim_Dataset	OUTPUT(S)	tMap_4

Component Parameters:

Properties	Values
Unique Name	tFileOutputExcel_1
Component Name	tFileOutputExcel
Version	0.101 (ALPHA)
Family	File/Output

Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFileOutputExcel
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	D:\Talend\Talend-Studio-20180116_1512-V6.5.1\configura
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Property Type	Built-In
Write excel2007 file format(xlsx)	true

Use Output Stream	false
Output Stream	outputStream
File Name	"C:/poc_data/output/Active_Interim_Dataset.xlsx"
Sheet name	"Interim_Dataset"
Include header	true
Append existing file	false
Append existing sheet	false
Is absolute Y pos.	false
First cell X	0
First cell Y	0
Keep existing cell format	false
Font	
Define all columns auto size	false

Define column auto size	[{SCHEMA_COLUMN=Cctid, IS_AUTO_SIZE=false}, {SCHEMA_COLUMN=Cct_Thirdparty, IS_AUTO_SIZE=fal: {SCHEMA_COLUMN=Clarify_Reference_Msp_Order, IS_AUTO_SIZE=false}, {SCHEMA_COLUMN=GSR_Ref, IS_AUTO_SIZE=false}, {SCHEMA_COLUMN=GTOMS_Re IS_AUTO_SIZE=false}, {SCHEMA_COLUMN=Circuit_Spe IS_AUTO_SIZE=false}, {SCHEMA_COLUMN=Product, IS_AUTO_SIZE=false}, {SCHEMA_COLUMN=A_End_City IS_AUTO_SIZE=false}, {SCHEMA_COLUMN=A_End_Cou IS_AUTO_SIZE=false}, {SCHEMA_COLUMN=Date_Tail_D IS_AUTO_SIZE=false}, {SCHEMA_COLUMN=Service_Notification_Description, IS_AUTO_SIZE=false}, {SCHEMA_COLUMN=Service_Or IS_AUTO_SIZE=false}, {SCHEMA_COLUMN=Operation_I IS_AUTO_SIZE=false}, {SCHEMA_COLUMN=Unique_SO IS_AUTO_SIZE=false}, {SCHEMA_COLUMN=PO_Numbe IS_AUTO_SIZE=false}, {SCHEMA_COLUMN=PO_Line_Ite IS_AUTO_SIZE=false}, {SCHEMA_COLUMN=OPSD, IS_AUTO_SIZE=false}, {SCHEMA_COLUMN=OPED, IS_AUTO_SIZE=false}, {SCHEMA_COLUMN=PO_COVER IS_AUTO_SIZE=false}, {SCHEMA_COLUMN=NPID_Name IS_AUTO_SIZE=false}, {SCHEMA_COLUMN=NPID_ID_in IS_AUTO_SIZE=false}, {SCHEMA_COLUMN=Functional_Location_ID, IS_AUTO_SIZE=false}, {SCHEMA_COLUMN=AML_NPID, IS_AUTO_SIZE=false}, {SCHEMA_COLUMN=Start_Date, IS_AUTO_SIZE=false}, {SCHEMA_COLUMN=End_Date, IS_AUTO_SIZE=false}, {SCHEMA_COLUMN=Vendor, IS_AUTO_SIZE=false}, {SCHEMA_COLUMN=SO_Vendor IS_AUTO_SIZE=false}]
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Create directory if does not exist	true
Custom the flush buffer size	false
Row number	100
Advanced separator (for numbers)	false

Thousands separator	","
Decimal separator	"."
Encoding	"ISO-8859-15"
Don't generate empty file	false
Recalculate formula	false
!!!SCHEMA_OPT_NUM.NAME!!!	100
Label format	Interim_Dataset
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for out :

Column	Key	Type	Length	Precision	Nullable	Comment
Cctid	false	String	50		true	
Cct_Thirdparty	false	String	50		true	

Clarify_Reference_Msp_Order	false	String	50		true	
GSR_Ref	false	String	54		true	
GTOMS_Ref	false	Integer	2		true	
Circuit_Speed	false	String	20		true	
Product	false	String	21		true	
A_End_City	false	String	9		true	
A_End_Country	false	String	14		true	
Date_Tail_Delivered	false	java.util.Date	10		true	
Service_Notification_Description	false	String			true	
Service_Order_ID	false	Integer	10		true	
Operation_ID	false	Integer	2		true	
Unique_SO	false	String	15		true	
PO_Number	false	String	10		true	
PO_Line_Item	false	Integer	2		true	
OPSD	false	java.util.Date	10		true	
OPED	false	java.util.Date	10		true	
PO_COVER	false	String	15		true	

NPID_Name_in_SO	false	String	17		true	
NPID_ID_in_SO	false	String	10		true	
Functional_Location_ID	false	String	10		true	
AML_NPID	false	String	10		true	
Start_Date	false	String	11		true	
End_Date	false	String	11		true	
Vendor	false	String	9		true	
SO_Vendor_Name	false	String	35		true	

Original Function Parameters:
Component   tFilterRow

	UNIQUE NAME	tFilterRow_7	INPUT(S)	tFileInputDelimited_1
	LABEL	Active&Ceased Circuits filter	OUTPUT(S)	tFilterRow_17

Component Parameters:

Properties	Values
Unique Name	tFilterRow_7
Component Name	tFilterRow
Version	0.102 (ALPHA)

Family	Processing
Startable	false
SUBTREE_START	false
END_OF_FLOW	false
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tFilterRow
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	D:\Talend\Talend-Studio-20180116_1512-V6.5.1\configura
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
REPOSITORY_ALLOW_AUTO_SWITCH	true

Schema	Built-In
Schema	Built-In
Schema	Built-In
Logical operator used to combine conditions	||
Conditions	[]
Use advanced mode	true
Advanced	// code sample : use input_row to define the condition. // inp ||!(input_row.columnName2.equals("bar")) // replace the fol condition (input_row.Order_Type.equalsIgnoreCase("cease (input_row.Status.equalsIgnoreCase("completed")||input_ro ||(input_row.Order_Type.equalsIgnoreCase("provide") && (input_row.Status.equalsIgnoreCase("completed")||input_ro
Label format	Active&Ceased Circuits filter
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for GTOMS_Metadata :

Column	Key	Type	Length	Precision	Nullable	Comment
GTOMS_Ref	false	Integer	2		true	
A_End_City	false	String	9		true	
A_End_Country	false	String	14		true	
B_End_City	false	String	9		true	
B_End_Country	false	String	7		true	
Product	false	String	21		true	
Order_Type	false	String	9		true	
GSOS_Ref	false	String	47		true	
GSR_Ref	false	String	54		true	
COMS_Ref	false	String	31		true	
Msp_Order	false	String	50		true	
Status	false	String	10		true	
DPC_Owner	false	String	19		true	
Carrier	false	String	27		true	
Date_Tail_Ordered	false	java.util.Date	10		true	
Date_Tail_Delivered	false	java.util.Date	10		true	

D_RFS	false	java.util.Date	10		true	
Cctid	false	String	50		true	
Cct_Thirdparty	false	String	50		true	
Circuit_Speed	false	String	20		true	
Order_Type_2	false	String	4		true	
Customer	false	String	50		true	

Original Function Parameters:
Component   tJava

	UNIQUE NAME	tJava_1	INPUT(S)	tServiceNowConnection_1
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tFileInputDelimited_1

Component Parameters:

Properties	Values
Unique Name	tJava_1
Component Name	tJava
Version	0.101 (ALPHA)
Family	Custom_Code
Start	false
Startable	true

SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	org.talend.help.tJava
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	D:\Talend\Talend-Studio-20180116_1512-V6.5.1\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false
Number of parallel executions	2
	false
Code	System.out.println("ServiceNow Connection Successful");
Import	//import java.util.List;

Schema	Built-In
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tJava_1 :

Column	Key	Type	Length	Precision	Nullable	Comment

Original Function Parameters:
Component   tServiceNowConnection

	UNIQUE NAME	tServiceNowConnection_1	INPUT(S)	none
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tJava_1

Component Parameters:

Properties	Values
Unique Name	tServiceNowConnection_1
Component Name	tServiceNowConnection

Version	0.3 (BETA)
Family	Business/ServiceNow|Cloud/ServiceNow
Start	true
Startable	true
SUBTREE_START	true
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	datalytyx.com
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	D:\Talend\Talend-Studio-20180116_1512-V6.5.1\configuration\lib\java
Subjob color	
Title color	
Enable parallel execution	false

Number of parallel executions	2
	false
URL	context.sn_URL
Username	context.sn_User
Password	context.sn_Pwd
Label format	__UNIQUE_NAME__
Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Original Function Parameters:
Component   tServiceNowOutput

	UNIQUE NAME	tServiceNowOutput_1	INPUT(S)	tMap_4
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	none

Component Parameters:

Properties	Values
Unique Name	tServiceNowOutput_1
Component Name	tServiceNowOutput
Version	0.3 (BETA)
Family	Business/ServiceNow|Cloud/ServiceNow
Startable	false
SUBTREE_START	false
END_OF_FLOW	true
Activate	true
DUMMY	false
tStatCatcher Statistics	false
Help	www.datalytyx.com
Update components	true
IREPORT_PATH	
JAVA_LIBRARY_PATH	D:\Talend\Talend-Studio-20180116_1512-V6.5.1\configura
Subjob color	
Title color	

Enable parallel execution	false
Number of parallel executions	2
	false
Use Existing Connection	true
	tServiceNowConnection_1
URL	"https://myinstance.service-now.com/"
Username	"UserName"
Password	**********
Action	insert
Table	custom_table
Custom Table Name	"u_imp_asset"
REPOSITORY_ALLOW_AUTO_SWITCH	true
Schema	Built-In
Reject Schema	Built-In
Enable payload debug mode	false
Enable response debug mode	false
Label format	__UNIQUE_NAME__

Hint format	__UNIQUE_NAME__ __COMMENT__
Connection format	row
Show Information	false
Comment	
Use an existing validation rule	false
Validation Rule Type	

Schema for tServiceNowOutput_1 :

Column	Key	Type	Length	Precision	Nullable	Comment
u_name	false	String	50		true	
u_third_part_circuit_ref	false	String	50		true	
u_clarify_ref	false	String	50		true	
u_gsr	false	String	54		true	
u_gtoms	false	Integer	2		true	
u_bandwidth	false	String	20		true	
u_location	false	String	14		true	
u_tail_delivered_date	false	java.util.Date	10		true	
u_so_number	false	Integer	10		true	

u_so_line	false	Integer	2		true	
u_unique_so	false	String	15		true	
u_po_number	false	String	10		true	
u_po_line	false	Integer	2		true	
u_opsd	false	java.util.Date	10		true	
u_oped	false	java.util.Date	10		true	
u_po_status	false	String	15		true	
u_functional_location	false	String	10		true	
u_vendor_number	false	String	9		true	

Original Function Parameters:
Component   tMap

	UNIQUE NAME	tMap_1	INPUT(S)	tMap_1 , tFileInputDelimited_3, tFileInputDelimited_4
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_2
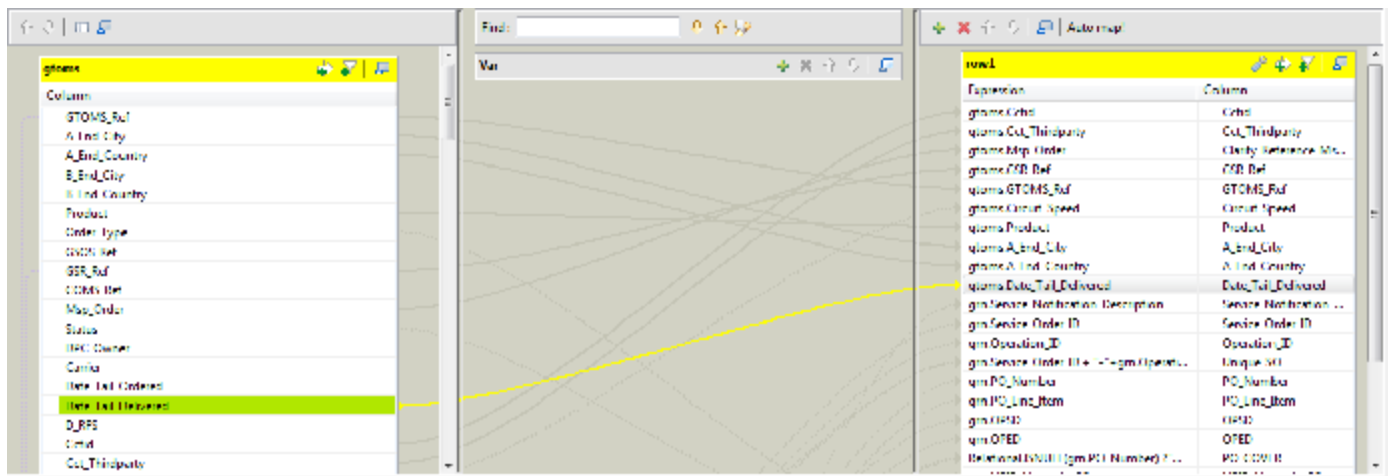
Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	true
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_1 (input):

Mapper table Properties(gtoms):

Properties	Values
Name	gtoms
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(gtoms):

Name	Type	Expression	isNullable
GTOMS_Ref	Integer		true
A_End_City	String		true
A_End_Country	String		true
B_End_City	String		true
B_End_Country	String		true
Product	String		true
Order_Type	String		true

GSOS_Ref	String		true
GSR_Ref	String		true
COMS_Ref	String		true
Msp_Order	String		true
Status	String		true
DPC_Owner	String		true
Carrier	String		true
Date_Tail_Ordered	java.util.Date		true
Date_Tail_Delivered	java.util.Date		true
D_RFS	java.util.Date		true
Cctid	String		true
Cct_Thirdparty	String		true
Circuit_Speed	String		true
Order_Type_2	String		true
Customer	String		true

Constraint Table Entries(gtoms):

Name	Type	Expression	isNullable

Mapper table Properties(grn):

Properties	Values
Name	grn
Matching-mode	ALL_MATCHES
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	true
expressionFilter	grn.Recurring.equalsIgnoreCase("MRC")

Metadata Table Entries(grn):

Name	Type	Expression	isNullab
Select_Operation	String		true
Service_Order_ID	Integer		true
Operation_ID	Integer		true
Related_Operation_ID	String		true
Company_Code	String		true
Work_Center_ID	String		true
Work_Center_ID_Description	String		true

Operation_User_Status	String		true
Operation_User_Status_Description	String		true
OPSD	java.util.Date		true
OPED	java.util.Date		true
Recurring	String		true
Number_of_Recurring	Integer		true
PO_Vendor	String		true
PO_Number	String		true
PO_Line_Item	Integer		true
PO_Line_Item_Material_ID	String		true
PO_Line_Item_Material_Description	String		true
PO_Line_Item_Quantity	Integer		true
PO_Line_Item_UOM	String		true
PO_Line_Item_Final_Delivery	String		true
Received_Quantity	Float		true
Outstanding_Quantity	Float		true
GRN_Quantity	Float		true

Traffic_Light	String		true
Reason_for_Traffic_Light	String		true
Service_Order_Type	String		true
Service_Order_Description	String		true
Service_Notification_Type	String		true
Service_Notification_ID	Integer		true
Service_Notification_Description	String		true
Functional_Location_ID	String		true
Functional_Location_Description	String		true
Code_Group___Coding___CWW_Prime_Product	String		true
Coding___CWW_Prime_Product_ID	Integer		true
Code_Description	String		true
NPID_ID_in_SO	String		true
NPID_Name_in_SO	String		true
Main_Work_Center	String		true
Main_Work_Center_Description	String		true
Maintenance_Planning_Plant	String		true

Service_Order_Header_User_Status	String		true
Service_Order_Header_User_Status_Descrip	String		true
Service_Order_Created_On	java.util.Date		true
Service_Order_Created_By	String		true
Service_Order_Created_By__Mail_	String		true
Service_Order_Changed_On	java.util.Date		true
Service_Order_Changed_By	String		true
Service_Order_Changed_By__Mail_	String		true
Service_Order_Basic_Start_Date	java.util.Date		true
Service_Order_Basic_End_Date	java.util.Date		true
GSR__External_System_Reference_	String	gtoms.GSR_Ref	true
GTOMS__External_System_Reference_	String	gtoms.GTOMS_Ref.toString()	true
Mozart__External_System_Reference_	String		true
Clarify__External_System_Reference_	String		true
SPT__External_System_Reference_	Integer		true
GRN_processor	String		true

Constraint Table Entries(grn):

Name	Type	Expression	isNullable

Mapper table Properties(aml_npid):

Properties	Values
Name	aml_npid
Matching-mode	FIRST_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	true
expressionFilter	null

Metadata Table Entries(aml_npid):

Name	Type	Expression	isNullable
Customer_Number	String		true
Customer_Name_1	String		true
PID	String		true
EVO_NPID	String	grn.NPID_ID_in_SO	true
AML_NPID	String		true

Constraint Table Entries(aml_npid):

Name	Type	Expression	isNullable

Mapper table for tMap_1 (output):
Mapper table Properties(row1):

Properties	Values
Name	row1
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row1):

Name	Type	Expression
Cctid	String	gtoms.Cctid
Cct_Thirdparty	String	gtoms.Cct_Thirdparty
Clarify_Reference_Msp_Order	String	gtoms.Msp_Order
GSR_Ref	String	gtoms.GSR_Ref
GTOMS_Ref	Integer	gtoms.GTOMS_Ref
Circuit_Speed	String	gtoms.Circuit_Speed
Product	String	gtoms.Product

A_End_City	String	gtoms.A_End_City
A_End_Country	String	gtoms.A_End_Country
Date_Tail_Delivered	java.util.Date	gtoms.Date_Tail_Delivered
Service_Notification_Description	String	grn.Service_Notification_Description
Service_Order_ID	Integer	grn.Service_Order_ID
Operation_ID	Integer	grn.Operation_ID
Unique_SO	String	grn.Service_Order_ID + "-"+grn.Operation_ID
PO_Number	String	grn.PO_Number
PO_Line_Item	Integer	grn.PO_Line_Item
OPSD	java.util.Date	grn.OPSD
OPED	java.util.Date	grn.OPED
PO_COVER	String	Relational.ISNULL(grn.PO_Number) ?"No PO Cover" : grn.PO_Number.toString()!=""&&TalendDate.compareD Cover":grn.PO_Number.toString()==""&&TalendDate.c WIP":grn.PO_Number.toString()!=""&&TalendDate.com Expired":"No PO Cover"
NPID_Name_in_SO	String	grn.NPID_Name_in_SO
NPID_ID_in_SO	String	grn.NPID_ID_in_SO
Functional_Location_ID	String	grn.Functional_Location_ID
AML_NPID	String	aml_npid.AML_NPID

Order_Type	String	gtoms.Order_Type
Status	String	gtoms.Status

Constraint Table Entries(row1):

Name	Type	Expression

Mapper table for tMap_1 (var):
  Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(Var):

Name	Type	Expression	isNullable

Constraint Table Entries(Var):

Name	Type	Expression	isNullable

Component   tMap

	UNIQUE NAME	tMap_2	INPUT(S)	tFileInputDelimited_2, tMap_3
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tFileOutputExcel_1, tFileOutputExcel_3, tFileOutputExcel_2

Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	true
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_2 (input):
   Mapper table Properties(row1):

Properties	Values
Name	row1
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row1):

Name	Type	Expression	isNullable
Cctid	String		true
Cct_Thirdparty	String		true
Clarify_Reference_Msp_Order	String		true
GSR_Ref	String		true
GTOMS_Ref	Integer		true
Circuit_Speed	String		true
Product	String		true

A_End_City	String		true
A_End_Country	String		true
Date_Tail_Delivered	java.util.Date		true
Service_Notification_Description	String		true
Service_Order_ID	Integer		true
Operation_ID	Integer		true
Unique_SO	String		true
PO_Number	String		true
PO_Line_Item	Integer		true
OPSD	java.util.Date		true
OPED	java.util.Date		true
PO_COVER	String		true
NPID_Name_in_SO	String		true
NPID_ID_in_SO	String		true
Functional_Location_ID	String		true
AML_NPID	String		true
Order_Type	String		true

Status	String		true

Constraint Table Entries(row1):

Name	Type	Expression	isNullable

Mapper table Properties(billing):

Properties	Values
Name	billing
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(billing):

Name	Type	Expression	isNullable
GCID	String		true
CID	Integer		true
GSR	String	row1.GSR_Ref	true
Start_Date	String		true

End_Date	String		true
Account_Id	Integer		true
Account_Name	String		true
Site_Id	String		true
Site_Name	String		true
Invoice_No_	Integer		true
Invoice_Currency	String		true
Amount	Float		true
Charge_Type	String		true
Charge_Frequency	String		true
Unit_Quantity	Integer		true
Charge_Description	String		true
Customer_Ref_	String		true
Product_Type	Integer		true
C2_Ref	String		true
Annual_Rental	Float		true
Annual_Rental_Currency	String		true

Charge_Type_Description	String		true
Charge___Credit_Start_Date	String		true
Charge___Credit_End_Date	String		true
Site_Country	String		true

Constraint Table Entries(billing):

Name	Type	Expression	isNullable

Mapper table Properties(sovr):

Properties	Values
Name	sovr
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(sovr):

Name	Type	Expression	isNullable
Service_Order	Integer	row1.Service_Order_ID	true
SO_Item_No	Integer	row1.Operation_ID	true
PO_Number	String	row1.PO_Number	true
Vendor	String		true
PO_Item_Number	Integer	row1.PO_Line_Item	true
SO_Vendor_Name	String		true

Constraint Table Entries(sovr):

Name	Type	Expression	isNullable

Mapper table for tMap_2 (output):
Mapper table Properties(active_and_po_cover):

Properties	Values
Name	active_and_po_cover
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	row1.Order_Type.equalsIgnoreCase("provide") && row1.PO_COVER.equalsIgnoreCase("PO Cover")

Metadata Table Entries(active_and_po_cover):

Name	Type	Expression	isNullable
Cctid	String	row1.Cctid	true
Cct_Thirdparty	String	row1.Cct_Thirdparty	true
Clarify_Reference_Msp_Order	String	row1.Clarify_Reference_Msp_Order	true
GSR_Ref	String	row1.GSR_Ref	true
GTOMS_Ref	Integer	row1.GTOMS_Ref	true
Circuit_Speed	String	row1.Circuit_Speed	true

Product	String	row1.Product	true
A_End_City	String	row1.A_End_City	true
A_End_Country	String	row1.A_End_Country	true
Date_Tail_Delivered	java.util.Date	row1.Date_Tail_Delivered	true
Service_Notification_Description	String	row1.Service_Notification_Description	true
Service_Order_ID	Integer	row1.Service_Order_ID	true
Operation_ID	Integer	row1.Operation_ID	true
Unique_SO	String	row1.Unique_SO	true
PO_Number	String	row1.PO_Number	true
PO_Line_Item	Integer	row1.PO_Line_Item	true
OPSD	java.util.Date	row1.OPSD	true
OPED	java.util.Date	row1.OPED	true
PO_COVER	String	row1.PO_COVER	true
NPID_Name_in_SO	String	row1.NPID_Name_in_SO	true
NPID_ID_in_SO	String	row1.NPID_ID_in_SO	true
Functional_Location_ID	String	row1.Functional_Location_ID	true
AML_NPID	String	row1.AML_NPID	true

Start_Date	String	billing.Start_Date	true
End_Date	String	billing.End_Date	true
Vendor	String	sovr.Vendor	true
SO_Vendor_Name	String	sovr.SO_Vendor_Name	true

Constraint Table Entries(active_and_po_cover):

Name	Type	Expression	isNullable

Mapper table Properties(Ceases):

Properties	Values
Name	Ceases
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	row1.Order_Type.equalsIgnoreCase("cease")

Metadata Table Entries(Ceases):

Name	Type	Expression	isNullable
Cctid	String	row1.Cctid	true

Cct_Thirdparty	String	row1.Cct_Thirdparty	true
Clarify_Reference_Msp_Order	String	row1.Clarify_Reference_Msp_Order	true
GSR_Ref	String	row1.GSR_Ref	true
GTOMS_Ref	Integer	row1.GTOMS_Ref	true
Circuit_Speed	String	row1.Circuit_Speed	true
Product	String	row1.Product	true
A_End_City	String	row1.A_End_City	true
A_End_Country	String	row1.A_End_Country	true
Date_Tail_Ordered	java.util.Date	row1.Date_Tail_Ordered	true
Service_Notification_Description	String	row1.Service_Notification_Description	true
Service_Order_ID	Integer	row1.Service_Order_ID	true
Operation_ID	Integer	row1.Operation_ID	true
Unique_SO	String	row1.Unique_SO	true
PO_Number	String	row1.PO_Number	true
PO_Line_Item	Integer	row1.PO_Line_Item	true
OPSD	java.util.Date	row1.OPSD	true
OPED	java.util.Date	row1.OPED	true

PO_COVER	String	row1.PO_COVER	true
NPID_Name_in_SO	String	row1.NPID_Name_in_SO	true
NPID_ID_in_SO	String	row1.NPID_ID_in_SO	true
Functional_Location_ID	String	row1.Functional_Location_ID	true
AML_NPID	String	row1.AML_NPID	true
Start_Date	String	billing.Start_Date	true
End_Date	String	billing.End_Date	true
Vendor	String	sovr.Vendor	true
SO_Vendor_Name	String	sovr.SO_Vendor_Name	true

Constraint Table Entries(Ceases):

Name	Type	Expression	isNullable

Mapper table Properties(active_po_expired):

Properties	Values
Name	active_po_expired
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	row1.Order_Type.equalsIgnoreCase("provide") && row1.PO_COVER.equalsIgnoreCase("PO Expired")

Metadata Table Entries(active_po_expired):

Name	Type	Expression	isNullable
Cctid	String	row1.Cctid	true
Cct_Thirdparty	String	row1.Cct_Thirdparty	true
Clarify_Reference_Msp_Order	String	row1.Clarify_Reference_Msp_Order	true
GSR_Ref	String	row1.GSR_Ref	true
GTOMS_Ref	Integer	row1.GTOMS_Ref	true
Circuit_Speed	String	row1.Circuit_Speed	true
Product	String	row1.Product	true

A_End_City	String	row1.A_End_City	true
A_End_Country	String	row1.A_End_Country	true
Date_Tail_Ordered	java.util.Date	row1.Date_Tail_Ordered	true
Service_Notification_Description	String	row1.Service_Notification_Description	true
Service_Order_ID	Integer	row1.Service_Order_ID	true
Operation_ID	Integer	row1.Operation_ID	true
Unique_SO	String	row1.Unique_SO	true
PO_Number	String	row1.PO_Number	true
PO_Line_Item	Integer	row1.PO_Line_Item	true
OPSD	java.util.Date	row1.OPSD	true
OPED	java.util.Date	row1.OPED	true
PO_COVER	String	row1.PO_COVER	true
NPID_Name_in_SO	String	row1.NPID_Name_in_SO	true
NPID_ID_in_SO	String	row1.NPID_ID_in_SO	true
Functional_Location_ID	String	row1.Functional_Location_ID	true
AML_NPID	String	row1.AML_NPID	true
Start_Date	String	billing.Start_Date	true

End_Date	String	billing.End_Date	true
Vendor	String	sovr.Vendor	true
SO_Vendor_Name	String	sovr.SO_Vendor_Name	true

Constraint Table Entries(active_po_expired):

Name	Type	Expression	isNullable

Mapper table for tMap_2 (var):

Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(Var):

Name	Type	Expression	isNullable

Constraint Table Entries(Var):

Name	Type	Expression	isNullable

Component   tMap

	UNIQUE NAME	tMap_3	INPUT(S)	tFileInputDelimited_2 , tMap_3
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tMap_2

Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	true
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_3 (input):
  Mapper table Properties(row2):

Properties	Values
Name	row2
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row2):

Name	Type	Expression	isNullable
Service_Order	Integer		true
SO_Item_No	Integer		true
SO_Type	String		true
SO_Header_Status	String		true
SO_Item_Status	String		true
SO_Created_On	java.util.Date		true
SO_Created_By	String		true

SO_Creator_Name	String		true
SO_Item_Net_Value	String		true
SO_Item_Currency	String		true
PR_Number	Long		true
PR_Created_On	java.util.Date		true
PR_Created_By	String		true
PR_Creator_Name	String		true
PO_Number	String		true
Vendor	String		true
PO_Release_Indicator	String		true
PO_Subject_to_release	String		true
PO_Value	String		true
PO_Currency	String		true
Release_Completed_On	String		true
Approval_pending_with	String		true
SO_Item_Creation_Date	String		true
PO_Item_Number	Integer		true

SO_Vendor_Name	String		true
SO_Customer_Number	Long		true
SO_Customer_Name	String		true
SO_Customer_NPID	String		true
SO_Requisitioner	String		true
OPSD	java.util.Date		true
OPED	java.util.Date		true
PO_Deletion_Status	String		true
PO_Rejection_Code	String		true
Person_Responsible_VW	String		true
Company_Code	String		true
Actual__Vendor	String		true
Actual_PO	String		true
Rejection_Text	String		true

Constraint Table Entries(row2):

Name	Type	Expression	isNullable

Mapper table for tMap_3 (output):
  Mapper table Properties(sovr):

Properties	Values
Name	sovr
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(sovr):

Name	Type	Expression	isNullable
Service_Order	Integer	row2.Service_Order	true
SO_Item_No	Integer	Integer.parseInt(row2.SO_Item_No.toString()+"0")	true
PO_Number	String	row2.PO_Number	true
Vendor	String	row2.Vendor	true
PO_Item_Number	Integer	row2.PO_Item_Number	true
SO_Vendor_Name	String	row2.SO_Vendor_Name	true

Constraint Table Entries(sovr):

Name	Type	Expression	isNullable

Mapper table for tMap_3 (var):
Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(Var):

Name	Type	Expression	isNullable

Constraint Table Entries(Var):

Name	Type	Expression	isNullable

Component   tMap

	UNIQUE NAME	tMap_4	INPUT(S)	tFileOutputExcel_1 , tFileInputDelimited_5
	LABEL	__UNIQUE_NAME__	OUTPUT(S)	tServiceNowOutput_1
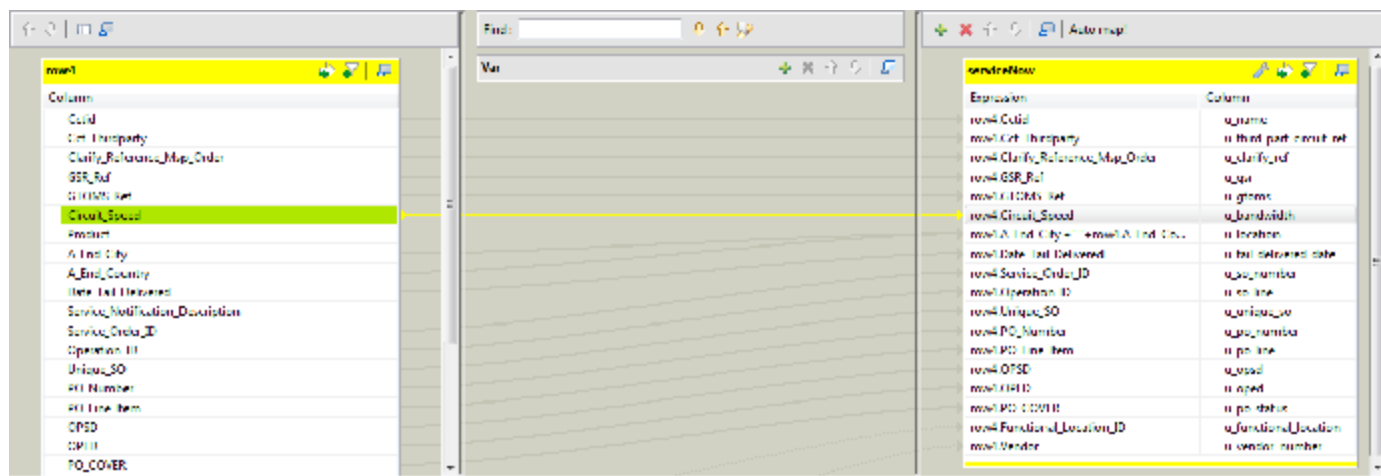
Component Parameters:

Properties	Values
tStatCatcher Statistics	false
Enable parallel execution	false
Mapping links display as:	AUTO
Temp data directory path:	
Max buffer size (nb of rows):	2000000
Ignore trailing zeros for BigDecimal	true
Show Information	false
Comment	
Use an existing validation rule	false

Mapper table for tMap_4 (input):

Mapper table Properties(row4):

Properties	Values
Name	row4
Matching-mode	UNIQUE_MATCH
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(row4):

Name	Type	Expression	isNullable
Cctid	String		true
Cct_Thirdparty	String		true
Clarify_Reference_Msp_Order	String		true
GSR_Ref	String		true
GTOMS_Ref	Integer		true
Circuit_Speed	String		true
Product	String		true

A_End_City	String		true
A_End_Country	String		true
Date_Tail_Delivered	java.util.Date		true
Service_Notification_Description	String		true
Service_Order_ID	Integer		true
Operation_ID	Integer		true
Unique_SO	String		true
PO_Number	String		true
PO_Line_Item	Integer		true
OPSD	java.util.Date		true
OPED	java.util.Date		true
PO_COVER	String		true
NPID_Name_in_SO	String		true
NPID_ID_in_SO	String		true
Functional_Location_ID	String		true
AML_NPID	String		true
Start_Date	String		true

End_Date	String		true
Vendor	String		true
SO_Vendor_Name	String		true

Constraint Table Entries(row4):

Name	Type	Expression	isNullable

Mapper table for tMap_4 (output):
Mapper table Properties(serviceNow):

Properties	Values
Name	serviceNow
Matching-mode	
isMinimized	false
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(serviceNow):

Name	Type	Expression	isNullable
u_name	String	row4.Cctid	true
u_third_part_circuit_ref	String	row4.Cct_Thirdparty	true

u_clarify_ref	String	row4.Clarify_Reference_Msp_Order	true
u_gsr	String	row4.GSR_Ref	true
u_gtoms	Integer	row4.GTOMS_Ref	true
u_bandwidth	String	row4.Circuit_Speed	true
u_location	String	row4.A_End_City +" "+row4.A_End_Country	true
u_tail_delivered_date	java.util.Date	row4.Date_Tail_Delivered	true
u_so_number	Integer	row4.Service_Order_ID	true
u_so_line	Integer	row4.Operation_ID	true
u_unique_so	String	row4.Unique_SO	true
u_po_number	String	row4.PO_Number	true
u_po_line	Integer	row4.PO_Line_Item	true
u_opsd	java.util.Date	row4.OPSD	true
u_oped	java.util.Date	row4.OPED	true
u_po_status	String	row4.PO_COVER	true
u_functional_location	String	row4.Functional_Location_ID	true
u_vendor_number	String	row4.Vendor	true

Constraint Table Entries(serviceNow):

Name	Type	Expression	isNullable

Mapper table for tMap_4 (var):
Mapper table Properties(Var):

Properties	Values
Name	Var
Matching-mode	
isMinimized	true
isReject	false
isRejectInnerJoin	false
isInnerJoin	false
expressionFilter	null

Metadata Table Entries(Var):

Name	Type	Expression	isNullable

Constraint Table Entries(Var):

Name	Type	Expression	isNullable