ODK MML Docs

This is a page that documents the workflows and functionality that are possible with MML within Otherside. Updated as of Feb 2026.

These docs will evolve and get updated as MML functionality comes online, this guide contains the following sub pages

- Create your first MML - This page walks you through the creation of your first MML object and goes from LLM command through to placing it in game
- Supported MML Types - This section highlights the differences between Static and Dynamic MML's
- Supported Tags - This identifies what tags of the MML API are supported within Unreal.

Important Links:

BUILD LINK
MML EDITOR
MML UPLOAD - ***We are going to make a change to this page in the coming days, which will wipe MML's added and you will just need to re add them once our change has landed.***

Controls:

Left Click = placement
X = Close MML preview model
Del = Remove MML within user view
J = Remove oldest MML

What you need to start creating

1. A LLM enabled IDE or prompt window e.g Cursor.
2. Access to the MML Editor: https://mmleditor.com/explore
3. Access to https://main.o7e.dev/mmls/

Useful Documentation

1. https://mml.io/docs - Msquareds documentation on MML (Metaverse Markup Language)

How to create your first MML object

- Create an account at: https://mmleditor.com/

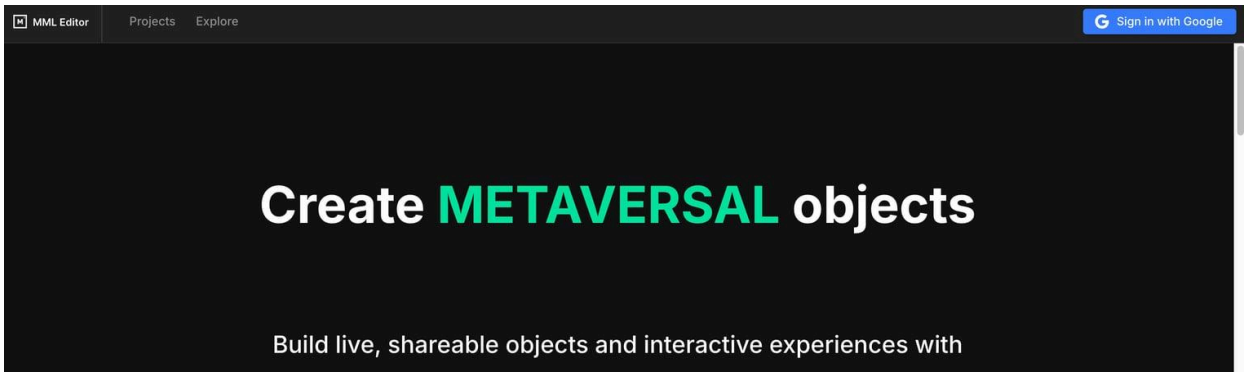

- Create a New Project on the MML Editor Homepage

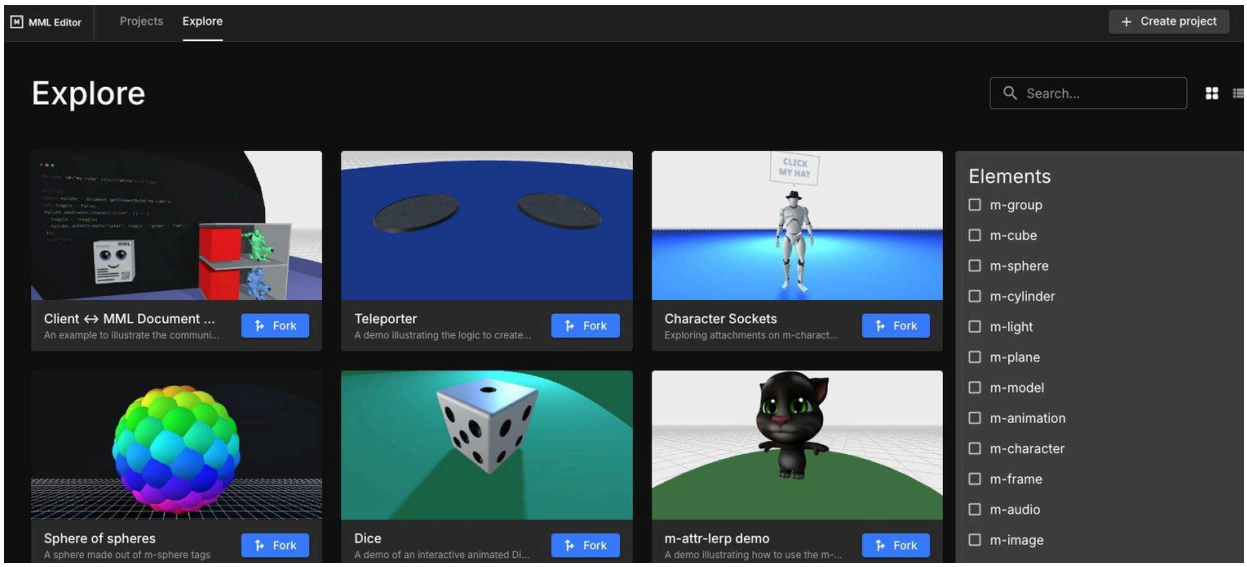

- The MML Editor will open for your new MML document, I would give the MML a new name by going Info ---> Edit Name in this instance I will call it "My First MML"

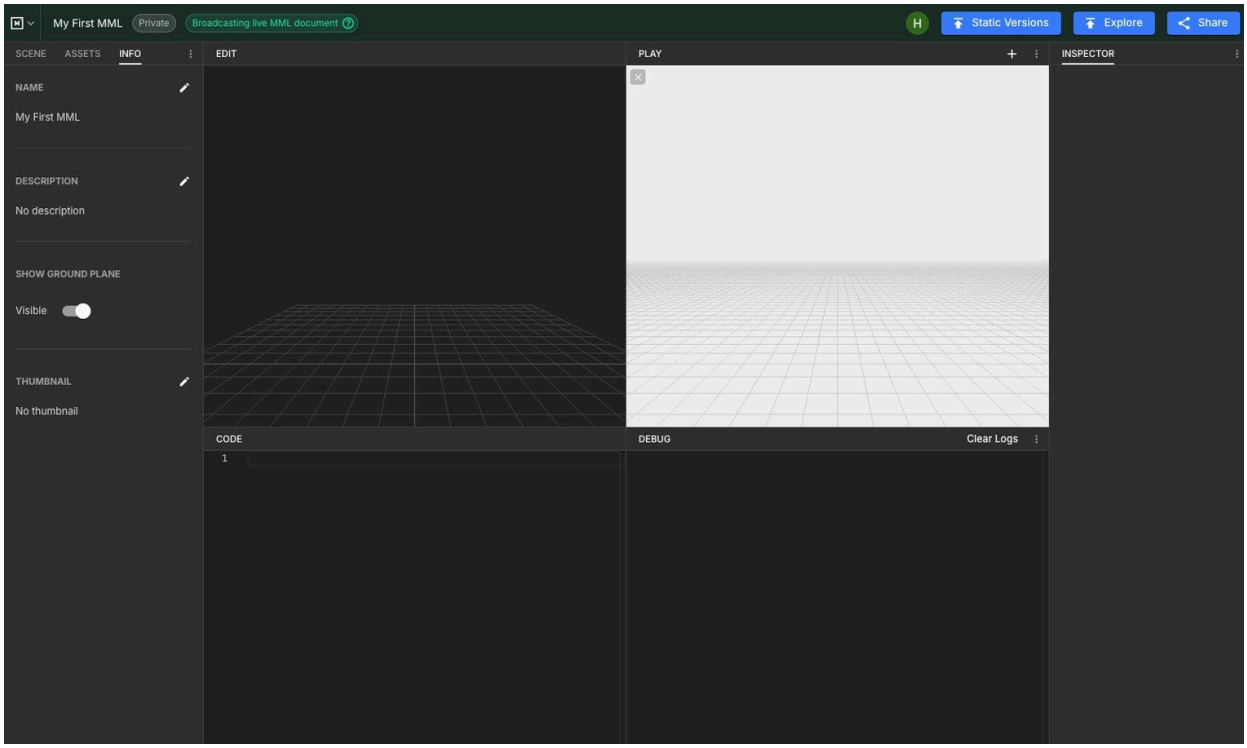

- If you are using Cursor, I would create a new Folder on your machine called "MML Creations" and then open that folder with Cursor. Start a new agent with your chosen LLM model, and you can start prompting, for this example I am going to build a Rocket with the following prompt "*Create a rocket ship that takes off in Metaverse Markup Language in a new HTML file"* You can be more descriptive with your creation depending on what you are wanting to create.
    - ***If you dont use cursor, you could use chat gpt or whatever LLM prompting tool you use to generate the MML code.***

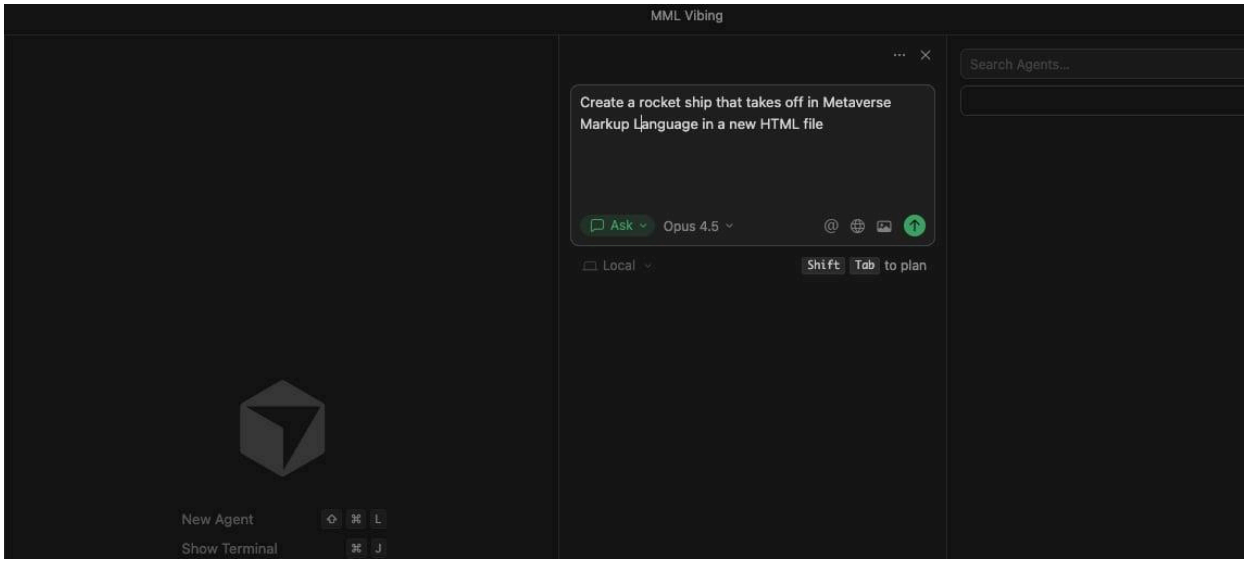

Once your chosen agent has created the first pass you can copy and paste it into the MML editor in the CODE viewport to see how its turned out

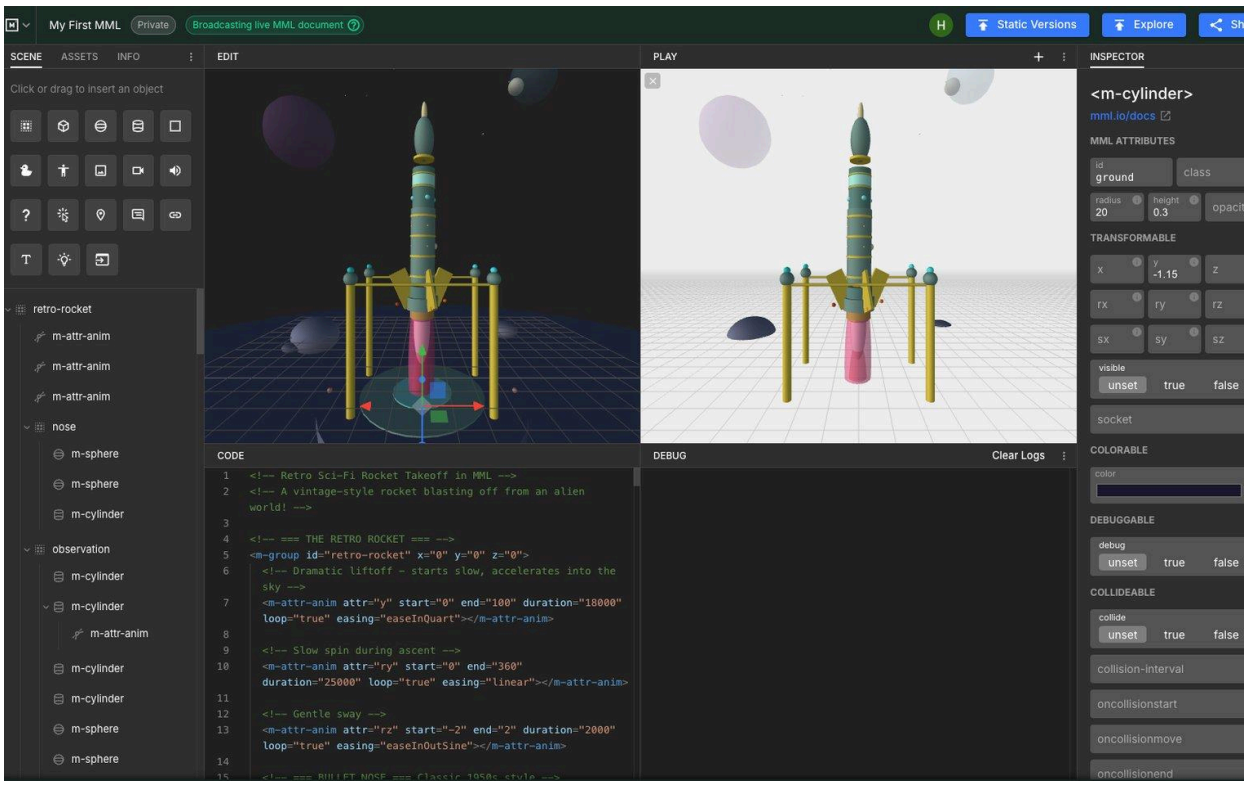

When you are happy with your MML creation click "Static Version" in the top right, then Publish and then copy the URL.

- If you want a Dynamic MML then go to Share and copy the web socket link, your MML must be running on your local browser so within the MML editor for it to work in world as your local machine acts as a server. At a later date we may add a MML hosting service.

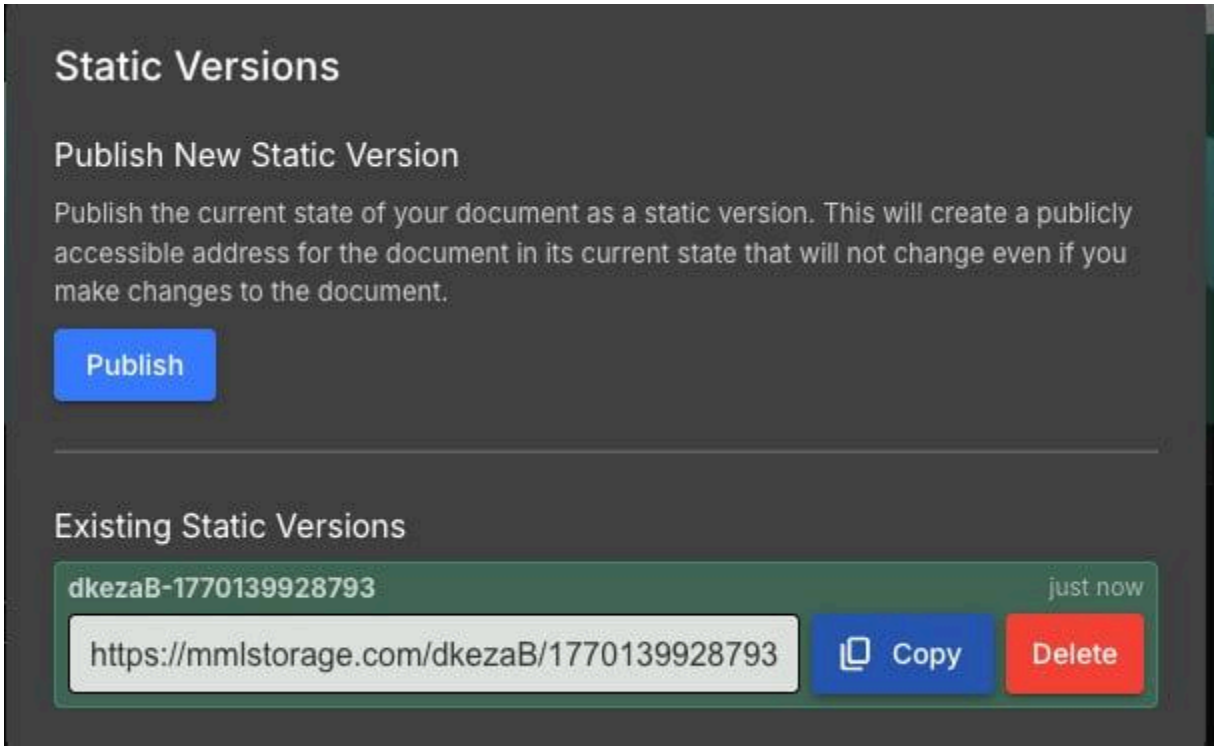

Next head to https://www.otherside.xyz/mmls and add your URL + name.

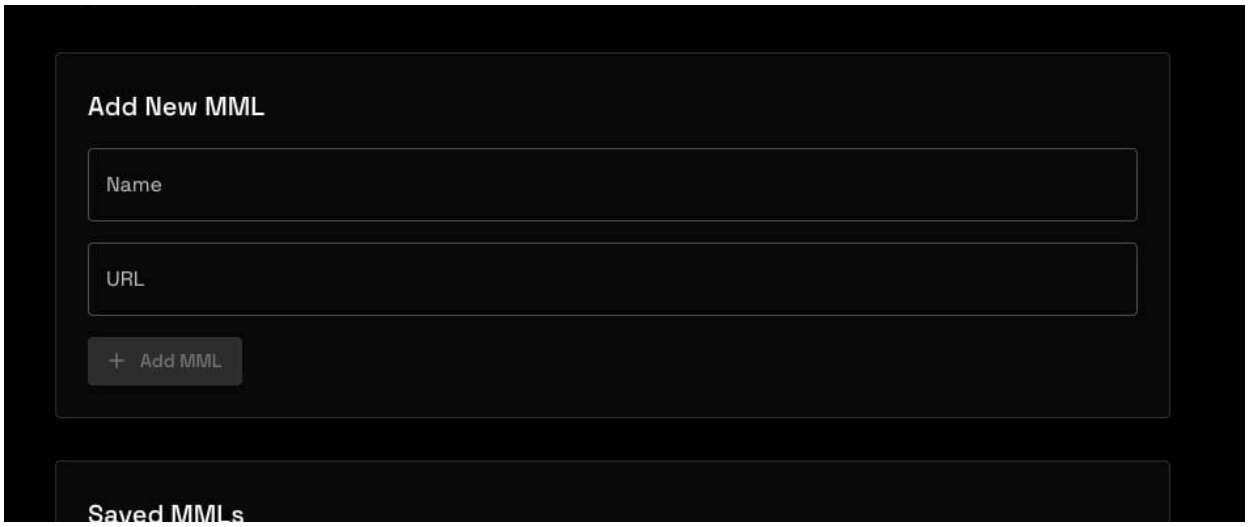

Once you have clicked Add MML it will be stored against your profile, and will appear in the drop down. If you cannot see the drop down in world you will need to be added to the MML Director group if its not available in the roles dropdown in settings

Supported MML Types4412113

Static MMLS Static MML's are fully supported and are the most simple form the MML type.

    - Static MML's can't contain javascript code and therefore do not support interaction or OnClick events.
    - Static MML's utlise all supported Tags
    - Static MML's cannot be edited live, and when a change is made a new link will need to be published from the MML Editor.
- Dynamic MML's are partially supported, these MML's can contain javascript and can be edited live, which means you don't need to publish a new link for every change you make. The state and MML code will syncronise with every instance of the object for example if you have a jukebox and the song can be changed, the song will update in every world where this MML is present.
    - Interaction/Player click events are currently **NOT** supported in Unreal
    - You MUST keep the MML running within the MML Editor in your browser as this acts as the server
        - A MML hosting service may come online at a later date to circumvent this restriction

Supported Tags

MML TAG	Supported in Unreal (Yes/No)
<m-group>	**YES**

`<m-cube>`
`<m-sphere>`
`<m-cylinder>`
	YES

<m-light>	**YES**
<m-plane>	**YES**
<m-model>	**YES**
<m-character>	**YES**

<m-audio>	**NO**
<m-image>	**YES**
<m-video>	**YES**
<m-label>	**YES**
<m-position-probe>	**NO**
<m-prompt>	**YES**
<m-link>	**NO**
<m-interaction>	**NO**
<m-chat-probe>	**NO**
<m-attr-anim>	**YES**
<m-attr-lerp>	**NO**

Notes for the MML Alpha

This is very much a prototype sandbox, so we will expect there to be bugs and issues which will lead to the server needing to be restarted

Due to increased expectations around server restarts, it is **HIGHLY** advisable to keep your creations contained within a single MML file so if the server gets restarted you can re-place the whole creation quickly and easily
.

- e.g don't create a building out of individual MML's placed in the world, create the WHOLE building within the MML editor as ONE single MML object.

We are currently locking MML placement behind a role, if you don't have access to the MML placement role in settings let us know and we can add you.

We of course want your feedback so we can make improvements to the experience and improve the MML experience within Otherside