

• TANYA IMAN

Widget Integration Developer Guide

Embed the Tanya Iman AI chat widget on any approved website in under 5 minutes.

Version

v1.0 — September 2026

Audience

Front-end / WordPress Developers

Production URL

<https://app.tanyaiman.id>


TABLE OF CONTENTS

1	Overview & How It Works	3
2	Quick Start — One Line of Code	4
3	Configuration Options	4
4	WordPress Integration	5
5	Raw HTML / Static Site Integration	6
6	Advanced: Inline Iframe Embed	7
7	postMessage Events API	8
8	Security & CSP Requirements	9
9	Troubleshooting	10
10	Appendix: Full Embed Snippet Reference	11

Overview & How It Works

The **Tanya Iman widget** is a floating AI-chat button that site owners embed with a single `<script>` tag. The entire chat UI runs inside a sandboxed **iframe** — the widget never reads cookies, localStorage, or DOM content from the host page.

Architecture

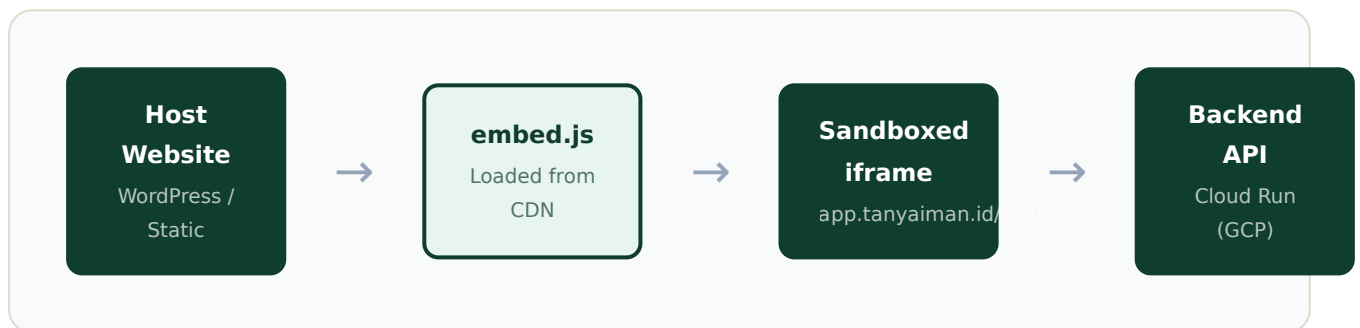

What the Script Does

1. Injects a fixed-position **launcher button** (bottom-right or bottom-left of the viewport).
2. Creates a **sandboxed** `<iframe>` pointing to `https://app.tanyaiman.id/chat?embed=1`.
3. Listens for `postMessage` events from the frame to **auto-resize** the iframe height as the conversation grows.
4. Closes the widget on Escape key press for accessibility.

Security Model

The iframe is loaded with a strict `sandbox` attribute. The host page is **never** exposed to widget data. No cookies, no localStorage cross-access, no `allow-same-origin`. The backend enforces a **Content-Security-Policy** allowlist — only approved domains can frame the chat.

i APPROVED DOMAINS ONLY

Your domain must be added to the CSP `frame-ancestors` allowlist by the Tanya Iman team before the iframe will display. Contact admin@tanyaiman.id to request approval.

Quick Start — One Line of Code

Paste this **one script tag** anywhere in your `<body>` or `<head>` :

```
<script  
  src="https://app.tanyaiman.id/embed.js"  
  defer  
></script>
```


That's it. The widget will appear in the **bottom-right corner** of the page with the default label "*Tanya Iman*".

✓ ZERO DEPENDENCIES

The embed script has no external dependencies. It does not load jQuery, React, or any other library. Total script size is under 4 KB (minified + gzipped).

What Visitors See

A pill-shaped launcher button appears fixed at the bottom of the viewport:



Tanya Iman

↑ Floating launcher button (actual size)

Clicking it opens a **400 × 620 px chat panel** (responsive on mobile) that auto-resizes as the conversation grows.

SECTION 03

Configuration Options

All configuration is done via **HTML `data-*` attributes** on the script tag. No JavaScript is required.

Attribute	Type	Default	Description
<code>data-label</code> OPTIONAL	string	"Tanya Iman"	Text shown on the launcher button and used as the iframe <code>title</code> for screen readers.
<code>data-position</code> OPTIONAL	"right" "left"	"right"	Which corner of the viewport the launcher and chat panel appear in. Any value other than "left" defaults to right.

Examples

Default (right, standard label)

```
<script src="https://app.tanyaiman.id/embed.js" defer></script>
```

Custom label

```
<script  
  src="https://app.tanyaiman.id/embed.js"  
  data-label="Ada Pertanyaan?"  
  defer  
></script>
```

Left-hand side placement

```
<script  
  src="https://app.tanyaiman.id/embed.js"  
  data-position="left"  
  defer  
></script>
```

⚠ **ONE WIDGET PER PAGE**

The script is idempotent — loading it twice is safe and will not create duplicate widgets.
The second load is silently ignored via `window.__tanyaImanEmbedLoaded` .

WordPress Integration

There are two recommended ways to add the widget to a WordPress site.

Method A — Theme `functions.php` (Recommended)

This registers the script with WordPress's asset queue so it loads correctly on every page, respects caching, and does not break theme updates.

```
<?php
add_action( 'wp_enqueue_scripts', function() {
    wp_enqueue_script(
        'tanya-iman-widget',
        'https://app.tanyaiman.id/embed.js',
        [], // no dependencies
        '1.0', // version string for cache busting
        true // load in footer (equivalent to defer)
    );

    // Pass data-attributes via script tag filter
    add_filter( 'script_loader_tag', function( $tag, $handle ) {
        if ( $handle !== 'tanya-iman-widget' ) return $tag;
        return str_replace(
            '<script ',
            '<script data-label="Tanya Iman" data-position="right" ',
            $tag
        );
    }, 10, 2 );
} );
?>
```

Method B — WordPress Code Snippets Plugin

If you don't have theme access, install the free **Code Snippets** plugin and create a new snippet of type "*Functions PHP*" with the code above.

Method C — Widget / Block (No Code)

In the WordPress admin, go to **Appearance → Widgets**, add a **Custom HTML widget** to the site-wide footer area, and paste:

```
<script
  src="https://app.tanyaiman.id/embed.js"
  data-label="Tanya Iman"
  defer
></script>
```

i BLOCK THEMES (FULL SITE EDITING)

For block themes, use the **Template Editor** → **Footer template** and insert a *Custom HTML block* with the script tag above.

Raw HTML / Static Site Integration

For plain HTML sites, Jekyll, Hugo, Eleventy, or any static generator, paste the script tag just before the closing `</body>` tag in your base template.

Minimal Complete Page Example

```
<!DOCTYPE html>
<html lang="id">
<head>
  <meta charset="UTF-8">
  <title>My Website</title>
</head>
<body>

  <h1>Welcome</h1>
  <p>Your page content here.</p>

  <!-- Tanya Iman Widget – add just before </body> -->
  <script
    src="https://app.tanya iman.id/embed.js"
    data-label="Tanya Iman"
    data-position="right"
    defer
  ></script>

</body>
</html>
```

Platform-Specific Notes

Hugo

Add to `layouts/partials/footer.html` or your base layout's body-end partial.

```
{{ partial "tanya-iman" . }}
```

Create `layouts/partials/tanya-iman.html` with the script tag.

Jekyll

Add to `_includes/tanya-iman.html` and include it in `_layouts/default.html`:

```
{% include tanya-iman.html %}
```

Webflow

Project Settings → Custom Code → **Footer Code**. Paste the script tag there.

Squarespace / Wix

Use **Settings → Advanced → Code Injection → Footer** (Squarespace) or **Add Apps → Custom Code** (Wix).

Advanced: Inline Iframe Embed

Instead of the floating launcher button, you can embed the chat directly into a **sidebar, article column, or dedicated chat page** using a plain `<iframe>`. This gives you full control over placement and sizing.

⚠ REQUIRES CSP APPROVAL

Inline iframes require the same domain approval as the floating widget. Contact **admin@tanyaiman.id** first.

Basic Inline Iframe

```
<iframe
  src="https://app.tanyaiman.id/chat?embed=1"
  title="Tanya Iman"
  width="100%"
  height="620"
  style="border: 1px solid #e0dbc9; border-radius: 12px;"
  sandbox="allow-scripts allow-forms allow-popups"
></iframe>
```

Auto-Resizing Inline Iframe

Listen for the `tanya-iman:height` `postMessage` event to dynamically resize the iframe as the conversation grows:

```

<iframe
  id="tanya-iman-frame"
  src="https://app.tanyaيمان.id/chat?embed=1"
  title="Tanya Iman"
  width="100%"
  height="620"
  style="border:1px solid #e0dbc9; border-radius:12px;"
  sandbox="allow-scripts allow-forms allow-popups"
></iframe>

<script>
  const frame = document.getElementById('tanya-iman-frame');
  const MAX_HEIGHT = 620; // pixels – cap at your design's max

  window.addEventListener('message', function(event) {
    // Security: only accept messages from Tanya Iman origin
    if (event.origin !== 'https://app.tanyaيمان.id') return;
    if (!event.data || event.data.type !== 'tanya-iman:height') return;

    const next = Number(event.data.height);
    if (!isFinite(next) || next <= 0) return;

    frame.height = Math.min(next, MAX_HEIGHT);
  });
</script>

```

URL Parameters

Parameter	Value	Effect
embed=1 REQUIRED	1	Activates embedded mode — hides the top navigation header and outer background. Always include this.

postMessage Events API

The widget communicates with the host page via the browser's `window.postMessage` API. You can listen for these events to build richer integrations — for example, displaying a custom notification badge when the chat receives a response, or resizing a sidebar layout.

Events Emitted by the Widget (Widget → Host)

Event Type	Payload	When Fired
<code>tanya- iman:height</code>	<code>{ type, height: number }</code>	Every time the chat content height changes (new message, answer received). Use this to resize inline iframes.

Listening for Events

```
const WIDGET_ORIGIN = 'https://app.tanyaiman.id';

window.addEventListener('message', function(event) {
  // Always verify origin before processing any postMessage
  if (event.origin !== WIDGET_ORIGIN) return;

  switch (event.data?.type) {

    case 'tanya-iman:height':
      // Resize your iframe container
      console.log('New height:', event.data.height, 'px');
      break;

    default:
      // Unknown event – ignore
      break;

  }
});
```

❗ ALWAYS VERIFY EVENT.ORIGIN

Never process `postMessage` events without checking `event.origin === 'https://app.tanyaiman.id'`. Skipping this check is a cross-site scripting vulnerability.

Message Shape Reference

Field	Type	Description
<code>type</code>	<code>string</code>	Event identifier. Currently only <code>"tanya-iman:height"</code> .
<code>height</code>	<code>number</code>	The widget's content height in pixels. Cap at your desired maximum (recommend 620px).

Security & CSP Requirements

Understanding the security model helps you integrate correctly and avoid surprises.

iframe Sandbox Attribute

The embed script sets the following sandbox permissions on the iframe:

```
sandbox="allow-scripts allow-forms allow-popups"
```

Permission	Why it's included
<code>allow-scripts</code>	The chat UI is a JavaScript SPA — it must execute scripts to render.
<code>allow-forms</code>	The text input that submits questions requires form processing.
<code>allow-popups</code>	Citation links open in a new tab (<code>target="_blank"</code>) — popups must be allowed for this to work.

❗ DO NOT ADD ALLOW-SAME-ORIGIN

Never add `allow-same-origin` to the sandbox. Doing so would allow the widget to access your host page's cookies, localStorage, and DOM — defeating the entire security isolation model.

Content-Security-Policy (CSP)

If your site sends a `Content-Security-Policy` header, you must whitelist the Tanya Iman origin in the `frame-src` directive:

```
Content-Security-Policy:  
  frame-src https://app.tanyaيمان.id;  
  script-src 'self' https://app.tanyaيمان.id;
```

Backend CSP (for your information)

The Tanya Iman backend sets `frame-ancestors` to its approved domain allowlist. If your domain is not on this list, browsers will refuse to render the iframe and show a blank frame. To request domain approval, email **admin@tanyaiman.id** with:

- Your full domain (e.g., `https://example.com`)
- Organisation / ministry name
- Brief description of your site's purpose

HTTPS Requirement

⚠ HTTPS REQUIRED ON HOST PAGE

Modern browsers block mixed-content iframes — a secure iframe cannot be embedded inside an HTTP page. Your host site must be served over **HTTPS**. Use Let's Encrypt or your hosting provider's free SSL.

Troubleshooting

Symptom	Likely Cause	Fix
Widget button doesn't appear at all	Script tag not loaded, or a JavaScript error on the host page stopped execution	Open browser DevTools → Console. Look for script errors. Check that the <code>src</code> URL is correct and the script has loaded (Network tab).
Chat panel is blank / white	Domain not on CSP <code>frame-ancestors</code> allowlist	Open DevTools → Console — you'll see a CSP violation message. Email admin@tanyaiman.id to request domain approval.
Chat panel blocked in browser	Host page served over HTTP (not HTTPS)	Migrate your site to HTTPS. Browsers block mixed-content iframes.
Widget appears twice	The embed script was included twice on the page	The script is idempotent — remove the duplicate <code><script></code> tag. The second load is silently ignored, but it wastes bandwidth.
Widget overlaps a sticky header	Host page has a <code>z-index</code> or <code>position:fixed</code> header with a higher stacking order	The widget uses <code>z-index: 2147483000</code> . If your sticky header uses a higher value, lower it. Alternatively, use the inline iframe method (§6) with custom positioning.
Iframe height doesn't auto-resize	Not listening to <code>postMessage</code> events, or origin check is failing	See §7. Make sure <code>event.origin === 'https://app.tanyaiman.id'</code> and that you're updating the <code>height</code> attribute of the correct element.
WordPress: widget shows in editor but not live site	Caching plugin serving stale HTML	Flush your WordPress cache (WP Super Cache, W3 Total Cache, or your hosting provider's cache). Then hard-refresh the browser.
Citation links don't open	<code>allow-popups</code> is missing from sandbox, or a browser popup blocker	Ensure the <code>sandbox</code> attribute includes <code>allow-popups</code> . Do not modify the embed script's sandbox value.

Getting Help

If the above steps don't resolve your issue, contact the Tanya Iman team with:

1. The URL of the page where the widget is embedded
2. A screenshot of the browser DevTools **Console** and **Network** tabs
3. Your browser and OS version

Email: **admin@tanyaiman.id**

Appendix: Full Embed Snippet Reference

A — Floating Widget (Standard)

```
<!-- Tanya Iman Floating Widget (right) -->
<script
  src="https://app.tanyaiman.id/embed.js"
  data-label="Tanya Iman"
  data-position="right"
  defer
></script>
```

B — Floating Widget (Left Side)

```
<!-- Tanya Iman Floating Widget (left) -->
<script
  src="https://app.tanyaiman.id/embed.js"
  data-label="Tanya Iman"
  data-position="left"
  defer
></script>
```

C — Inline Iframe with Auto-Resize

```

<!-- Tanya Iman Inline Chat -->
<iframe
  id="tanya-iman-frame"
  src="https://app.tanyaiman.id/chat?embed=1"
  title="Tanya Iman"
  width="100%"
  height="620"
  style="border:1px solid #e0dbc9; border-radius:12px; background:#fffdf7;"
  sandbox="allow-scripts allow-forms allow-popups"
></iframe>
<script>
(function() {
  var frame = document.getElementById('tanya-iman-frame');
  var MAX = 620;
  window.addEventListener('message', function(e) {
    if (e.origin !== 'https://app.tanyaiman.id') return;
    if (!e.data || e.data.type !== 'tanya-iman:height') return;
    var h = Number(e.data.height);
    if (isFinite(h) && h > 0) frame.height = Math.min(h, MAX);
  });
})();
</script>

```

D — WordPress functions.php (Full)

```

<?php
add_action( 'wp_enqueue_scripts', function() {
    wp_enqueue_script(
        'tanya-iman-widget',
        'https://app.tanyaiman.id/embed.js',
        [], '1.0', true
    );
    add_filter( 'script_loader_tag', function( $tag, $handle ) {
        if ( $handle !== 'tanya-iman-widget' ) return $tag;
        return str_replace(
            '<script ',
            '<script data-label="Tanya Iman" data-position="right" ',
            $tag
        );
    }, 10, 2 );
} );
?>

```

✓ LIVE DEMO

Test the widget in context at: <https://app.tanyaiman.id/widget-demo>

TANYA IMAN

Questions? We're here to help.

