



[HIT Configuration]

```
title = Example MTurk experiment
description = Judge the color of a series of words.
amt_keywords = Perception, Psychology
organization_name = Dartmouth College
browser_exclude_rule = MSIE, mobile, tablet
contact_email_on_error = Paxton.C.Fitzpatrick@Dartmouth.edu
lifetime = 1
ad_group = Example Experiments
allow_repeats = false
us_only = true
approve_requirement = 95
number_hits_approved = 0
require_master_workers = false
```

[Database Parameters]

```
database_url = mysql://paxton:psiturk@db:3306/participants
table_name = turkdemo
```

[Server Parameters]

```
host = 0.0.0.0
port = 22362
cutoff_time = 30
logfile = server.log
loglevel = 2
debug = true
threads = auto
adserver_revproxy_host = 127.0.0.1
adserver_revproxy_port = 80
```

[Task Parameters]

```
experiment_code_version = 1.0
num_conds = 1
num_counters = 1
```

[Shell Parameters]

```
launch_in_sandbox_mode = true
use_psiturk_ad_server = true
ad_location = false
```



PSITURK

my_experiment/

├── exp/

├── data/


├── Dockerfile

├── docker-compose.yml

└── default.conf


confing.txt

Server Parameters




```
server {  
    listen 80 default_server;  
    server_name localhost;  
    root /var/www/exp/templates;  
  
    location / {  
        try_files $uri @proxy_to_psiturk;  
    }  
  
    location @proxy_to_psiturk {  
        proxy_set_header X-Forwarded-For $proxy_add_x_forwarded_for;  
        proxy_set_header Host $http_host;  
        proxy_redirect off;  
        proxy_pass http://psiturk:22362;  
    }  
}
```

• Correspond to default.conf



exp/

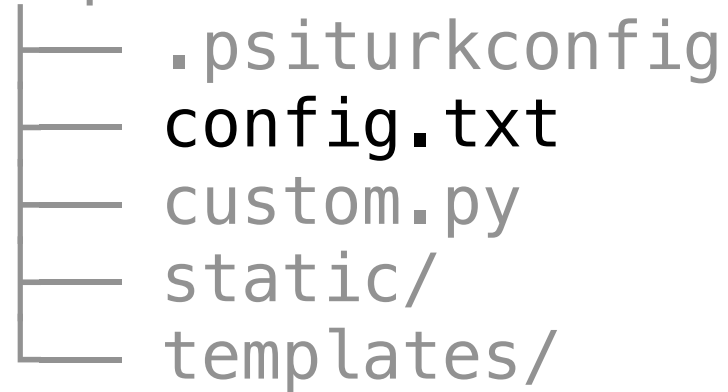

default.conf

`docker-compose.yml`

my experience



data/



exp/

└─ Dockerfile

https://it.uirkconfi.g

→ **confing.txt**

static/

templates/

exp/

↳ custom.py