





```
<!doctype html>
<html>
  <head>
    <title>Example experiment</title>

    <link rel="stylesheet" href="/static/css/bootstrap.min.css" type="text/css" />
    <link rel="stylesheet" href="/static/css/style.css" type="text/css" />
    <link rel="stylesheet" href="/static/css/jspsych.css" type="text/css">

    <script src="/static/lib/jquery-min.js" type="text/javascript"></script>
    <script src="/static/lib/underscore-min.js" type="text/javascript"></script>
    <script src="/static/lib/backbone-min.js" type="text/javascript"></script>

    <script src="/static/js/jspsych.js" type="text/javascript"></script>
    <script src="/static/js/jspsych-fullscreen.js" type="text/javascript"></script>
    <script src="/static/js/jspsych-html-button-response.js" type="text/javascript"></script>
    <script src="/static/js/jspsych-html-keyboard-response.js" type="text/javascript"></script>
    <script src="/static/js/jspsych-image-keyboard-response.js" type="text/javascript"></script>

    <script type="text/javascript">
      var uniqueId = "{{ uniqueId }}";
      var adServerLoc = "{{ adServerLoc }}";
      var mode = "{{ mode }}";
    </script>

    <script src="/static/js/utils.js" type="text/javascript"></script>
    <script src="/static/js/psiturk.js" type="text/javascript"></script>

    <script src="/static/js/experiment.js" type="text/javascript"></script>
  </head>
  <body>
    <noscript>
      <h1>Warning: Javascript seems to be disabled</h1>
      <p>This website requires that Javascript be enabled on your browser.</p>
      <p>Instructions for enabling Javascript in your browser can be found
        <a href="http://support.google.com/bin/answer.py?hl=en&answer=23852">here</a>
      </p>
    </noscript>
  </body>
</html>
```











**PSITURK**

my\_experiment/

├── exp/

├── data/

├── Dockerfile


├── docker-compose.yml

└── default.conf



**temp/taates/**

exp/

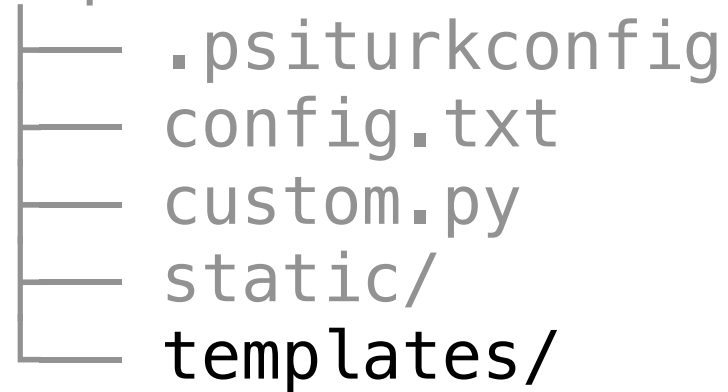

templates/



ad.html

complete.html

consent.html


default.html


error.html

**exp.html**

• Required block, but fields provided by the psiTurk server

• Generated dynamically at runtime









default.conf



exp/

└─ Dockerfile

`docker-compose.yml`



data/

my experience

— confing.txt

templates/



https://it.uarkconfing

exp/

↳ custom.py

static/

[-complete.html

[+consent.html](#)

[-error.html





templates/

exp.html

add.html