

Larissa García Valdivia


Docker-compose.yml:

```
Welcome X docker-compose.yml
🔥 docker-compose.yml
  ▶ Run All Services
1  services:
  ▶ Run Service
2    mysql_db:
3      image: mysql:8.0
4      container_name: mysql_local
5      environment:
6      | MYSQL_ROOT_PASSWORD: secret
7      ports:
8      | - "3306:3306"
9      volumes:
10     | - db_data:/var/lib/mysql
11
12     ▶ Run Service
13     postgres_db:
14         image: postgres:16-alpine
15         container_name: postgres_local
16         environment:
17         | POSTGRES_PASSWORD: secret
18         | POSTGRES_DB: mi_base_datos
19         ports:
20         | - "5432:5432"
21         volumes:
22         | - pg_data:/var/lib/postgresql/data
23
24     ▶ Run Service
25     pg_admin_local:
26         image: dpage/pgadmin4
27         container_name: pg_admin_mio
28         restart: always
29         environment:
30         | PGADMIN_DEFAULT_EMAIL: admin@admin.com
31         | PGADMIN_DEFAULT_PASSWORD: admin
32         ports:
33         | - "8080:80"
34         volumes:
35         | - pgadmin_data:/var/lib/pgadmin
36         depends_on:
37         | - postgres_db
38
39     volumes:
40         db_data:
41         pg_data:
42         pgadmin_data:
```

Iniciar los contenedores:


```
PS C:\Users\laris\OneDrive\Desktop\Universidad\5to\AB base de datos\Práctica3> docker compose up -d
[+] up 3/3
  ✓ Container postgres_local Started                                0.7s
  ✓ Container mysql_local Started                                  0.7s
  ✓ Container pg_admin_mio Started                                0.8s
PS C:\Users\laris\OneDrive\Desktop\Universidad\5to\AB base de datos\Práctica3> docker compose up
[+] up 3/3
  ✓ Container mysql_local Running                                  0.0s
  ✓ Container postgres_local Running                              0.0s
  ✓ Container pg_admin_mio Running                                0.0s
Attaching to mysql_local, pg_admin_mio, postgres_local
```

Acceder a pgAdmin:

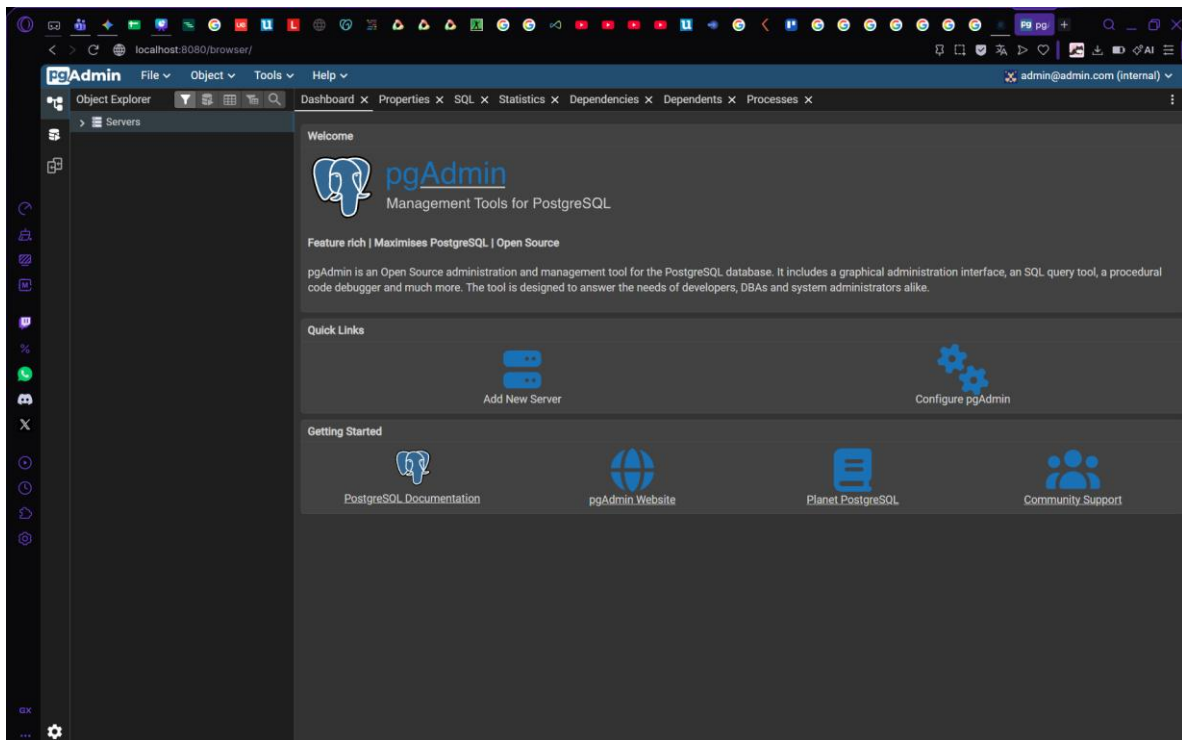


Conexión a PostgreSQL:

Asignamos un nombre al servidor, y luego vamos a la pestaña “Connection”

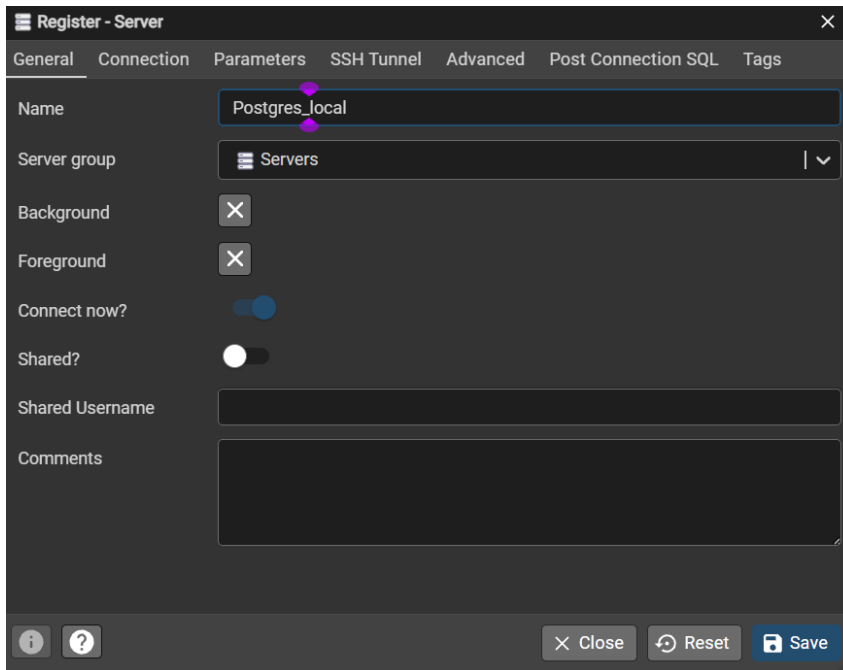

The screenshot shows the 'Register - Server' dialog box with the 'General' tab selected. The 'Name' field is set to 'Postgres_local'. The 'Server group' is set to 'Servers'. The 'Background' and 'Foreground' checkboxes are unchecked. The 'Connect now?' checkbox is checked. The 'Shared?' checkbox is unchecked. The 'Shared Username' field is empty. The 'Comments' field is empty. The bottom of the dialog has buttons for 'Close', 'Reset', and 'Save'.

Colocamos el host name, el puerto, la bd, username, y password asignados en el Docker compose

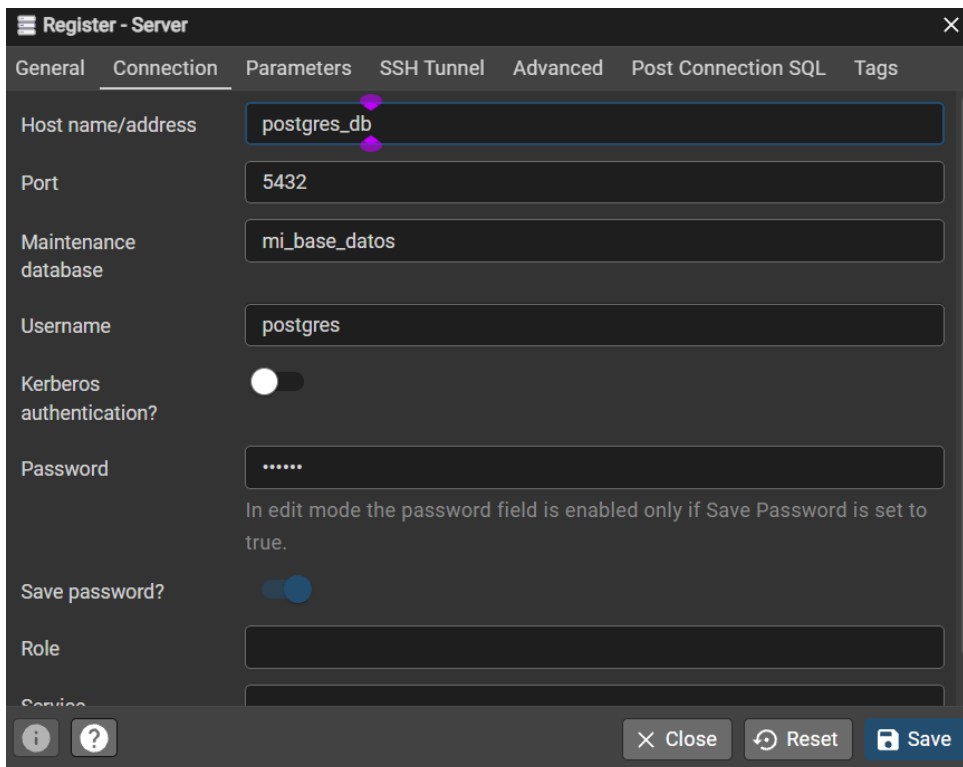

The screenshot shows the 'Register - Server' dialog box with the 'Connection' tab selected. The 'Host name/address' field is set to 'postgres_db'. The 'Port' field is set to '5432'. The 'Maintenance database' field is set to 'mi_base_datos'. The 'Username' field is set to 'postgres'. The 'Kerberos authentication?' checkbox is unchecked. The 'Password' field is masked with dots. Below the password field, there is a note: 'In edit mode the password field is enabled only if Save Password is set to true.' The 'Save password?' checkbox is checked. The 'Role' field is empty. The bottom of the dialog has buttons for 'Close', 'Reset', and 'Save'.

Conexión exitosa.

