


RR hides a hotspot behind similar per-backend output rates

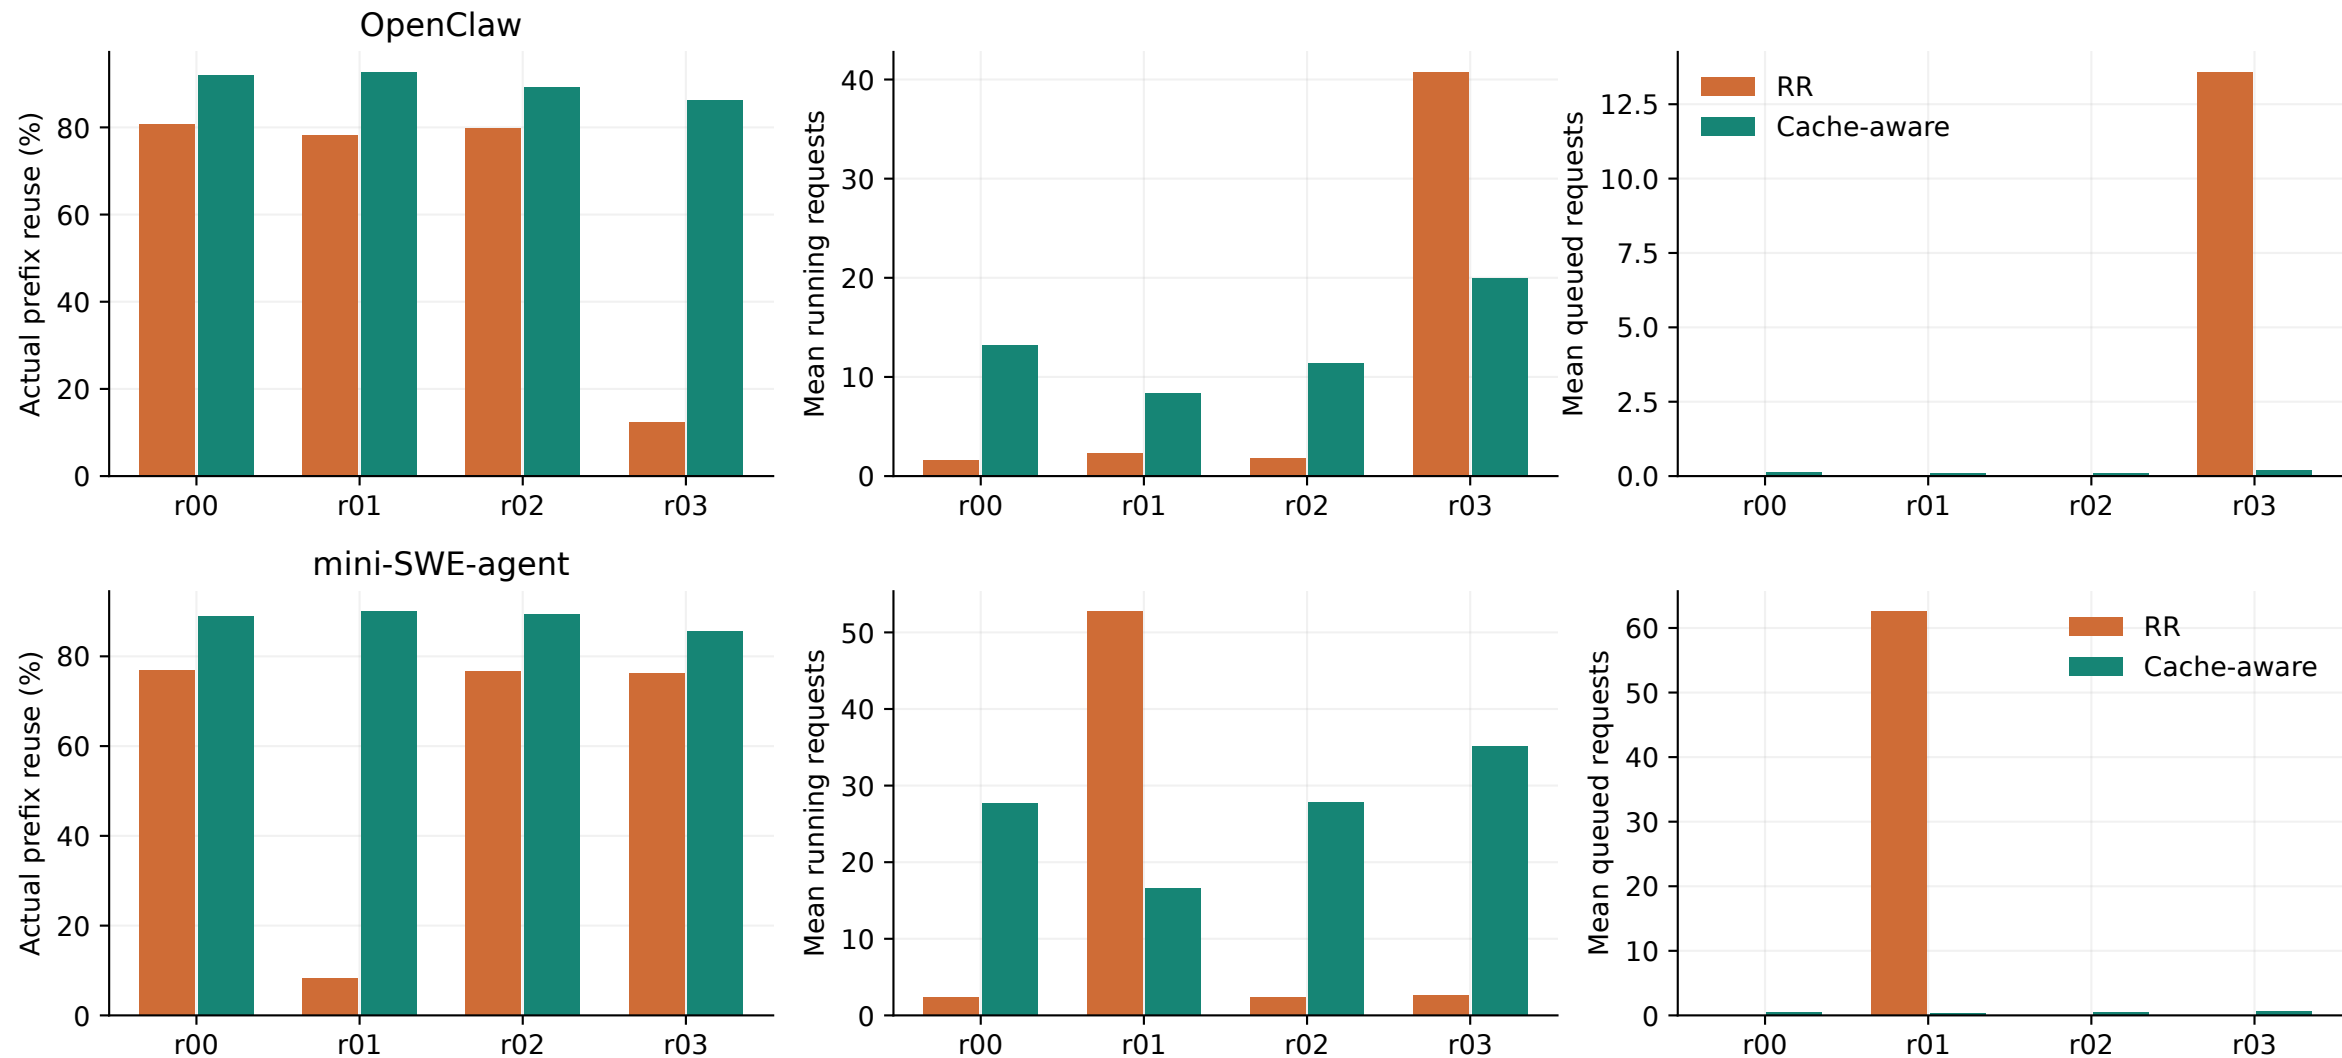

Full-window samples. RR hotspots: OpenClaw r03, mini-SWE r01. Closed-loop task progress can be limited by these replicas. This identifies queue/cache concentration; the initiating cause needs repeats / request-level context and routing diagnostics.