
Lynx API - Operational

Version: 1.2

Date Produced: 07.05.2020

Produced by: Nayax



Document Control

Version	Author	Date	Description	Approved by
0.1	Oleg Rozenblum	28/06/2016	Initial Release.	
0.2	Oleg Rozenblum	19/03/2017	Methods updated	
0.3	Oleg Rozenblum	20/03/2017	Style and text corrections	
0.4	Oleg Rozenblum	21/03/2017	Methods Added	
0.5	Oleg Rozenblum	20/04/2017	Methods and Request Parameters Added	
0.6	Oleg Rozenblum	26/04/2017	Lookup Methods Added	
0.7	Oleg Rozenblum	30/04/2017	Actor Methods Added	
0.8	Oleg Rozenblum	04/05/2017	Added Billing Providers Method	
0.9	Oleg Rozenblum	30/07/2017	Added Cards Methods, updated existing method changes	
1.0	Oleg Rozenblum	17/05/2018	Added POST Methods for Card Status Update, Card Details Update, For Actors GET Actor Details by ActorCode, For Lookups GET Payment Methods	
1.1	Oleg Rozenblum	27/03/2020	Updated Authentication DEPRICATED Token Method Added Token Auth Method Added GET and PUT Encryption Keys Added GET, POST, PUT Machine Groups Methods Added POST Machine Products	
1.2	Oleg Rozenblum	07/05/2020	Added GET, PUT Card Details Added GET, PUT Card Groups	

Table of Content

Document Control	2
Table of Content	3
Overview	18
Authentication	18
Testing web interface URLs	18
Lynx API Permissions	18
Swagger UI	19
Tokens	20
POST Token (DEPRICATED)	20
Request URL	20
Model	20
Example Response Body	20
POST Token Auth	21
Request URL	21
Request Parameters	21
Model	21
Example Response Body	21
POST Token Auth Response Fields Description	21
DELETE Token	22
Request URL	22
Model	22
Example Response Body	22
Actors	23
GET Actor Details by Actor ID	23
Request URL	23
Request Parameters	23
Model	23
Example Response Body	24
GET Actor Details Response Fields Description	25

PUT Actor by Actor ID.....	26
Request URL.....	26
Request Parameters	26
Model	26
Example Response Body.....	27
PUT Actor Details Response Fields Description	28
GET Actor Details by Actor Code.....	29
Request URL.....	29
Request Parameters	29
Model	29
Example Response Body.....	30
GET Actor Details Response Fields Description	31
POST Actor by Parent Actor ID.....	32
Request URL.....	32
Request Parameters	32
Model	32
Example Response Body.....	33
POST Actor Details Response Fields Description.....	34
GET Encryption Keys by Actor ID.....	35
Request URL.....	35
Request Parameters	35
Model	35
Example Response Body.....	35
GET Encryption Keys Response Fields Description.....	36
PUT Encryption Keys by Actor ID	36
Request URL.....	36
Request Parameters	36
Model	36
Example Response Body.....	36
GET Encryption Keys Response Fields Description.....	36
GET Machine Groups by Actor ID.....	37

Request URL.....	37
Request Parameters	37
Model	37
Example Response Body	37
GET Machine Groups Response Fields Description.....	38
POST Machine Group by Actor ID	38
Request URL.....	38
Request Parameters	38
Model	38
Example Response Body	38
POST Machine Groups Response Fields Description.....	39
PUT Machine Group by Actor ID.....	39
Request URL.....	39
Request Parameters	39
Model	39
Example Response Body	39
POST Machine Groups Response Fields Description.....	40
Cards	41
GET Card Credit by Card Unique Identifier.....	41
Request URL.....	41
Request Parameters	41
Model	41
Example Response Body	41
GET Card Credit Response Fields Description.....	41
GET Card Details by Card Unique Identifier.....	42
Request URL.....	42
Request Parameters	42
Model	42
Example Response Body	43
GET Card Details Response Fields Description.....	43
GET Card Revalue Credit by Card Unique Identifier.....	44

Request URL.....	44
Request Parameters	44
Model	44
Example Response Body	44
GET Card Credit Response Fields Description	44
GET Card Details by Card Display Number	45
Request URL.....	45
Request Parameters	45
Model	45
Example Response Body	46
GET Card Details Response Fields Description	46
GET Card Details by Card ID.....	47
Request URL.....	47
Request Parameters	47
Model	48
Example Response Body	49
GET Card Details Response Fields Description	50
PUT Card Details by Card ID.....	52
Request URL.....	52
Request Parameters	52
Model	52
Example Response Body	53
GET Card Details Response Fields Description	54
GET Card Groups by Card ID	56
Request URL.....	56
Request Parameters	56
Model	56
Example Response Body	57
GET Card Groups Response Fields Description	57
POST Card Credit by Card Unique Identifier	58
Request URL.....	58

Request Parameters	58
Model	58
Example Response Body	58
POST Card Credit Response Fields Description	58
POST Card Revalue Credit by Card Unique Identifier	59
Request URL	59
Request Parameters	59
Model	59
Example Response Body	59
POST Card Credit Response Fields Description	59
POST Card Revalue Credit from Card Unique Identifier to Card Unique Identifier	60
Request URL	60
Request Parameters	60
Model	60
Example Response Body	60
POST Card Credit Response Fields Description	60
POST Card Status by Card Unique Identifier	61
Request URL	61
Request Parameters	61
Model	61
Example Response Body	61
POST Card Details	62
Request URL	62
Request Parameters	62
Model	62
Example Response Body	63
PUT Card Details Response Fields Description	63
PUT Card Details by Card Unique Identifier	64
Request URL	64
Request Parameters	64
Model	64

Example Response Body	65
PUT Card Details Response Fields Description.....	65
PUT Card Details by Card Display Number	66
Request URL.....	66
Request Parameters	66
Model	66
Example Response Body	67
PUT Card Details Response Fields Description.....	67
PUT Card Groups by Card ID	68
Request URL.....	68
Request Parameters	68
Model	68
Example Response Body	69
GET Card Groups Response Fields Description	69
Lookups	70
GET Actor Types	70
Request URL.....	70
Model	70
Example Response Body	70
GET Product Group Response Fields Description.....	70
GET Lookup Types	71
Request URL.....	71
Request Parameters	71
Model	71
Example Response Body	72
GET Lookup Types Response Fields Description	72
GET Lookup Type Values by Lookup Type ID	73
Request URL.....	73
Request Parameters	73
Model	73
Example Response Body	74

GET Lookup Type Value Response Fields Description	74
GET Lookup Type Values by Lookup ID	75
Request URL	75
Request Parameters	75
Model	75
Example Response Body	75
GET Lookup Type Value Response Fields Description	75
GET Time Zones.....	76
Request URL	76
Request Parameters	76
Model	76
Example Response Body	77
GET Time Zones Response Fields Description.....	77
GET Time Zone by Time Zone Key	78
Request URL	78
Request Parameters	78
Model	78
Example Response Body	79
GET Time Zones Response Fields Description.....	79
GET Countries	80
Request URL	80
Request Parameters	80
Model	80
Example Response Body	81
GET Product Group Response Fields Description.....	81
GET Country by Country Code	82
Request URL	82
Request Parameters	82
Model	82
Example Response Body	82
GET Product Group Response Fields Description.....	82

GET Currencies	83
Request URL	83
Request Parameters	83
Model	83
Example Response Body	84
GET Currencies Response Fields Description	84
GET Currency by Currency Code	85
Request URL	85
Request Parameters	85
Model	85
Example Response Body	85
GET Product Group Response Fields Description	85
GET Billing Providers	86
Request URL	86
Request Parameters	86
Model	86
Example Response Body	87
GET Currencies Response Fields Description	88
GET Payment Methods	89
Request URL	89
Request Parameters	89
Model	89
Example Response Body	90
GET Currencies Response Fields Description	91
Machines	92
GET Machine by Machine ID	92
Request URL	92
Request Parameters	92
Model	92
Example Response Body	93
GET Machine Response Fields Description	93

PUT Machine by Machine ID.....	94
Request URL.....	94
Request Parameters	94
Model	94
Example Response Body.....	95
PUT Machine Fields Description.....	96
GET Machines by Offset and Limit	97
Request URL.....	97
Request Parameters	97
Model	97
Example Response Body	98
GET Machines Response Fields Description	99
POST Machine.....	100
Request URL.....	100
Request Parameters	100
Model	100
Example Response Body.....	101
PUT Machine Fields Description.....	102
GET Machine by Device Serial Number	103
Request URL.....	103
Request Parameters	103
Model	103
Example Response Body	104
GET Machine Response Fields Description	104
GET Machine by VPOS Serial Number	105
Request URL.....	105
Request Parameters	105
Model	105
Example Response Body.....	106
GET Machine Response Fields Description.....	106
GET Machine Status by Machine ID	107

Request URL	107
Request Parameters	107
Model	107
Example Response Body	108
GET Machine Status Response Fields Description	109
Machine Attributes	110
POST Machine Attribute Defaults by Machine ID	110
Request URL	110
Request Parameters	110
Model	110
Example Response Body	110
POST Machine Attributes Current Configuration by Machine ID	111
Request URL	111
Request Parameters	111
Model	111
Example Response Body	111
GET Machine Attributes by Machine ID	112
Request URL	112
Request Parameters	112
Model	112
Example Response Body	113
GET Machine Attributes Response Fields Description	113
GET Machine Attribute by Machine ID and Attribute ID	114
Request URL	114
Request Parameters	114
Model	114
Example Response Body	115
GET Machine Attributes Response Fields Description	115
PUT Machine Attribute by Machine ID and Attribute ID	116
Request URL	116
Request Parameters	116

Model	116
Example Response Body	117
GET Machine Attributes Response Fields Description	117
Machine Products	118
GET Machine Products by Machine ID	118
Request URL	118
Request Parameters	118
Model	118
Example Response Body	119
GET Machine Products Response Fields Description	120
POST Machine Products by Machine ID	121
Request URL	121
Request Parameters	121
Model	121
Example Response Body	122
POST Machine Products Fields Description	123
PUT Machine Products by Machine ID	124
Request URL	124
Request Parameters	124
Model	124
Example Response Body	125
PUT Machine Products Fields Description	126
GET Machine Product by Machine ID and Machine Product ID	127
Request URL	127
Request Parameters	127
Model	127
Example Response Body	128
GET Machine Product Response Fields Description	129
GET Machine Product Calories by Device Serial Number	130
Request URL	130
Request Parameters	130

Model	130
Example Response Body	130
GET Machine Product Calories Response Fields Description	130
Product Groups	131
GET Product Group by Product Group ID	131
Request URL	131
Request Parameters	131
Model	131
Example Response Body	131
GET Product Group Response Fields Description	131
PUT Product Group by Product Group ID	132
Request URL	132
Request Parameters	132
Model	132
Example Response Body	132
PUT Product Group Fields Description	132
GET Product Groups by Actor ID	133
Request URL	133
Request Parameters	133
Model	133
Example Response Body	134
GET Product Groups Response Fields Description	134
GET Product Groups	135
Request URL	135
Model	135
Example Response Body	136
GET Product Groups Response Fields Description	136
POST Product Group	137
Request URL	137
Request Parameters	137
Model	137

Example Response Body	137
POST Product Group Fields Description	137
Products	138
GET Products by Operator ID	138
Request URL	138
Request Parameters	138
Model	138
Example Response Body	139
GET Products Response Fields Description	140
POST Product by Operator ID	141
Request URL	141
Request Parameters	141
Model	141
Example Response Body	142
GET Products Response Fields Description	143
GET Product by Nayax Product ID	144
Request URL	144
Request Parameters	144
Model	144
Example Response Body	145
GET Products Response Fields Description	146
PUT Product by Nayax Product ID	147
Request URL	147
Request Parameters	147
Model	147
Example Response Body	148
PUT Product Response Fields Description	149
Machine Inventory	150
DELETE Pick List by Machine ID	150
Request URL	150
Request Parameters	150

Model	150
Example Response Body	150
POST Pick List by Machine ID	151
Request URL	151
Request Parameters	151
GET Pick List by Machine ID	152
Request URL	152
Request Parameters	152
Model	152
Example Response Body	153
GET Pick List Response Fields Description	154
POST Full Machine by Machine ID	155
Request URL	155
Request Parameters	155
Model	155
Example Response Body	155
POST Empty Machine by Machine ID	156
Request URL	156
Request Parameters	156
Model	156
Example Response Body	156
Machine Billing	157
GET Payment Details	157
Request URL	157
Request Parameters	157
Model	157
Example Response Body	157
POST Payment Details	158
Request URL	158
Model	158
Example Response Body	158

POST Billing Fields Description.....	158
Error Codes.....	159

Overview

This API has been designed to provide the ability for 3rd party systems to update information and perform various actions in Nayax Back Office System via API Calls. All queries are limited to Hierarchy level of the User in Nayax back-office. Data will be from the same or lower Hierarchy levels where the user is created, but not above it.

Authentication

In order to interact with Lynx API you need to obtain a bearer token, the token is obtained by performing an anonymous call to Token Auth method with username and password provided by Nayax in the body of the message, in response you will get a Token, you are able to use Nayax's Swagger UI testing web interface to interact with the API and view all methods details to help you understand the API

Testing web interface URLs

QA Environment:

- <https://qa2-lynx.nayax.com/Operational/swagger/ui/index#>

Production Environment:

- <https://lynx.nayax.com/Operational/swagger/ui/index#>

Lynx API Permissions

Lynx API Access is managed via Permissions given to the system user in Nayax back office, each permission provides access to a group of methods, your access will vary based on the use cases you wish to achieve


 Lynx - Tokens	 Lynx - Lookups
 Lynx - Actors	 Lynx - Machine Attributes
 Lynx - Cards	 Lynx - Machine Inventory
 Lynx - Device Orders	 Lynx - Machine Products
 Lynx - Devices	 Lynx - Machines
 Lynx - Product Groups	 Lynx - Products

Swagger UI

Access Swagger UI by inputting username and password provided by Nayax

For testing in the UI, create a token by pressing “Get New Token” button in the top right corner

Click on a group to reveal the available methods, click on the method to see its details and test it

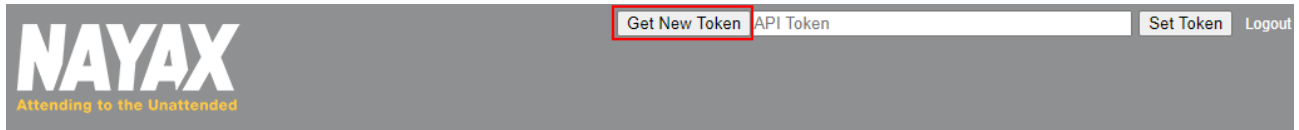

Nayax Operational Lynx API

Actors	Show/Hide	List Operations	Expand Operations
BankInformation	Show/Hide	List Operations	Expand Operations
Cards	Show/Hide	List Operations	Expand Operations
Certificates	Show/Hide	List Operations	Expand Operations
CompanyInfo	Show/Hide	List Operations	Expand Operations
Devices	Show/Hide	List Operations	Expand Operations
Lookups	Show/Hide	List Operations	Expand Operations
MachineAttribute	Show/Hide	List Operations	Expand Operations
MachineBilling	Show/Hide	List Operations	Expand Operations
MachineInventory	Show/Hide	List Operations	Expand Operations
MachineProducts	Show/Hide	List Operations	Expand Operations
Machines	Show/Hide	List Operations	Expand Operations
Permissions	Show/Hide	List Operations	Expand Operations
ProductGroups	Show/Hide	List Operations	Expand Operations
Products	Show/Hide	List Operations	Expand Operations
Programmer	Show/Hide	List Operations	Expand Operations
PushTokens	Show/Hide	List Operations	Expand Operations
Tokens	Show/Hide	List Operations	Expand Operations

Tokens

POST Token (DEPRICATED)

Method generates token to be used in each request header to the Lynx API

POST /v1/token

Create a new token. Previous token will be deleted.

Request URL

https://lynx.nayax.com/Operational/v1/token

Model

```
LynxToken {  
    Token (string, optional)  
}
```

Example Response Body

```
{  
  "token": "qgVNwW4rQkeCilO8LS43aqnj6xzNjXvq-LHrnOwO-IITFrVexYfqbgVUtvMuL0mq0"  
}
```

POST Token Auth

Method generates token to be used in each request header to the Lynx API, tokens can be identified by TokenId and then refreshed by using an existing token referencing TokenId only, each Lynx API user can generate up to 10 concurrent tokens

POST /v1/token/auth

Create a new multi token.

Request URL

https://lynx.nayax.com/Operational/v1/token/auth

Request Parameters

Parameter	Parameter Type	Data Type	Description
tokenRequest	Body	JSON	Request containing Credentials, Expiration Date up to 24 hours and TokenID which can be used to refresh an existing token

Model

```
TokenRequest {
  Usr (string, required),
  Pwd (string, required),
  ExpirationUTC (string, required),
  TokenId (string, optional)
}
```

Example Response Body

```
{
  "Token": "L42sKDIZlcrI6Nuon7iUyjJbK4tCO_LEUaEo7gWfg9psdER8oPwOK2RcFzs34WGY0",
  "ExpirationUTC": "2020-03-28T15:45:26.667Z",
  "TokenId": "Token#1"
}
```

POST Token Auth Response Fields Description

Field Name	Description
Token	Bearer Token, Alphanumeric GUID used to perform API calls to Lynx API Methods
ExpirationUTC	Date and Time Token will Expire
TokenId	User generated ID used to identify this token, can be used to refresh the current token

DELETE Token

Method Deletes any generated token

DELETE /v1/token

Deletes the current token

Request URL

https://lynx.nayax.com/Operational/v1/token

Model

```
ApiResponse {  
    Ok (boolean, optional),  
    Message (string, optional),  
    SystemMessage (string, optional)  
}
```

Example Response Body

```
{  
    "Ok": true,  
    "Message": null,  
    "SystemMessage": null  
}
```

Actors

GET Actor Details by Actor ID

Method returns Actor Details for specified ActorID

GET /v1/actors/{ActorID}

Get Actor by ActorID

Request URL

https://lynx.nayax.com/Operational/v1/Actors/{ActorID}

Request Parameters

Parameter	Parameter Type	Data Type	Description
ActorID	Path	Long	Auto generate unique id, represents the hierarchical entity in the hierarchy tree

Model

```
Actors {
  ParentActorID (integer, optional),
  ActorID (integer, optional),
  ActorDescription (string, optional),
  ActorCode (integer, optional),
  ActorAddress (string, optional),
  ActorContact (string, optional),
  ActorTypeID (integer, optional),
  ActorStatus (integer, optional),
  ActorHierarchyLevel (integer, optional),
  CurrencyID (integer, optional),
  LastUpdated (string, optional),
  RouteManagerName (string, optional),
  RouteManagerMobile (string, optional),
  TimeZoneKey (integer, optional),
  DayLightSavingsBit (boolean, optional),
  CountryID (integer, optional),
  DailyCCTransLimitPerCard (integer, optional),
  DailyPPTTransLimitPerCard (integer, optional),
  DailyExternalPPTTransLimitPerCard (integer, optional),
  DailyCCTransLimitPerCardPerOperator (integer, optional),
  OperatorActorID (integer, optional),
  DistributorActorID (integer, optional),
  AreaActorID (integer, optional),
  RouteActorID (integer, optional),
  ActorHierarchy (string, optional),
  ActorHasChildrenBit (boolean, optional),
  ActorHasMachinesBit (boolean, optional),
  ActorImageURL (string, optional),
  UseProductGroupVATBit (boolean, optional),
  MaximumRevalueAmountLimit (number, optional),
  ActorCreatedBy (integer, optional),
  ActorCreationDate (string, optional),
  UpdateBy (integer, optional),
  CultureID (integer, optional),
  RevaluePayoutByDistributor (boolean, optional),
  Refs (inline_model, optional)
}
```

Example Response Body

```
{
  "ParentActorID": 1,
  "ActorID": 3,
  "ActorDescription": "Nayax Test Bunny",
  "ActorCode": 10,
  "ActorAddress": "4 Hanechoshet St. tel Aviv",
  "ActorContact": "David Ben Avi",
  "ActorTypeID": 2,
  "ActorStatus": 1,
  "ActorHierarchyLevel": 2,
  "CurrencyID": 5,
  "LastUpdated": "2018-03-23T00:00:14.187",
  "RouteManagerName": "Yair Nechmad",
  "RouteManagerMobile": "0547800308",
  "TimeZoneKey": 15,
  "DayLightSavingsBit": true,
  "CountryID": 161,
  "DailyCCTransLimitPerCard": 1,
  "DailyPPTTransLimitPerCard": null,
  "DailyExternalPPTTransLimitPerCard": null,
  "DailyCCTransLimitPerCardPerOperator": 10,
  "OperatorActorID": 3,
  "DistributorActorID": 1,
  "AreaActorID": null,
  "RouteActorID": null,
  "ActorHierarchy": "Dually / Nayax Test Bunny /",
  "ActorHasChildrenBit": true,
  "ActorHasMachinesBit": true,
  "ActorImageURL": "https://static.nayax.com/res/media/201502081042152015/pro_621200741045pm.gif",
  "UseProductGroupVATBit": false,
  "MaximumRevalueAmountLimit": null,
  "ActorCreatedBy": null,
  "ActorCreationDate": null,
  "UpdateBy": null,
  "CultureID": 50,
  "RevaluePayoutByDistributor": false,
  "Refs": {
    "parentActor": "v1/actors/1",
    "timeZone": "v1/timeZones/15",
    "country": "v1/countries/161",
    "currency": "v1/currencies/5",
    "actorType": "v1/actorTypes?ActorTypeID=5"
  }
}
```

GET Actor Details Response Fields Description

Field Name	Description
ParentActorID	Auto generate unique id, represents the Parent hierarchical entity or the Actor in the hierarchy tree
ActorID	Auto generate unique id, represents the hierarchical entity in the hierarchy tree
ActorDescription	Name of the hierarchical entity
ActorCode	User defined operator identification number (not unique)
ActorAddress	Address managed by operator in Nayax back office
ActorContact	Contact Person Name
ActorTypeID	Auto generated Unique ID, represents an Actor Type
ActorStatus	Status of the Actor, 1=Active, 2=Not Active
ActorHierarchyLevel	Numeric representation of Actor position in the Hierarchy Tree
CurrencyID	Auto generated unique id, represents a Currency
LastUpdated	Date Time Actor last updated
ActorImage	Filename of the Logo Image for actor
RouteManagerName	Name of the Route Manager
RouteManagerMobile	Mobile Phone number of the Route Manager
TimrZoneKey	Auto generated unique id, represents Time Zone order of display
DayLightSavingsBit	Bit which defines if Actor is on Daylight Savings Time, 0=False, 1=True
CountryID	Auto generated unique id, represents a Country
DailyCCTransLimitPerCard	Actor Level default limitation designed to limit the number of Credit Card transactions per card, per day, per machine
DailyPPTransLimitPerCard	Actor Level default limitation designed to limit the number of Prepaid Card transactions per card, per day, per machine
DailyExternalPPTransLimitPerCard	Actor Level default limitation designed to limit the number of External Prepaid Card transactions per card, per day, per machine
DailyCCTransLimitPerCardPerOperator	Actor Level default limitation designed to limit the number of credit card transactions per card, per day, per operator
OperatorActorID	Auto generate unique id, represents the Operator hierarchical entity in the hierarchy tree
DistributorActorID	Auto generate unique id, represents the Distributor hierarchical entity in the hierarchy tree
AreaActorID	Auto generate unique id, represents the Area hierarchical entity in the hierarchy tree
RouteActorID	Auto generate unique id, represents the Route hierarchical entity in the hierarchy tree
ActorHierarchy	A type of secondary navigation scheme that displays the full path of the hierarchy tree
ActorHasChildrenBit	Bit which indicates if Actor has children hierarchy entities, True=Has children, False=Doesn't have children
ActorHasMachinesBit	Bit which indicates if Actor has machines under its hierarchy, True=Has machines, False=Doesn't have machines
ActorImageURL	URL where the Actor Logo image is stored

PUT Actor by Actor ID

Method updates Actor details in Nayax back office for specified ActorID

PUT /v1/actors/{ActorID}

Update operator/sub operator

Request URL

https://lynx.nayax.com/Operational/v1/Actors/{ActorID}

Request Parameters

Parameter	Parameter Type	Data Type	Description
ActorID	Path	Long	Auto generated unique id, represents the Parent hierarchical entity or the Actor in the hierarchy tree

Model

```
Actors {
  ParentActorID (integer, optional),
  ActorID (integer, optional),
  ActorDescription (string, optional),
  ActorCode (integer, optional),
  ActorAddress (string, optional),
  ActorContact (string, optional),
  ActorTypeID (integer, optional),
  ActorStatus (integer, optional),
  ActorHierarchyLevel (integer, optional),
  CurrencyID (integer, optional),
  LastUpdated (string, optional),
  RouteManagerName (string, optional),
  RouteManagerMobile (string, optional),
  TimeZoneKey (integer, optional),
  DayLightSavingsBit (boolean, optional),
  CountryID (integer, optional),
  DailyCCTransLimitPerCard (integer, optional),
  DailyPPTTransLimitPerCard (integer, optional),
  DailyExternalPPTTransLimitPerCard (integer, optional),
  DailyCCTransLimitPerCardPerOperator (integer, optional),
  OperatorActorID (integer, optional),
  DistributorActorID (integer, optional),
  AreaActorID (integer, optional),
  RouteActorID (integer, optional),
  ActorHierarchy (string, optional),
  ActorHasChildrenBit (boolean, optional),
  ActorHasMachinesBit (boolean, optional),
  ActorImageURL (string, optional),
  UseProductGroupVATBit (boolean, optional),
  MaximumRevalueAmountLimit (number, optional),
  ActorCreatedBy (integer, optional),
  ActorCreationDate (string, optional),
  UpdateBy (integer, optional),
  CultureID (integer, optional),
  RevaluePayoutByDistributor (boolean, optional),
}
```

Example Response Body

```
{
  "ParentActorID": 1,
  "ActorID": 3,
  "ActorDescription": "Nayax Test Bunny",
  "ActorCode": 10,
  "ActorAddress": "4 Hanechoshet St. tel Aviv",
  "ActorContact": "David Ben Avi",
  "ActorTypeID": 2,
  "ActorStatus": 1,
  "ActorHierarchyLevel": 2,
  "CurrencyID": 5,
  "LastUpdated": "2018-03-23T00:00:14.187",
  "RouteManagerName": "Yair Nechmad",
  "RouteManagerMobile": "0547800308",
  "TimeZoneKey": 15,
  "DayLightSavingsBit": true,
  "CountryID": 161,
  "DailyCCTransLimitPerCard": 1,
  "DailyPPTTransLimitPerCard": null,
  "DailyExternalPPTTransLimitPerCard": null,
  "DailyCCTransLimitPerCardPerOperator": 10,
  "OperatorActorID": 3,
  "DistributorActorID": 1,
  "AreaActorID": null,
  "RouteActorID": null,
  "ActorHierarchy": "Dually / Nayax Test Bunny /",
  "ActorHasChildrenBit": true,
  "ActorHasMachinesBit": true,
  "ActorImageURL": "https://static.nayax.com/res/media/201502081042152015/pro_621200741045pm.gif",
  "UseProductGroupVATBit": false,
  "MaximumRevalueAmountLimit": null,
  "ActorCreatedBy": 11,
  "ActorCreationDate": "2018-05-17T17:17:15.11",
  "UpdateBy": 11,
  "CultureID": 50,
  "RevaluePayoutByDistributor": false,
  "Refs": {
    "parentActor": "v1/actors/1",
    "timeZone": "v1/timeZones/15",
    "country": "v1/countries/161",
    "currency": "v1/currencies/5",
    "actorType": "v1/actorTypes?ActorTypeID=5"
  }
}
```

PUT Actor Details Response Fields Description

Field Name	Description
ParentActorID	Auto generate unique id, represents the Parent hierarchical entity or the Actor in the hierarchy tree
ActorID	Auto generate unique id, represents the hierarchical entity in the hierarchy tree
ActorDescription	Name of the hierarchical entity
ActorCode	User defined operator identification number (not unique)
ActorAddress	Address managed by operator in Nayax back office
ActorContact	Contact Person Name
ActorTypeID	Auto generated Unique ID, represents an Actor Type
ActorStatus	Status of the Actor, 1=Active, 2=Not Active
ActorHierarchyLevel	Numeric representation of Actor position in the Hierarchy Tree
CurrencyID	Auto generated unique id, represents a Currency
LastUpdated	Date Time Actor last updated
ActorImage	Filename of the Logo Image for actor
RouteManagerName	Name of the Route Manager
RouteManagerMobile	Mobile Phone number of the Route Manager
TimrZoneKey	Auto generated unique id, represents Time Zone order of display
DayLightSavingsBit	Bit which defines if Actor is on Daylight Savings Time, 0=False, 1=True
CountryID	Auto generated unique id, represents a Country
DailyCCTransLimitPerCard	Actor Level default limitation designed to limit the number of Credit Card transactions per card, per day, per machine
DailyPPTransLimitPerCard	Actor Level default limitation designed to limit the number of Prepaid Card transactions per card, per day, per machine
DailyExternalPPTransLimitPerCard	Actor Level default limitation designed to limit the number of External Prepaid Card transactions per card, per day, per machine
DailyCCTransLimitPerCardPerOperator	Actor Level default limitation designed to limit the number of credit card transactions per card, per day, per operator
OperatorActorID	Auto generate unique id, represents the Operator hierarchical entity in the hierarchy tree
DistributorActorID	Auto generate unique id, represents the Distributor hierarchical entity in the hierarchy tree
AreaActorID	Auto generate unique id, represents the Area hierarchical entity in the hierarchy tree
RouteActorID	Auto generate unique id, represents the Route hierarchical entity in the hierarchy tree
ActorHierarchy	A type of secondary navigation scheme that displays the full path of the hierarchy tree
ActorHasChildrenBit	Bit which indicates if Actor has children hierarchy entities, True=Has children, False=Doesn't have children
ActorHasMachinesBit	Bit which indicates if Actor has machines under its hierarchy, True=Has machines, False=Doesn't have machines
ActorImageURL	URL where the Actor Logo image is stored

GET Actor Details by Actor Code

Method returns Actor Details for specified ActorID

GET /v1/actors

Get Actor by ActorCode

Request URL

https://lynx.nayax.com/Operational/v1/Actors

Request Parameters

Parameter	Parameter Type	Data Type	Description
ActorCode	Query	Long	User defined operator identification number (not unique)

Model

```
Actors {
  ParentActorID (integer, optional),
  ActorID (integer, optional),
  ActorDescription (string, optional),
  ActorCode (integer, optional),
  ActorAddress (string, optional),
  ActorContact (string, optional),
  ActorTypeID (integer, optional),
  ActorStatus (integer, optional),
  ActorHierarchyLevel (integer, optional),
  CurrencyID (integer, optional),
  LastUpdated (string, optional),
  RouteManagerName (string, optional),
  RouteManagerMobile (string, optional),
  TimeZoneKey (integer, optional),
  DayLightSavingsBit (boolean, optional),
  CountryID (integer, optional),
  DailyCCTransLimitPerCard (integer, optional),
  DailyPPTTransLimitPerCard (integer, optional),
  DailyExternalPPTTransLimitPerCard (integer, optional),
  DailyCCTransLimitPerCardPerOperator (integer, optional),
  OperatorActorID (integer, optional),
  DistributorActorID (integer, optional),
  AreaActorID (integer, optional),
  RouteActorID (integer, optional),
  ActorHierarchy (string, optional),
  ActorHasChildrenBit (boolean, optional),
  ActorHasMachinesBit (boolean, optional),
  ActorImageURL (string, optional),
  UseProductGroupVATBit (boolean, optional),
  MaximumRevalueAmountLimit (number, optional),
  ActorCreatedBy (integer, optional),
  ActorCreationDate (string, optional),
  UpdateBy (integer, optional),
  CultureID (integer, optional),
  RevaluePayoutByDistributor (boolean, optional),
  Refs (inline_model, optional)
}
```

Example Response Body

```
{
  "ParentActorID": 1,
  "ActorID": 3,
  "ActorDescription": "Nayax Test Bunny",
  "ActorCode": 10,
  "ActorAddress": "4 Hanechoshet St. tel Aviv",
  "ActorContact": "David Ben Avi",
  "ActorTypeID": 2,
  "ActorStatus": 1,
  "ActorHierarchyLevel": 2,
  "CurrencyID": 5,
  "LastUpdated": "2018-03-23T00:00:14.187",
  "RouteManagerName": "Yair Nechmad",
  "RouteManagerMobile": "0547800308",
  "TimeZoneKey": 15,
  "DayLightSavingsBit": true,
  "CountryID": 161,
  "DailyCCTransLimitPerCard": 1,
  "DailyPPTTransLimitPerCard": null,
  "DailyExternalPPTTransLimitPerCard": null,
  "DailyCCTransLimitPerCardPerOperator": 10,
  "OperatorActorID": 3,
  "DistributorActorID": 1,
  "AreaActorID": null,
  "RouteActorID": null,
  "ActorHierarchy": "Dually / Nayax Test Bunny /",
  "ActorHasChildrenBit": true,
  "ActorHasMachinesBit": true,
  "ActorImageURL": "https://static.nayax.com/res/media/201502081042152015/pro_621200741045pm.gif",
  "UseProductGroupVATBit": false,
  "MaximumRevalueAmountLimit": null,
  "ActorCreatedBy": null,
  "ActorCreationDate": null,
  "UpdateBy": null,
  "CultureID": 50,
  "RevaluePayoutByDistributor": false,
  "Refs": {
    "parentActor": "v1/actors/1",
    "timeZone": "v1/timeZones/15",
    "country": "v1/countries/161",
    "currency": "v1/currencies/5",
    "actorType": "v1/actorTypes?ActorTypeID=5"
  }
}
```

GET Actor Details Response Fields Description

Field Name	Description
ParentActorID	Auto generate unique id, represents the Parent hierarchical entity or the Actor in the hierarchy tree
ActorID	Auto generate unique id, represents the hierarchical entity in the hierarchy tree
ActorDescription	Name of the hierarchical entity
ActorCode	User defined operator identification number (not unique)
ActorAddress	Address managed by operator in Nayax back office
ActorContact	Contact Person Name
ActorTypeID	Auto generated Unique ID, represents an Actor Type
ActorStatus	Status of the Actor, 1=Active, 2=Not Active
ActorHierarchyLevel	Numeric representation of Actor position in the Hierarchy Tree
CurrencyID	Auto generated unique id, represents a Currency
LastUpdated	Date Time Actor last updated
ActorImage	Filename of the Logo Image for actor
RouteManagerName	Name of the Route Manager
RouteManagerMobile	Mobile Phone number of the Route Manager
TimrZoneKey	Auto generated unique id, represents Time Zone order of display
DayLightSavingsBit	Bit which defines if Actor is on Daylight Savings Time, 0=False, 1=True
CountryID	Auto generated unique id, represents a Country
DailyCCTransLimitPerCard	Actor Level default limitation designed to limit the number of Credit Card transactions per card, per day, per machine
DailyPPTransLimitPerCard	Actor Level default limitation designed to limit the number of Prepaid Card transactions per card, per day, per machine
DailyExternalPPTransLimitPerCard	Actor Level default limitation designed to limit the number of External Prepaid Card transactions per card, per day, per machine
DailyCCTransLimitPerCardPerOperator	Actor Level default limitation designed to limit the number of credit card transactions per card, per day, per operator
OperatorActorID	Auto generate unique id, represents the Operator hierarchical entity in the hierarchy tree
DistributorActorID	Auto generate unique id, represents the Distributor hierarchical entity in the hierarchy tree
AreaActorID	Auto generate unique id, represents the Area hierarchical entity in the hierarchy tree
RouteActorID	Auto generate unique id, represents the Route hierarchical entity in the hierarchy tree
ActorHierarchy	A type of secondary navigation scheme that displays the full path of the hierarchy tree
ActorHasChildrenBit	Bit which indicates if Actor has children hierarchy entities, True=Has children, False=Doesn't have children
ActorHasMachinesBit	Bit which indicates if Actor has machines under its hierarchy, True=Has machines, False=Doesn't have machines
ActorImageURL	URL where the Actor Logo image is stored

POST Actor by Parent Actor ID

Method Creates New Actor in Nayax back office under specified ParentActorID

POST /v1/actors/{ParentActorID} Create new actor

Request URL

https://lynx.nayax.com/Operational/v1/Actors/{ParentActorID}

Request Parameters

Parameter	Parameter Type	Data Type	Description
Actor	Body	JSON	Actor Details fields
ParentActorID	Path	Long	Auto generate unique id, represents the Parent hierarchical entity or the Actor in the hierarchy tree

Model

```
Actors {
  ParentActorID (integer, optional),
  ActorID (integer, optional),
  ActorDescription (string, optional),
  ActorCode (integer, optional),
  ActorAddress (string, optional),
  ActorContact (string, optional),
  ActorTypeID (integer, optional),
  ActorStatus (integer, optional),
  ActorHierarchyLevel (integer, optional),
  CurrencyID (integer, optional),
  LastUpdated (string, optional),
  RouteManagerName (string, optional),
  RouteManagerMobile (string, optional),
  TimeZoneKey (integer, optional),
  DayLightSavingsBit (boolean, optional),
  CountryID (integer, optional),
  DailyCCTransLimitPerCard (integer, optional),
  DailyPPTTransLimitPerCard (integer, optional),
  DailyExternalPPTTransLimitPerCard (integer, optional),
  DailyCCTransLimitPerCardPerOperator (integer, optional),
  OperatorActorID (integer, optional),
  DistributorActorID (integer, optional),
  AreaActorID (integer, optional),
  RouteActorID (integer, optional),
  ActorHierarchy (string, optional),
  ActorHasChildrenBit (boolean, optional),
  ActorHasMachinesBit (boolean, optional),
  ActorImageURL (string, optional),
  UseProductGroupVATBit (boolean, optional),
  MaximumRevalueAmountLimit (number, optional),
  ActorCreatedBy (integer, optional),
  ActorCreationDate (string, optional),
  UpdateBy (integer, optional),
  CultureID (integer, optional),
  RevaluePayoutByDistributor (boolean, optional),
}
```

Example Response Body

```
{
  "ParentActorID": 1,
  "ActorID": 3,
  "ActorDescription": "Nayax Test Bunny",
  "ActorCode": 10,
  "ActorAddress": "4 Hanechoshet St. tel Aviv",
  "ActorContact": "David Ben Avi",
  "ActorTypeID": 2,
  "ActorStatus": 1,
  "ActorHierarchyLevel": 2,
  "CurrencyID": 5,
  "LastUpdated": "2018-03-23T00:00:14.187",
  "RouteManagerName": "Yair Nechmad",
  "RouteManagerMobile": "0547800308",
  "TimeZoneKey": 15,
  "DayLightSavingsBit": true,
  "CountryID": 161,
  "DailyCCTransLimitPerCard": 1,
  "DailyPPTTransLimitPerCard": null,
  "DailyExternalPPTTransLimitPerCard": null,
  "DailyCCTransLimitPerCardPerOperator": 10,
  "OperatorActorID": 3,
  "DistributorActorID": 1,
  "AreaActorID": null,
  "RouteActorID": null,
  "ActorHierarchy": "Dually / Nayax Test Bunny /",
  "ActorHasChildrenBit": true,
  "ActorHasMachinesBit": true,
  "ActorImageURL": "https://static.nayax.com/res/media/201502081042152015/pro_621200741045pm.gif",
  "UseProductGroupVATBit": false,
  "MaximumRevalueAmountLimit": null,
  "ActorCreatedBy": 11,
  "ActorCreationDate": "2018-05-17T17:17:15.11",
  "UpdateBy": 11,
  "CultureID": 50,
  "RevaluePayoutByDistributor": false,
  "Refs": {
    "parentActor": "v1/actors/1",
    "timeZone": "v1/timeZones/15",
    "country": "v1/countries/161",
    "currency": "v1/currencies/5",
    "actorType": "v1/actorTypes?ActorTypeID=5"
  }
}
```

POST Actor Details Response Fields Description

Field Name	Description
ParentActorID	Auto generate unique id, represents the Parent hierarchical entity or the Actor in the hierarchy tree
ActorID	Auto generate unique id, represents the hierarchical entity in the hierarchy tree
ActorDescription	Name of the hierarchical entity
ActorCode	User defined operator identification number (not unique)
ActorAddress	Address managed by operator in Nayax back office
ActorContact	Contact Person Name
ActorTypeID	Auto generated Unique ID, represents an Actor Type
ActorStatus	Status of the Actor, 1=Active, 2=Not Active
ActorHierarchyLevel	Numeric representation of Actor position in the Hierarchy Tree
CurrencyID	Auto generated unique id, represents a Currency
LastUpdated	Date Time Actor last updated
ActorImage	Filename of the Logo Image for actor
RouteManagerName	Name of the Route Manager
RouteManagerMobile	Mobile Phone number of the Route Manager
TimrZoneKey	Auto generated unique id, represents Time Zone order of display
DayLightSavingsBit	Bit which defines if Actor is on Daylight Savings Time, 0=False, 1=True
CountryID	Auto generated unique id, represents a Country
DailyCCTransLimitPerCard	Actor Level default limitation designed to limit the number of Credit Card transactions per card, per day, per machine
DailyPPTransLimitPerCard	Actor Level default limitation designed to limit the number of Prepaid Card transactions per card, per day, per machine
DailyExternalPPTransLimitPerCard	Actor Level default limitation designed to limit the number of External Prepaid Card transactions per card, per day, per machine
DailyCCTransLimitPerCardPerOperator	Actor Level default limitation designed to limit the number of credit card transactions per card, per day, per operator
OperatorActorID	Auto generate unique id, represents the Operator hierarchical entity in the hierarchy tree
DistributorActorID	Auto generate unique id, represents the Distributor hierarchical entity in the hierarchy tree
AreaActorID	Auto generate unique id, represents the Area hierarchical entity in the hierarchy tree
RouteActorID	Auto generate unique id, represents the Route hierarchical entity in the hierarchy tree
ActorHierarchy	A type of secondary navigation scheme that displays the full path of the hierarchy tree
ActorHasChildrenBit	Bit which indicates if Actor has children hierarchy entities, True=Has children, False=Doesn't have children
ActorHasMachinesBit	Bit which indicates if Actor has machines under its hierarchy, True=Has machines, False=Doesn't have machines
ActorImageURL	URL where the Actor Logo image is stored

GET Encryption Keys by Actor ID

Method returns an array of Encryption Keys for specified ActorID

GET /v1/actors/GetEncKeys

Get Encryption Keys by actorId

Request URL

https://lynx.nayax.com/Operational/v1/Actors/GetEncKeys?actorID={ActorID}

Request Parameters

Parameter	Parameter Type	Data Type	Description
ActorID	Query	Long	Auto generate unique id, represents the hierarchical entity in the hierarchy tree

Model

```
Array [
  EncryptionKey {
    actor_id (integer, optional),
    enc_ver (integer, optional),
    enc_key (string, optional),
    created_dt (string, optional)
  }
]
```

Example Response Body

```
[
  {
    "actor_id": 39517,
    "enc_ver": 1,
    "enc_key": "5c076ac925304fb6813388dbfa65a453",
    "created_dt": "2020-03-25T17:21:56.273"
  },
  {
    "actor_id": 39517,
    "enc_ver": 2,
    "enc_key": "80c3b1d556f64a4dbec1992edbc4f578",
    "created_dt": "2020-03-25T17:25:17.073"
  },
  {
    "actor_id": 39517,
    "enc_ver": 3,
    "enc_key": "82c6683de4284199aa5608d121ff7399",
    "created_dt": "2020-03-25T18:24:32.54"
  }
]
```

GET Encryption Keys Response Fields Description

Field Name	Description
actor_id	Auto generate unique id, represents the hierarchical entity in the hierarchy tree
enc_ver	Numerator identifying Encryption Key Version
enc_key	Encryption Key, Alphanumeric GUID used to encrypt Messages delivered to Amazon SQS
created_dt	Encryption Key Creation Date and Time

PUT Encryption Keys by Actor ID

Method Generate an Encryption Key for specified ActorID

PUT /v1/actors/GenarateEncKey

Generate Encryption Key

Request URL

https://lynx.nayax.com/Operational/v1/Actors/GenarateEncKey?actorID={ActorID}

Request Parameters

Parameter	Parameter Type	Data Type	Description
ActorID	Query	Long	Auto generate unique id, represents the hierarchical entity in the hierarchy tree

Model

```
DispatchActorEncKeysDbEntity {
  actor_id (integer, optional),
  enc_ver (integer, optional),
  enc_key (string, optional),
  created_dt (string, optional)
}
```

Example Response Body

```
{
  "actor_id": 39517,
  "enc_ver": 4,
  "enc_key": "3fc820c5173a41269f5aa6bb7d7ffeab",
  "created_dt": "2020-03-27T19:26:18.508233Z"
}
```

GET Encryption Keys Response Fields Description

Field Name	Description
actor_id	Auto generate unique id, represents the hierarchical entity in the hierarchy tree
enc_ver	Numerator identifying Encryption Key Version
enc_key	Encryption Key, Alphanumeric GUID used to encrypt Messages delivered to Amazon SQS
created_dt	Encryption Key Creation Date and Time

GET Machine Groups by Actor ID

Method returns an array of Encryption Keys for specified ActorID

GET /v1/actor/{ActorID}/machineGroups

get all machine groups for actor

Request URL

https://lynx.nayax.com/Operational/v1/actor/{ActorID}/machineGroups

Request Parameters

Parameter	Parameter Type	Data Type	Description
ActorID	Path	Long	Auto generate unique id, represents the hierarchical entity in the hierarchy tree

Model

```
Array [
  MachineGroup {
    MachineGroupId (integer, optional),
    ActorId (integer, optional),
    MachineGroupName (string, optional),
    MachineGroupCode (integer, optional),
    MachineGroupStatus (integer, optional),
    CreatedBy (integer, optional),
    CreatedOn (string, optional),
    UpdatedOn (string, optional),
    UpdatedBy (integer, optional)
  }
]
```

Example Response Body

```
[
  {
    "MachineGroupId": 5884,
    "ActorId": 39517,
    "MachineGroupName": "Soft drinks",
    "MachineGroupCode": null,
    "MachineGroupStatus": 1,
    "CreatedBy": null,
    "CreatedOn": null,
    "UpdatedOn": "2014-04-27T14:20:35.657",
    "UpdatedBy": null
  },
  {
    "MachineGroupId": 6266,
    "ActorId": 39517,
    "MachineGroupName": "Snacks",
    "MachineGroupCode": null,
    "MachineGroupStatus": 1,
    "CreatedBy": null,
    "CreatedOn": null,
    "UpdatedOn": "2014-06-19T15:21:15.387",
    "UpdatedBy": null
  }
]
```

GET Machine Groups Response Fields Description

Field Name	Description
MachineGroupId	Auto generate unique id, represents Machine Group
ActorId	Auto generate unique id, represents the hierarchical entity in the hierarchy tree
MachineGroupName	Machine Group Name, for example: Snacks, Cold Drinks etc.
MachineGroupCode	Machine Group Code, User Generated
MachineGroupStatus	Machine Group Status, 1 = Active , 2 = Not Active
CreatedBy	Nayax User ID of Machine Group Creator
CreatedOn	Creation Date and Time
UpdatedOn	Update Date and Time
UpdatedBy	Nayax User ID of Machine Group Updater

POST Machine Group by Actor ID

Method Creates Machine Group for specified ActorID

POST

/v1/actor/{ActorID}/machineGroups

Add machine group

Request URL

https://lynx.nayax.com/Operational/v1/actor/{ActorID}/machineGroups

Request Parameters

Parameter	Parameter Type	Data Type	Description
ActorID	Path	Long	Auto generate unique id, represents the hierarchical entity in the hierarchy tree

Model

```
MachineGroupRequestDTO {
    MachineGroupId (integer, optional),
    MachineGroupName (string, optional),
    MachineGroupCode (integer, optional),
    MachineGroupStatus (integer, optional)
}
```

Example Response Body

```
{
  "MachineGroupId": 138408774,
  "ActorId": 39517,
  "MachineGroupName": "Office",
  "MachineGroupCode": 0,
  "MachineGroupStatus": 2,
  "CreatedBy": 11,
  "CreatedOn": "2020-03-27T20:26:59.813",
  "UpdatedOn": "2020-03-27T20:26:59.813",
  "UpdatedBy": 11
}
```

POST Machine Groups Response Fields Description

Field Name	Description
MachineGroupId	Auto generate unique id, represents Machine Group
ActorId	Auto generate unique id, represents the hierarchical entity in the hierarchy tree
MachineGroupName	Machine Group Name, for example: Snacks, Cold Drinks etc.
MachineGroupCode	Machine Group Code, User Generated
MachineGroupStatus	Machine Group Status, 1 = Active , 2 = Not Active
CreatedBy	Nayax User ID of Machine Group Creator
CreatedOn	Creation Date and Time
UpdatedOn	Update Date and Time
UpdatedBy	Nayax User ID of Machine Group Updater

PUT Machine Group by Actor ID

Method Creates Machine Group for specified ActorID

PUT

/v1/actor/{ActorID}/machineGroups

Update machine group

Request URL

https://lynx.nayax.com/Operational/v1/actor/{ActorID}/machineGroups

Request Parameters

Parameter	Parameter Type	Data Type	Description
ActorID	Path	Long	Auto generate unique id, represents the hierarchical entity in the hierarchy tree

Model

```
MachineGroupRequestDTO {
    MachineGroupId (integer, optional),
    MachineGroupName (string, optional),
    MachineGroupCode (integer, optional),
    MachineGroupStatus (integer, optional)
}
```

Example Response Body

```
{
  "MachineGroupId": 138408774,
  "ActorId": 39517,
  "MachineGroupName": "Office",
  "MachineGroupCode": 0,
  "MachineGroupStatus": 2,
  "CreatedBy": 11,
  "CreatedOn": "2020-03-27T20:26:59.813",
  "UpdatedOn": "2020-03-27T20:48:11.4",
  "UpdatedBy": 11
}
```

POST Machine Groups Response Fields Description

Field Name	Description
MachineGroupId	Auto generate unique id, represents Machine Group
ActorId	Auto generate unique id, represents the hierarchical entity in the hierarchy tree
MachineGroupName	Machine Group Name, for example: Snacks, Cold Drinks etc.
MachineGroupCode	Machine Group Code, User Generated
MachineGroupStatus	Machine Group Status, 1 = Active , 2 = Not Active
CreatedBy	Nayax User ID of Machine Group Creator
CreatedOn	Creation Date and Time
UpdatedOn	Update Date and Time
UpdatedBy	Nayax User ID of Machine Group Updater

Cards

GET Card Credit by Card Unique Identifier

Method returns Card's Credit Balance for specified Card Unique Identifier

GET /v1/cards/{CardUniqueIdentifier}/credit

[Get the credit](#)

Request URL

https://lynx.nayax.com/Operational/v1/cards/{CardUniqueIdentifier}/credit

Request Parameters

Parameter	Parameter Type	Data Type	Description
CardUniqueIdentifier	Path	String	The Number or HEX value encoded on Magnetic Stripe or Contactless Chip of a card

Model

```
CardValue {  
    Value (number, optional),  
}
```

Example Response Body

```
{  
    "value": 93.5,  
}
```

GET Card Credit Response Fields Description

Field Name	Description
value	Card Credit Balance Monetary Value

GET Card Details by Card Unique Identifier

Method returns details of specified Card Unique Identifier

GET

/v1/cards/uniqueIdentifier/{CardUniqueIdentifier}

Get Cards by CardUniqueIdentifier

Request URL

https://lynx.nayax.com/Operational/v1/cards/uniqueIdentifier/{CardUniqueIdentifier}

Request Parameters

Parameter	Parameter Type	Data Type	Description
CardUniqueIdentifier	Query	String	The Number or HEX value encoded on Magnetic Stripe or Contactless Chip of a card

Model

```
CardsDbEntity {  
    CardUniqueIdentifier (string, optional),  
    CardDisplayNumber (string, optional),  
    CardHolderName (string, optional),  
    CardUserIdentity (string, optional),  
    CountryID (integer, optional),  
    MobileNumber (integer, optional),  
    Email (string, optional)  
}
```

Example Response Body

```
{  
  "CardUniqueIdentifier": "1000441791999",  
  "CardDisplayNumber": "1000441791999",  
  "CardHolderName": "Oleg Rozenblum",  
  "CardUserIdentity": "880029",  
  "CountryID": 225,  
  "MobileNumber": 545688038,  
  "Email": "oleg@nayax.com"  
}
```

GET Card Details Response Fields Description

Field Name	Description
CardUniqueIdentifier	The Number or HEX value encoded on Magnetic Stripe or Contactless Chip of a card
CardDisplayNumber	The Number or HEX value Printed on the Card
CardHolderName	First and Last Name of the Cardholder
CardUserIdentity	Identification Number of the Card User
CountryID	Auto generated unique id, represents a Country, used as dialing code for mobile number
MobileNumber	Mobile Phone Number of the Cardholder
Email	Email Address of the Card Holder

GET Card Revalue Credit by Card Unique Identifier

Method returns Card's Credit Balance for specified Card Unique Identifier

GET /v1/cards/{CardUniqueIdentifier}/credit

[Get the credit](#)

Request URL

https://lynx.nayax.com/Operational/v1/cards/{CardUniqueIdentifier}/credit

Request Parameters

Parameter	Parameter Type	Data Type	Description
CardUniqueIdentifier	Path	String	The Number or HEX value encoded on Magnetic Stripe or Contactless Chip of a card

Model

```
CardValue {
    Value (number, optional),
}
```

Example Response Body

```
{
  "value": 93.5,
}
```

GET Card Credit Response Fields Description

Field Name	Description
value	Card Revalue Credit Balance Monetary Value

GET Card Details by Card Display Number

Method returns details of specified Display Card Number

GET

/v1/cards/displayNumber/{CardDisplayNumber}

Get Cards by CardDisplayNumber

Request URL

https://lynx.nayax.com/Operational/v1/cards/displayNumber/{CardDisplayNumber}

Request Parameters

Parameter	Parameter Type	Data Type	Description
CardDisplayNumber	Path	String	The Number or HEX value Printed on the Card

Model

```
CardsDbEntity {  
    CardUniqueIdentifier (string, optional),  
    CardDisplayNumber (string, optional),  
    CardHolderName (string, optional),  
    CardUserIdentity (string, optional),  
    CountryID (integer, optional),  
    MobileNumber (integer, optional),  
    Email (string, optional)  
}
```

Example Response Body

```
{  
  "CardUniqueIdentifier": "1000441791999",  
  "CardDisplayNumber": "1000441791999",  
  "CardHolderName": "Oleg Rozenblum",  
  "CardUserIdentity": "880029",  
  "CountryID": 225,  
  "MobileNumber": 545688038,  
  "Email": "oleg@yayax.com"  
}
```

GET Card Details Response Fields Description

Field Name	Description
CardUniqueIdentifier	The Number or HEX value encoded on Magnetic Stripe or Contactless Chip of a card
CardDisplayNumber	The Number or HEX value Printed on the Card
CardHolderName	First and Last Name of the Cardholder
CardUserIdentity	Identification Number of the Card User
CountryID	Auto generated unique id, represents a Country, used as dialing code for mobile number
MobileNumber	Mobile Phone Number of the Cardholder
Email	Email Address of the Card Holder

GET Card Details by Card ID

Method returns details of specified Card ID

GET

[/v1/cards/{CardId}/prepaid](https://lynx.nayax.com/Operational/v1/cards/{CardId}/prepaid)

Get prepaid card

Request URL

<https://lynx.nayax.com/Operational/v1/cards/{CardId}/prepaid>

Request Parameters

Parameter	Parameter Type	Data Type	Description
CardId	Path	Long	Auto Generated Nayax Internal Unique Identifier

Model

```
PrepaidCard {
    PrepaidCard (PrepaidCardDbEntity, optional),
    Card (CardsDbEntity, optional)
}
PrepaidCardDbEntity {
    CardID (integer, optional),
    CardDiscountAmount (number, optional),
    CardCreditTypeMoneyBit (boolean, optional),
    CardCreditAccumulateBit (boolean, optional),
    CardCreditSingleUseBit (boolean, optional),
    CardRevalueCashBit (boolean, optional),
    CardRevalueCreditCardBit (boolean, optional),
    CardCredit (number, optional),
    CardRevalueCredit (number, optional),
    CardMaxRevalueAmountLimit (number, optional),
    CreditAmountDailyLimit (number, optional),
    CreditAmountMonthlyLimit (number, optional),
    CreditTransactionsDailyLimit (integer, optional),
    CreditTransactionsMonthlyLimit (integer, optional),
    CreditTransactionsMonthlyReload (integer, optional),
    CreditAmountCapture (number, optional),
    CreditTransactionsCapture (integer, optional),
    CreditCaptureDate (string, optional),
    CreditAmountDailyUsage (number, optional),
    CreditAmountMonthlyUsage (number, optional),
    CreditAmountTotalUsage (number, optional),
    CreditTransactionsDailyUsage (integer, optional),
    CreditTransactionsMonthlyUsage (integer, optional),
    TransactionsTotalUsage (integer, optional),
    CardRevalueExpirationDate (string, optional),
    CardSetSingleUseDate (string, optional),
    RemoveSingleUseDate (string, optional),
    CreditAmountMonthlyReload (number, optional),
    CreditTransactionsTotalUsage (integer, optional),
    CardCustomerTypeID (integer, optional),
    CardLastUpdatedBy (integer, optional),
    CardLastUpdatedDate (string, optional),
    final_wd_limit_money (number, optional)
}
CardsDbEntity {
    CardID (integer, optional),
    CardUniqueIdentifier (string, optional),
    CardDisplayNumber (string, optional),
    CardHolderName (string, optional),
    CardUserIdentity (string, optional),
    CountryID (integer, optional),
    Email (string, optional),
    CardActivationDate (string, optional),
    CardExpirationDate (string, optional),
    CardImageUrl (string, optional),
    CardNote (string, optional),
    wd_limits_money (string, optional),
    wd_limits_trans (string, optional),
    use_wd_limit (boolean, optional)
}
```

Example Response Body

```
{
  "PrepaidCard": {
    "CardID": 138182097181879,
    "CardDiscountAmount": 0,
    "CardCreditTypeMoneyBit": true,
    "CardCreditAccumulateBit": false,
    "CardCreditSingleUseBit": false,
    "CardRevalueCashBit": true,
    "CardRevalueCreditCardBit": true,
    "CardCredit": 26.96,
    "CardRevalueCredit": 0,
    "CardMaxRevalueAmountLimit": 30,
    "CreditAmountDailyLimit": 0,
    "CreditAmountMonthlyLimit": 201,
    "CreditTransactionsDailyLimit": null,
    "CreditTransactionsMonthlyLimit": null,
    "CreditTransactionsMonthlyReload": null,
    "CreditAmountCapture": 0,
    "CreditTransactionsCapture": 0,
    "CreditCaptureDate": null,
    "CreditAmountDailyUsage": 0,
    "CreditAmountMonthlyUsage": 83.04,
    "CreditAmountTotalUsage": 83.04,
    "CreditTransactionsDailyUsage": 0,
    "CreditTransactionsMonthlyUsage": 25,
    "TransactionsTotalUsage": 25,
    "CardRevalueExpirationDate": "2020-05-22T00:00:00",
    "CardSetSingleUseDate": "2020-05-29T00:00:00",
    "RemoveSingleUseDate": "2020-06-07T00:00:00",
    "CreditAmountMonthlyReload": 0,
    "CreditTransactionsTotalUsage": 0,
    "CardCustomerTypeID": null,
    "CardLastUpdatedBy": 11,
    "CardLastUpdatedDate": "2020-05-07T20:37:16.123",
    "final_wd_limit_money": null
  },
  "Card": {
    "CardID": 138182097181879,
    "CardUniqueIdentifier": "8888002901",
    "CardDisplayNumber": "8888002901",
    "CardHolderName": "Oleg Rozenblum",
    "CardUserIdentity": "1",
    "CountryID": 105,
    "Email": "oleg@nayax.com",
    "CardActivationDate": "2020-06-07T00:00:00",
    "CardExpirationDate": "2020-05-31T00:00:00",
    "CardImageUrl": "https://static.nayax.com/res/media/202005071735321324/lynxicon.png",
    "CardNote": "these are my notes",
    "wd_limits_money": null,
    "wd_limits_trans": null,
    "use_wd_limit": null
  }
}
```

GET Card Details Response Fields Description

Field Name	Description
CardID	Auto Generated Nayax Internal Unique Identifier
CardDiscountAmount	Discount Amount, applicable when Card Type set to Discount Card
CardCreditTypeMoneyBit	Bit indicating if card credit is true=Money or false=Transactions
CardCreditAccumulateBit	Bit indicating if card credit is accumulated at the end of the month, if true existing credit will get an addition of Monthly Reload Amount or Transactions depending on Credit Type
CardCreditSingleUseBit	Bit indicating if card credit is replenished or not at the end of the month, if true, remaining card credit will be unchanged and available for usage next month until depleted
CardRevalueCashBit	Bit indicating if card can be revalued with cash at the vending machine, if true, card's credit will be provided to device in authorization with the bit indicating that revalue is enabled
CardRevalueCreditCardBit	Bit indicating if card can be revalued with Credit Card at the vending machine, if true, card's credit will be provided to device in authorization with the bit indicating that revalue is enabled
CardCredit	Card's credit either Amount or Transactions depending on Credit Type
CardRevalueCredit	Card's Revalue Credit Amount (Revalue credit is always an amount)
CardMaxRevalueAmountLimit	Card's Revalue Credit Limit, defines the amount up to which the card can be revalued
CreditAmountDailyLimit	Card credit daily limit, defines the amount card can purchase daily
CreditAmountMonthlyLimit	Card credit monthly limit, defines the amount card can purchase monthly
CreditTransactionsDailyLimit	Card credit daily limit, defines the number of transactions card can perform daily
CreditTransactionsMonthlyLimit	Card credit monthly limit, defines the number of transactions card can perform monthly
CreditTransactionsMonthlyReload	The number of transactions card will be reloaded with at the end of the month, depending on card Credit Type, Credit Accumulate Bit, Credit Single Use Bit
CreditAmountCapture	Amount Currently Captured from Card Balance, hold done during authorization to prevent card credit to enter negative balance, hold released once transaction is completed or cancelled
CreditTransactionsCapture	Transaction Currently Captured from Card Balance, hold done during authorization to prevent card credit to enter negative balance, hold released once transaction is completed or cancelled
CreditCaptureDate	Date and Time of Credit Capture
CreditAmountDailyUsage	Amount of credit used today, reset midnight based on cardholder time zone
CreditAmountMonthlyUsage	Amount of credit used this month, reset end of the month midnight based on cardholder time zone
CreditAmountTotalUsage	Amount of credit used this since card was created, never reset
CreditTransactionsDailyUsage	Number of transactions done today, reset midnight based on cardholder time zone
CreditTransactionsMonthlyUsage	Number of transactions done this month, reset end of the month midnight based on cardholder time zone
TransactionsTotalUsage	Number of transactions done this since card was created, never reset
CardRevalueExpirationDate	If set, defines the date when CardRevalueCreditCardBit is set to false, preventing the card from further being revalued, does not affect remaining revalue credit, credit will still be available for use
CardSetSingleUseDate	If set, defines the date when CardCreditSingleUseBit is set to true
RemoveSingleUseDate	If set, defines the date when CardCreditSingleUseBit is set to false
CreditAmountMonthlyReload	The amount card will be reloaded with at the end of the month, depending on card Credit Type, Credit Accumulate Bit, Credit Single Use Bit
CreditTransactionsTotalUsage	Number of transactions done this since card was created, never reset
CardCustomerTypeID	
CardLastUpdatedBy	Nayax System User ID of the user that updated this value
CardLastUpdatedDate	Date and Time this was last updated
final_wd_limit_money	
CardUniqueIdentifier	The Number or HEX value encoded on Magnetic Stripe or Contactless Chip of a card
CardDisplayNumber	The Number or HEX value Printed on the Card

CardHolderName	First and Last Name of the Cardholder
CardUserIdentity	Identification Number of the Card User
CountryID	Auto generated unique id, represents a Country, used as dialing code for mobile number
MobileNumber	Mobile Phone Number of the Cardholder
Email	Email Address of the Card Holder
CardActivationDate	If set, defines the date when Card Status will be set to Active
CardExpirationDate	If set, defines the date when Card Status will be set to Expired
CardImageUrl	Uploaded Image URL
CardNote	Free Text Notes
wd_limits_money	
wd_limits_trans	
use_wd_limit	

PUT Card Details by Card ID

Method returns details of specified Card ID

PUT /v1/cards/{CardId}/prepaid

Update prepaid card

Request URL

https://lynx.nayax.com/Operational/v1/cards/{CardId}/prepaid

Request Parameters

Parameter	Parameter Type	Data Type	Description
CardId	Path	Long	Auto Generated Nayax Internal Unique Identifier
Card	Body	JSON	Card's Detail Fields

Model

```
PrepaidCardDbEntity {
    CardID (integer, optional),
    CardDiscountAmount (number, optional),
    CardCreditTypeMoneyBit (boolean, optional),
    CardCreditAccumulateBit (boolean, optional),
    CardCreditSingleUseBit (boolean, optional),
    CardRevalueCashBit (boolean, optional),
    CardRevalueCreditCardBit (boolean, optional),
    CardCredit (number, optional),
    CardRevalueCredit (number, optional),
    CardMaxRevalueAmountLimit (number, optional),
    CreditAmountDailyLimit (number, optional),
    CreditAmountMonthlyLimit (number, optional),
    CreditTransactionsDailyLimit (integer, optional),
    CreditTransactionsMonthlyLimit (integer, optional),
    CreditTransactionsMonthlyReload (integer, optional),
    CreditAmountCapture (number, optional),
    CreditTransactionsCapture (integer, optional),
    CreditCaptureDate (string, optional),
    CreditAmountDailyUsage (number, optional),
    CreditAmountMonthlyUsage (number, optional),
    CreditAmountTotalUsage (number, optional),
    CreditTransactionsDailyUsage (integer, optional),
    CreditTransactionsMonthlyUsage (integer, optional),
    TransactionsTotalUsage (integer, optional),
    CardRevalueExpirationDate (string, optional),
    CardSetSingleUseDate (string, optional),
    RemoveSingleUseDate (string, optional),
    CreditAmountMonthlyReload (number, optional),
    CreditTransactionsTotalUsage (integer, optional),
    CardCustomerTypeID (integer, optional),
    CardLastUpdatedBy (integer, optional),
    CardLastUpdatedDate (string, optional),
    final_wd_limit_money (number, optional)
}
```

Example Response Body

```
{
  "PrepaidCard": {
    "CardID": 138182097181879,
    "CardDiscountAmount": 0,
    "CardCreditTypeMoneyBit": true,
    "CardCreditAccumulateBit": false,
    "CardCreditSingleUseBit": false,
    "CardRevalueCashBit": true,
    "CardRevalueCreditCardBit": true,
    "CardCredit": 26.96,
    "CardRevalueCredit": 0,
    "CardMaxRevalueAmountLimit": 30,
    "CreditAmountDailyLimit": 0,
    "CreditAmountMonthlyLimit": 201,
    "CreditTransactionsDailyLimit": null,
    "CreditTransactionsMonthlyLimit": null,
    "CreditTransactionsMonthlyReload": null,
    "CreditAmountCapture": 0,
    "CreditTransactionsCapture": 0,
    "CreditCaptureDate": null,
    "CreditAmountDailyUsage": 0,
    "CreditAmountMonthlyUsage": 83.04,
    "CreditAmountTotalUsage": 83.04,
    "CreditTransactionsDailyUsage": 0,
    "CreditTransactionsMonthlyUsage": 25,
    "TransactionsTotalUsage": 25,
    "CardRevalueExpirationDate": "2020-05-22T00:00:00",
    "CardSetSingleUseDate": "2020-05-29T00:00:00",
    "RemoveSingleUseDate": "2020-06-07T00:00:00",
    "CreditAmountMonthlyReload": 0,
    "CreditTransactionsTotalUsage": 0,
    "CardCustomerTypeID": null,
    "CardLastUpdatedBy": 11,
    "CardLastUpdatedDate": "2020-05-07T20:37:16.123",
    "final_wd_limit_money": null
  },
  "Card": {
    "CardID": 138182097181879,
    "CardUniqueIdentifier": "8888002901",
    "CardDisplayNumber": "8888002901",
    "CardHolderName": "Oleg Rozenblum",
    "CardUserIdentity": "1",
    "CountryID": 105,
    "Email": "oleg@nayax.com",
    "CardActivationDate": "2020-06-07T00:00:00",
    "CardExpirationDate": "2020-05-31T00:00:00",
    "CardImageUrl": "https://static.nayax.com/res/media/202005071735321324/lynxicon.png",
    "CardNote": "these are my notes",
    "wd_limits_money": null,
    "wd_limits_trans": null,
    "use_wd_limit": null
  }
}
```

GET Card Details Response Fields Description

Field Name	Description
CardID	Auto Generated Nayax Internal Unique Identifier
CardDiscountAmount	Discount Amount, applicable when Card Type set to Discount Card
CardCreditTypeMoneyBit	Bit indicating if card credit is true=Money or false=Transactions
CardCreditAccumulateBit	Bit indicating if card credit is accumulated at the end of the month, if true existing credit will get an addition of Monthly Reload Amount or Transactions depending on Credit Type
CardCreditSingleUseBit	Bit indicating if card credit is replenished or not at the end of the month, if true, remaining card credit will be unchanged and available for usage next month until depleted
CardRevalueCashBit	Bit indicating if card can be revalued with cash at the vending machine, if true, card's credit will be provided to device in authorization with the bit indicating that revalue is enabled
CardRevalueCreditCardBit	Bit indicating if card can be revalued with Credit Card at the vending machine, if true, card's credit will be provided to device in authorization with the bit indicating that revalue is enabled
CardCredit	Card's credit either Amount or Transactions depending on Credit Type
CardRevalueCredit	Card's Revalue Credit Amount (Revalue credit is always an amount)
CardMaxRevalueAmountLimit	Card's Revalue Credit Limit, defines the amount up to which the card can be revalued
CreditAmountDailyLimit	Card credit daily limit, defines the amount card can purchase daily
CreditAmountMonthlyLimit	Card credit monthly limit, defines the amount card can purchase monthly
CreditTransactionsDailyLimit	Card credit daily limit, defines the number of transactions card can perform daily
CreditTransactionsMonthlyLimit	Card credit monthly limit, defines the number of transactions card can perform monthly
CreditTransactionsMonthlyReload	The number of transactions card will be reloaded with at the end of the month, depending on card Credit Type, Credit Accumulate Bit, Credit Single Use Bit
CreditAmountCapture	Amount Currently Captured from Card Balance, hold done during authorization to prevent card credit to enter negative balance, hold released once transaction is completed or cancelled
CreditTransactionsCapture	Transaction Currently Captured from Card Balance, hold done during authorization to prevent card credit to enter negative balance, hold released once transaction is completed or cancelled
CreditCaptureDate	Date and Time of Credit Capture
CreditAmountDailyUsage	Amount of credit used today, reset midnight based on cardholder time zone
CreditAmountMonthlyUsage	Amount of credit used this month, reset end of the month midnight based on cardholder time zone
CreditAmountTotalUsage	Amount of credit used this since card was created, never reset
CreditTransactionsDailyUsage	Number of transactions done today, reset midnight based on cardholder time zone
CreditTransactionsMonthlyUsage	Number of transactions done this month, reset end of the month midnight based on cardholder time zone
TransactionsTotalUsage	Number of transactions done this since card was created, never reset
CardRevalueExpirationDate	If set, defines the date when CardRevalueCreditCardBit is set to false, preventing the card from further being revalued, does not affect remaining revalue credit, credit will still be available for use
CardSetSingleUseDate	If set, defines the date when CardCreditSingleUseBit is set to true
RemoveSingleUseDate	If set, defines the date when CardCreditSingleUseBit is set to false
CreditAmountMonthlyReload	The amount card will be reloaded with at the end of the month, depending on card Credit Type, Credit Accumulate Bit, Credit Single Use Bit
CreditTransactionsTotalUsage	Number of transactions done this since card was created, never reset
CardCustomerTypeID	
CardLastUpdatedBy	Nayax System User ID of the user that updated this value
CardLastUpdatedDate	Date and Time this was last updated
final_wd_limit_money	
CardUniqueIdentifier	The Number or HEX value encoded on Magnetic Stripe or Contactless Chip of a card
CardDisplayNumber	The Number or HEX value Printed on the Card

CardHolderName	First and Last Name of the Cardholder
CardUserIdentity	Identification Number of the Card User
CountryID	Auto generated unique id, represents a Country, used as dialing code for mobile number
MobileNumber	Mobile Phone Number of the Cardholder
Email	Email Address of the Card Holder
CardActivationDate	If set, defines the date when Card Status will be set to Active
CardExpirationDate	If set, defines the date when Card Status will be set to Expired
CardImageUrl	Uploaded Image URL
CardNote	Free Text Notes
wd_limits_money	
wd_limits_trans	
use_wd_limit	

GET Card Groups by Card ID

Method returns details of specified Display Card Number

GET

/v1/cards/displayNumber/{CardDisplayNumber}

Get Cards by CardDisplayNumber

Request URL

https://lynx.nayax.com/Operational/v1/cards/{cardId}/cardGroups

Request Parameters

Parameter	Parameter Type	Data Type	Description
CardId	Path	Long	Auto Generated Nayax Internal Unique Identifier

Model

```
Array [  
  CardGroup {  
    CardGroupEnabledBit (boolean, optional),  
    GroupName (string, optional),  
    CardGroupId (integer, optional),  
    GroupDailyLimit (integer, optional),  
    UpdatedBy (integer, optional),  
    LastUpdated (string, optional)  
  }  
]
```

Example Response Body

```
[
  {
    "CardGroupEnabledBit": true,
    "GroupName": "Cold Drinks",
    "CardGroupId": 2,
    "GroupDailyLimit": 2,
    "UpdatedBy": null,
    "LastUpdated": "2018-12-05T16:38:29.26"
  },
  {
    "CardGroupEnabledBit": true,
    "GroupName": "Snacks",
    "CardGroupId": 201,
    "GroupDailyLimit": null,
    "UpdatedBy": null,
    "LastUpdated": "2018-12-05T16:38:29.26"
  },
  {
    "CardGroupEnabledBit": true,
    "GroupName": "Coffee",
    "CardGroupId": 1132,
    "GroupDailyLimit": null,
    "UpdatedBy": null,
    "LastUpdated": "2018-12-05T16:38:29.26"
  }
]
```

GET Card Groups Response Fields Description

Field Name	Description
CardGroupEnabledBit	Bit indicating if card is allowed to purchase on machines under this group
GroupName	Machine Group Name
CardGroupId	Machine Group ID
GroupDailyLimit	Daily limit defines the number of purchases card can make on machines under this group
UpdatedBy	Nayax System User ID of the user that updated this value
LastUpdated	Date and Time this was last updated

POST Card Credit by Card Unique Identifier

Method updates card credit for specified Card Unique Identifier

POST /v1/cards/{CardUniqueIdentifier}/credit/add

Add to the credit

Request URL

https://lynx.nayax.com/Operational/v1/cards/{CardUniqueIdentifier}/credit/add

Request Parameters

Parameter	Parameter Type	Data Type	Description
CardUniqueIdentifier	Path	String	The Number or HEX value encoded on Magnetic Stripe or Contactless Chip of a card
CardCredit	Query	Double	Amount of money to be added to card credit balance

Model

```
CardValue {  
    Value (number, optional),  
}
```

Example Response Body

```
{  
    "value": 93.5,  
}
```

POST Card Credit Response Fields Description

Field Name	Description
value	Card Credit Balance (after update) Monetary Value

POST Card Revalue Credit by Card Unique Identifier

Method updates card revalue credit for specified Card Unique Identifier

POST /v1/cards/{CardUniqueIdentifier}/revalue/add

Add to the revalue

Request URL

https://lynx.nayax.com/Operational/v1/cards/{CardUniqueIdentifier}/revalue/add

Request Parameters

Parameter	Parameter Type	Data Type	Description
CardUniqueIdentifier	Path	String	The Number or HEX value encoded on Magnetic Stripe or Contactless Chip of a card
CardCredit	Query	Double	Amount of money to be added to card revalue credit balance
CreditChangeRemarks	Query	String	Remarks for why credit was changed

Model

```
CardValue {
    Value (number, optional),
}
```

Example Response Body

```
{
  "value": 93.5,
}
```

POST Card Credit Response Fields Description

Field Name	Description
value	Card Revalue Credit Balance (after update) Monetary Value

POST Card Revalue Credit from Card Unique Identifier to Card Unique Identifier

Method transfers card revalue credit from specified Card Unique Identifier to specified Card Unique Identifier

POST

/v1/cards/{FromCardUniqueIdentifier}/revalue/send/{ToCardUniqueIdentifier}

Add to the revalue

Request URL

https://lynx.nayax.com/Operational/v1/cards/{FromCardUniqueIdentifier}/revalue/send/{ToCardUniqueIdentifier}

Request Parameters

Parameter	Parameter Type	Data Type	Description
FromCardUniqueIdentifier	Path	String	The Number or HEX value encoded on Magnetic Stripe or Contactless Chip of a card
ToCardUniqueIdentifier	Path	String	The Number or HEX value encoded on Magnetic Stripe or Contactless Chip of a card
CardCredit	Query	Double	Amount of money to be added to card revalue credit balance
CreditChangeRemarks	Query	String	Remarks for why credit was changed

Model

```
CardValue {
    Value (number, optional),
}
```

Example Response Body

```
{
  "value": 93.5,
}
```

POST Card Credit Response Fields Description

Field Name	Description
value	Card Revalue Credit Balance (after update) Monetary Value

POST Card Status by Card Unique Identifier

Method updates card status

POST /v1/cards/{CardUniqueIdentifier}/status/{CardStatus}

Update status

Request URL

https://lynx.nayax.com/Operational/v1/cards/{CardUniqueIdentifier}/status/{CardStatus}

Request Parameters

Parameter	Parameter Type	Data Type	Description
CardUniqueIdentifier	Path	String	The Number or HEX value encoded on Magnetic Stripe or Contactless Chip of a card
CardStatus	Path	Int	Card Status, 1=Active, 2=Not Active

Model

```
ApiResponse {  
    Ok (boolean, optional),  
    Message (string, optional),  
    SystemMessage (string, optional)  
}
```

Example Response Body

```
{  
    "Ok": true,  
    "Message": null,  
    "SystemMessage": null  
}
```

POST Card Details

Method Creates a new prepaid card

POST /v1/cards

creates a new virtual card

Request URL

https://lynx.nayax.com/Operational/v1/cards

Request Parameters

Parameter	Parameter Type	Data Type	Description
Card	Body	JSON	Card's Detail Fields

Model

```
Cards {  
  CardUniqueIdentifier (string, optional),  
  CardDisplayNumber (string, optional),  
  CardHolderName (string, optional),  
  CardUserIdentity (string, optional),  
  CountryID (integer, optional),  
  MobileNumber (integer, optional),  
  Email (string, optional)  
  Refs (string, optional)  
}
```

Example Response Body

```
{
  "CardUniqueIdentifier": "1000441791999",
  "CardDisplayNumber": "1000441791999",
  "CardHolderName": "Oleg Rozenblum",
  "CardUserIdentity": "880029",
  "CountryID": 105,
  "MobileNumber": 545688038,
  "Email": "oleg@nayax.com"
  "Refs": {
    "revalueBalance": "/v1/cards/811916735143356/revalue"
  }
}
```

PUT Card Details Response Fields Description

Field Name	Description
CardUniqueIdentifier	The Number or HEX value encoded on Magnetic Stripe or Contactless Chip of a card
CardDisplayNumber	The Number or HEX value Printed on the Card
CardHolderName	First and Last Name of the Cardholder
CardUserIdentity	Identification Number of the Card User
CountryID	Auto generated unique id, represents a Country, used as dialing code for mobile number
MobileNumber	Mobile Phone Number of the Cardholder
Email	Email Address of the Card Holder

PUT Card Details by Card Unique Identifier

Method updates details of specified Card Unique Identifier

PUT /v1/cards

Update Card Detail By CardUniqueIdentifier

Request URL

https://lynx.nayax.com/Operational/v1/cards?CardUniqueIdentifier={CardUniqueIdentifier}

Request Parameters

Parameter	Parameter Type	Data Type	Description
CardUniqueIdentifier	Query	String	The Number or HEX value encoded on Magnetic Stripe or Contactless Chip of a card
Card	Body	JSON	Card's Detail Fields

Model

```
CardsDbEntity {  
    CardUniqueIdentifier (string, optional),  
    CardDisplayNumber (string, optional),  
    CardHolderName (string, optional),  
    CardUserIdentity (string, optional),  
    CountryID (integer, optional),  
    MobileNumber (integer, optional),  
    Email (string, optional)  
}
```

Example Response Body

```
{  
  "CardUniqueIdentifier": "1000441791999",  
  "CardDisplayNumber": "1000441791999",  
  "CardHolderName": "Oleg Rozenblum",  
  "CardUserIdentity": "880029",  
  "CountryID": 225,  
  "MobileNumber": 545688038,  
  "Email": "oleg@nayax.com"  
}
```

PUT Card Details Response Fields Description

Field Name	Description
CardUniqueIdentifier	The Number or HEX value encoded on Magnetic Stripe or Contactless Chip of a card
CardDisplayNumber	The Number or HEX value Printed on the Card
CardHolderName	First and Last Name of the Cardholder
CardUserIdentity	Identification Number of the Card User
CountryID	Auto generated unique id, represents a Country, used as dialing code for mobile number
MobileNumber	Mobile Phone Number of the Cardholder
Email	Email Address of the Card Holder

PUT Card Details by Card Display Number

Method updates details of specified Display Card Number

PUT

/v1/cards/{CardDisplayNumber}

Update Card Detail By CardDisplayNumber

Request URL

https://lynx.nayax.com/Operational/v1/cards/{DisplayCardNumber}

Request Parameters

Parameter	Parameter Type	Data Type	Description
CardDisplayNumber	Path	String	The Number or HEX value Printed on the Card
Card	Body	JSON	Card's Detail Fields

Model

```
CardsDbEntity {  
    CardUniqueIdentifier (string, optional),  
    CardDisplayNumber (string, optional),  
    CardHolderName (string, optional),  
    CardUserIdentity (string, optional),  
    CountryID (integer, optional),  
    MobileNumber (integer, optional),  
    Email (string, optional)  
}
```

Example Response Body

```
{  
  "CardUniqueIdentifier": "1000441791999",  
  "CardDisplayNumber": "1000441791999",  
  "CardHolderName": "Oleg Rozenblum",  
  "CardUserIdentity": "880029",  
  "CountryID": 225,  
  "MobileNumber": 545688038,  
  "Email": "oleg@yayax.com"  
}
```

PUT Card Details Response Fields Description

Field Name	Description
CardUniqueIdentifier	The Number or HEX value encoded on Magnetic Stripe or Contactless Chip of a card
CardDisplayNumber	The Number or HEX value Printed on the Card
CardHolderName	First and Last Name of the Cardholder
CardUserIdentity	Identification Number of the Card User
CountryID	Auto generated unique id, represents a Country, used as dialing code for mobile number
MobileNumber	Mobile Phone Number of the Cardholder
Email	Email Address of the Card Holder

PUT Card Groups by Card ID

Method returns details of specified Display Card Number

PUT /v1/cards/{CardId}/cardGroups

Request URL

https://lynx.nayax.com/Operational/v1/cards/{cardId}/cardGroups

Request Parameters

Parameter	Parameter Type	Data Type	Description
CardId	Path	Long	Auto Generated Nayax Internal Unique Identifier
CardGroups	Body	JSON	Card Group Details

Model

```
Array [  
  CardGroup {  
    CardGroupEnabledBit (boolean, optional),  
    GroupName (string, optional),  
    CardGroupId (integer, optional),  
    GroupDailyLimit (integer, optional),  
    UpdatedBy (integer, optional),  
    LastUpdated (string, optional)  
  }  
]
```

Example Response Body

```
[
  {
    "CardGroupEnabledBit": true,
    "GroupName": "Cold Drinks",
    "CardGroupId": 2,
    "GroupDailyLimit": 2,
    "UpdatedBy": null,
    "LastUpdated": "2018-12-05T16:38:29.26"
  },
  {
    "CardGroupEnabledBit": true,
    "GroupName": "Snacks",
    "CardGroupId": 201,
    "GroupDailyLimit": null,
    "UpdatedBy": null,
    "LastUpdated": "2018-12-05T16:38:29.26"
  },
  {
    "CardGroupEnabledBit": true,
    "GroupName": "Coffee",
    "CardGroupId": 1132,
    "GroupDailyLimit": null,
    "UpdatedBy": null,
    "LastUpdated": "2018-12-05T16:38:29.26"
  }
]
```

GET Card Groups Response Fields Description

Field Name	Description
CardGroupEnabledBit	Bit indicating if card is allowed to purchase on machines under this group
GroupName	Machine Group Name
CardGroupId	Machine Group ID
GroupDailyLimit	Daily limit defines the number of purchases card can make on machines under this group
UpdatedBy	Nayax System User ID of the user that updated this value
LastUpdated	Date and Time this was last updated

Lookups

GET Actor Types

Method returns list of Actor Types

GET /v1/actorTypes

Get all actor types.

Request URL

https://lynx.nayax.com/Operational/v1/actorTypes

Model

```
Array [
  ActorTypeDbEntity {
    ActorTypeID (integer, optional),
    ActorTypeName (string, optional),
    LastUpdated (string, optional),
    DefaultBit (boolean, optional),
    CKey (string, optional)
  }
]
```

Example Response Body

```
[
  {
    "ActorTypeID": 1,
    "ActorTypeName": "Parent",
    "LastUpdated": "2011-09-19T06:00:22.01",
    "DefaultBit": true,
    "CKey": "parent"
  },
  {
    "ActorTypeID": 2,
    "ActorTypeName": "Operator",
    "LastUpdated": "2011-09-19T06:00:22.01",
    "DefaultBit": true,
    "CKey": "oper"
  }
]
```

GET Product Group Response Fields Description

Field Name	Description
ActorTypeID	Auto generated Unique ID, represents an Actor Type
ActorTypeName	Name of the Actor Type entity
LastUpdated	Date Time Actor Type last updated
DefaultBit	
CKey	Actor Type system reference

GET Lookup Types

Method returns a list of Lookup Types or single type of specified LutTypeID

GET /v1/lookupTypes

Get lookup types.

Request URL

https://lynx.nayax.com/Operational/v1/lookupTypes

Request Parameters

Parameter	Parameter Type	Data Type	Description
LutTypeID	Query	Integer	Auto generated unique id, represents a Lookup Type

Model

```
Array [  
  LookupTypeDbEntity {  
    LutTypeID (integer, optional),  
    LutTypeDescription (string, optional),  
    LastUpdated (string, optional),  
    LutTypeCode (string, optional),  
    CKey (string, optional),  
    RequiredLutCodeBit (boolean, optional)  
  }  
]
```

Example Response Body

```
[
  {
    "LutTypeID": 1,
    "LutTypeDescription": "Data Type",
    "LastUpdated": "2017-04-09T08:56:54.29",
    "LutTypeCode": "Data_Type",
    "CKey": "data_type",
    "RequiredLutCodeBit": false
  },
  {
    "LutTypeID": 2,
    "LutTypeDescription": "Application Type",
    "LastUpdated": "2007-06-10T19:55:10.977",
    "LutTypeCode": null,
    "CKey": "machine_type",
    "RequiredLutCodeBit": true
  },
  {
    "LutTypeID": 3,
    "LutTypeDescription": "Provider Type",
    "LastUpdated": "2007-01-24T21:05:26.463",
    "LutTypeCode": null,
    "CKey": "provider_type",
    "RequiredLutCodeBit": false
  }
]
```

GET Lookup Types Response Fields Description

Field Name	Description
LutTypeID	Auto generated unique id, represents a Lookup Type
LutTypeDescription	Lookup Type Name
LastUpdated	Date Time Lookup Type last updated
LutTypeCode	Optional Lookup Type Code
CKey	Lookup Type System Reference
RequiredLutCodeBit	

GET Lookup Type Values by Lookup Type ID

Method returns Lookup Type Values for the specified LutTypeID

GET /v1/lookupTypes/{LutTypeID}/values

Get lookup values by lut type id

Request URL

https://lynx.nayax.com/Operational/v1/lookupTypes/{LutTypeID}/values

Request Parameters

Parameter	Parameter Type	Data Type	Description
LutTypeID	Path	Integer	Auto generated unique id, represents a Lookup Type

Model

```
Array [  
  LutsDbEntity {  
    LutID (integer, optional),  
    LutTypeID (integer, optional),  
    LutValue (string, optional),  
    LastUpdated (string, optional),  
    OrderKey (integer, optional),  
    LutCode (integer, optional),  
    Ckey (string, optional)  
  }  
]
```

Example Response Body

```
[
  {
    "LutID": 12,
    "LutTypeID": 5,
    "LutValue": "Executive",
    "LastUpdated": "2007-01-25T00:00:00",
    "OrderKey": null,
    "LutCode": null,
    "Ckey": null
  },
  {
    "LutID": 11,
    "LutTypeID": 5,
    "LutValue": "MDB",
    "LastUpdated": "2007-01-25T00:00:00",
    "OrderKey": null,
    "LutCode": null,
    "Ckey": "protocol_type_mdb"
  },
  {
    "LutID": 13,
    "LutTypeID": 5,
    "LutValue": "Mechanical",
    "LastUpdated": "2007-01-25T00:00:00",
    "OrderKey": null,
    "LutCode": null,
    "Ckey": null
  },
  {
    "LutID": 134,
    "LutTypeID": 5,
    "LutValue": "Pulse",
    "LastUpdated": "2009-11-09T12:36:25.267",
    "OrderKey": null,
    "LutCode": null,
    "Ckey": null
  }
]
```

GET Lookup Type Value Response Fields Description

Field Name	Description
LutID	Auto generated unique id, represents a lookup Type Value
LutTypeID	Auto generated unique id, represents a Lookup Type
LutValue	Lookup Type Value
LastUpdated	Date Time Lookup Type Value last updated
LutCode	Optional Lookup Type Value Code
Ckey	Lookup Type Value System Name

GET Lookup Type Values by Lookup ID

Method returns Lookup Type Value for the specified LutID

GET /v1/lookups/values/{LutID}

Get lookup value by lut id

Request URL

https://lynx.nayax.com/Operational/v1/lookupTypes/{LutID}/values

Request Parameters

Parameter	Parameter Type	Data Type	Description
LutID	Path	Integer	Auto generated unique id, represents a lookup Type Value

Model

```
LutsDbEntity {
    LutID (integer, optional),
    LutTypeID (integer, optional),
    LutValue (string, optional),
    LastUpdated (string, optional),
    OrderKey (integer, optional),
    LutCode (integer, optional),
    Ckey (string, optional)
}
```

Example Response Body

```
{
  "LutID": 1,
  "LutTypeID": 1,
  "LutValue": "int",
  "LastUpdated": "2017-04-26T09:30:29.22",
  "OrderKey": null,
  "LutCode": 1,
  "Ckey": "int_type"
}
```

GET Lookup Type Value Response Fields Description

Field Name	Description
LutID	Auto generated unique id, represents a lookup Type Value
LutTypeID	Auto generated unique id, represents a Lookup Type
LutValue	Lookup Type Value
LastUpdated	Date Time Lookup Type Value last updated
LutCode	Optional Lookup Type Value Code
Ckey	Lookup Type Value System Name

GET Time Zones

Method returns list of all Time Zones or list of Time Zones for specified TimeZoneOffset

GET /v1/timeZones

Get time zones by time zone offset.

Request URL

https://lynx.nayax.com/Operational/v1/timeZones

Request Parameters

Parameter	Parameter Type	Data Type	Description
TimeZoneOffset	Query	Double	Number of hours offset from GMT

Model

```
Array [  
  TimeZoneDbEntity {  
    TimeZoneKey (integer, optional),  
    TimeZoneID (string, optional),  
    TimeZoneDisplayName (string, optional),  
    TimeZoneStandardName (string, optional),  
    TimeZoneDayLightName (string, optional),  
    TimeZoneOffset (number, optional),  
    CreatedDate (string, optional),  
    LastUpdated (string, optional),  
    DaylightSavingsBit (boolean, optional),  
    Latitude (number, optional),  
    Longitude (number, optional)  
  }  
]
```

Example Response Body

```
[
  {
    "TimeZoneKey": 1,
    "TimeZoneID": "Morocco Standard Time",
    "TimeZoneDisplayName": "(GMT) Casablanca",
    "TimeZoneStandardName": "Morocco Standard Time",
    "TimeZoneDayLightName": "Morocco Daylight Time",
    "TimeZoneOffset": 0,
    "CreateDate": "2008-11-23T18:03:40.873",
    "LastUpdated": "2017-03-26T12:00:07.017",
    "DaylightSavingsBit": true,
    "Latitude": 33.5333333,
    "Longitude": -7.5833333
  },
  {
    "TimeZoneKey": 2,
    "TimeZoneID": "GMT Standard Time",
    "TimeZoneDisplayName": "(GMT) Greenwich Mean Time : Dublin, Edinburgh, Lisbon, London",
    "TimeZoneStandardName": "GMT Standard Time",
    "TimeZoneDayLightName": "GMT Daylight Time",
    "TimeZoneOffset": 0,
    "CreateDate": "2008-11-23T18:03:40.89",
    "LastUpdated": "2017-03-26T12:00:07.22",
    "DaylightSavingsBit": true,
    "Latitude": 51.508515,
    "Longitude": -0.1254872
  }
]
```

GET Time Zones Response Fields Description

Field Name	Description
TimeZoneKey	Auto generated unique id, represents time zone order of display
TimeZoneID	Time Zone Identification Name
TimeZoneDisplayName	Time Zone Display Name
TimeZoneStandardName	Time Zone Standard Name
TimeZoneDayLightName	Time Zone Day Light Name
TimeZoneOffset	Number of hours offset from GMT
CreateDate	Date Time of Time Zone creation in the table
LastUpdated	Date Time of Time Zone last update
Latitude	The angular distance of a place north or south of the earth's equator, or of a celestial object north or south of the celestial equator, usually expressed in degrees and minutes
Longitude	The angular distance of a place east or west of the meridian at Greenwich, England, or west of the standard meridian of a celestial object, usually expressed in degrees and minutes

GET Time Zone by Time Zone Key

Method returns Time Zone for specified TimeZoneKey

GET /v1/timeZones/{TimeZoneKey}

Get time zones by time zone key.

Request URL

https://lynx.nayax.com/Operational/v1/timeZones/{**TimeZoneKey**}

Request Parameters

Parameter	Parameter Type	Data Type	Description
TimeZoneKey	Path	Integer	Auto generated unique id, represents Time Zone order of display

Model

```
TimeZoneDbEntity {  
    TimeZoneKey (integer, optional),  
    TimeZoneID (string, optional),  
    TimeZoneDisplayName (string, optional),  
    TimeZoneStandardName (string, optional),  
    TimeZoneDayLightName (string, optional),  
    TimeZoneOffset (number, optional),  
    CreatedDate (string, optional),  
    LastUpdated (string, optional),  
    DaylightSavingsBit (boolean, optional),  
    Latitude (number, optional),  
    Longitude (number, optional)  
}
```

Example Response Body

```
{
  "TimeZoneKey": 1,
  "TimeZoneID": "Morocco Standard Time",
  "TimeZoneDisplayName": "(GMT) Casablanca",
  "TimeZoneStandardName": "Morocco Standard Time",
  "TimeZoneDayLightName": "Morocco Daylight Time",
  "TimeZoneOffset": 0,
  "CreatedDate": "2008-11-23T18:03:40.873",
  "LastUpdated": "2017-03-26T12:00:07.017",
  "DaylightSavingsBit": true,
  "Latitude": 33.5333333,
  "Longitude": -7.5833333
}
```

GET Time Zones Response Fields Description

Field Name	Description
TimeZoneKey	Auto generated unique id, represents Time Zone order of display
TimeZoneID	Time Zone Identification Name
TimeZoneDisplayName	Time Zone Display Name
TimeZoneStandardName	Time Zone Standard Name
TimeZoneDayLightName	Time Zone Day Light Name
TimeZoneOffset	Number of hours offset from GMT
CreatedDate	Date Time of Time Zone creation in the table
LastUpdated	Date Time of Time Zone last update
Latitude	The angular distance of a place north or south of the earth's equator, or of a celestial object north or south of the celestial equator, usually expressed in degrees and minutes
Longitude	The angular distance of a place east or west of the meridian at Greenwich, England, or west of the standard meridian of a celestial object, usually expressed in degrees and minutes

GET Countries

Method returns list of all Countries

GET /v1/countries

[Get countries.](#)

Request URL

<https://lynx.nayax.com/Operational/v1/countries>

Request Parameters

Parameter	Parameter Type	Data Type	Description
CountryID	Query	Integer	Auto generated unique id, represents a Country

Model

```
Array [  
  CountryDbEntity {  
    CountryID (integer, optional),  
    CountryCode (string, optional),  
    CountryName (string, optional),  
    CountryDialingCode (integer, optional),  
    CountryReference (integer, optional),  
    CountryISONumericCode (integer, optional)  
  }  
]
```

Example Response Body

```
[
  {
    "CountryID": 1,
    "CountryCode": "AF",
    "CountryName": "AFGHANISTAN",
    "CountryDialingCode": 93,
    "CountryReference": 1024,
    "CountryISONumericCode": 4
  },
  {
    "CountryID": 2,
    "CountryCode": "AL",
    "CountryName": "ALBANIA",
    "CountryDialingCode": 355,
    "CountryReference": 4028,
    "CountryISONumericCode": 8
  },
  {
    "CountryID": 3,
    "CountryCode": "DZ",
    "CountryName": "ALGERIA",
    "CountryDialingCode": 213,
    "CountryReference": 5033,
    "CountryISONumericCode": 12
  }
]
```

GET Product Group Response Fields Description

Field Name	Description
CountryID	Auto generated unique id, represents a Country
CountryCode	A two-letter suffix such as .US (United States), .CA (Canada) and .DE (Germany).
CountryName	Name of the Country
CountryDialingCode	Telephone dialing prefixes for the member countries or regions of the International Telecommunication Union (ITU)
CountryReference	Country Reference Number
CountryISONumericCode	Country ISO Numeric Code

GET Country by Country Code

Method returns Country details for specified CountryCode

GET /v1/countries/{CountryCode}

Get country by code.

Request URL

https://lynx.nayax.com/Operational/v1/countries/{CountryCode}

Request Parameters

Parameter	Parameter Type	Data Type	Description
CountryCode	Path	String	A two-letter suffix such as .US (United States), .CA (Canada) and .DE (Germany).

Model

```
CountryDbEntity {
    CountryID (integer, optional),
    CountryCode (string, optional),
    CountryName (string, optional),
    CountryDialingCode (integer, optional),
    CountryReference (integer, optional),
    CountryISONumericCode (integer, optional)
}
```

Example Response Body

```
{
  "CountryID": 81,
  "CountryCode": "DE",
  "CountryName": "GERMANY",
  "CountryDialingCode": 49,
  "CountryReference": 3160,
  "CountryISONumericCode": 276
}
```

GET Product Group Response Fields Description

Field Name	Description
CountryID	Auto generated unique id, represents a Country
CountryCode	A two-letter suffix such as .US (United States), .CA (Canada) and .DE (Germany).
CountryName	Name of the Country
CountryDialingCode	Telephone dialing prefixes for the member countries or regions of the International Telecommunication Union (ITU)
CountryReference	Country Reference Number
CountryISONumericCode	Country ISO Numeric Code

GET Currencies

Method returns a list of all currencies or a single Currency for specified CurrencyID

GET /v1/currencies

[Get currencies.](#)

Request URL

https://lynx.nayax.com/Operational/v1/currencies

Request Parameters

Parameter	Parameter Type	Data Type	Description
CurrencyID	Query	Integer	Auto generated unique id, represents a Currency

Model

```
Array [  
  CurrencyDbEntity {  
    CurrencyID (integer, optional),  
    CurrencyCode (string, optional),  
    CurrencySign (string, optional),  
    LastUpdated (string, optional),  
    ShvaValue (string, optional),  
    ShvaCode (integer, optional),  
    CurrencyISONumerical (string, optional)  
  }  
]
```

Example Response Body

```
[
  {
    "CurrencyID": 1,
    "CurrencyCode": "USD",
    "CurrencySign": "$",
    "LastUpdated": "2007-06-10T17:10:55.803",
    "ShvaValue": "USD",
    "ShvaCode": 2,
    "CurrencyISONumerical": "840"
  },
  {
    "CurrencyID": 2,
    "CurrencyCode": "ILS",
    "CurrencySign": "₪",
    "LastUpdated": "2016-04-13T15:27:02.883",
    "ShvaValue": "ILS",
    "ShvaCode": 1,
    "CurrencyISONumerical": "376"
  },
  {
    "CurrencyID": 3,
    "CurrencyCode": "EUR",
    "CurrencySign": "€",
    "LastUpdated": "2016-06-21T11:20:43.873",
    "ShvaValue": "EUR",
    "ShvaCode": 7,
    "CurrencyISONumerical": "978"
  }
]
```

GET Currencies Response Fields Description

Field Name	Description
CurrencyID	Auto generated unique id, represents a Currency
CurrencyCode	Three-letter alphabetic code that represent the Currency
CurrencySign	A Currency Sign is a graphic symbol used as a shorthand for a currency's name
LastUpdated	Date Time Currency last updated
Savable	Three-letter alphabetic code that represent the Currency in Shva
ShvaCode	Currency Identification Number in Shva
CurrencyISONumerical	Currency ISO Numerical Code

GET Currency by Currency Code

Method returns a single Currency for specified CurrencyCode

GET /v1/currencies/{CurrencyCode}

Get currency by Code.

Request URL

https://lynx.nayax.com/Operational/v1/productGroups/{ProductGroupID}

Request Parameters

Parameter	Parameter Type	Data Type	Description
CurrencyCode	Path	String	Three-letter alphabetic code that represent the Currency

Model

```
CurrencyDbEntity {
    CurrencyID (integer, optional),
    CurrencyCode (string, optional),
    CurrencySign (string, optional),
    LastUpdated (string, optional),
    ShvaValue (string, optional),
    ShvaCode (integer, optional),
    CurrencyISONumerical (string, optional)
}
```

Example Response Body

```
{
  "CurrencyID": 3,
  "CurrencyCode": "EUR",
  "CurrencySign": "€",
  "LastUpdated": "2016-06-21T11:20:43.873",
  "ShvaValue": "EUR",
  "ShvaCode": 7,
  "CurrencyISONumerical": "978"
}
```

GET Product Group Response Fields Description

Field Name	Description
CurrencyID	Auto generated unique id, represents a Currency
CurrencyCode	Three-letter alphabetic code that represent the Currency
CurrencySign	A Currency Sign is a graphic symbol used as a shorthand for a currency's name
LastUpdated	Date Time Currency last updated
ShvaValue	Three-letter alphabetic code that represent the Currency in Shva
ShvaCode	Currency Identification Number in Shva
CurrencyISONumerical	Currency ISO Numerical Code

GET Billing Providers

Method returns a list of all Billing Providers or a single Provider for specified BillingProviderID

GET /v1/billingProviders

Get billing providers by billing provider id

Request URL

https://lynx.nayax.com/Operational/v1/billingProviders

Request Parameters

Parameter	Parameter Type	Data Type	Description
BillingProviderID	Query	Integer	Auto generated unique id, represents a Billing Provider

Model

```
Array [  
  BillingProviderDbEntity {  
    BillingProviderID (integer, optional),  
    BillingProviderName (string, optional),  
    TerminalIDLength (integer, optional),  
    BillingProviderComments (string, optional),  
    LastUpdated (string, optional),  
    MinimumTransactionAmount (string, optional),  
    RegularAuthorizationBit (boolean, optional),  
    CancelAuthorizationBit (boolean, optional),  
    PreSelectionBit (boolean, optional),  
    TransactionVoidBit (boolean, optional),  
    ECommerceTransactionsBit (boolean, optional),  
    ForcedTransactionsBit (boolean, optional),  
    ConstantPreAuthorizationBit (boolean, optional),  
    EMVTransactionsBit (integer, optional),  
    AutomaticTransactionVoidBit (boolean, optional),  
    ForceSettlementBit (boolean, optional),  
    OfflineEMVTransactionsBit (boolean, optional),  
    SettlementRetryBit (boolean, optional),  
    CKey (string, optional)  
  }  
]
```

Example Response Body

```
[
  {
    "BillingProviderID": 3,
    "BillingProviderName": "Credit Call",
    "TerminalIDLength": 8,
    "BillingProviderComments": null,
    "LastUpdated": "2014-07-27T06:09:21.19",
    "MinimumTransactionAmount": "0.01",
    "RegularAuthorizationBit": true,
    "CancelAuthorizationBit": true,
    "PreSelectionBit": true,
    "TransactionVoidBit": true,
    "ECommerceTransactionsBit": false,
    "ForcedTransactionsBit": false,
    "ConstantPreAuthorizationBit": true,
    "EMVTransactionsBit": 0,
    "AutomaticTransactionVoidBit": null,
    "ForceSettlementBit": false,
    "OfflineEMVTransactionsBit": null,
    "SettlementRetryBit": null,
    "CKey": "credit_call"
  },
  {
    "BillingProviderID": 6,
    "BillingProviderName": "Heimir",
    "TerminalIDLength": null,
    "BillingProviderComments": null,
    "LastUpdated": "2014-11-30T06:45:33.917",
    "MinimumTransactionAmount": "0.01",
    "RegularAuthorizationBit": true,
    "CancelAuthorizationBit": true,
    "PreSelectionBit": true,
    "TransactionVoidBit": true,
    "ECommerceTransactionsBit": true,
    "ForcedTransactionsBit": false,
    "ConstantPreAuthorizationBit": true,
    "EMVTransactionsBit": 1,
    "AutomaticTransactionVoidBit": true,
    "ForceSettlementBit": false,
    "OfflineEMVTransactionsBit": true,
    "SettlementRetryBit": true,
    "CKey": "heimir"
  }
]
```

GET Currencies Response Fields Description

Field Name	Description
BillingProviderID	Auto generated unique id, represents a Billing Provider
BillingProviderName	Name of the Billing Provider
TerminalIDLength	Optional field to indicate the length of the Terminal ID
BillingProviderComments	Optional Field for general comments about the Billing Provider
LastUpdated	Date Time when Billing Provider was Last Updated
MinimumTransactionAmount	Lowest Transaction Amount Supported by Billing Provider
RegularAuthorizationBit	Bit indicating if Billing Providers supports Authorization/Settlement transaction flow
CancelAuthorizationBit	Bit indicating if Billing Providers supports Authorization Cancel command
PreSelectionBit	Bit indicating if Billing Providers supports Pre-Selection transaction flow
TransactionVoidBit	Bit indicating if Billing Providers supports transaction Void command
ECommerceTransactionsBit	Bit indicating if Billing Providers supports eCommerce transactions
ForcedTransactionsBit	Bit indicating if Billing Providers supports Forced transactions
ConstantPreAuthorizationBit	Bit indicating if Billing Providers supports Constant Authorization Amount (may be lower than Settlement amount)
EMVTransactionsBit	Bit indicating if Billing Providers supports EMV transactions
AutomaticTransactionVoidBit	Bit indicating if Billing Providers supports Automatic Transaction Void/Refund (when no confirmation of product delivery received from device)
ForceSettlementBit	Bit indicating if Billing Providers supports Forced settlement transaction flow
OfflineEMVTransactionsBit	Bit indicating if Billing Providers supports Offline EMV Transactions
SettlementRetryBit	Bit indicating if Billing Providers supports Settlement retry
CKey	Billing Provider system name

GET Payment Methods

Method returns a list of all Billing Providers or a single Provider for specified BillingProviderID

GET /v1/paymentMethods

Get Payment Method by Payment Method id

Request URL

https://lynx.nayax.com/Operational/v1/paymentMethods

Request Parameters

Parameter	Parameter Type	Data Type	Description
PaymentMethodID	Query	Integer	Auto generated unique id, represents a Payment Method

Model

```
Array [
  PaymentMethodDbEntity {
    PaymentMethodID (integer, optional),
    PaymentMethodDescription (string, optional),
    LastUpdated (string, optional),
    PrepaidPaymentBit (boolean, optional),
    PreselectionSupportBit (integer, optional),
    TransactionBlockDuration (integer, optional),
    AutomaticVoidBit (boolean, optional),
    CKey (string, optional),
    ExternalPrepaidBit (boolean, optional),
    MobileApplicationBit (boolean, optional),
    QRPaymentSupportBit (boolean, optional),
    ForceSettlementSupportBit (boolean, optional)
  }
]
```

Example Response Body

```
[
  {
    "PaymentMethodID": 1,
    "PaymentMethodDescription": "Credit Card",
    "LastUpdated": "05/02/2007",
    "PrepaidPaymentBit": false,
    "PreselectionSupportBit": 1,
    "TransactionBlockDuration": null,
    "AutomaticVoidBit": null,
    "CKey": "credit_card",
    "ExternalPrepaidBit": false,
    "MobileApplicationBit": false,
    "QRPaymentSupportBit": null,
    "ForceSettlementSupportBit": null
  },
  {
    "PaymentMethodID": 2,
    "PaymentMethodDescription": "Prepaid Credit",
    "LastUpdated": "05/02/2007",
    "PrepaidPaymentBit": true,
    "PreselectionSupportBit": null,
    "TransactionBlockDuration": null,
    "AutomaticVoidBit": null,
    "CKey": "prepaid_credit",
    "ExternalPrepaidBit": false,
    "MobileApplicationBit": false,
    "QRPaymentSupportBit": null,
    "ForceSettlementSupportBit": null
  },
  {
    "PaymentMethodID": 3,
    "PaymentMethodDescription": "Cash",
    "LastUpdated": "05/02/2007",
    "PrepaidPaymentBit": false,
    "PreselectionSupportBit": null,
    "TransactionBlockDuration": null,
    "AutomaticVoidBit": null,
    "CKey": "cash",
    "ExternalPrepaidBit": false,
    "MobileApplicationBit": false,
    "QRPaymentSupportBit": null,
    "ForceSettlementSupportBit": null
  }
]
```

GET Currencies Response Fields Description

Field Name	Description
BillingProviderID	Auto generated unique id, represents a Billing Provider
BillingProviderName	Name of the Billing Provider
TerminalIDLength	Optional field to indicate the length of the Terminal ID
BillingProviderComments	Optional Field for general comments about the Billing Provider
LastUpdated	Date Time when Billing Provider was Last Updated
MinimumTransactionAmount	Lowest Transaction Amount Supported by Billing Provider
RegularAuthorizationBit	Bit indicating if Billing Providers supports Authorization/Settlement transaction flow
CancelAuthorizationBit	Bit indicating if Billing Providers supports Authorization Cancel command
PreSelectionBit	Bit indicating if Billing Providers supports Pre-Selection transaction flow
TransactionVoidBit	Bit indicating if Billing Providers supports transaction Void command
ECommerceTransactionsBit	Bit indicating if Billing Providers supports eCommerce transactions
ForcedTransactionsBit	Bit indicating if Billing Providers supports Forced transactions
ConstantPreAuthorizationBit	Bit indicating if Billing Providers supports Constant Authorization Amount (may be lower than Settlement amount)
EMVTransactionsBit	Bit indicating if Billing Providers supports EMV transactions
AutomaticTransactionVoidBit	Bit indicating if Billing Providers supports Automatic Transaction Void/Refund (when no confirmation of product delivery received from device)
ForceSettlementBit	Bit indicating if Billing Providers supports Forced settlement transaction flow
OfflineEMVTransactionsBit	Bit indicating if Billing Providers supports Offline EMV Transactions
SettlementRetryBit	Bit indicating if Billing Providers supports Settlement retry
CKey	Billing Provider system name

Machines

GET Machine by Machine ID

Method returns machine details using Machine ID, an autogenerated unique id

GET /v1/machines/{MachineID}

Get specific machine basic info

Please Note: POST Query is limited to the Hierarchy level of the User in Nayax back office, and will search only for machines under the same or lower Hierarchy levels where the user is created, but not above it.

Request URL

https://lynx.nayax.com/Operational/v1/machines/{MachineID}

Request Parameters

Parameter	Parameter Type	Data Type	Description
MachineID	Path	Long	Auto generate unique id, which represents the Vending Machine in Nayax back office

Model

```
MachineInfo {  
  MachineID (integer, optional, read only),  
  ActorID (integer, optional),  
  MachineTypeID (integer, optional),  
  MachineModelID (integer, optional),  
  MachineGroupID (integer, optional),  
  MachineName (string, optional),  
  MachineNumber (string, optional),  
  CountryID (integer, optional),  
  MachineStatusBit (boolean, optional),  
  VPOSSerialNumber (string, optional),  
  DeviceSerialNumber (string, optional),  
  Serial Number (string, optional),  
  VposID (integer, optional),  
  DeviceID (integer, optional),  
  InstituteID (integer, optional),  
  LocationID (integer, optional),  
  OperatorActorID (integer, optional),  
  DistributorActorID (integer, optional),  
  AreaActorID (integer, optional),  
  Href (string, optional, read only)  
}
```

Example Response Body

```
{
  "MachineID": 98108,
  "ActorID": 32622,
  "MachineTypeID": 30000516,
  "MachineModelID": 837,
  "MachineGroupID": 201,
  "MachineName": "Nayax Office Cold Drinks",
  "MachineNumber": "187178",
  "CountryID": 105,
  "MachineStatusBit": true,
  "VPOSSerialNumber": "0000003214020020",
  "DeviceSerialNumber": "0000000000187178",
  "SerialNumber": "987654",
  "VposID": 22056,
  "DeviceID": 96397,
  "InstituteID": 31436,
  "LocationID": 31437,
  "OperatorActorID": 3,
  "DistributorActorID": 1,
  "AreaActorID": 32622,
  "Href": "/v1/machines/98108",
}
```

GET Machine Response Fields Description

Field Name	Description
MachineID	Auto generate unique id, which represents the Vending Machine in Nayax back office
ActorID	Auto generate unique id, represents the hierarchical entity in the hierarchy tree machine is assigned to.
MachineTypeID	Auto generate unique id, represent the type of products sold in the vending machine, example: Snacks, Cold Drinks
MachineModelID	Auto generate unique id, represents the vending machine model in of the vending machine
MachineGroupID	Auto generate unique id, represents group of the machine as defined by the operator in Nayax back office
MachineName	Machine name / reference as defined by the operator in the Nayax back office
MachineNumber	Machine number / Operator identifier as define by the vending operator in the Nayax back office
CountryID	Auto generate unique id, represents machine's country as defined in Nayax back office
MachineStatusBit	Machine Status in Nayax back office True=Active, False=Not Active
VPOSSerialNumber	Nayax VPOS Hardware Serial Number, the number printed on the Nayax device sticker, full device number is 16 digits long with 10 digits as the serial number and 0 padding on the left,
DeviceSerialNumber	Nayax Device Hardware Serial Number, the number printed on the Nayax device sticker, full device number is 16 digits long with 5 or 6 digits as the serial number and 0 padding on the left,
MachineSerialNumber	Machine Serial Number as defined by the vending operator in Nayax back office
VposID	Auto generate unique id, represents Nayax VPOS Hardware
DeviceID	Auto generate unique id, represents Nayax Device Hardware
InstituteID	Auto generate unique id, represents the hierarchical entity of the Institute associated with the machine in the Nayax back office
LocationID	Auto generate unique id, represents the hierarchical entity of the Location associated with the machine in the Nayax back office
OperatorActorID	Auto generate unique id, represents the hierarchical entity of the Operator of the machine
DistributorActorID	Auto generate unique id, represents the hierarchical entity of the Nayax Distributor/ reseller
AreaActorID	Auto generate unique id, represents the hierarchical entity of the Area of the machine

PUT Machine by Machine ID

Method updates machine details using MachineID, an autogenerated unique id

PUT

/v1/machines/{MachineID}

Update specific machine basic info

Request URL

https://lynx.nayax.com/Operational/v1/machines/{MachineID}

Request Parameters

Parameter	Parameter Type	Data Type	Description
MachineID	Path	Long	Auto generate unique id, which represents the Vending Machine in Nayax back office

Model

```
MachineInfo {  
    MachineID (integer, optional, read only),  
    ActorID (integer, optional),  
    MachineTypeID (integer, optional),  
    MachineModelID (integer, optional),  
    MachineGroupID (integer, optional),  
    MachineName (string, optional),  
    MachineNumber (string, optional),  
    CountryID (integer, optional),  
    MachineStatusBit (boolean, optional),  
    VPOSSerialNumber (string, optional),  
    DeviceSerialNumber (string, optional),  
    SerialNumber (string, optional),  
    VposID (integer, optional),  
    DeviceID (integer, optional),  
    InstituteID (integer, optional),  
    LocationID (integer, optional),  
    OperatorActorID (integer, optional),  
    DistributorActorID (integer, optional),  
    AreaActorID (integer, optional),  
    Href (string, optional, read only)  
}
```

Example Response Body

```
{
  "MachineID": 98108,
  "ActorID": 32622,
  "MachineTypeID": 30000516,
  "MachineModelID": 837,
  "MachineGroupID": 201,
  "MachineName": "Nayax Office Cold Drinks",
  "MachineNumber": "187178",
  "CountryID": 105,
  "MachineStatusBit": true,
  "VPOSSerialNumber": "0000003214020020",
  "DeviceSerialNumber": "0000000000187178",
  "SerialNumber": "987654",
  "VposID": 22056,
  "DeviceID": 96397,
  "InstituteID": 31436,
  "LocationID": 31437,
  "OperatorActorID": 3,
  "DistributorActorID": 1,
  "AreaActorID": 32622,
  "Href": "/v1/machines/98108",
}
```

PUT Machine Fields Description

Field Name	Type	Max Length	Validation	Description
MachineID				Auto generate unique id, which represents the Vending Machine in Nayax back office
ActorID				Auto generate unique id, represents the hierarchical entity in the hierarchy tree machine is assigned to.
MachineTypeID				Auto generate unique id, represent the type of products sold in the vending machine, example: Snacks, Cold Drinks
MachineModelID				Auto generate unique id, represents the vending machine model in of the vending machine
MachineGroupID				Auto generate unique id, represents the group of machines as defined in the Nayax back office
MachineName				Machine name / reference as defined by the operator in the Nayax back office
MachineNumber				Machine number / Operator identifier as define by the vending operator in the Nayax back office
CountryID				Auto generate unique id, represents machine's country as defined in Nayax back office
MachineStatusBit				Machine Status in Nayax back office True=Active, False=Not Active
VPOSSerialNumber				Nayax VPOS Hardware Serial Number, the number printed on the Nayax device sticker, full device number is 16 digits long with 10 digits as the serial number and 0 padding on the left,
DeviceSerialNumber				Nayax Device Hardware Serial Number, the number printed on the Nayax device sticker, full device number is 16 digits long with 5 or 6 digits as the serial number and 0 padding on the left,
MachineSerialNumber				Machine Serial Number as defined by the vending operator in Nayax back office
VposID				Auto generate unique id, represents Nayax VPOS Hardware
DeviceID				Auto generate unique id, represents Nayax Device Hardware
InstituteID				Auto generate unique id, represents the hierarchical entity of the Institute associated with the machine in the Nayax back office
LocationID				Auto generate unique id, represents the hierarchical entity of the Location associated with the machine in the Nayax back office
OperatorActorID				Auto generate unique id, represents the hierarchical entity of the Operator of the machine
DistributorActorID				Auto generate unique id, represents the hierarchical entity of the Nayax Distributor/ reseller
AreaActorID				Auto generate unique id, represents the hierarchical entity of the Area of the machine

GET Machines by Offset and Limit

Method returns list of machines and their details using Results Limit and Results Offset parameters

GET /v1/machines

Get all machine basic info

Request URL

<https://lynx.nayax.com/Operational/v1/machines?ResultsLimit=2&ResultsOffset=100>

Request Parameters

Parameter	Parameter Type	Data Type	Description
ResultsLimit	Path	Integer	Limits the number of machines returned in the response
ResultsOffset	Path	Integer	Offset from which machine id to return results

Model

```
MachineInfo {  
    MachineID (integer, optional, read only),  
    ActorID (integer, optional),  
    MachineTypeID (integer, optional),  
    MachineModelID (integer, optional),  
    MachineGroupID (integer, optional),  
    MachineName (string, optional),  
    MachineNumber (string, optional),  
    CountryID (integer, optional),  
    MachineStatusBit (boolean, optional),  
    VPOSSerialNumber (string, optional),  
    DeviceSerialNumber (string, optional),  
    SerialNumber (string, optional),  
    VposID (integer, optional),  
    DeviceID (integer, optional),  
    InstituteID (integer, optional),  
    LocationID (integer, optional),  
    OperatorActorID (integer, optional),  
    DistributorActorID (integer, optional),  
    AreaActorID (integer, optional),  
    Href (string, optional, read only)  
}
```

Example Response Body

```
[
  {
    "MachineID": 98108,
    "ActorID": 32622,
    "MachineTypeID": 30000516,
    "MachineModelID": 837,
    "MachineGroupID": 201,
    "MachineName": "Nayax Office Cold Drinks",
    "MachineNumber": "187178",
    "CountryID": 105,
    "MachineStatusBit": true,
    "VPOSSerialNumber": "0000003214020020",
    "DeviceSerialNumber": "0000000000187178",
    "SerialNumber": "987654",
    "VposID": 22056,
    "DeviceID": 96397,
    "InstituteID": 31436,
    "LocationID": 31437,
    "OperatorActorID": 3,
    "DistributorActorID": 1,
    "AreaActorID": 32622,
    "Href": "/v1/machines/98108",
  },
  {
    "MachineID": 161342,
    "ActorID": 32622,
    "MachineTypeID": 30000527,
    "MachineModelID": 7,
    "MachineGroupID": 43,
    "MachineName": "Nayax office Snacks",
    "MachineNumber": "137158",
    "CountryID": 105,
    "MachineStatusBit": true,
    "VPOSSerialNumber": "0000004516040022",
    "DeviceSerialNumber": "0000000000137158",
    "SerialNumber": "645678",
    "VposID": 220326,
    "DeviceID": 96567,
    "InstituteID": 31436,
    "LocationID": 31437,
    "OperatorActorID": 3,
    "DistributorActorID": 1,
    "AreaActorID": 32622,
    "Href": "/v1/machines/161342",
  }
]
```

GET Machines Response Fields Description

Field Name	Description
MachineID	Auto generate unique id, which represents the Vending Machine in Nayax back office
ActorID	Auto generate unique id, represents the hierarchical entity in the hierarchy tree machine is assigned to.
MachineTypeID	Auto generate unique id, represent the type of products sold in the vending machine, example: Snacks, Cold Drinks
MachineModelID	Auto generate unique id, represents the vending machine model in of the vending machine
MachineGroupID	Auto generate unique id, represents the group of machines as defined in the Nayax back office
MachineName	Machine name / reference as defined by the operator in the Nayax back office
MachineNumber	Machine number / Operator identifier as define by the vending operator in the Nayax back office
CountryID	Auto generate unique id, represents machine's country as defined in Nayax back office
MachineStatusBit	Machine Status in Nayax back office True=Active, False=Not Active
VPOSSerialNumber	Nayax VPOS Hardware Serial Number, the number printed on the Nayax device sticker, full device number is 16 digits long with 10 digits as the serial number and 0 padding on the left,
DeviceSerialNumber	Nayax Device Hardware Serial Number, the number printed on the Nayax device sticker, full device number is 16 digits long with 5 or 6 digits as the serial number and 0 padding on the left,
MachineSerialNumber	Machine Serial Number as defined by the vending operator in Nayax back office
VposID	Auto generate unique id, represents Nayax VPOS Hardware
DeviceID	Auto generate unique id, represents Nayax Device Hardware
InstituteID	Auto generate unique id, represents the hierarchical entity of the Institute associated with the machine in the Nayax back office
LocationID	Auto generate unique id, represents the hierarchical entity of the Location associated with the machine in the Nayax back office
OperatorActorID	Auto generate unique id, represents the hierarchical entity of the Operator of the machine
DistributorActorID	Auto generate unique id, represents the hierarchical entity of the Nayax Distributor/ reseller
AreaActorID	Auto generate unique id, represents the hierarchical entity of the Area of the machine

POST Machine

Method Creates new machine in Nayax back office

POST /v1/machines

Create new machine

Request URL

https://lynx.nayax.com/Operational/v1/machines/

Request Parameters

Parameter	Parameter Type	Data Type	Description
MachineInfo	Body	JSON	Machine Details Fields

Model

```
MachineInfo {  
    MachineID (integer, optional, read only),  
    ActorID (integer, optional),  
    MachineTypeID (integer, optional),  
    MachineModelID (integer, optional),  
    MachineGroupID (integer, optional),  
    MachineName (string, optional),  
    MachineNumber (string, optional),  
    CountryID (integer, optional),  
    MachineStatusBit (boolean, optional),  
    VPOSSerialNumber (string, optional),  
    DeviceSerialNumber (string, optional),  
    SerialNumber (string, optional),  
    VposID (integer, optional),  
    DeviceID (integer, optional),  
    InstituteID (integer, optional),  
    LocationID (integer, optional),  
    OperatorActorID (integer, optional),  
    DistributorActorID (integer, optional),  
    AreaActorID (integer, optional),  
    Href (string, optional, read only)  
}
```

Example Response Body

```
{  
  "MachineID": 247274574,  
  "ActorID": 32622,  
  "MachineTypeID": 30000516,  
  "MachineModelID": 837,  
  "MachineGroupID": 201,  
  "MachineName": "Newly Created Machine",  
  "MachineNumber": "123456",  
  "CountryID": 105,  
  "MachineStatusBit": true,  
  "VPOSSerialNumber": "",  
  "DeviceSerialNumber": "",  
  "SerialNumber": "123456",  
  "VposID": null,  
  "DeviceID": null,  
  "InstituteID": null,  
  "LocationID": null,  
  "OperatorActorID": 3,  
  "DistributorActorID": 1,  
  "AreaActorID": 32622,  
  "Href": "/v1/machines/247274574",  
}
```

PUT Machine Fields Description

Field Name	Type	Max Length	Validation	Description
MachineID				Auto generate unique id, which represents the Vending Machine in Nayax back office
ActorID				Auto generate unique id, represents the hierarchical entity in the hierarchy tree machine is assigned to.
MachineTypeID				Auto generate unique id, represent the type of products sold in the vending machine, example: Snacks, Cold Drinks
MachineModelID				Auto generate unique id, represents the vending machine model in of the vending machine
MachineGroupID				Auto generate unique id, represents the group of machines as defined in the Nayax back office
MachineName				Machine name / reference as defined by the operator in the Nayax back office
MachineNumber				Machine number / Operator identifier as define by the vending operator in the Nayax back office
CountryID				Auto generate unique id, represents machine's country as defined in Nayax back office
MachineStatusBit				Machine Status in Nayax back office True=Active, False=Not Active
VPOSSerialNumber				Nayax VPOS Hardware Serial Number, the number printed on the Nayax device sticker, full device number is 16 digits long with 10 digits as the serial number and 0 padding on the left,
DeviceSerialNumber				Nayax Device Hardware Serial Number, the number printed on the Nayax device sticker, full device number is 16 digits long with 5 or 6 digits as the serial number and 0 padding on the left,
MachineSerialNumber				Machine Serial Number as defined by the vending operator in Nayax back office
VposID				Auto generate unique id, represents Nayax VPOS Hardware
DeviceID				Auto generate unique id, represents Nayax Device Hardware
InstituteID				Auto generate unique id, represents the hierarchical entity of the Institute associated with the machine in the Nayax back office
LocationID				Auto generate unique id, represents the hierarchical entity of the Location associated with the machine in the Nayax back office
OperatorActorID				Auto generate unique id, represents the hierarchical entity of the Operator of the machine
DistributorActorID				Auto generate unique id, represents the hierarchical entity of the Nayax Distributor/ reseller
AreaActorID				Auto generate unique id, represents the hierarchical entity of the Area of the machine

GET Machine by Device Serial Number

Method finds machine details using Nayax Device Hardware Serial Number, the number printed on the Nayax device sticker, full device number is 16 digits long with 5 or 6 digits as the serial number and 0 padding on the left, it is possible to send either the full 16 digits or just the 5 or 6 digits of serial number and the service will add the padding

GET

/v1/devices/{DeviceSerialNumber}/machine

Get specific machine basic info by Device

Please Note: POST Query is limited to the Hierarchy level of the User in Nayax back office, and will search only for Devices under the same or lower Hierarchy levels where the user is created, but not above it.

Request URL

https://lynx.nayax.com/Operational/v1/devices/{DeviceSerialNumber}/machine

Request Parameters

Parameter	Type	Description
DeviceSerialNumber	String	Nayax Device Hardware Serial Number, the number printed on the Nayax device sticker, full device number is 16 digits long with 5 or 6 digits as the serial number and 0 padding on the left

Model

```
MachineInfo {  
    MachineID (integer, optional, read only),  
    ActorID (integer, optional),  
    MachineTypeID (integer, optional),  
    MachineModelID (integer, optional),  
    MachineGroupID (integer, optional),  
    MachineName (string, optional),  
    MachineNumber (string, optional),  
    CountryID (integer, optional),  
    MachineStatusBit (boolean, optional),  
    VPOSSerialNumber (string, optional),  
    DeviceSerialNumber (string, optional),  
    SerialNumber (string, optional),  
    VposID (integer, optional),  
    DeviceID (integer, optional),  
    InstituteID (integer, optional),  
    LocationID (integer, optional),  
    OperatorActorID (integer, optional),  
    DistributorActorID (integer, optional),  
    AreaActorID (integer, optional),  
    Href (string, optional, read only)  
}
```

Example Response Body

```
{
  "MachineID": 98108,
  "ActorID": 32622,
  "MachineTypeID": 30000516,
  "MachineModelID": 837,
  "MachineGroupID": 201,
  "MachineName": "Oleg's Simulator",
  "MachineNumber": "187178",
  "CountryID": 105,
  "MachineStatusBit": true,
  "VPOSSerialNumber": "0000003214020020",
  "DeviceSerialNumber": "0000000000187178",
  "SerialNumber": "987654",
  "VposID": 22056,
  "DeviceID": 96397,
  "InstituteID": 31436,
  "LocationID": 31437,
  "OperatorActorID": 3,
  "DistributorActorID": 1,
  "AreaActorID": 32622,
  "Href": "/v1/machines/98108",
}
```

GET Machine Response Fields Description

Field Name	Description
MachineID	Auto generate unique id, which represents the Vending Machine in Nayax back office
ActorID	Auto generate unique id, represents the hierarchical entity in the hierarchy tree machine is assigned to.
MachineTypeID	Auto generate unique id, represent the type of products sold in the vending machine, example: Snacks, Cold Drinks
MachineModelID	Auto generate unique id, represents the vending machine model in of the vending machine
MachineGroupID	Auto generate unique id, represents the group of machines as defined
MachineName	Machine name / reference as defined by the operator in the Nayax back office
MachineNumber	Machine number / Operator identifier as define by the vending operator in the Nayax back office
CountryID	Auto generate unique id, represents machine's country as defined in Nayax back office
MachineStatusBit	Machine Status in Nayax back office True=Active, False=Not Active
VPOSSerialNumber	Nayax VPOS Hardware Serial Number, the number printed on the Nayax device sticker, full device number is 16 digits long with 10 digits as the serial number and 0 padding on the left,
DeviceSerialNumber	Nayax Device Hardware Serial Number, the number printed on the Nayax device sticker, full device number is 16 digits long with 5 or 6 digits as the serial number and 0 padding on the left
MachineSerialNumber	Machine Serial Number as defined by the vending operator in Nayax back office
VposID	Auto generate unique id, represents Nayax VPOS Hardware
DeviceID	Auto generate unique id, represents Nayax Device Hardware
InstituteID	Auto generate unique id, represents the hierarchical entity of the Institute associated with the machine in the Nayax back office
LocationID	Auto generate unique id, represents the hierarchical entity of the Location associated with the machine in the Nayax back office
OperatorActorID	Auto generate unique id, represents the hierarchical entity of the Operator of the machine
DistributorActorID	Auto generate unique id, represents the hierarchical entity of the Nayax Distributor/ reseller
AreaActorID	Auto generate unique id, represents the hierarchical entity of the Area of the machine

GET Machine by VPOS Serial Number

Method finds machine details using Nayax VPOS Hardware Serial Number, the number printed on the Nayax device sticker, full device number is 16 digits long with 10 digits as the serial number and 0 padding on the left, it is possible to send either the full 16 digits or just the 10 digits of serial number and the service will add the padding

GET

/v1/vpos/{VPOSSerial}/machine

Get specific machine basic info by VPOS

Please Note: POST Query is limited to the Hierarchy level of the User in Nayax back office, and will search only for Devices under the same or lower Hierarchy levels where the user is created, but not above it.

Request URL

https://lynx.nayax.com/Operational/v1/devices/{VPOSSerialNumber}/machine

Request Parameters

Parameter	Parameter Type	Data Type	Description
VPOSSerialNumber	Path	String	Nayax VPOS Hardware Serial Number, the number printed on the Nayax device sticker, full device number is 16 digits long with 10 digits as the serial number and 0 padding on the left,

Model

```
MachineInfo {
  MachineID (integer, optional, read only),
  ActorID (integer, optional),
  MachineTypeID (integer, optional),
  MachineModelID (integer, optional),
  MachineGroupID (integer, optional),
  MachineName (string, optional),
  MachineNumber (string, optional),
  CountryID (integer, optional),
  MachineStatusBit (boolean, optional),
  VPOSSerialNumber (string, optional),
  DeviceSerialNumber (string, optional),
  SerialNumber (string, optional),
  VposID (integer, optional),
  DeviceID (integer, optional),
  InstituteID (integer, optional),
  LocationID (integer, optional),
  OperatorActorID (integer, optional),
  DistributorActorID (integer, optional),
  AreaActorID (integer, optional),
  Href (string, optional, read only)
}
```

Example Response Body

```
{
  "MachineID": 98108,
  "ActorID": 32622,
  "MachineTypeID": 30000516,
  "MachineModelID": 837,
  "MachineGroupID": 201,
  "MachineName": "Oleg's Simulator",
  "MachineNumber": "187178",
  "CountryID": 105,
  "MachineStatusBit": true,
  "VPOSSerialNumber": "0000003214020020",
  "DeviceSerialNumber": "0000000000187178",
  "SerialNumber": "987654",
  "VposID": 22056,
  "DeviceID": 96397,
  "InstituteID": 31436,
  "LocationID": 31437,
  "OperatorActorID": 3,
  "DistributorActorID": 1,
  "AreaActorID": 32622,
  "Href": "/v1/machines/98108",
}
```

GET Machine Response Fields Description

Field Name	Description
MachineID	Auto generate unique id, which represents the Vending Machine in Nayax back office
ActorID	Auto generate unique id, represents the hierarchical entity in the hierarchy tree machine is assigned to.
MachineTypeID	Auto generate unique id, represent the type of products sold in the vending machine, example: Snacks, Cold Drinks
MachineModelID	Auto generate unique id, represents the vending machine model in of the vending machine
MachineGroupID	Auto generate unique id, represents the group of machines as defined
MachineName	Machine name / reference as defined by the operator in the Nayax back office
MachineNumber	Machine number / Operator identifier as define by the vending operator in the Nayax back office
CountryID	Auto generate unique id, represents machine's country as defined in Nayax back office
MachineStatusBit	Machine Status in Nayax back office True=Active, False=Not Active
VPOSSerialNumber	Nayax VPOS Hardware Serial Number, the number printed on the Nayax device sticker, full device number is 16 digits long with 10 digits as the serial number and 0 padding on the left,
DeviceSerialNumber	Nayax Device Hardware Serial Number, the number printed on the Nayax device sticker, full device number is 16 digits long with 5 or 6 digits as the serial number and 0 padding on the left
MachineSerialNumber	Machine Serial Number as defined by the vending operator in Nayax back office
VposID	Auto generate unique id, represents Nayax VPOS Hardware
DeviceID	Auto generate unique id, represents Nayax Device Hardware
InstituteID	Auto generate unique id, represents the hierarchical entity of the Institute associated with the machine in the Nayax back office
LocationID	Auto generate unique id, represents the hierarchical entity of the Location associated with the machine in the Nayax back office
OperatorActorID	Auto generate unique id, represents the hierarchical entity of the Operator of the machine
DistributorActorID	Auto generate unique id, represents the hierarchical entity of the Nayax Distributor/ reseller
AreaActorID	Auto generate unique id, represents the hierarchical entity of the Area of the machine

GET Machine Status by Machine ID

Method returns variety of statuses and statistics for machine using MachineID

GET /v1/machines/{MachineID}/status

Get specific machine statistics

Request URL

https://lynx.nayax.com/Operational/v1/machines/{MachineID}/status

Request Parameters

Parameter	Parameter Type	Data Type	Description
MachineID	Path	Long	Auto generate unique id, which represents the Vending Machine in Nayax back office

Model

```
MachineStatusInfo {
    MachineID (integer, optional, read only),
    PickListGeneratedDateTime (string, optional, read only),
    MachineInstallationDate (string, optional, read only),
    InventoryCountDateTime (string, optional, read only),
    QTYSoldSinceLastVisitDEXSales (integer, optional, read only),
    KeepAliveAverageComm(sec) (integer, optional, read only),
    LastCashSaleDateTime (string, optional, read only),
    LastCashTransactionID (integer, optional, read only),
    LastCashlessSaleDateTime (string, optional, read only),
    LastDEXReadDateTime (string, optional, read only),
    LastGPRSFailureCount (integer, optional, read only),
    LastKeepAliveDateTime (string, optional, read only),
    LastPowerDownDateTime (string, optional, read only),
    LastPowerUpDateTime (string, optional, read only),
    LastReceptionLevel(RSSI) (integer, optional, read only),
    LastTransactionDateTime (string, optional, read only),
    LastVisitDateTime (string, optional, read only),
    LastLCDMSISDN(CLI) (string, optional, read only),
    ReaderStateErrorDateTime (string, optional, read only),
    ReaderStateEnableDateTime (string, optional, read only),
    MachineStockRefilDateTime (string, optional, read only),
    MachineRemarks (string, optional, read only),
    MachineStatusUpdateDateTime (string, optional, read only),
    LastCashlesstransactionID (integer, optional, read only),
    AllKeepAliveAverageComm(sec) (integer, optional, read only),
    DeviceLastIPAddress (string, optional, read only),
    QTYSoldSinceLastVisitOnlineSales (integer, optional, read only),
    Last24HAverageReceptionLevel(RSSI) (integer, optional, read only),
    LastCashCollectionDateTime(UTC) (string, optional, read only),
    Online30DayAverageDailyVends (integer, optional, read only),
    DEX30DayAverageDailyVends (integer, optional, read only),
    LastCashTransactionDateTime (string, optional, read only),
    Href (string, optional, read only)
}
```

Example Response Body

```
{
  "MachineID": 98108,
  "PickListGeneratedDateTime": "2017-02-26T07:21:33.96",
  "MachineInstallationDate": "2015-07-12T00:00:00",
  "InventoryCountDateTime": "2016-12-28T15:52:20.05",
  "QTYSoldSinceLastVisitDEXSales": 0,
  "KeepAliveAverageComm(sec)": 2508,
  "LastCashSaleDateTime": "2016-02-23T16:09:24.98",
  "LastCashTransactionID": 16,
  "LastCashlessSaleDateTime": "2017-03-06T10:04:45.887",
  "LastDEXReadDateTime": "2017-03-06T09:58:24.953",
  "LastGPRSFailureCount": null,
  "LastKeepAliveDateTime": "2017-03-21T10:34:49.86",
  "LastPowerDownDateTime": "2017-02-09T08:35:45.867",
  "LastPowerUpDateTime": "2017-03-20T09:29:35.753",
  "LastReceptionLevel(RSSI)": 16,
  "LastTransactionDateTime": "2017-03-06T10:04:45.887",
  "LastVisitDateTime": "2017-03-06T08:58:41.89",
  "LastLCDMSISDN(CLI)": "052-3302143",
  "ReaderStateErrorDateTime": "2016-03-31T12:35:42.433",
  "ReaderStateEnableDateTime": "2017-03-20T09:29:35.753",
  "MachineStockRefilDateTime": "2017-03-06T08:58:41.89",
  "MachineRemarks": "",
  "MachineStatusUpdateDateTime": "2017-03-21T10:34:49.86",
  "LastCashlesstransactionID": null,
  "AllKeepAliveAverageComm(sec)": 2508,
  "DeviceLastIPAddress": "10.120.38.4",
  "QTYSoldSinceLastVisitOnlineSales": 2,
  "Last24HAverageReceptionLevel(RSSI)": null,
  "LastCashCollectionDateTime(UTC)": "2016-12-18T10:13:38.71",
  "Online30DayAverageDailyVends": 0,
  "DEX30DayAverageDailyVends": 0,
  "LastCashTransactionDateTime": null,
  "Href": "/v1/machines/98108/status"
}
```

GET Machine Status Response Fields Description

Field Name	Description
MachineID	Auto generate unique id, which represents the Vending Machine in Nayax back office
PickListGeneratedDateTime	Date Time of last pick list generation for the specified MachineID, either by user on Nayax back office, MoMa application or Lynx API call
MachineInstallationDate	Date when machine was installed, automatically updated on first device communication with server
InventoryCountDateTime	Date Time of last inventory count by user in Nayax back office
QTYSoldSinceLastVisitDEXSales	Number of products sold since machine last visited based on DEX counters
KeepAliveAverageComm(sec)	Average of Keep Alive communications interval between Device to server in seconds
LastCashSaleDateTime	Date Time of last Cash transaction recorded in Nayax back office
LastCashTransactionID	Transaction ID of last Cash transaction recorded in Nayax back office
LastCashlessSaleDateTime	Date Time of last Cashless transaction recorded in Nayax back office
LastDEXReadDateTime	Date Time of last DEX read for the specified Machine ID
LastGPRSFailureCount	Count of Device GPRS Communication failures between Keep Alive Communications
LastKeepAliveDateTime	Date Time of last Nayax device Keep Alive Communication to server
LastPowerDownDateTime	Date Time of last Power Down Event sent by Nayax device to server
LastPowerUpDateTime	Date Time of last Power Up Event sent by Nayax device to Server
LastReceptionLevel(RSSI)	Last Reception Level reported by Nayax Device to server (scale: 0 - 31)
LastTransactionDateTime	Date Time of last transaction recorded in Nayax back office
LastVisitDateTime	Date Time of last visit to machine recorded in Nayax back office
LastLCDMSISDN(CLI)	Last MSISDN displayed on Nayax device LCD screen, MSISDN = Phone Number of the SIM card installed in the Nayax device
ReaderStateErrorDateTime	Date Time of last "Reader State Error" event reported by Nayax device to server, event occurs when Vending machine disables the card reader from operation either due to malfunction or sold products or door opening or technician mode entry
ReaderStateEnableDateTime	Date Time of last "Reader State Enable" event reported by Nayax device to server, event occurs when Vending machine enables the card reader and full operation is resumed
MachineStockRefilDateTime	Date Time of last stock replenishment for specified MachineID
MachineRemarks	Machine Remarks filled by vending machine operator in Nayax back office
MachineStatusUpdateDateTime	Date Time of MachineStatusBit change
LastCashlesstransactionID	Transaction ID of last Cashless transaction recorded in Nayax back office
AllKeepAliveAverageComm(sec)	Average of All type communications (Keep Alive, Transactions, Events, DEX Read) interval between Device to server in seconds
DeviceLastIPAddress	Last IP Address of Nayax Device as reported on last communication to server
QTYSoldSinceLastVisitOnlineSales	Number of products sold since machine last visited based on Live Transactions recorded in Nayax back office
Last24HAverageReceptionLevel(RSSI)	Last 24 hours Average Reception Level reported by Nayax Device to server (scale: 0 - 31)
LastCashCollectionDateTime(UTC)	Date Time of last Cash Collection recorded in Nayax back office
Online30DayAverageDailyVends	Average number of daily transactions based on Live Transactions of last 30 days
DEX30DayAverageDailyVends	Average number of daily transactions based on DEX Read calculations of last 30 days
LastCashTransactionDateTime	Date Time of last Cash transaction recorded in Nayax back office

Machine Attributes

POST Machine Attribute Defaults by Machine ID

Method sends Default Attribute Values from Machine Model to Machine's parameters queue of the specified Machine ID

POST

/v1/machines/{MachineID}/attributes/defaults

Update machine attribute to machine model defaults

Request URL

https://lynx.nayax.com/Operational/v1/machines/{MachineID}/attributes/defaults

Request Parameters

Parameter	Parameter Type	Data Type	Description
MachineID	Path	Long	Auto generate unique id, which represents the Vending Machine in Nayax back office

Model

```
ApiResponse {  
    Ok (boolean, optional),  
    Message (string, optional),  
    SystemMessage (string, optional)  
}
```

Example Response Body

```
{  
    "Ok": true,  
    "Message": null,  
    "SystemMessage": null  
}
```

POST Machine Attributes Current Configuration by Machine ID

Method resends current Attribute Values to Machine's parameters queue of the specified Machine ID

POST

/v1/machines/{MachineID}/attributes/defaults

Update machine attribute to machine model defaults

Request URL

https://lynx.nayax.com/Operational/v1/machines/{MachineID}/attributes/resendConfig

Request Parameters

Parameter	Parameter Type	Data Type	Description
MachineID	Path	Long	Auto generate unique id, which represents the Vending Machine in Nayax back office

Model

```
ApiResponse {  
    Ok (boolean, optional),  
    Message (string, optional),  
    SystemMessage (string, optional)  
}
```

Example Response Body

```
{  
    "Ok": true,  
    "Message": null,  
    "SystemMessage": null  
}
```

GET Machine Attributes by Machine ID

Method returns list of machine Attribute Values of the specified Machine ID

GET /v1/machines/{MachineID}/attributes

Get all machine attributes

Request URL

https://lynx.nayax.com/Operational/v1/machines/{MachineID}/attributes

Request Parameters

Parameter	Parameter Type	Data Type	Description
MachineID	Path	Long	Auto generate unique id, which represents the Vending Machine in Nayax back office

Model

```
Array [  
  AttrInfo {  
    DeviceAttributeID (integer, optional),  
    MachineID (integer, optional),  
    DeviceAttributeValue (string, optional),  
    DeviceAttributeCodeID (integer, optional),  
    DeviceAttributeName (string, optional),  
    DeviceAttributeGroup (string, optional),  
    DeviceAttributeReadOnlyBit (boolean, optional),  
    Href (string, optional, read only)  
  }  
]
```

Example Response Body

```
[
  {
    "DeviceAttributeID": 520,
    "MachineID": 98108,
    "DeviceAttributeValue": "1",
    "DeviceAttributeCodeID": 0,
    "DeviceAttributeName": "Card Reader MDB Level",
    "DeviceAttributeGroup": "Card Readers",
    "DeviceAttributeReadOnlyBit": false,
    "Href": "/v1/machine/98108/attributes/520"
  },
  {
    "DeviceAttributeID": 523,
    "MachineID": 98108,
    "DeviceAttributeValue": "2",
    "DeviceAttributeCodeID": 2,
    "DeviceAttributeName": "Decimal Place",
    "DeviceAttributeGroup": "Card Readers",
    "DeviceAttributeReadOnlyBit": false,
    "Href": "/v1/machine/98108/attributes/523"
  },
  {
    "DeviceAttributeID": 4098,
    "MachineID": 98108,
    "DeviceAttributeValue": "",
    "DeviceAttributeCodeID": 0,
    "DeviceAttributeName": "EMV Contact Floor Limit",
    "DeviceAttributeGroup": "Card Readers",
    "DeviceAttributeReadOnlyBit": false,
    "Href": "/v1/machine/98108/attributes/4098"
  },
  {
    "DeviceAttributeID": 4097,
    "MachineID": 98108,
    "DeviceAttributeValue": "1",
    "DeviceAttributeCodeID": 0,
    "DeviceAttributeName": "EMV Contactless Floor Limit",
    "DeviceAttributeGroup": "Card Readers",
    "DeviceAttributeReadOnlyBit": false,
    "Href": "/v1/machine/98108/attributes/4097"
  },
  {
    "DeviceAttributeID": 535,
    "MachineID": 98108,
    "DeviceAttributeValue": "MAESTRO + CNOUS",
    "DeviceAttributeCodeID": 3,
    "DeviceAttributeName": "Extended Cards Support",
    "DeviceAttributeGroup": "Card Readers",
    "DeviceAttributeReadOnlyBit": false,
    "Href": "/v1/machine/98108/attributes/535"
  }
]
```

GET Machine Attributes Response Fields Description

Field Name	Description
DeviceAttributeID	Protocol defined Attribute Identification Number
MachineID	Auto generate unique id, represents the Vending Machine in Nayax back office
DeviceAttributeValue	
DeviceAttributeCodeID	
DeviceAttributeName	Name of the Attribute / Parameter
DeviceAttributeGroup	Group of the Attribute / Parameter
DeviceAttributeReadOnlyBit	

GET Machine Attribute by Machine ID and Attribute ID

Method returns Attribute Value for the specified Machine ID and Device Attribute ID

GET

/v1/machines/{MachineID}/attributes/{DeviceAttributeID}

Get specific machine attributes

Request URL

https://lynx.nayax.com/Operational/v1/machines/{MachineID}/attributes/{DeviceAttributeID}

Request Parameters

Parameter	Parameter Type	Data Type	Description
MachineID	Path	Long	Auto generate unique id, which represents the Vending Machine in Nayax back office
DeviceAttributeID	Path	Long	Protocol defined Attribute Identification Number

Model

```
AttrInfo {  
    DeviceAttributeID (integer, optional),  
    MachineID (integer, optional),  
    DeviceAttributeValue (string, optional),  
    DeviceAttributeCodeID (integer, optional),  
    DeviceAttributeName (string, optional),  
    DeviceAttributeGroup (string, optional),  
    DeviceAttributeReadOnlyBit (boolean, optional),  
    Href (string, optional, read only)  
}
```

Example Response Body

```
{
  "DeviceAttributeID": 520,
  "MachineID": 98108,
  "DeviceAttributeValue": "1",
  "DeviceAttributeCodeID": 0,
  "DeviceAttributeName": "Card Reader MDB Level",
  "DeviceAttributeGroup": "Card Readers",
  "DeviceAttributeReadOnlyBit": false,
  "Href": "/v1/machine/98108/attributes/520"
}
```

GET Machine Attributes Response Fields Description

Field Name	Description
DeviceAttributeID	Protocol defined Attribute Identification Number
MachineID	Auto generate unique id, represents the Vending Machine in Nayax back office
DeviceAttributeValue	
DeviceAttributeCodeID	
DeviceAttributeName	Name of the Attribute / Parameter
DeviceAttributeGroup	Group of the Attribute / Parameter
DeviceAttributeReadOnlyBit	

PUT Machine Attribute by Machine ID and Attribute ID

Method Updates Attribute Value into Machine Parameter's Queue for the specified Machine ID and Device Attribute ID

PUT

/v1/machines/{MachineID}/attributes/{DeviceAttributeID}

Update specific machine attribute

Request URL

https://lynx.nayax.com/Operational/v1/machines/{MachineID}/attributes/{DeviceAttributeID}

Request Parameters

Parameter	Parameter Type	Data Type	Description
MachineID	Path	Long	Auto generate unique id, which represents the Vending Machine in Nayax back office
DeviceAttributeID	Path	Long	Protocol defined Attribute Identification Number

Model

```
AttrInfo {
    DeviceAttributeID (integer, optional),
    MachineID (integer, optional),
    DeviceAttributeValue (string, optional),
    DeviceAttributeCodeID (integer, optional),
    DeviceAttributeName (string, optional),
    DeviceAttributeGroup (string, optional),
    DeviceAttributeReadOnlyBit (boolean, optional),
    Href (string, optional, read only)
}
```

Example Response Body

```
{
  "DeviceAttributeID": 520,
  "MachineID": 98108,
  "DeviceAttributeValue": "1",
  "DeviceAttributeCodeID": 0,
  "DeviceAttributeName": "Card Reader MDB Level",
  "DeviceAttributeGroup": "Card Readers",
  "DeviceAttributeReadOnlyBit": false,
  "Href": "/v1/machine/98108/attributes/520"
}
```

GET Machine Attributes Response Fields Description

Field Name	Description
DeviceAttributeID	Protocol defined Attribute Identification Number
MachineID	Auto generate unique id, represents the Vending Machine in Nayax back office
DeviceAttributeValue	
DeviceAttributeCodeID	
DeviceAttributeName	Name of the Attribute / Parameter
DeviceAttributeGroup	Group of the Attribute / Parameter
DeviceAttributeReadOnlyBit	

Machine Products

GET Machine Products by Machine ID

Method returns list of machine products using MachineID

GET /v1/machine/{MachineID}/machineProducts

Get machine products

Request URL

https://lynx.nayax.com/Operational/v1/machine/{MachineID}/machineProducts

Request Parameters

Parameter	Parameter Type	Data Type	Description
MachineID	Path	Long	Auto generate unique id, which represents the Vending Machine in Nayax back office

Model

```
Array [
  MachineProductsDbEntity {
    MachineProductID (integer, optional),
    NayaxProductID (integer, optional),
    MachineID (integer, optional),
    MDBCode (integer, optional),
    PAR (integer, optional),
    CashPrice (number, optional),
    CreditCardPrice (number, optional),
    MachinePrice (number, optional),
    RetailPrice (number, optional),
    DEXProductName (string, optional),
    PACode (string, optional),
    PCCode (string, optional),
    ProductMinimumPickQTY (integer, optional),
    VendOutAlertThreshold (integer, optional),
    LastUpdated (string, optional),
    MissingStockByDEX (integer, optional),
    DEXMissingStockLastUpdated (string, optional),
    PrePaidCardPrice (number, optional),
    OperatorButtonCode (string, optional),
    LastUpdatedByMobile (string, optional),
    ProductGroupID (integer, optional),
    DEX30DayAverageDailyVends (integer, optional),
    Online30DayAverageDailyVends (integer, optional),
    MissingStockByMDB (integer, optional),
    MDBMissingStockLastUpdated (string, optional),
    SelectionVendOutBit (boolean, optional),
    CommissionValue (number, optional),
    ExternalPrepaidPrice (number, optional)
  }
]
```

Example Response Body

```
[
  {
    "MachineProductID": 110009243632628,
    "NayaxProductID": 3440,
    "MachineID": 98108,
    "MDBCode": 0,
    "PAR": 50,
    "CashPrice": 6,
    "CreditCardPrice": null,
    "MachinePrice": 0.1,
    "RetailPrice": 6,
    "DEXProductName": "Coca Cola",
    "PACode": "A1",
    "PCCode": "1",
    "ProductMinimumPickQTY": 24,
    "VendOutAlertThreshold": 10,
    "LastUpdated": "2017-02-16T15:12:16.717",
    "MissingStockByDEX": 33,
    "DEXMissingStockLastUpdated": "2017-03-01T14:16:39.13",
    "PrePaidCardPrice": null,
    "OperatorButtonCode": "A1",
    "LastUpdatedByMobile": null,
    "ProductGroupID": 1,
    "DEX30DayAverageDailyVends": null,
    "Online30DayAverageDailyVends": null,
    "MissingStockByMDB": 11,
    "MDBMissingStockLastUpdated": "2017-03-01T14:16:39.13",
    "SelectionVendOutBit": false,
    "CommissionValue": null,
    "ExternalPrepaidPrice": null
  },
  {
    "MachineProductID": 110009243632627,
    "NayaxProductID": 3441,
    "MachineID": 98108,
    "MDBCode": 1,
    "PAR": 60,
    "CashPrice": 6,
    "CreditCardPrice": 6,
    "MachinePrice": null,
    "RetailPrice": 6,
    "DEXProductName": "Diet Cola",
    "PACode": "A2",
    "PCCode": "2",
    "ProductMinimumPickQTY": 24,
    "VendOutAlertThreshold": 10,
    "LastUpdated": "2016-08-01T08:32:02.367",
    "MissingStockByDEX": 23,
    "DEXMissingStockLastUpdated": "2017-03-01T14:14:28.82",
    "PrePaidCardPrice": 4,
    "OperatorButtonCode": "A2",
    "LastUpdatedByMobile": null,
    "ProductGroupID": 1,
    "DEX30DayAverageDailyVends": null,
    "Online30DayAverageDailyVends": null,
    "MissingStockByMDB": null,
    "MDBMissingStockLastUpdated": "2017-03-01T14:14:28.82",
    "SelectionVendOutBit": false,
    "CommissionValue": null,
    "ExternalPrepaidPrice": null
  }
]
```

GET Machine Products Response Fields Description

Field Name	Description
MachineProductID	Auto generated unique id, represents a selection/row in machine product map
NayaxProductID	Auto generated unique id, represents a product
MachineID	Auto generate unique id, represents the Vending Machine in Nayax back office
MDBCCode	Selection ID reported in the Vend Request sent by machine to card reader
PAR	Real Capacity - QTY of products which defines Selection as 100% full
CashPrice	Cash Price as defined in the machine product map in Nayax back office
CreditCardPrice	Credit Card Price as defined in the machine product map in Nayax back office
MachinePrice	Price reported/updated to server on every transaction to machine product map
RetailPrice	Retail Price as defined in the machine product map in Nayax back office
DEXProductName	Name product as defined in the machine product map in Nayax back office (used to update Product Name in the DEX file using DEX upload mechanism)
PACode	Selection ID reported in the DEX PA101 value
PCCode	Price Change Code PC101 DEX Value (used to update Product Price in the DEX file using DEX upload mechanism)
ProductMinimumPickQTY	Threshold number of items missing in the selection which defines if the item will be added to the pick list when generated, if missing items are below defined threshold – item will not be added to pick list
VendOutAlertThreshold	Threshold number of items left in the selection which defines when the alert is generated
LastUpdated	Date Time when any of the selection row columns were last update
MissingStockByDEX	QTY of missing items for selection based on DEX read calculations
DEXMissingStockLastUpdated	Date Time when MissingStockByDEX last updated
PrePaidCardPrice	Pre-Paid Card Price as defined in the machine product map in Nayax back office
OperatorButtonCode	Selection ID as defined by the operator
LastUpdatedByMobile	Date Time when any of the selection row columns were last update using MoMa App
ProductGroupID	Auto generated unique id, represents a product group
DEX30DayAverageDailyVends	Average number of daily transactions based on DEX Read calculations of last 30 days
Online30DayAverageDailyVends	Average number of daily transactions based on Live Transactions of last 30 days
MissingStockByMDB	QTY of missing items for selection based Live Transactions
MDBMissingStockLastUpdated	Date Time when MissingStockByMDB last updated
SelectionVendOutBit	Selection Vendout status, True=Empty (no products in selection), False=not empty (products remaining in the selection)
ExternalPrepaidPrice	External Pre-Paid Card Price as defined in the machine product map in Nayax back office

POST Machine Products by Machine ID

Method Creates Product in the Product map of a machine using MachineID

POST /v1/machines/{MachineID}/machineProducts

Create machine products

Request URL

https://lynx.nayax.com/Operational/v1/machine/{MachineID}/machineProducts

Request Parameters

Parameter	Parameter Type	Data Type	Description
MachineID	Path	Long	Auto generate unique id, which represents the Vending Machine in Nayax back office
Products	Body	JSON	Machine Products Fields of Information

Model

```
Array[
  MachineProductPostRequest {
    NayaxProductID (integer, optional),
    MDBCode (integer, optional),
    PAR (integer, optional),
    CashPrice (number, optional),
    CreditCardPrice (number, optional),
    MachinePrice (number, optional),
    RetailPrice (number, optional),
    DEXProductName (string, optional),
    PACode (string, optional),
    PCCode (string, optional),
    ProductMinimumPickQTY (integer, optional),
    VendOutAlertThreshold (integer, optional),
    PrePaidCardPrice (number, optional),
    OperatorButtonCode (string, optional),
    ProductGroupID (integer, optional),
    CommissionValue (number, optional),
    ExternalPrepaidPrice (number, optional)
  }
]
```

Example Response Body

```
[
  {
    "DexPrice": 0,
    "ProductRef": "v1/products/98849852355515",
    "MachineProductRef": "v1/machines/718210490/machineProducts/4988798901847724814",
    "ProductGroupRef": "/v1/productGroups/280020415",
    "MachineRef": "/v1/machines/718210490",
    "MachineProductID": "4988798901847724814",
    "NayaxProductID": 98849852355515,
    "MachineID": 718210490,
    "MDBCode": 7,
    "PAR": 10,
    "CashPrice": 2.5,
    "CreditCardPrice": 2.5,
    "MachinePrice": 0,
    "RetailPrice": 2.5,
    "DEXProductName": "Cosi",
    "PACode": "1",
    "PCCode": null,
    "ProductMinimumPickQTY": 0,
    "VendOutAlertThreshold": 0,
    "LastUpdated": "2020-03-27T21:11:58.443",
    "MissingStockByDEX": null,
    "DEXMissingStockLastUpdated": null,
    "PrePaidCardPrice": 2,
    "OperatorButtonCode": null,
    "LastUpdatedByMobile": null,
    "ProductGroupID": 280020415,
    "MissingStockByMDB": null,
    "MDBMissingStockLastUpdated": null,
    "SelectionVendOutBit": null,
    "CommissionValue": 0,
    "ExternalPrepaidPrice": 0,
    "product_mark_for_alerts": null,
    "last_sale_dt": null,
    "last_sale_mdb_dt": null,
    "slow_mover": null
  }
]
```

POST Machine Products Fields Description

Field Name	Type	Max Length	Validation	Description
MachineProductID				Auto generated unique id, represents a selection/row in machine product map
NayaxProductID				Auto generated unique id, represents a product
MachineID				Auto generate unique id, represents the Vending Machine in Nayax back office
MDBCode				Selection ID reported in the Vend Request sent by machine to card reader
PAR				Real Capacity - QTY of products which defines Selection as 100% full
CashPrice				Cash Price as defined in the machine product map in Nayax back office
CreditCardPrice				Credit Card Price as defined in the machine product map in Nayax back office
MachinePrice				Price reported/updated to server on every transaction to machine product map
RetailPrice				Retail Price as defined in the machine product map in Nayax back office
DEXProductName				Name product as defined in the machine product map in Nayax back office (used to update Product Name in the DEX file using DEX upload mechanism)
PACode				Selection ID reported in the DEX PA101 value
PCCode				Price Change Code PC101 DEX Value (used to update Product Price in the DEX file using DEX upload mechanism)
ProductMinimumPickQTY				Threshold number of items missing in the selection which defines if the item will be added to the pick list when generated, if missing items are below defined threshold – item will not be added to pick list
VendOutAlertThreshold				Threshold number of items left in the selection which defines when the alert is generated
LastUpdated				Date Time when any of the selection row columns were last update
MissingStockByDEX				QTY of missing items for selection based on DEX read calculations
DEXMissingStockLastUpdated				Date Time when MissingStockByDEX last updated
PrePaidCardPrice				Pre-Paid Card Price as defined in the machine product map in Nayax back office
OperatorButtonCode				Selection ID as defined by the operator
LastUpdatedByMobile				Date Time when any of the selection row columns were last update using MoMa App
ProductGroupID				Auto generated unique id, represents a product group
DEX30DayAverageDailyVends				Average number of daily transactions based on DEX Read calculations of last 30 days
Online30DayAverageDailyVends				Average number of daily transactions based on Live Transactions of last 30 days
MissingStockByMDB				QTY of missing items for selection based Live Transactions
MDBMissingStockLastUpdated				Date Time when MissingStockByMDB last updated
SelectionVendOutBit				Selection Vendout status, True=Empty (no products in selection), False=not empty (products remaining in the selection)
ExternalPrepaidPrice				External Pre-Paid Card Price as defined in the machine product map in Nayax back office

PUT Machine Products by Machine ID

Method updates list of machine products using MachineID

PUT

/v1/machine/{MachineID}/machineProducts

Update machine products

Request URL

https://lynx.nayax.com/Operational/v1/machine/{MachineID}/machineProducts

Request Parameters

Parameter	Parameter Type	Data Type	Description
MachineID	Path	Long	Auto generate unique id, which represents the Vending Machine in Nayax back office
Products	Body	JSON	Machine Products Fields of Information

Model

```
Array [
  MachineProductsDbEntity {
    MachineProductID (integer, optional),
    NayaxProductID (integer, optional),
    MachineID (integer, optional),
    MDBCode (integer, optional),
    PAR (integer, optional),
    CashPrice (number, optional),
    CreditCardPrice (number, optional),
    MachinePrice (number, optional),
    RetailPrice (number, optional),
    DEXProductName (string, optional),
    PACode (string, optional),
    PCCode (string, optional),
    ProductMinimumPickQTY (integer, optional),
    VendOutAlertThreshold (integer, optional),
    LastUpdated (string, optional),
    MissingStockByDEX (integer, optional),
    DEXMissingStockLastUpdated (string, optional),
    PrePaidCardPrice (number, optional),
    OperatorButtonCode (string, optional),
    LastUpdatedByMobile (string, optional),
    ProductGroupID (integer, optional),
    DEX30DayAverageDailyVends (integer, optional),
    Online30DayAverageDailyVends (integer, optional),
    MissingStockByMDB (integer, optional),
    MDBMissingStockLastUpdated (string, optional),
    SelectionVendOutBit (boolean, optional),
    CommissionValue (number, optional),
    ExternalPrepaidPrice (number, optional)
  }
]
```

Example Response Body

```
{
  "MachineProductID": 110009243632628,
  "NayaxProductID": 3440,
  "MachineID": 98108,
  "MDBCode": 0,
  "PAR": 50,
  "CashPrice": 6,
  "CreditCardPrice": null,
  "MachinePrice": 0.1,
  "RetailPrice": 6,
  "DEXProductName": "Coca Cola",
  "PACode": "A1",
  "PCCode": "1",
  "ProductMinimumPickQTY": 24,
  "VendOutAlertThreshold": 10,
  "LastUpdated": "2017-02-16T15:12:16.717",
  "MissingStockByDEX": 33,
  "DEXMissingStockLastUpdated": "2017-03-01T14:16:39.13",
  "PrePaidCardPrice": null,
  "OperatorButtonCode": "A1",
  "LastUpdatedByMobile": null,
  "ProductGroupID": 1,
  "DEX30DayAverageDailyVends": null,
  "Online30DayAverageDailyVends": null,
  "MissingStockByMDB": 11,
  "MDBMissingStockLastUpdated": "2017-03-01T14:16:39.13",
  "SelectionVendOutBit": false,
  "CommissionValue": null,
  "ExternalPrepaidPrice": null
}
```

PUT Machine Products Fields Description

Field Name	Type	Max Length	Validation	Description
MachineProductID				Auto generated unique id, represents a selection/row in machine product map
NayaxProductID				Auto generated unique id, represents a product
MachineID				Auto generate unique id, represents the Vending Machine in Nayax back office
MDBCode				Selection ID reported in the Vend Request sent by machine to card reader
PAR				Real Capacity - QTY of products which defines Selection as 100% full
CashPrice				Cash Price as defined in the machine product map in Nayax back office
CreditCardPrice				Credit Card Price as defined in the machine product map in Nayax back office
MachinePrice				Price reported/updated to server on every transaction to machine product map
RetailPrice				Retail Price as defined in the machine product map in Nayax back office
DEXProductName				Name product as defined in the machine product map in Nayax back office (used to update Product Name in the DEX file using DEX upload mechanism)
PACode				Selection ID reported in the DEX PA101 value
PCCode				Price Change Code PC101 DEX Value (used to update Product Price in the DEX file using DEX upload mechanism)
ProductMinimumPickQTY				Threshold number of items missing in the selection which defines if the item will be added to the pick list when generated, if missing items are below defined threshold – item will not be added to pick list
VendOutAlertThreshold				Threshold number of items left in the selection which defines when the alert is generated
LastUpdated				Date Time when any of the selection row columns were last update
MissingStockByDEX				QTY of missing items for selection based on DEX read calculations
DEXMissingStockLastUpdated				Date Time when MissingStockByDEX last updated
PrePaidCardPrice				Pre-Paid Card Price as defined in the machine product map in Nayax back office
OperatorButtonCode				Selection ID as defined by the operator
LastUpdatedByMobile				Date Time when any of the selection row columns were last update using MoMa App
ProductGroupID				Auto generated unique id, represents a product group
DEX30DayAverageDailyVends				Average number of daily transactions based on DEX Read calculations of last 30 days
Online30DayAverageDailyVends				Average number of daily transactions based on Live Transactions of last 30 days
MissingStockByMDB				QTY of missing items for selection based Live Transactions
MDBMissingStockLastUpdated				Date Time when MissingStockByMDB last updated
SelectionVendOutBit				Selection Vendout status, True=Empty (no products in selection), False=not empty (products remaining in the selection)
ExternalPrepaidPrice				External Pre-Paid Card Price as defined in the machine product map in Nayax back office

GET Machine Product by Machine ID and Machine Product ID

Method returns list of machine products using MachineID

GET

/v1/machine/{MachineID}/machineProducts/{MachineProductID}

Get a machine product

Request URL

https://lynx.nayax.com/Operational/v1/machine/{MachineID}/machineProducts/{MachineProductID}

Request Parameters

Parameter	Parameter Type	Data Type	Description
MachineID	Path	Long	Auto generate unique id, which represents the Vending Machine in Nayax back office
MachineProductID	Path	Long	Auto generate unique id, represents the specific selection in the machine product map

Model

```
MachineProductsDbEntity {
    MachineProductID (integer, optional),
    NayaxProductID (integer, optional),
    MachineID (integer, optional),
    MDBCode (integer, optional),
    PAR (integer, optional),
    CashPrice (number, optional),
    CreditCardPrice (number, optional),
    MachinePrice (number, optional),
    RetailPrice (number, optional),
    DEXProductName (string, optional),
    PACode (string, optional),
    PCCode (string, optional),
    ProductMinimumPickQTY (integer, optional),
    VendOutAlertThreshold (integer, optional),
    LastUpdated (string, optional),
    MissingStockByDEX (integer, optional),
    DEXMissingStockLastUpdated (string, optional),
    PrePaidCardPrice (number, optional),
    OperatorButtonCode (string, optional),
    LastUpdatedByMobile (string, optional),
    ProductGroupID (integer, optional),
    DEX30DayAverageDailyVends (integer, optional),
    Online30DayAverageDailyVends (integer, optional),
    MissingStockByMDB (integer, optional),
    MDBMissingStockLastUpdated (string, optional)
}
```

Example Response Body

```
{
  "MachineProductID": 73979202,
  "NayaxProductID": 69213,
  "MachineID": 98108,
  "MDBCode": 0,
  "PAR": 30,
  "CashPrice": 6,
  "CreditCardPrice": 0.1,
  "MachinePrice": 0.1,
  "RetailPrice": 4,
  "DEXProductName": "Top Vending",
  "PACode": "A1",
  "PCCode": "1",
  "ProductMinimumPickQTY": 80,
  "VendOutAlertThreshold": 10,
  "LastUpdated": "2017-03-06T10:04:45.887",
  "MissingStockByDEX": 0,
  "DEXMissingStockLastUpdated": "2017-03-06T09:58:25.113",
  "PrePaidCardPrice": 4,
  "OperatorButtonCode": "A1",
  "LastUpdatedByMobile": null,
  "ProductGroupID": null,
  "DEX30DayAverageDailyVends": 0,
  "Online30DayAverageDailyVends": 0,
  "MissingStockByMDB": 34,
  "MDBMissingStockLastUpdated": "2017-03-06T10:04:45.95"
}
```

GET Machine Product Response Fields Description

Field Name	Description
MachineProductID	Auto generate unique id, represents the specific selection in the machine product map
NayaxProductID	Auto generate unique id, represents the product in Nayax back office
MachineID	Auto generate unique id, represents the Vending Machine in Nayax back office
MDBCCode	Selection ID reported in the Vend Request sent by machine to card reader
PAR	Real Capacity - QTY of products which defines Selection as 100% full
CashPrice	Cash Price as defined in the machine product map in Nayax back office
CreditCardPrice	Credit Card Price as defined in the machine product map in Nayax back office
MachinePrice	Price reported/updated to server on every transaction to machine product map
RetailPrice	Retail Price as defined in the machine product map in Nayax back office
DEXProductName	Name product as defined in the machine product map in Nayax back office (used to update DEX file using DEX upload mechanism)
PACode	Selection ID reported in the DEX PA101 value
PCCode	Price Change Code PC101 DEX Value (used to update Product Price in the DEX file using DEX upload mechanism)
ProductMinimumPickQTY	Threshold number of items missing in the selection which defines if the item will be added to the pick list when generated, if missing items are below defined threshold – item will not be added to pick list
VendOutAlertThreshold	Threshold number of items left in the selection which defines when the alert is generated
LastUpdated	Date Time when any of the selection row columns were last update
MissingStockByDEX	QTY of missing items for selection based on DEX read calculations
DEXMissingStockLastUpdated	Date Time when MissingStockByDEX last updated
PrePaidCardPrice	Pre-Paid Card Price as defined in the machine product map in Nayax back office
OperatorButtonCode	Selection ID as defined by the operator
LastUpdatedByMobile	Date Time when any of the selection row columns were last update using MoMa App
ProductGroupID	Auto generated unique id, represents a product group
DEX30DayAverageDailyVends	Average number of daily transactions based on DEX Reads of last 30 days
Online30DayAverageDailyVends	Average number of daily transactions based on Live Transactions of last 30 days
MissingStockByMDB	QTY of missing items for selection based Live Transactions
MDBMissingStockLastUpdated	Date Time when MissingStockByMDB last updated

GET Machine Product Calories by Device Serial Number

Method returns list of all machine products and their nutritional info by specified DeviceSerialNumber

GET /v1/devices/{DeviceSerialNumber}/machineProducts/calories

Get products calories

Request URL

https://lynx.nayax.com/Operational/v1/devices/{DeviceSerialNumber}/machineProducts/calories

Request Parameters

Parameter	Type	Description
DeviceSerialNumber	String	Nayax Device Hardware Serial Number, the number printed on the Nayax device sticker, full device number is 16 digits long with 5 or 6 digits as the serial number and 0 padding on the left

Model

```
Array [
  ProductInfoDbEntity {
    n (string, optional),
    c (string, optional),
  }
]
```

Example Response Body

```
[
  {
    "n": "Coca Cola",
    "c": "11/1",
  },
  {
    "n": "Operator",
    "c": "22/2",
  }
]
```

GET Machine Product Calories Response Fields Description

Field Name	Description
n	Product Name
c	Nutritional information: Calories per 100g / Calories per Serving

Product Groups

GET Product Group by Product Group ID

Method Returns Product Group details for specified Product Group ID

GET /v1/productGroups/{ProductGroupID}

Get product group

Request URL

https://lynx.nayax.com/Operational/v1/productGroups/{ProductGroupID}

Request Parameters

Parameter	Parameter Type	Data Type	Description
ProductGroupID	Path	Long	Auto generated unique id, represents a product group

Model

```
ProductGroupDbEntity {
    ProductGroupID (integer, optional),
    ActorID (integer, optional),
    ProductGroupName (string, optional),
    ProductGroupLastUpdated (string, optional),
    ProductGroupCode (integer, optional)
}
```

Example Response Body

```
{
  "ProductGroupID": 643,
  "ActorID": 3,
  "ProductGroupName": "Cold Drinks",
  "ProductGroupLastUpdated": "2008-02-21T18:10:15.713",
  "ProductGroupCode": null
}
```

GET Product Group Response Fields Description

Field Name	Description
ProductGroupID	Auto generated unique id, represents a product group
ActorID	Auto generate unique id, represents the hierarchical entity in the hierarchy tree
ProductGroupName	Name of the Product Group
ProductGroupLastUpdated	Date Time Product Group last updated
ProductGroupCode	Optional Product Group Identification Code

PUT Product Group by Product Group ID

Method updates Product Group details for specified Product Group ID

PUT

/v1/productGroups/{ProductGroupID}

Update product group

Request URL

https://lynx.nayax.com/Operational/v1/productGroups/{ProductGroupID}

Request Parameters

Parameter	Parameter Type	Data Type	Description
ProductGroupID	Path	Long	Auto generated unique id, represents a product group
Item	Body	JSON	Product Group Fields of Information

Model

```
ProductGroupDbEntity {  
    ProductGroupID (integer, optional),  
    ActorID (integer, optional),  
    ProductGroupName (string, optional),  
    ProductGroupLastUpdated (string, optional),  
    ProductGroupCode (integer, optional)  
}
```

Example Response Body

```
{  
    "ProductGroupID": 643,  
    "ActorID": 3,  
    "ProductGroupName": "Cold Drinks",  
    "ProductGroupLastUpdated": "2008-02-21T18:10:15.713",  
    "ProductGroupCode": null  
}
```

PUT Product Group Fields Description

Field Name	Description
ProductGroupID	Auto generated unique id, represents a product group
ActorID	Auto generate unique id, represents the hierarchical entity in the hierarchy tree
ProductGroupName	Name of the Product Group
ProductGroupLastUpdated	Date Time Product Group last updated
ProductGroupCode	Optional Product Group Identification Code

GET Product Groups by Actor ID

Method returns a list of all Product Groups and their details for the specified Actor ID

GET

/v1/operator/{ActorID}/productGroups

Get product group by actor

Request URL

https://lynx.nayax.com/Operational/v1/operator/{ActorID}/productGroups

Request Parameters

Parameter	Parameter Type	Data Type	Description
ActorID	Path	Long	Auto generate unique id, represents the hierarchical entity in the hierarchy tree

Model

```
Array [  
  ProductGroupDbEntity {  
    ProductGroupID (integer, optional),  
    ActorID (integer, optional),  
    ProductGroupName (string, optional),  
    ProductGroupLastUpdated (string, optional),  
    ProductGroupCode (integer, optional)  
  }  
]
```

Example Response Body

```
[
  {
    "ProductGroupID": 643,
    "ActorID": 3,
    "ProductGroupName": "Cold Drinks",
    "ProductGroupLastUpdated": "2008-02-21T18:10:15.713",
    "ProductGroupCode": null
  },
  {
    "ProductGroupID": 644,
    "ActorID": 3,
    "ProductGroupName": "Snacks",
    "ProductGroupLastUpdated": "2008-02-28T13:09:14.93",
    "ProductGroupCode": 1234
  },
]
```

GET Product Groups Response Fields Description

Field Name	Description
ProductGroupID	Auto generated unique id, represents a product group
ActorID	Auto generate unique id, represents the hierarchical entity in the hierarchy tree
ProductGroupName	Name of the Product Group
ProductGroupLastUpdated	Date Time Product Group last updated
ProductGroupCode	Optional Product Group Identification Code

GET Product Groups

Method Returns All Product Groups and their details for the User Actor ID

GET

/v1/productGroups

Get all product groups

Request URL

https://lynx.nayax.com/Operational/v1/productGroups

Model

```
Array [  
  ProductGroupDbEntity {  
    ProductGroupID (integer, optional),  
    ActorID (integer, optional),  
    ProductGroupName (string, optional),  
    ProductGroupLastUpdated (string, optional),  
    ProductGroupCode (integer, optional)  
  }  
]
```

Example Response Body

```
[
  {
    "ProductGroupID": 643,
    "ActorID": 3,
    "ProductGroupName": "Cold Drinks",
    "ProductGroupLastUpdated": "2008-02-21T18:10:15.713",
    "ProductGroupCode": null
  },
  {
    "ProductGroupID": 644,
    "ActorID": 3,
    "ProductGroupName": "Snacks",
    "ProductGroupLastUpdated": "2008-02-28T13:09:14.93",
    "ProductGroupCode": 1234
  },
]
```

GET Product Groups Response Fields Description

Field Name	Description
ProductGroupID	Auto generated unique id, represents a product group
ActorID	Auto generate unique id, represents the hierarchical entity in the hierarchy tree
ProductGroupName	Name of the Product Group
ProductGroupLastUpdated	Date Time Product Group last updated
ProductGroupCode	Optional Product Group Identification Code

POST Product Group

Method Creates Product Group under User Actor ID

POST /v1/productGroups

Update all product groups

Request URL

https://lynx.nayax.com/Operational/v1/productGroups/

Request Parameters

Parameter	Parameter Type	Data Type	Description
Item	Body	JSON	Product Group Fields of Information

Model

```
ProductGroupDbEntity {  
    ProductGroupID (integer, optional),  
    ActorID (integer, optional),  
    ProductGroupName (string, optional),  
    ProductGroupLastUpdated (string, optional),  
    ProductGroupCode (integer, optional)  
}
```

Example Response Body

```
{  
    "Ok": true,  
    "Message": null,  
    "SystemMessage": null  
}
```

POST Product Group Fields Description

Field Name	Description
ProductGroupID	Auto generated unique id, represents a product group
ActorID	Auto generate unique id, represents the hierarchical entity in the hierarchy tree
ProductGroupName	Name of the Product Group
ProductGroupLastUpdated	Date Time Product Group last updated
ProductGroupCode	Optional Product Group Identification Code

Products

GET Products by Operator ID

Method returns a list of all products for specified Operator ID

GET /v1/operators/{OperatorID}/products

Get specific operator products

Request URL

https://lynx.nayax.com/Operational/v1/operators/{OperatorID}/products

Request Parameters

Parameter	Parameter Type	Data Type	Description
OperatorID	Path	Long	Auto generate unique id, represents the hierarchical entity in the hierarchy tree

Model

```
Array [
  ProductsDbEntity {
    NayaxProductID (integer, optional),
    ProductGroupID (integer, optional),
    ActorID (integer, optional),
    ProductManufacturerID (integer, optional),
    ProductName (string, optional),
    ProductCatalogNumber (string, optional),
    ProductBarcode (string, optional),
    ProductPackageQuantity (integer, optional),
    ProductDescription (string, optional),
    ProductVolumeTypeID (integer, optional),
    ProductLastUpdated (string, optional),
    DEXProduct Name (string, optional),
    ProductCostPrice (number, optional),
    ProductDefaultRetailPrice (number, optional),
    ProductMinimumPickQTY (integer, optional),
    ProductPicture (string, optional),
    ProductStatus (integer, optional),
    ProductCashPrice (number, optional),
    ProductCreditCardPrice (number, optional),
    ProductPrepaidCardPrice (number, optional),
    ProductMemberTypePriceBit (boolean, optional),
    ProductPictureURL (string, optional),
    CaloriesPer100g (number, optional),
    CaloriesPerServing (number, optional)
  }
]
```

Example Response Body

```
[
  {
    "NayaxProductID": 3440,
    "ProductGroupID": 643,
    "ActorID": 3,
    "ProductManufacturerID": 15,
    "ProductName": "Coca Cola",
    "ProductCatalogNumber": "12345",
    "ProductBarcode": "12345",
    "ProductPackageQuantity": 24,
    "ProductDescription": "",
    "ProductVolumeTypeID": 96,
    "ProductLastUpdated": "2016-11-08T13:27:45.33",
    "DEXProductName": "Coca Cola",
    "ProductCostPrice": 2.9,
    "ProductDefaultRetailPrice": 6,
    "ProductMinimumPickQTY": 80,
    "ProductPicture": "p3440Admin.jpg",
    "ProductStatus": 1,
    "ProductCashPrice": 6,
    "ProductCreditCardPrice": 6,
    "ProductPrepaidCardPrice": 4,
    "ProductMembertypePriceBit": null,
    "ProductPictureURL": null,
    "CaloriesPer100g": null,
    "CaloriesPerServing": null
  },
  {
    "NayaxProductID": 3441,
    "ProductGroupID": 643,
    "ActorID": 3,
    "ProductManufacturerID": 15,
    "ProductName": "Diet Cola",
    "ProductCatalogNumber": "",
    "ProductBarcode": "",
    "ProductPackageQuantity": 24,
    "ProductDescription": "",
    "ProductVolumeTypeID": 96,
    "ProductLastUpdated": "2016-11-08T13:27:45.33",
    "DEXProductName": "",
    "ProductCostPrice": null,
    "ProductDefaultRetailPrice": null,
    "ProductMinimumPickQTY": null,
    "ProductPicture": null,
    "ProductStatus": 1,
    "ProductCashPrice": null,
    "ProductCreditCardPrice": null,
    "ProductPrepaidCardPrice": null,
    "ProductMembertypePriceBit": null,
    "ProductPictureURL": null,
    "CaloriesPer100g": null,
    "CaloriesPerServing": null
  }
]
```

GET Products Response Fields Description

Field Name	Description
NayaxProductID	Auto generated unique id, represents a product
ProductGroupID	Auto generated unique id, represents a product group
ActorID	Auto generate unique id, represents the hierarchical entity in the hierarchy tree
ProductManufacturerID	Auto generate unique id, represents the product supplier / producer
ProductName	Name of the product
ProductCatalogNumber	Product Catalog Number as defined by the Operator in Nayax back office
ProductBarcode	Product Barcode Number as defined by the Operator in Nayax back office
ProductPackageQuantity	Number of items in Package when product is purchased by the operator
ProductDescription	Products description
ProductVolumeTypeID	
ProductLastUpdated	Date Time when any of the product fields were last updated
DEXProductName	Name product as defined in the machine product map in Nayax back office (used to update DEX file using DEX upload mechanism)
ProductCostPrice	Product Cost price as purchased by operator
ProductDefaultRetailPrice	Default Retail Price as defined in Nayax back office
ProductMinimumPickQTY	Threshold number of items missing in the selection which defines if the item will be added to the pick list when generated, if missing items are below defined threshold – item will not be added to pick list
ProductPicture	File Name of the Product picture uploaded by operator using Nayax back office
ProductStatus	Status of the product in Nayax back office, 1 = Active, 2=Not Active
ProductCashPrice	Cash Price as defined on the product in Nayax back office
ProductCreditCardPrice	Credit Card Price as defined on the product in Nayax back office
ProductPrepaidCardPrice	Pre-Paid Card Price as defined on the product in Nayax back office
ProductMemberTypePriceBit	Bit which defines if product has price scheme for Member Types (Bronze, Silver, Gold...), True = Has Member Type Pricing Scheme, False = Doesn't have Member Type Pricing Scheme
ProductPictureURL	
CaloriesPer100g	
CaloriesPerServing	

POST Product by Operator ID

Method creates a product under specified Operator ID

POST /v1/operators/{OperatorID}/products

Create new operator product

Request URL

https://lynx.nayax.com/Operational/v1/operators/{OperatorID}/products

Request Parameters

Parameter	Parameter Type	Data Type	Description
OperatorID	Path	Long	Auto generate unique id, represents the hierarchical entity in the hierarchy tree
Product	Body	JSON	Product Fields of information

Model

```
ProductsDbEntity {
    NayaxProductID (integer, optional),
    ProductGroupID (integer, optional),
    ActorID (integer, optional),
    ProductManufacturerID (integer, optional),
    ProductName (string, optional),
    ProductCatalogNumber (string, optional),
    ProductBarcode (string, optional),
    ProductPackageQuantity (integer, optional),
    ProductDescription (string, optional),
    ProductVolumeTypeID (integer, optional),
    ProductLastUpdated (string, optional),
    DEXProductName (string, optional),
    ProductCostPrice (number, optional),
    ProductDefaultRetailPrice (number, optional),
    ProductMinimumPickQTY (integer, optional),
    ProductPicture (string, optional),
    ProductStatus (integer, optional),
    ProductCashPrice (number, optional),
    ProductCreditCardPrice (number, optional),
    ProductPrepaidCardPrice (number, optional),
    ProductMemberTypePriceBit (boolean, optional),
    ProductPictureURL (string, optional),
    CaloriesPer100g (number, optional),
    CaloriesPerServing (number, optional)
}
```

Example Response Body

```
[
  {
    "NayaxProductID": 3440,
    "ProductGroupID": 643,
    "ActorID": 3,
    "ProductManufacturerID": 15,
    "ProductName": "Coca Cola",
    "ProductCatalogNumber": "12345",
    "ProductBarcode": "12345",
    "ProductPackageQuantity": 24,
    "ProductDescription": "",
    "ProductVolumeTypeID": 96,
    "ProductLastUpdated": "2016-11-08T13:27:45.33",
    "DEXProductName": "Coca Cola",
    "ProductCostPrice": 2.9,
    "ProductDefaultRetailPrice": 6,
    "ProductMinimumPickQTY": 80,
    "ProductPicture": "p3440Admin.jpg",
    "ProductStatus": 1,
    "ProductCashPrice": 6,
    "ProductCreditCardPrice": 6,
    "ProductPrepaidCardPrice": 4,
    "ProductMembertypePriceBit": null,
    "ProductPictureURL": null,
    "CaloriesPer100g": null,
    "CaloriesPerServing": null
  },
  {
    "NayaxProductID": 3441,
    "ProductGroupID": 643,
    "ActorID": 3,
    "ProductManufacturerID": 15,
    "ProductName": "Diet Cola",
    "ProductCatalogNumber": "",
    "ProductBarcode": "",
    "ProductPackageQuantity": 24,
    "ProductDescription": "",
    "ProductVolumeTypeID": 96,
    "ProductLastUpdated": "2016-11-08T13:27:45.33",
    "DEXProductName": "",
    "ProductCostPrice": null,
    "ProductDefaultRetailPrice": null,
    "ProductMinimumPickQTY": null,
    "ProductPicture": null,
    "ProductStatus": 1,
    "ProductCashPrice": null,
    "ProductCreditCardPrice": null,
    "ProductPrepaidCardPrice": null,
    "ProductMembertypePriceBit": null,
    "ProductPictureURL": null,
    "CaloriesPer100g": null,
    "CaloriesPerServing": null
  }
]
```

GET Products Response Fields Description

Field Name	Description
NayaxProductID	Auto generated unique id, represents a product
ProductGroupID	Auto generated unique id, represents a product group
ActorID	Auto generate unique id, represents the hierarchical entity in the hierarchy tree
ProductManufacturerID	Auto generate unique id, represents the product supplier / producer
ProductName	Name of the product
ProductCatalogNumber	Product Catalog Number as defined by the Operator in Nayax back office
ProductBarcode	Product Barcode Number as defined by the Operator in Nayax back office
ProductPackageQuantity	Number of items in Package when product is purchased by the operator
ProductDescription	Products description
ProductVolumeTypeID	
ProductLastUpdated	Date Time when any of the product fields were last updated
DEXProductName	Name product as defined in the machine product map in Nayax back office (used to update DEX file using DEX upload mechanism)
ProductCostPrice	Product Cost price as purchased by operator
ProductDefaultRetailPrice	Default Retail Price as defined in Nayax back office
ProductMinimumPickQTY	Threshold number of items missing in the selection which defines if the item will be added to the pick list when generated, if missing items are below defined threshold – item will not be added to pick list
ProductPicture	File Name of the Product picture uploaded by operator using Nayax back office
ProductStatus	Status of the product in Nayax back office, 1 = Active, 2=Not Active
ProductCashPrice	Cash Price as defined on the product in Nayax back office
ProductCreditCardPrice	Credit Card Price as defined on the product in Nayax back office
ProductPrepaidCardPrice	Pre-Paid Card Price as defined on the product in Nayax back office
ProductMemberTypePriceBit	Bit which defines if product has price scheme for Member Types (Bronze, Silver, Gold...), True = Has Member Type Pricing Scheme, False = Doesn't have Member Type Pricing Scheme
ProductPictureURL	
CaloriesPer100g	
CaloriesPerServing	

GET Product by Nayax Product ID

Method returns details of a products for specified Nayax Product ID

GET /v1/products/{NayaxProductID}

Get specific product

Request URL

https://lynx.nayax.com/Operational/v1/products/{NayaxProductID}

Request Parameters

Parameter	Parameter Type	Data Type	Description
NayaxProductID	Path	Long	Auto generated unique id, represents a product

Model

```
ProductsDbEntity {
    NayaxProductID (integer, optional),
    ProductGroupID (integer, optional),
    ActorID (integer, optional),
    ProductManufacturerID (integer, optional),
    ProductName (string, optional),
    ProductCatalogNumber (string, optional),
    ProductBarcode (string, optional),
    ProductPackageQuantity (integer, optional),
    ProductDescription (string, optional),
    ProductVolumeTypeID (integer, optional),
    ProductLastUpdated (string, optional),
    DEXProductName (string, optional),
    ProductCostPrice (number, optional),
    ProductDefaultRetailPrice (number, optional),
    ProductMinimumPickQTY (integer, optional),
    ProductPicture (string, optional),
    ProductStatus (integer, optional),
    ProductCashPrice (number, optional),
    ProductCreditCardPrice (number, optional),
    ProductPrepaidCardPrice (number, optional),
    ProductMemberTypePriceBit (boolean, optional),
    ProductPictureURL (string, optional),
    CaloriesPer100g (number, optional),
    CaloriesPerServing (number, optional)
}
```

Example Response Body

```
{
  "NayaxProductID": 3440,
  "ProductGroupID": 643,
  "ActorID": 3,
  "ProductManufacturerID": 15,
  "ProductName": "Coca Cola",
  "ProductCatalogNumber": "12345",
  "ProductBarcode": "12345",
  "ProductPackageQuantity": 24,
  "ProductDescription": "",
  "ProductVolumeTypeID": 96,
  "ProductLastUpdated": "2016-11-08T13:27:45.33",
  "DEXProductName": "Coca Cola",
  "ProductCostPrice": 2.9,
  "ProductDefaultRetailPrice": 6,
  "ProductMinimumPickQTY": 80,
  "ProductPicture": "p3440Admin.jpg",
  "ProductStatus": 1,
  "ProductCashPrice": 6,
  "ProductCreditCardPrice": 6,
  "ProductPrepaidCardPrice": 4,
  "ProductMemberTypePriceBit": null,
  "ProductPictureURL": null,
  "CaloriesPer100g": null,
  "CaloriesPerServing": null
}
```

GET Products Response Fields Description

Field Name	Description
NayaxProductID	Auto generated unique id, represents a product
ProductGroupID	Auto generated unique id, represents a product group
ActorID	Auto generate unique id, represents the hierarchical entity in the hierarchy tree
ProductManufacturerID	Auto generate unique id, represents the product supplier / producer
ProductName	Name of the product
ProductCatalogNumber	Product Catalog Number as defined by the Operator in Nayax back office
ProductBarcode	Product Barcode Number as defined by the Operator in Nayax back office
ProductPackageQuantity	Number of items in Package when product is purchased by the operator
ProductDescription	Products description
ProductVolumeTypeID	
ProductLastUpdated	Date Time when any of the product fields were last updated
DEXProductName	Name product as defined in the machine product map in Nayax back office (used to update DEX file using DEX upload mechanism)
ProductCostPrice	Product Cost price as purchased by operator
ProductDefaultRetailPrice	Default Retail Price as defined in Nayax back office
ProductMinimumPickQTY	Threshold number of items missing in the selection which defines if the item will be added to the pick list when generated, if missing items are below defined threshold – item will not be added to pick list
ProductPicture	File Name of the Product picture uploaded by operator using Nayax back office
ProductStatus	Status of the product in Nayax back office, 1 = Active, 2=Not Active
ProductCashPrice	Cash Price as defined on the product in Nayax back office
ProductCreditCardPrice	Credit Card Price as defined on the product in Nayax back office
ProductPrepaidCardPrice	Pre-Paid Card Price as defined on the product in Nayax back office
ProductMemberTypePriceBit	Bit which defines if product has price scheme for Member Types (Bronze, Silver, Gold...), True = Has Member Type Pricing Scheme, False = Doesn't have Member Type Pricing Scheme
ProductPictureURL	
CaloriesPer100g	
CaloriesPerServing	

PUT Product by Nayax Product ID

Method updates a product details of the specified Nayax Product ID

PUT

/v1/products/{NayaxProductID}

Update specific product

Request URL

https://lynx.nayax.com/Operational/v1/products/{NayaxProductID}

Request Parameters

Parameter	Parameter Type	Data Type	Description
NayaxProductID	Path	Long	Auto generated unique id, represents a product
Product	Body	JSON	Product Fields of information

Model

```
ProductsDbEntity {
    NayaxProductID (integer, optional),
    ProductGroupID (integer, optional),
    ActorID (integer, optional),
    ProductManufacturerID (integer, optional),
    ProductName (string, optional),
    ProductCatalogNumber (string, optional),
    ProductBarcode (string, optional),
    ProductPackageQuantity (integer, optional),
    ProductDescription (string, optional),
    ProductVolumeTypeID (integer, optional),
    ProductLastUpdated (string, optional),
    DEXProductName (string, optional),
    ProductCostPrice (number, optional),
    ProductDefaultRetailPrice (number, optional),
    ProductMinimumPickQTY (integer, optional),
    ProductPicture (string, optional),
    ProductStatus (integer, optional),
    ProductCashPrice (number, optional),
    ProductCreditCardPrice (number, optional),
    ProductPrepaidCardPrice (number, optional),
    ProductMemberTypePriceBit (boolean, optional),
    ProductPictureURL (string, optional),
    CaloriesPer100g (number, optional),
    CaloriesPerServing (number, optional)
}
```

Example Response Body

```
{
  "NayaxProductID": 3440,
  "ProductGroupID": 643,
  "ActorID": 3,
  "ProductManufacturerID": 15,
  "ProductName": "Coca Cola",
  "ProductCatalogNumber": "12345",
  "ProductBarcode": "12345",
  "ProductPackageQuantity": 24,
  "ProductDescription": "",
  "ProductVolumeTypeID": 96,
  "ProductLastUpdated": "2016-11-08T13:27:45.33",
  "DEXProductName": "Coca Cola",
  "ProductCostPrice": 2.9,
  "ProductDefaultRetailPrice": 6,
  "ProductMinimumPickQTY": 80,
  "ProductPicture": "p3440Admin.jpg",
  "ProductStatus": 1,
  "ProductCashPrice": 6,
  "ProductCreditCardPrice": 6,
  "ProductPrepaidCardPrice": 4,
  "ProductMembertTypePriceBit": null,
  "ProductPictureURL": null,
  "CaloriesPer100g": null,
  "CaloriesPerServing": null
}
```

PUT Product Response Fields Description

Field Name	Description
NayaxProductID	Auto generated unique id, represents a product
ProductGroupID	Auto generated unique id, represents a product group
ActorID	Auto generate unique id, represents the hierarchical entity in the hierarchy tree
ProductManufacturerID	Auto generate unique id, represents the product supplier / producer
ProductName	Name of the product
ProductCatalogNumber	Product Catalog Number as defined by the Operator in Nayax back office
ProductBarcode	Product Barcode Number as defined by the Operator in Nayax back office
ProductPackageQuantity	Number of items in Package when product is purchased by the operator
ProductDescription	Products description
ProductVolumeTypeID	
ProductLastUpdated	Date Time when any of the product fields were last updated
DEXProductName	Name product as defined in the machine product map in Nayax back office (used to update DEX file using DEX upload mechanism)
ProductCostPrice	Product Cost price as purchased by operator
ProductDefaultRetailPrice	Default Retail Price as defined in Nayax back office
ProductMinimumPickQTY	Threshold number of items missing in the selection which defines if the item will be added to the pick list when generated, if missing items are below defined threshold – item will not be added to pick list
ProductPicture	File Name of the Product picture uploaded by operator using Nayax back office
ProductStatus	Status of the product in Nayax back office, 1 = Active, 2=Not Active
ProductCashPrice	Cash Price as defined on the product in Nayax back office
ProductCreditCardPrice	Credit Card Price as defined on the product in Nayax back office
ProductPrepaidCardPrice	Pre-Paid Card Price as defined on the product in Nayax back office
ProductMemberTypePriceBit	Bit which defines if product has price scheme for Member Types (Bronze, Silver, Gold...), True = Has Member Type Pricing Scheme, False = Doesn't have Member Type Pricing Scheme
ProductPictureURL	
CaloriesPer100g	
CaloriesPerServing	

Machine Inventory

DELETE Pick List by Machine ID

Method Deletes any existing picklist for specified Machine ID

DELETE /v1/machine/{MachineID}/pickList

delete pick list

Request URL

https://lynx.nayax.com/Operational/v1/machine/{MachineID}/pickList

Request Parameters

Parameter	Parameter Type	Data Type	Description
MachineID	Path	Long	Auto generate unique id, which represents the Vending Machine in Nayax back office

Model

```
ApiResponse {  
    Ok (boolean, optional),  
    Message (string, optional),  
    SystemMessage (string, optional)  
}
```

Example Response Body

```
{  
    "Ok": true,  
    "Message": null,  
    "SystemMessage": null  
}
```

POST Pick List by Machine ID

Method Generates a Pick List with list of products to pick using MachineID

POST /v1/machine/{MachineID}/pickList

Generate pick list

Request URL

<https://lynx.nayax.com/Operational/v1/machine/{MachineID}/pickList?UseMinPick=true&AddOnlineSales=false&AddEstimatedSales=>

Request Parameters

Parameter	Parameter Type	Data Type	Description
MachineID	Path	Long	Auto generate unique id, which represents the Vending Machine in Nayax back office
UseMinPick	Query	Boolean	Bit which defines if to use the threshold number of items missing in the selection which defines if the item will be added to the pick list when generated, if missing items are below defined threshold – item will not be added to pick list, True=Use, False=Do not use
AddOnlineSales	Query	Boolean	Bit which defines if to use Live Transaction Sales, to bridge the gap between DEX read sale calculations from last DEX read time to the time of picklist generation, used only for machines with Sales Source of DEX/DDCMP
AddEstimatedSales	Query	DateTime	Optional Date Time of estimated visit to machine which defines if to use Live Transaction Sales to estimate the missing items based on sales velocity of the vending machine

GET Pick List by Machine ID

Method returns last generated Pick List with list of products to pick using MachineID

GET /v1/machine/{MachineID}/pickList

[get pick list](#)

Request URL

<https://lynx.nayax.com/Operational/v1/machine/{MachineID}/pickList>

Request Parameters

Parameter	Parameter Type	Data Type	Description
MachineID	Path	Long	Auto generate unique id, which represents the Vending Machine in Nayax back office

Model

```
Array [  
  PickedProduct {  
    NayaxProductID (integer, optional),  
    MachineID (integer, optional),  
    MDBCode (integer, optional),  
    PAMCode (string, optional),  
    SelectionID (string, optional),  
    OperatorButtonCode (string, optional),  
    PAR (integer, optional),  
    MissingStock (integer, optional),  
    OnHandStock (integer, optional),  
    VendOutAlertThreshold (integer, optional),  
    MachinePrice (number, optional),  
    CreditCardPrice (number, optional),  
    RetailPrice (number, optional),  
    DEXPrice (number, optional),  
    LastPickQTY (integer, optional),  
    PrePaidCardPrice (number, optional),  
    CashPrice (number, optional),  
    DEXProductName (string, optional),  
    ProductName (string, optional),  
    SalesSourceID (integer, optional)  
  }  
]
```

Example Response Body

```
[
  {
    "NayaxProductID": 69213,
    "MachineID": 98108,
    "MDBCode": 0,
    "PACode": "A1",
    "SelectionID": "A1",
    "OperatorButtonCode": "A1",
    "PAR": 30,
    "MissingStock": 30,
    "OnHandStock": 0,
    "VendOutAlertThreshold": 10,
    "MachinePrice": 0.1,
    "CreditCardPrice": 0.1,
    "RetailPrice": 4,
    "DEXPrice": 10,
    "LastPickQTY": 30,
    "PrePaidCardPrice": 4,
    "CashPrice": 6,
    "DEXProductName": "Top Vending",
    "ProductName": "Swheps",
    "SalesSourceID": 30000512
  },
  {
    "NayaxProductID": 3441,
    "MachineID": 98108,
    "MDBCode": 1,
    "PACode": "A2",
    "SelectionID": "A2",
    "OperatorButtonCode": "A2",
    "PAR": 60,
    "MissingStock": 60,
    "OnHandStock": 0,
    "VendOutAlertThreshold": 10,
    "MachinePrice": null,
    "CreditCardPrice": 6,
    "RetailPrice": 3,
    "DEXPrice": 300,
    "LastPickQTY": 60,
    "PrePaidCardPrice": 4,
    "CashPrice": 6,
    "DEXProductName": "Ori San",
    "ProductName": "Diet Cola",
    "SalesSourceID": 30000512
  }
]
```

GET Pick List Response Fields Description

Field Name	Description
NayaxProductID	Auto generated unique id, represents a product
MachineID	Auto generate unique id, which represents the Vending Machine in Nayax back office
MDBCCode	Selection ID reported in the Vend Request sent by machine to card reader
PACode	Selection ID reported in the DEX PA101 value
SelectionID	Selection ID based on machine configuration, i.e. MDB Code, PA Code, Both...
OperatorButtonCode	Selection ID as defined by the operator
PAR	Real Capacity - QTY of products which defines Selection as 100% full
MissingStock	Current QTY of missing items in the specific selection
OnHandStock	Current QTY of on hand items in the specific selection
VendOutAlertThreshold	Threshold number of items left in the selection which defines when the alert is generated
MachinePrice	Price reported/updated to server on every transaction to machine product map
CreditCardPrice	Credit Card Price as defined in the machine product map in Nayax back office
RetailPrice	Retail Price as defined in the machine product map in Nayax back office
DEXPrice	Selection Price as reported in the DEX PA102 value
LastPickQTY	QTY of items to pick for the selection updated on last picklist generation (may be different from MissingStock)
PrePaidCardPrice	Pre-Paid Card Price as defined in the machine product map in Nayax back office
CashPrice	Cash Price as defined in the machine product map in Nayax back office
DEXProductName	Name product as defined in the machine product map in Nayax back office (used to update DEX file using DEX upload mechanism)
ProductName	Name of the product in the specific selection
SalesSourceID	

POST Full Machine by Machine ID

Method sets machine products stock levels to PAR

POST /v1/machine/{MachineID}/inventory/full

Set all machines bins as full

Request URL

https://lynx.nayax.com/Operational/v1/machine/{MachineID}/inventory/full

Request Parameters

Parameter	Parameter Type	Data Type	Description
MachineID	Path	Long	Auto generate unique id, which represents the Vending Machine in Nayax back office

Model

```
ApiResponse {  
    Ok (boolean, optional),  
    Message (string, optional),  
    SystemMessage (string, optional)  
}
```

Example Response Body

```
{  
    "Ok": true,  
    "Message": null,  
    "SystemMessage": null  
}
```

POST Empty Machine by Machine ID

Method sets machine products stock level to 0

POST /v1/machine/{MachineID}/inventory/empty

Empties machine products inventory

Request URL

https://lynx.nayax.com/Operational/v1/machine/{MachineID}/inventory/empty

Request Parameters

Parameter	Parameter Type	Data Type	Description
MachineID	Path	Long	Auto generate unique id, which represents the Vending Machine in Nayax back office

Model

```
ApiResponse {  
    Ok (boolean, optional),  
    Message (string, optional),  
    SystemMessage (string, optional)  
}
```

Example Response Body

```
{  
    "Ok": true,  
    "Message": null,  
    "SystemMessage": null  
}
```

Machine Billing

GET Payment Details

Method returns the 5 fields of the heartland billing provider defined to machine in Nayax back office using Machine ID

GET

/v1/machine/{MachineID}/billing

[Get Payment details info](#)

Request URL

https://lynx.nayax.com/Operational/v1/machine/{MachineID}/billing

Request Parameters

Parameter	Parameter Type	Data Type	Description
MachineID	Path	Long	Auto generate unique id, which represents the Vending Machine in Nayax back office

Model

```
BillingInfo {  
  Username (string, optional),  
  Password (string, optional),  
  LicenseID (integer, optional),  
  SiteID (integer, optional),  
  DeviceID (integer, optional)  
}
```

Example Response Body

```
{  
  "Username": "3763572",  
  "Password": "dfg4362",  
  "LicenseID": 13557,  
  "SiteID": 12132,  
  "DeviceID": 1436326  
}
```

POST Payment Details

Method updates the 5 fields of heartland billing provider to machine in Nayax back office using Machine ID

POST /v1/machine/{MachineID}/billing

[Update Payment details info](#)

Please Note: Heartland Device ID must be unique per machine per MID, if the credentials are already used by another machine the update process will fail

Request URL

https://lynx.nayax.com/Operational/v1/machine/{MachineID}/billing

Model

```
BillingInfo {
  Username (string, optional),
  Password (string, optional),
  LicenseID (integer, optional),
  SiteID (integer, optional),
  DeviceID (integer, optional)
}
```

Example Response Body

```
{
  "Ok": true,
  "Message": null,
  "SystemMessage": null
}
```

POST Billing Fields Description

Category	Field Name	Type	Max Length	Validation	Description
MID	Username	string	25	Mandatory	Heartland Username, Credentials Provided by heartland to enable cashless transactions through Nayax devices
	Password	string	25	Mandatory	Heartland Password, Credentials Provided by heartland to enable cashless transactions through Nayax devices
TID	LicenseID	int	6	Mandatory	Heartland License ID, Credentials Provided by heartland to enable cashless transactions through Nayax devices
	SiteID	int	6	Mandatory	Heartland Site ID, Credentials Provided by heartland to enable cashless transactions through Nayax devices
	DeviceID	int	10	Mandatory	Heartland Device ID, Credentials Provided by heartland to enable cashless transactions through Nayax devices,

Error Codes

Code	Error	Description
1	Your user hasn't been setup in DCS	Username used to POST Query does not exist in Nayax back office system, please contact the System Administrator to create one for you
2	Your user is Not Active in DCS	Username used to POST Query is set to 'Not Active' status in Nayax back office system, please contact the System Administrator to change the user status
3	Your user lacks 'NayaxService' Role	Username used to POST Query does not have the required 'NayaxService' role in Nayax back office system, please contact the System Administrator to create one for you
4	Device not found	Device number provided in the POST Query was not found under the Operator
5	Device and username already in use by {0}, and it must be unique	Heartland Device ID in combination with Heartland Username exists on another machine and cannot be updated on the current machine
6	'{0}' Billing Provider of machine {1} - not supported	Operator Hierarchy of this machine is not configured to the Heartland Billing provider and as a result cannot be updated with the Heartland Credentials