

DOCUMENTATION

Intro

Table of contents

1	Tutorial Intro	3
1.1	Getting Started	3
1.1.1	What you'll need	3
1.2	Generate a new site	3
1.3	Start your site	3

1 Tutorial Intro

Let's discover **Docusaurus** in less than 5 minutes.

1.1 Getting Started

Get started by **creating a new site**.

Or **try Docusaurus immediately** with docusaurus.new.

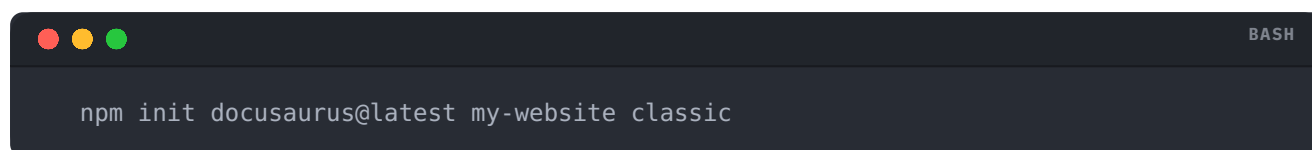
1.1.1 What you'll need

- [Node.js](#) version 18.0 or above:
 - When installing Node.js, you are recommended to check all checkboxes related to dependencies.

1.2 Generate a new site

Generate a new Docusaurus site using the **classic template**.

The classic template will automatically be added to your project after you run the command:

A terminal window with a dark background and three colored window control buttons (red, yellow, green) in the top-left corner. The text "BASH" is in the top-right corner. The command "npm init docusaurus@latest my-website classic" is entered in the terminal.

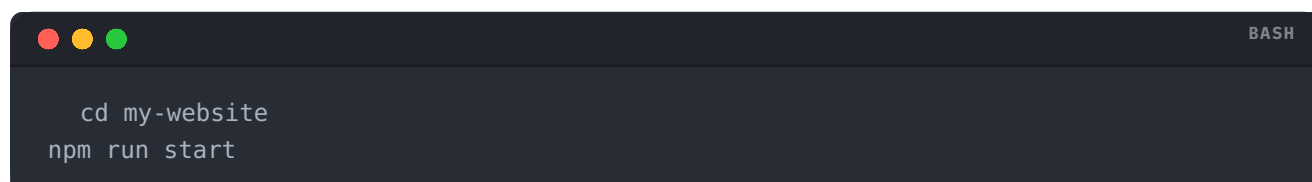
```
npm init docusaurus@latest my-website classic
```

You can type this command into Command Prompt, Powershell, Terminal, or any other integrated terminal of your code editor.

The command also installs all necessary dependencies you need to run Docusaurus.

1.3 Start your site

Run the development server:

A terminal window with a dark background and three colored window control buttons (red, yellow, green) in the top-left corner. The text "BASH" is in the top-right corner. The commands "cd my-website" and "npm run start" are entered in the terminal.

```
cd my-website  
npm run start
```

The `cd` command changes the directory you're working with. In order to work with your newly created Docusaurus site, you'll need to navigate the terminal there.

The `npm run start` command builds your website locally and serves it through a development server, ready for you to view at <http://localhost:3000/>.

Open `docs/intro.md` (this page) and edit some lines: the site **reloads automatically** and displays your changes.