

DOCUMENTATION

Full documentation

Table of contents

1	Main Page	4
2	Authentication	5
2.1	Level 1 — System Context	5
2.2	Level 2 — Building Blocks	5
3	Tutorial Intro	15
3.1	Getting Started	15
3.1.1	What you'll need	15
3.2	Generate a new site	15
3.3	Start your site	15
4	Rapid Alert System Notification ER Diagram	17
5	test intro	20
6	Congratulations!	21
6.1	What's next?	21
7	Create a Blog Post	22
7.1	Create your first Post	22
8	Create a Document	23
8.1	Create your first Doc	23
8.2	Configure the Sidebar	23
9	Create a Page	25
9.1	Create your first React Page	25
9.2	Create your first Markdown Page	25
10	Deploy your site	26
10.1	Build your site	26
10.2	Deploy your site	26
11	Markdown Features	27
11.1	Front Matter	27
11.2	Links	27
11.3	Images	27

11.4	Code Blocks	28
11.5	Admonitions	28
11.6	MDX and React Components	29
12	Manage Docs Versions	30
12.1	Create a docs version	30
12.2	Add a Version Dropdown	30
12.3	Update an existing version	31
13	Translate your site	32
13.1	Configure i18n	32
13.2	Translate a doc	32
13.3	Start your localized site	32
13.4	Add a Locale Dropdown	33
13.5	Build your localized site	34

1 Main Page

Let's discover **Docusaurus** in less than 5 minutes.

2 Authentication

2.1 Level 1 — System Context

The system exposes a public documentation portal and an internal editing API. The main external actors are:

Actor	Responsibility
End user	Browses the published documentation
Identity provider	Authenticates internal editors
CI pipeline	Builds, tests and deploys the site

The context boundary is intentionally small: everything user-facing is static.

2.2 Level 2 — Building Blocks


- **Web frontend** — the Docusaurus static site served from GitHub Pages.
- **Content pipeline** — Markdown assembled at build time, including the `#include` mechanism that composes pages from reusable fragments.
- **PDF exporter** — WeasyPrint renders the architecture section to a branded PDF as part of the CI workflow.

This whole section is assembled from separate files — if you can read it in the exported PDF, composition works end to end.

you can use `_folder` you create reusable md


```
#include "_sections/level-1-context.md"
#include "_sections/level-2-components.md"
```


Le flow OIDC complet : [C4 Core Diagrams](#)

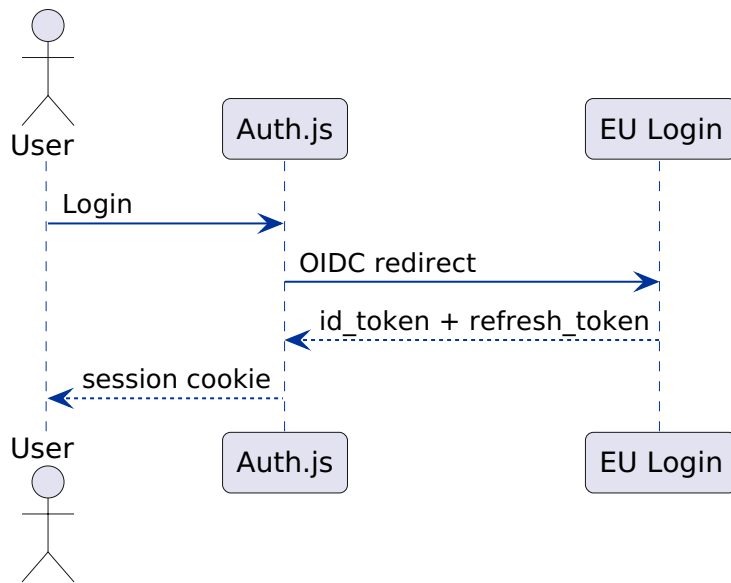


Détail du refresh token :

Refresh token race condition




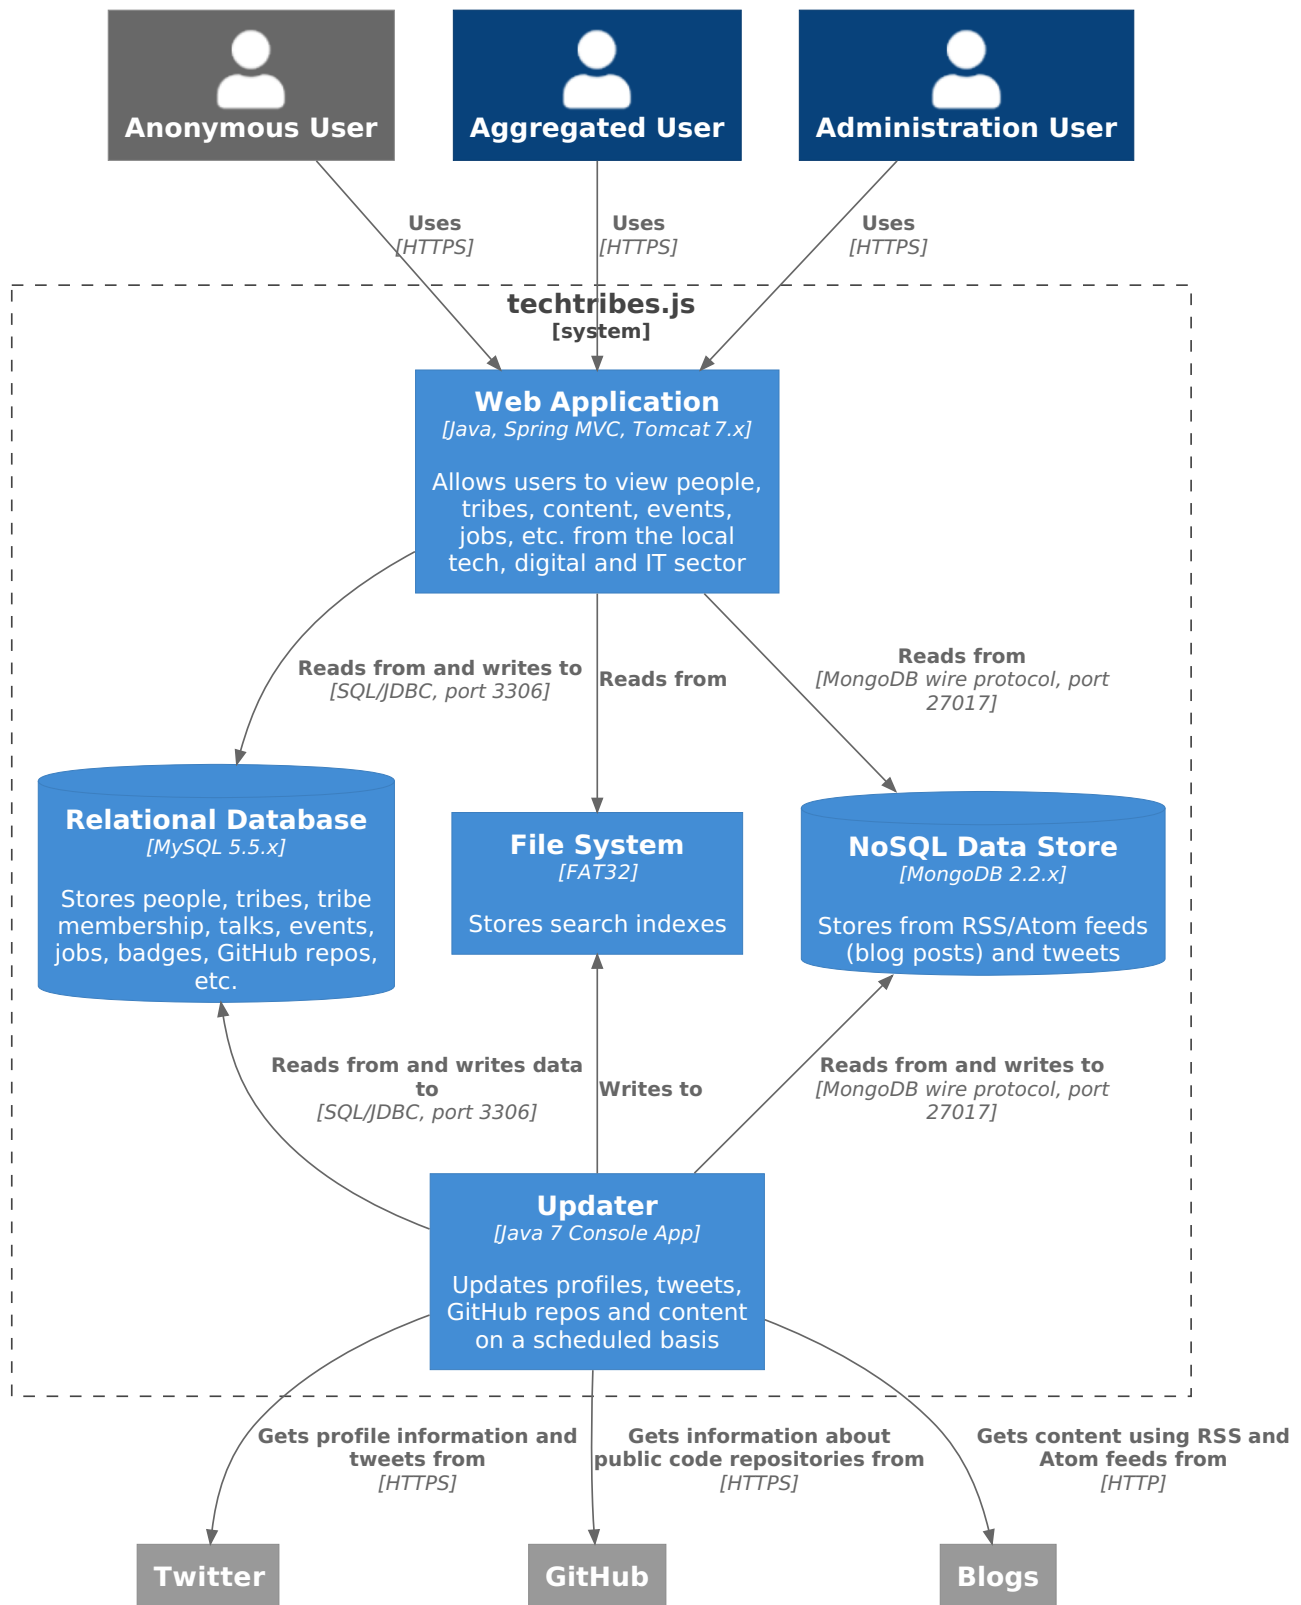


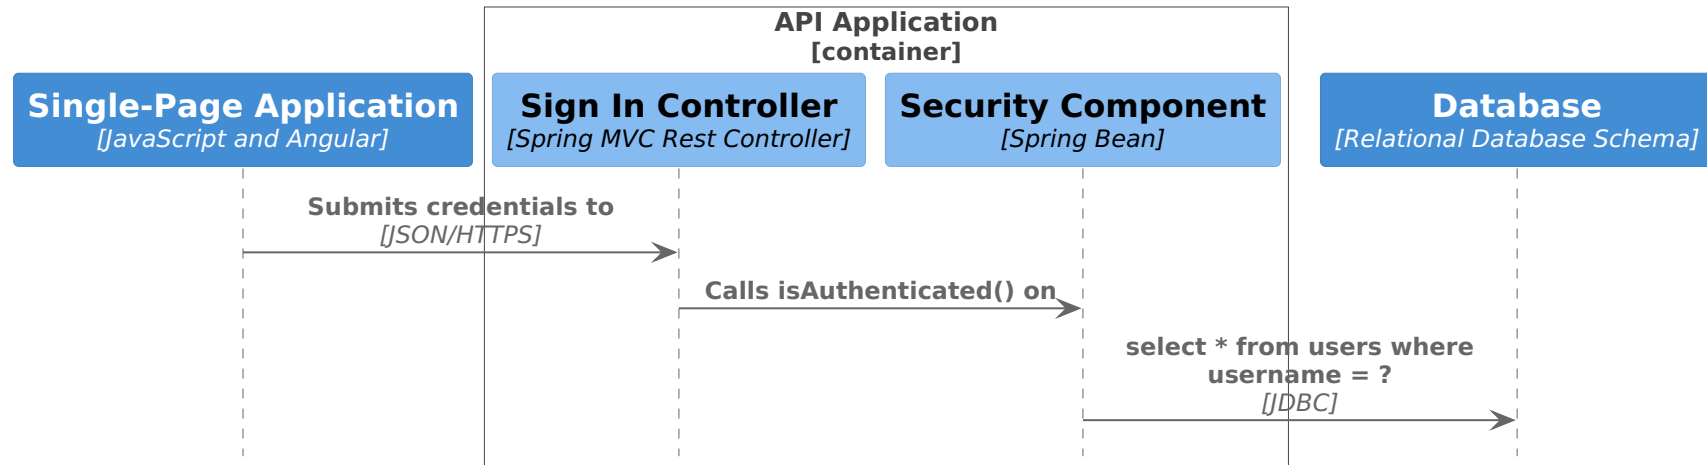

Legend	
	container
	component
	container boundary

Deployment Diagram for Internet Banking System - Live

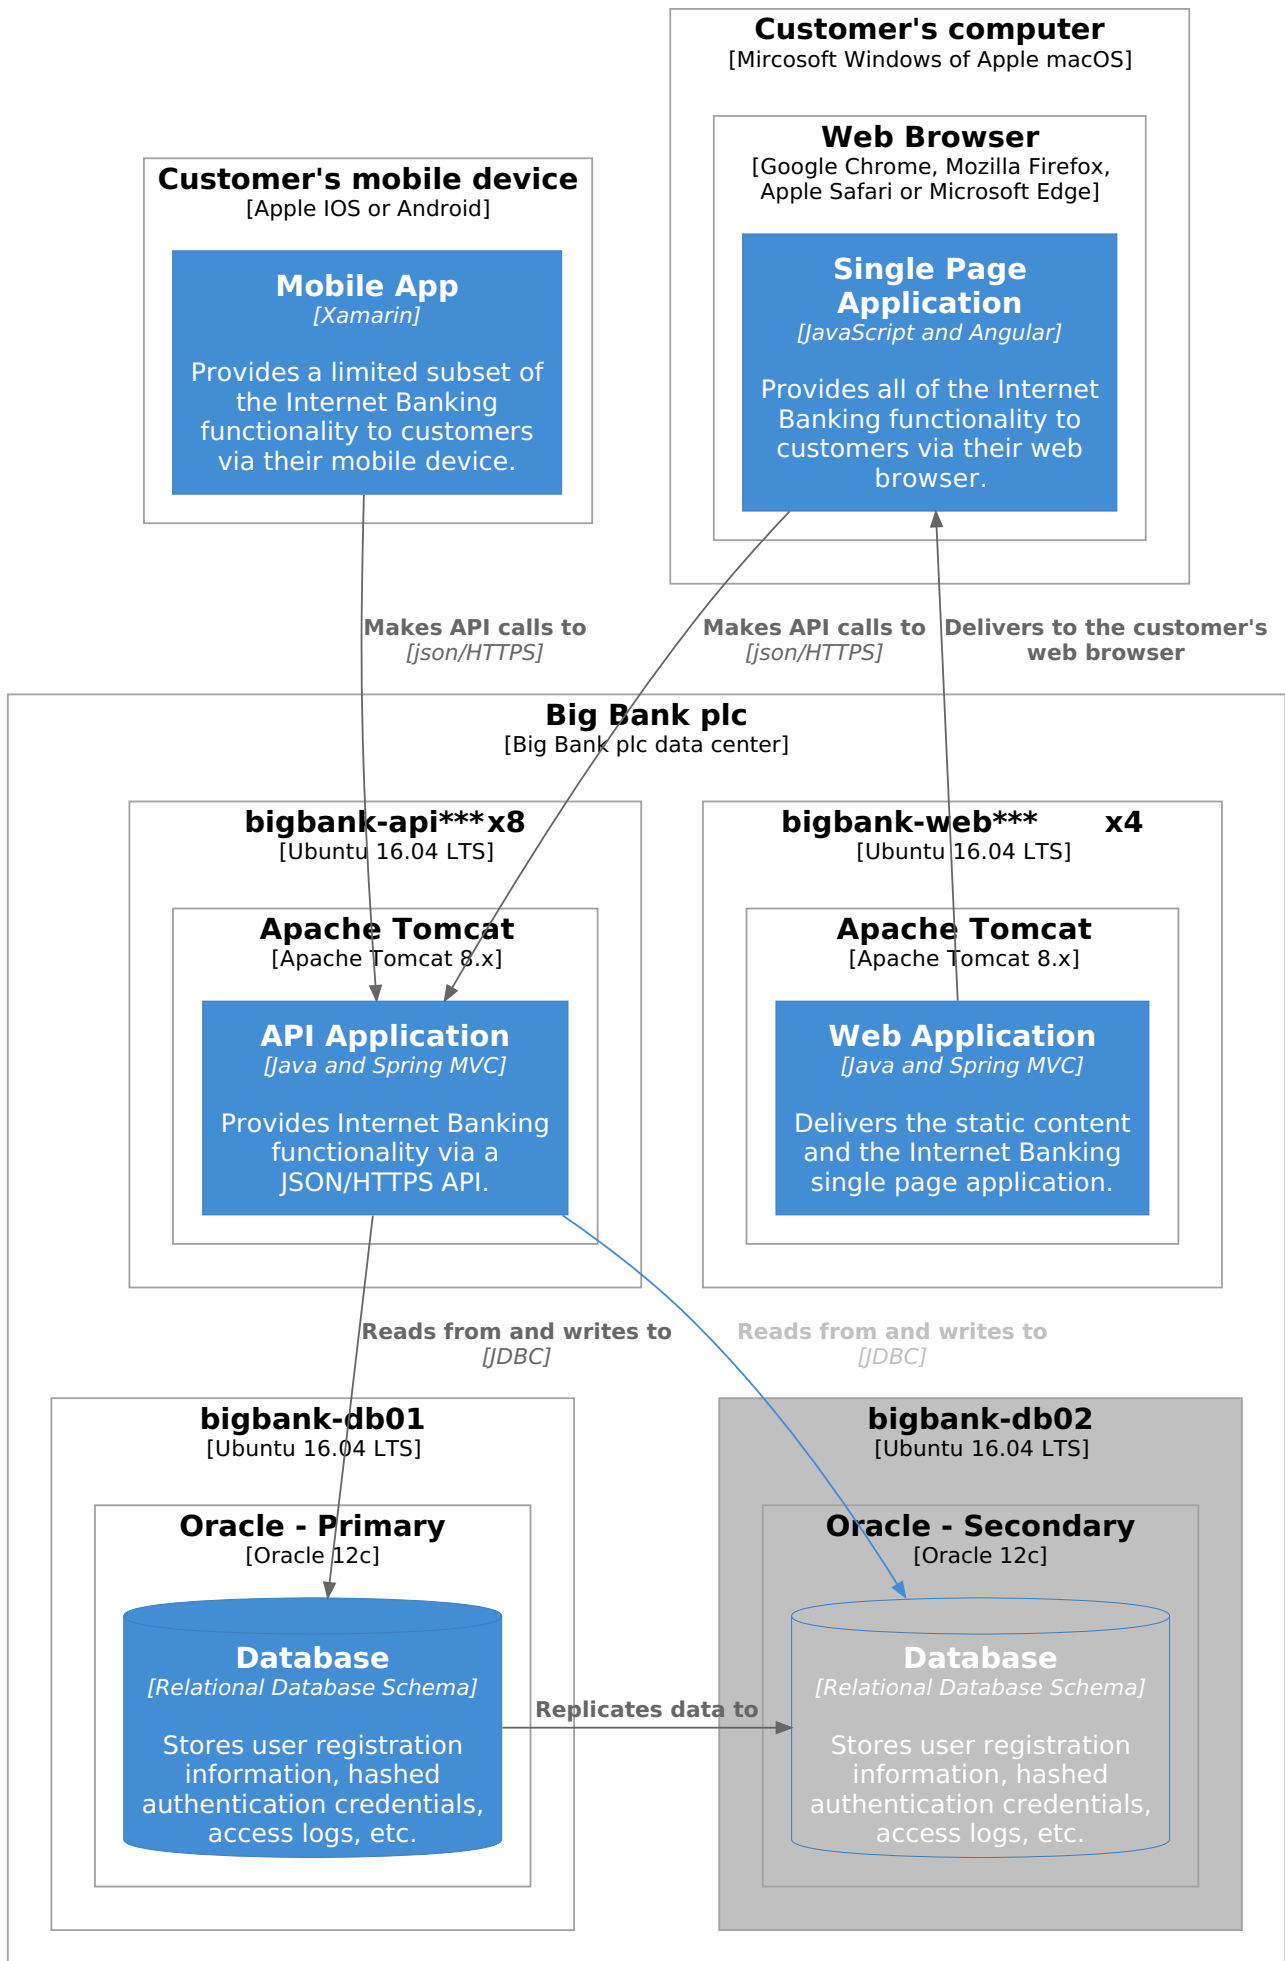

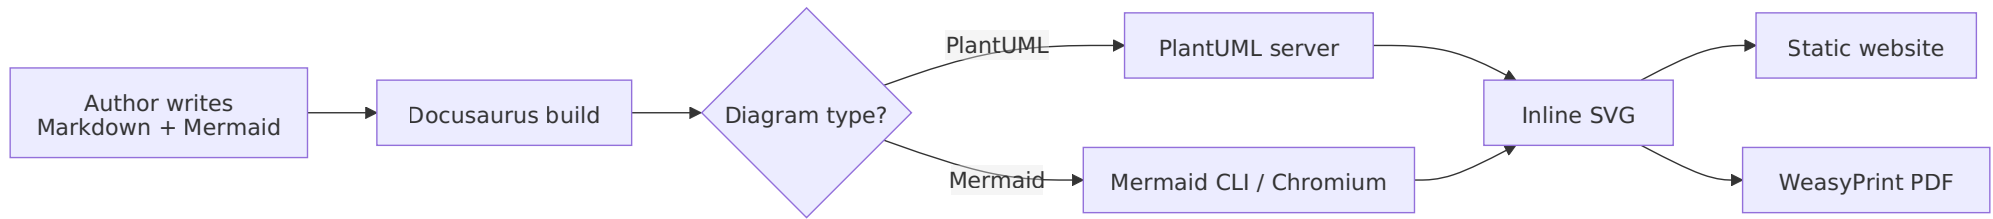

3 Tutorial Intro

Let's discover **Docusaurus** in less than 5 minutes.

3.1 Getting Started

Get started by **creating a new site**.

Or **try Docusaurus immediately** with docusaurus.new.


3.1.1 What you'll need

- [Node.js](#) version 18.0 or above:
 - When installing Node.js, you are recommended to check all checkboxes related to dependencies.

3.2 Generate a new site

Generate a new Docusaurus site using the **classic template**.

The classic template will automatically be added to your project after you run the command:

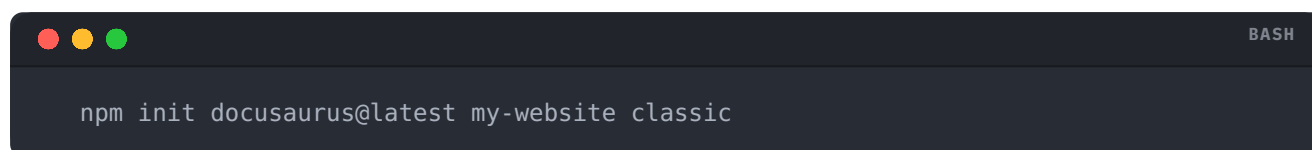A terminal window with a dark background and three colored window control buttons (red, yellow, green) in the top-left corner. The text "BASH" is in the top-right corner. The command "npm init docusaurus@latest my-website classic" is entered in the terminal.


```
npm init docusaurus@latest my-website classic
```

You can type this command into Command Prompt, Powershell, Terminal, or any other integrated terminal of your code editor.

The command also installs all necessary dependencies you need to run Docusaurus.

3.3 Start your site

Run the development server:

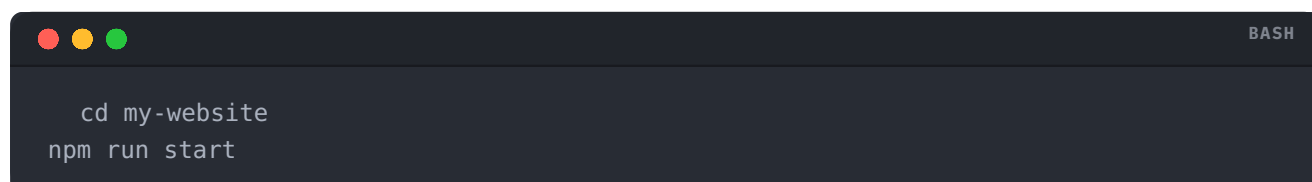A terminal window with a dark background and three colored window control buttons (red, yellow, green) in the top-left corner. The text "BASH" is in the top-right corner. The commands "cd my-website" and "npm run start" are entered in the terminal.


```
cd my-website  
npm run start
```

The `cd` command changes the directory you're working with. In order to work with your newly created Docusaurus site, you'll need to navigate the terminal there.

The `npm run start` command builds your website locally and serves it through a development server, ready for you to view at <http://localhost:3000/>.

Open `docs/intro.md` (this page) and edit some lines: the site **reloads automatically** and displays your changes.

4 Rapid Alert System Notification ER Diagram

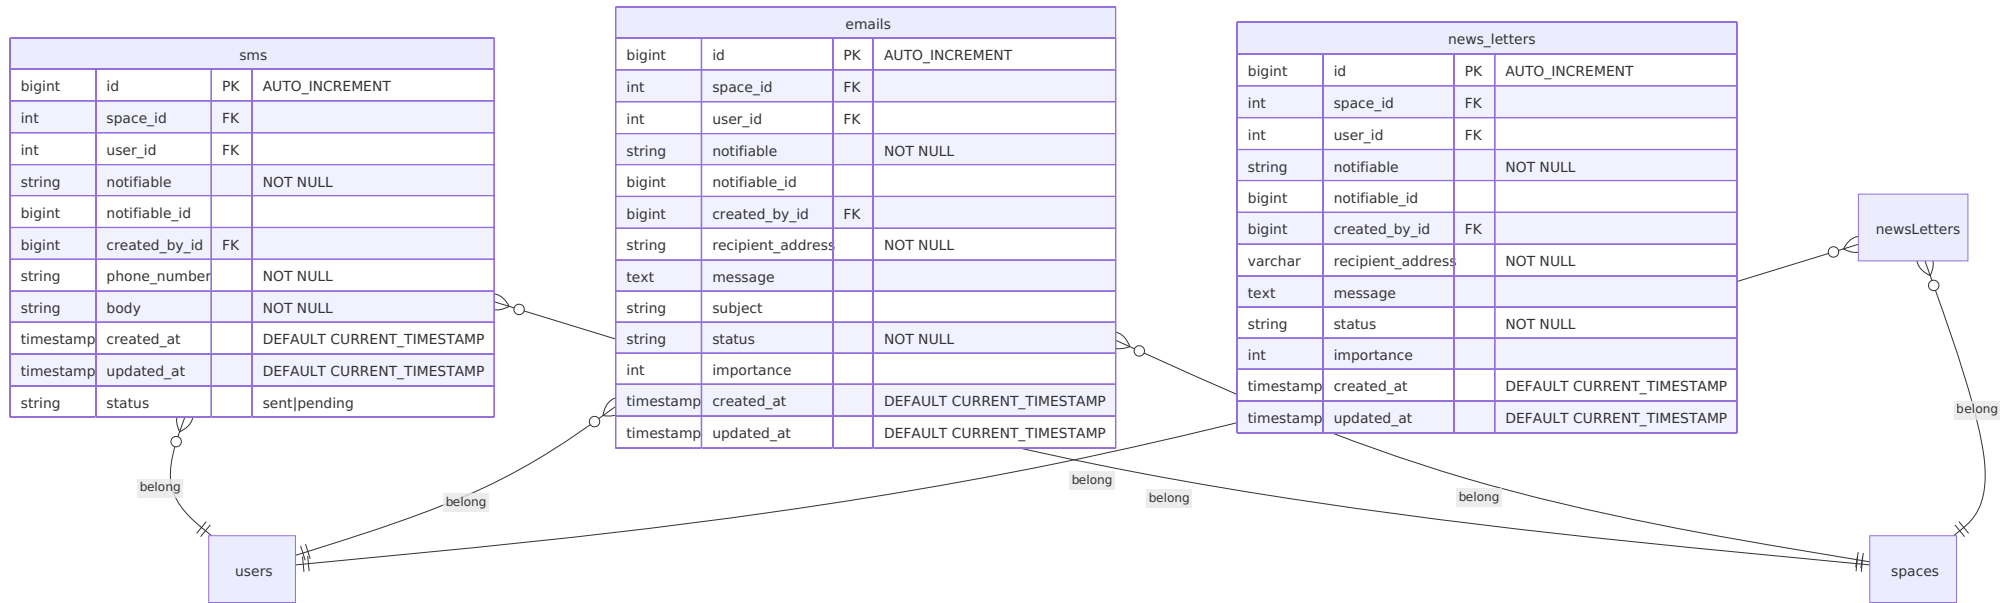

5 test intro

Let's discover **Docusaurus** in less than 5 minutes.

6 Congratulations!

You have just learned the **basics of Docusaurus** and made some changes to the **initial template**.

Docusaurus has **much more to offer!**

Have **5 more minutes**? Take a look at [versioning](#) and [i18n](#).

Anything **unclear** or **buggy** in this tutorial? [Please report it!](#)

6.1 What's next?


- Read the [official documentation](#)
- Modify your site configuration with `docusaurus.config.js`
- Add navbar and footer items with `themeConfig`
- Add a custom [Design and Layout](#)
- Add a [search bar](#)
- Find inspirations in the [Docusaurus showcase](#)
- Get involved in the [Docusaurus Community](#)

7 Create a Blog Post

Docusaurus creates a **page for each blog post**, but also a **blog index page**, a **tag system**, an **RSS** feed...

7.1 Create your first Post

Create a file at `blog/2021-02-28-greetings.md`:

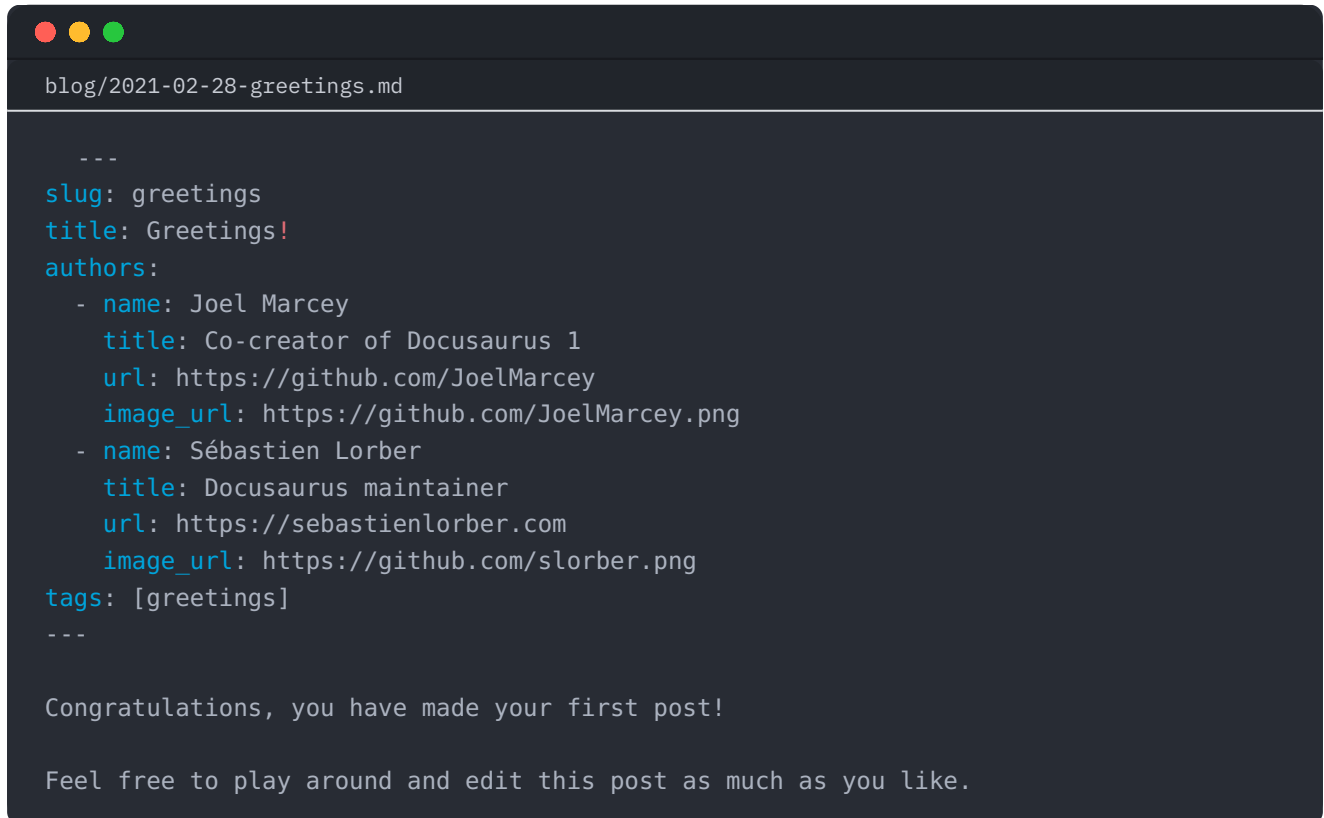

```
blog/2021-02-28-greetings.md

---
slug: greetings
title: Greetings!
authors:
  - name: Joel Marcey
    title: Co-creator of Docusaurus 1
    url: https://github.com/JoelMarcey
    image_url: https://github.com/JoelMarcey.png
  - name: Sébastien Lorber
    title: Docusaurus maintainer
    url: https://sebastienlorber.com
    image_url: https://github.com/slорber.png
tags: [greetings]
---

Congratulations, you have made your first post!

Feel free to play around and edit this post as much as you like.
```

A new blog post is now available at <http://localhost:3000/blog/greetings>.


8 Create a Document

Documents are **groups of pages** connected through:

- a **sidebar**
- **previous/next navigation**
- **versioning**

8.1 Create your first Doc

Create a Markdown file at `docs/hello.md`:

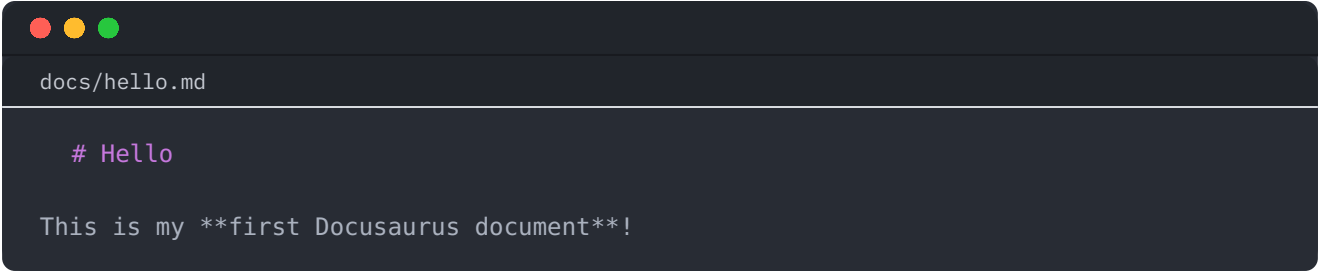

```
docs/hello.md

# Hello


This is my first Docusaurus document!
```

A new document is now available at <http://localhost:3000/docs/hello>.

8.2 Configure the Sidebar

Docusaurus automatically **creates a sidebar** from the `docs` folder.

Add metadata to customize the sidebar label and position:

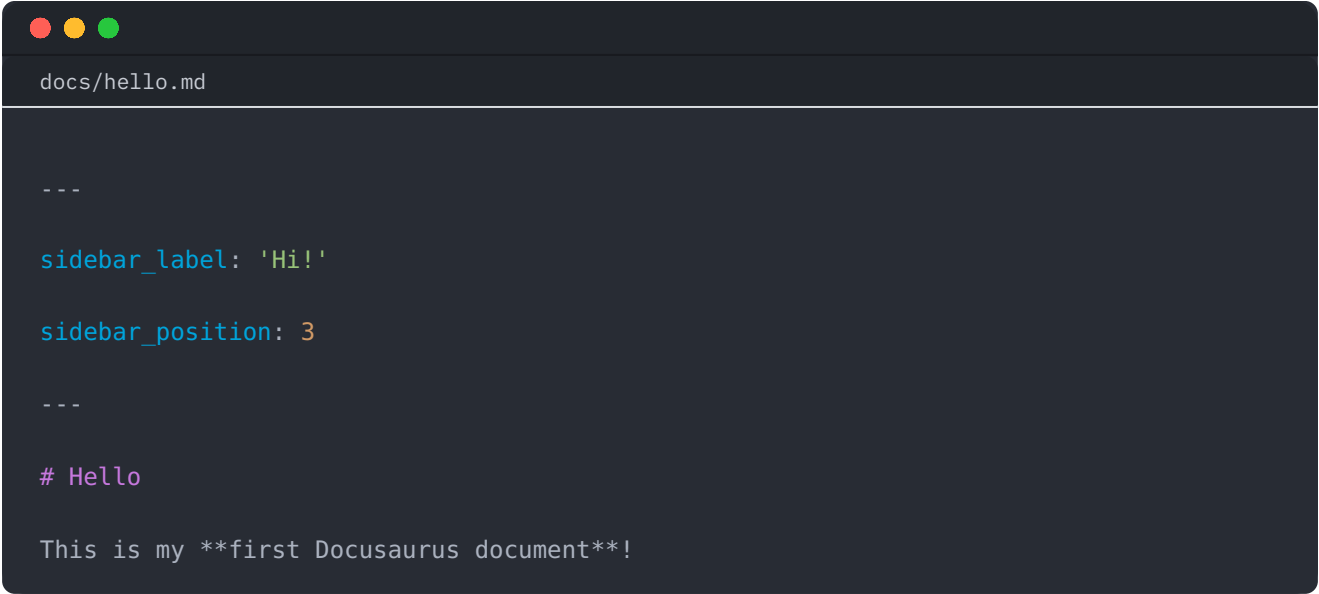

```
docs/hello.md

---

sidebar_label: 'Hi!'


sidebar_position: 3

---

# Hello

This is my first Docusaurus document!
```

It is also possible to create your sidebar explicitly in `sidebars.js`:

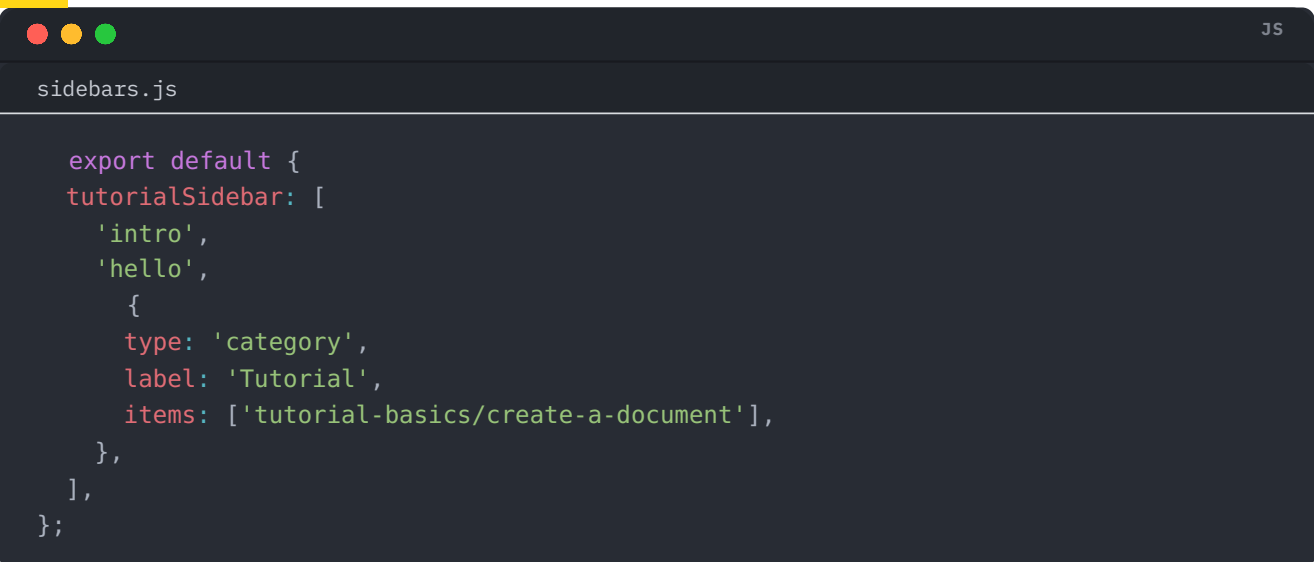

```
sidebars.js

export default {
  tutorialSidebar: [
    'intro',
    'hello',
    {
      type: 'category',
      label: 'Tutorial',
      items: ['tutorial-basics/create-a-document'],
    },
  ],
};
```



9 Create a Page

Add **Markdown or React** files to `src/pages` to create a **standalone page**:

- `src/pages/index.js` → `localhost:3000/`
- `src/pages/foo.md` → `localhost:3000/foo`
- `src/pages/foo/bar.js` → `localhost:3000/foo/bar`

9.1 Create your first React Page

Create a file at `src/pages/my-react-page.js`:

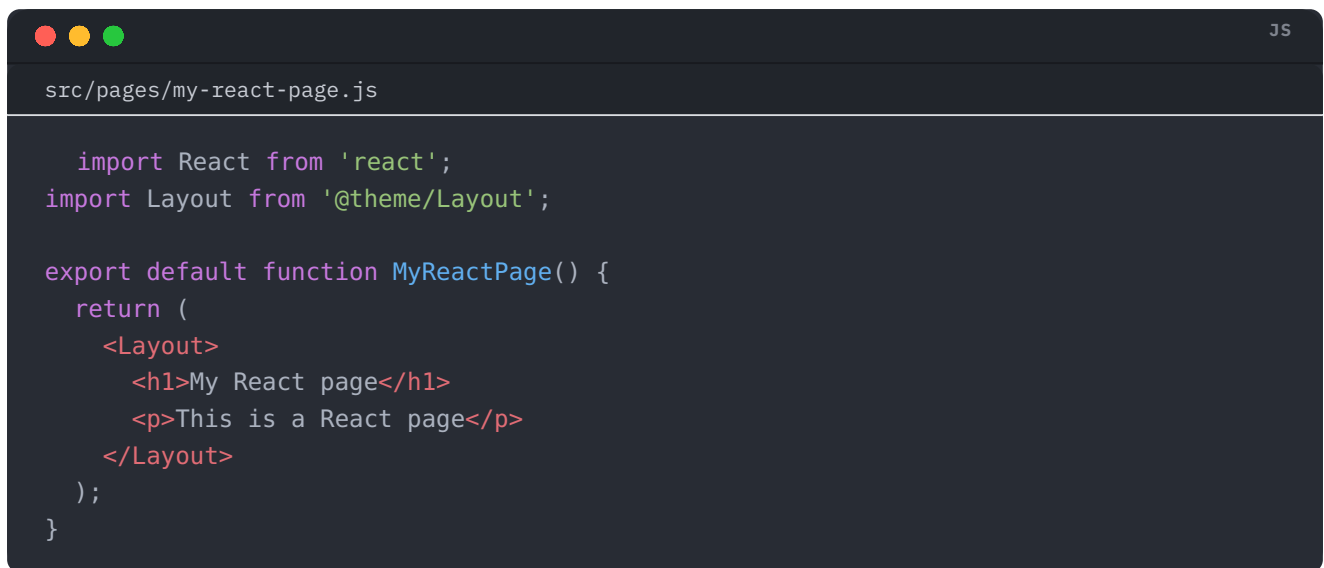A screenshot of a code editor window with a dark theme. The title bar shows three colored window control buttons (red, yellow, green) on the left and the text 'JS' on the right. The file name 'src/pages/my-react-page.js' is displayed in the editor's header. The code content is as follows:


```
import React from 'react';
import Layout from '@theme/Layout';

export default function MyReactPage() {
  return (
    <Layout>
      <h1>My React page</h1>
      <p>This is a React page</p>
    </Layout>
  );
}
```

A new page is now available at <http://localhost:3000/my-react-page>.

9.2 Create your first Markdown Page

Create a file at `src/pages/my-markdown-page.md`:

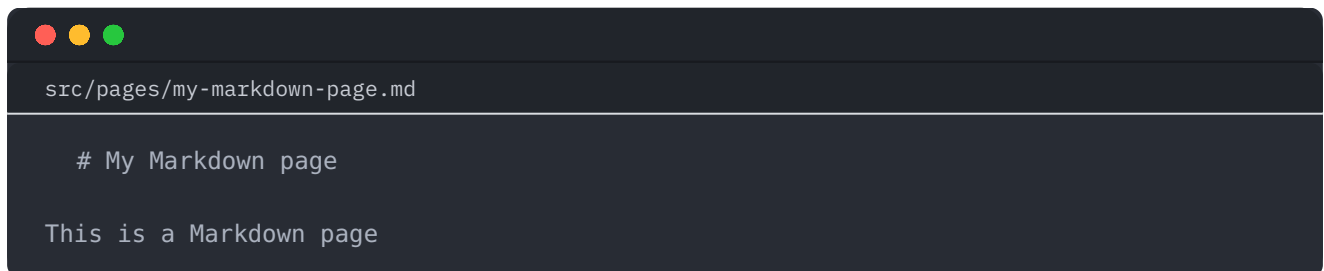A screenshot of a code editor window with a dark theme. The title bar shows three colored window control buttons (red, yellow, green) on the left. The file name 'src/pages/my-markdown-page.md' is displayed in the editor's header. The code content is as follows:

```
# My Markdown page

This is a Markdown page
```

A new page is now available at <http://localhost:3000/my-markdown-page>.

10 Deploy your site

Docusaurus is a **static-site-generator** (also called **Jamstack**).

It builds your site as simple **static HTML, JavaScript and CSS files**.

10.1 Build your site

Build your site **for production**:

A terminal window with a dark background and three colored window control buttons (red, yellow, green) in the top-left corner. The text "BASH" is in the top-right corner. The command "npm run build" is entered in the terminal.

```
npm run build
```

The static files are generated in the `build` folder.

10.2 Deploy your site

Test your production build locally:

A terminal window with a dark background and three colored window control buttons (red, yellow, green) in the top-left corner. The text "BASH" is in the top-right corner. The command "npm run serve" is entered in the terminal.

```
npm run serve
```

The `build` folder is now served at <http://localhost:3000/>.

You can now deploy the `build` folder **almost anywhere** easily, **for free** or very small cost (read the **Deployment Guide**).

11 Markdown Features

DocuSaurus supports **Markdown** and a few **additional features**.

11.1 Front Matter

Markdown documents have metadata at the top called **Front Matter**:

my-doc.md

id: my-doc-id

title: My document title

description: My document description

slug: /my-custom-url

Markdown heading

Markdown text with [links](./hello.md)

11.2 Links

Regular Markdown links are supported, using url paths or relative file paths.



Let's see how to [\[Create a page\]\(/create-a-page\)](/create-a-page).



Let's see how to [\[Create a page\]\(./create-a-page.md\)](/create-a-page.md).

Result: Let's see how to [Create a page](#).

11.3 Images

Regular Markdown images are supported.

You can use absolute paths to reference images in the static directory (`static/img/docusaurus.png`):

You can reference images relative to the current file as well. This is particularly useful to colocate images close to the Markdown files using them:

11.4 Code Blocks

Markdown code blocks are supported with Syntax highlighting.

```
```jsx title="src/components/HelloDocusaurus.js"
function HelloDocusaurus() {
 return <h1>Hello, Docusaurus!</h1>;
}
```
```

```
src/components/HelloDocusaurus.js

function HelloDocusaurus() {
  return <h1>Hello, Docusaurus!</h1>;
}
```

11.5 Admonitions

Docusaurus has a special syntax to create admonitions and callouts:

```
:::tip My tip

Use this awesome feature option

:::

:::danger Take care

This action is dangerous

:::
```

:::tip My tip

Use this awesome feature option

⋮

⋮:danger Take care

This action is dangerous

⋮

11.6 MDX and React Components

MDX can make your documentation more **interactive** and allows using any **React components inside Markdown**:

```
export const Highlight = ({children, color}) => (
  <span
    style={{
      backgroundColor: color,
      borderRadius: '20px',
      color: '#fff',
      padding: '10px',
      cursor: 'pointer',
    }}
    onClick={() => {
      alert(`You clicked the color ${color} with label ${children}`)
    }}>
    {children}
  </span>
);

This is <Highlight color="#25c2a0">Docusaurus green</Highlight> !

This is <Highlight color="#1877F2">Facebook blue</Highlight> !
```

This is Docusaurus green !


This is Facebook blue !

12 Manage Docs Versions

Docusaurus can manage multiple versions of your docs.

12.1 Create a docs version

Release a version 1.0 of your project:

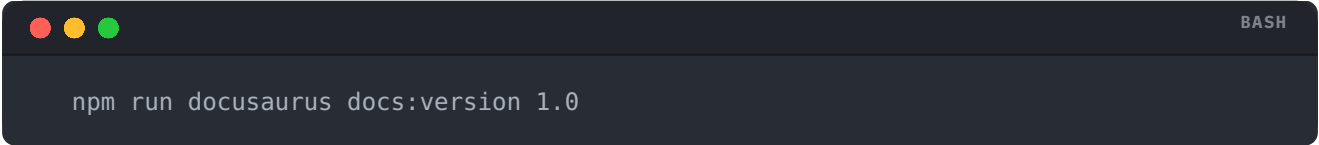

```
npm run docusaurus docs:version 1.0
```

The `docs` folder is copied into `versioned_docs/version-1.0` and `versions.json` is created.


Your docs now have 2 versions:

- `1.0` at `http://localhost:3000/docs/` for the version 1.0 docs
- `current` at `http://localhost:3000/docs/next/` for the **upcoming, unreleased docs**

12.2 Add a Version Dropdown

To navigate seamlessly across versions, add a version dropdown.


Modify the `docusaurus.config.js` file:

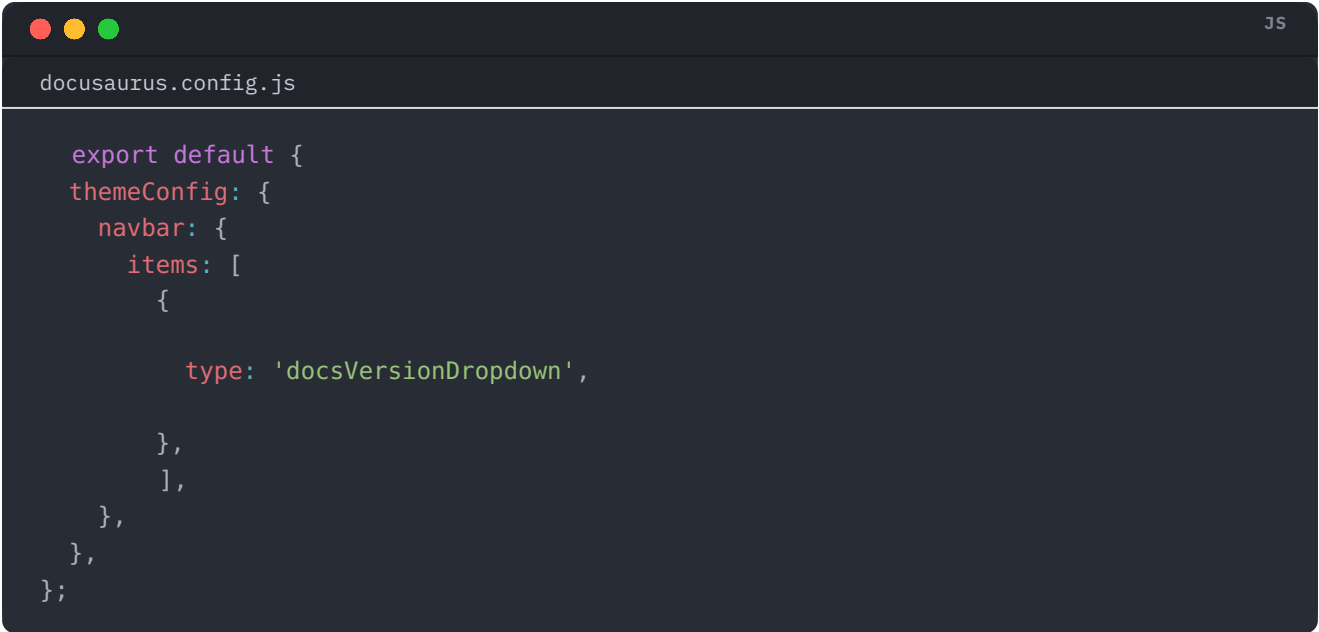

```
docusaurus.config.js

export default {
  themeConfig: {
    navbar: {
      items: [
        {
          type: 'docsVersionDropdown',
        },
      ],
    },
  },
};
```

The docs version dropdown appears in your navbar:

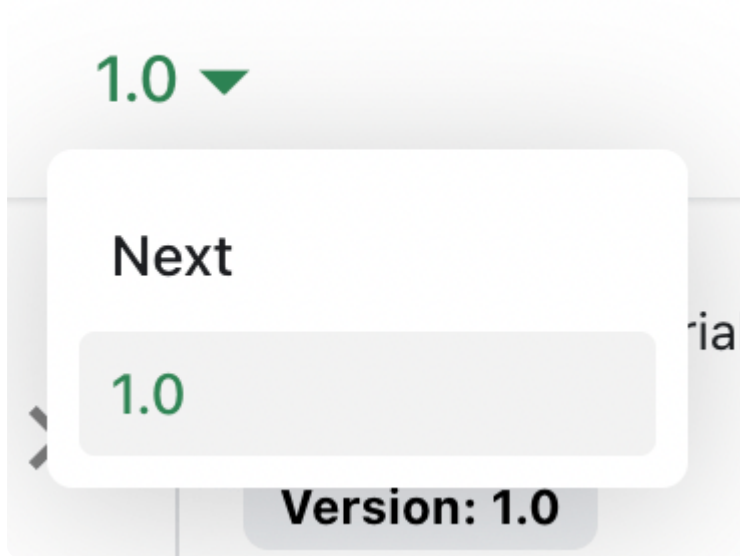

Docs Version Dropdown

[Ouvrir](#)[Télécharger](#)

12.3 Update an existing version

It is possible to edit versioned docs in their respective folder:


- `versioned_docs/version-1.0/hello.md` updates `http://localhost:3000/docs/hello`
- `docs/hello.md` updates `http://localhost:3000/docs/next/hello`

13 Translate your site

Let's translate `docs/intro.md` to French.

13.1 Configure i18n


Modify `docusaurus.config.js` to add support for the `fr` locale:

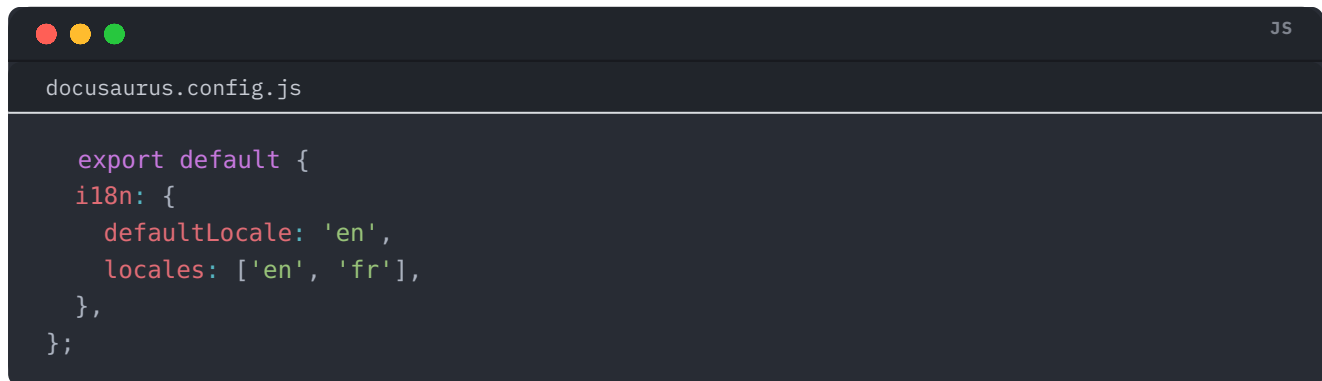

```
export default {
  i18n: {
    defaultLocale: 'en',
    locales: ['en', 'fr'],
  },
};
```

13.2 Translate a doc

Copy the `docs/intro.md` file to the `i18n/fr` folder:

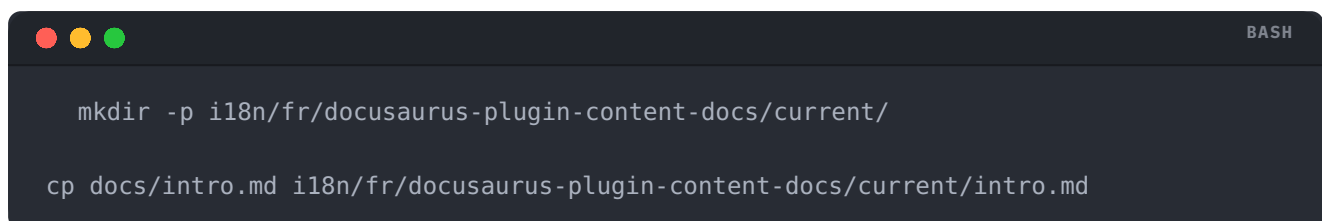

```
mkdir -p i18n/fr/docusaurus-plugin-content-docs/current/
cp docs/intro.md i18n/fr/docusaurus-plugin-content-docs/current/intro.md
```

Translate `i18n/fr/docusaurus-plugin-content-docs/current/intro.md` in French.

13.3 Start your localized site

Start your site on the French locale:



```
npm run start -- --locale fr
```

Your localized site is accessible at <http://localhost:3000/fr/> and the `Getting Started` page is translated.

! CAUTION

In development, you can only use one locale at a time.


13.4 Add a Locale Dropdown

To navigate seamlessly across languages, add a locale dropdown.

Modify the `docusaurus.config.js` file:

```
export default {
  themeConfig: {
    navbar: {
      items: [
        {
          type: 'localeDropdown',
        },
      ],
    },
  },
};
```


The locale dropdown now appears in your navbar:

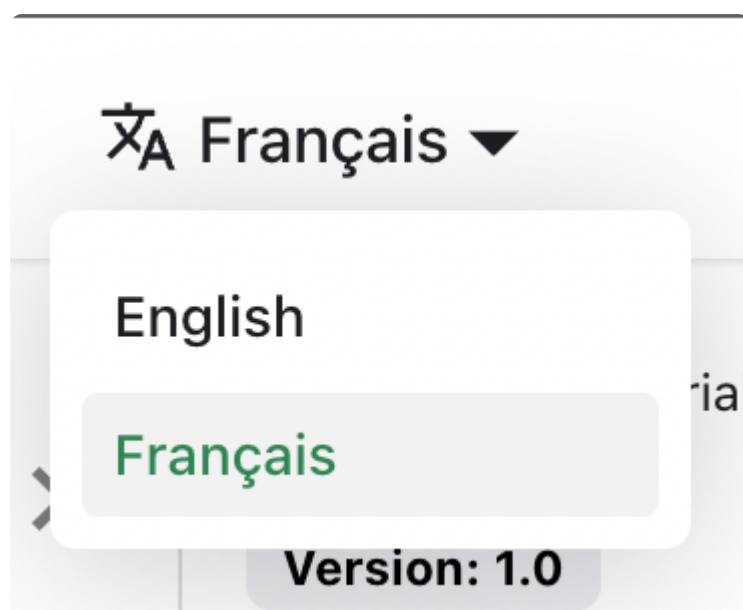

Locale Dropdown


13.5 Build your localized site

Build your site for a specific locale:

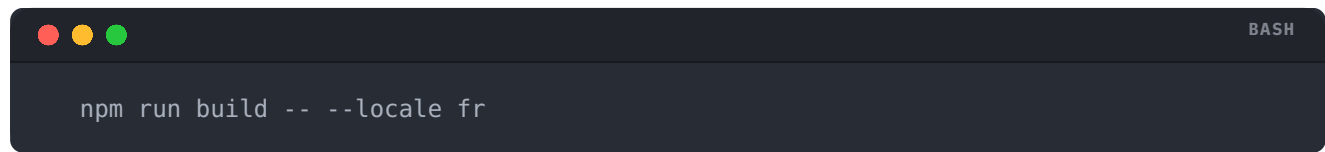A terminal window with a dark background and three colored window control buttons (red, yellow, green) in the top-left corner. The text "BASH" is in the top-right corner. The command "npm run build -- --locale fr" is entered in the terminal.

```
npm run build -- --locale fr
```

Or build your site to include all the locales at once:

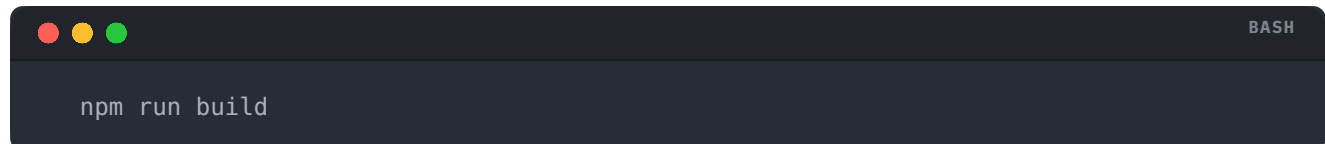A terminal window with a dark background and three colored window control buttons (red, yellow, green) in the top-left corner. The text "BASH" is in the top-right corner. The command "npm run build" is entered in the terminal.

```
npm run build
```