

DOCUMENTATION

Tutorial Extras

Table of contents


1	Manage Docs Versions	3
1.1	Create a docs version	3
1.2	Add a Version Dropdown	3
1.3	Update an existing version	4
2	Translate your site	5
2.1	Configure i18n	5
2.2	Translate a doc	5
2.3	Start your localized site	5
2.4	Add a Locale Dropdown	6
2.5	Build your localized site	7

1 Manage Docs Versions

Docusaurus can manage multiple versions of your docs.

1.1 Create a docs version

Release a version 1.0 of your project:

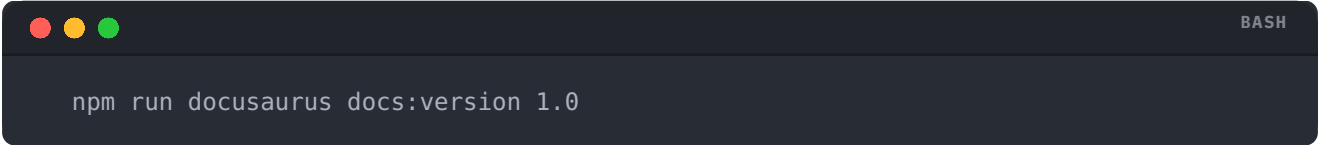

```
npm run docusaurus docs:version 1.0
```

The `docs` folder is copied into `versioned_docs/version-1.0` and `versions.json` is created.


Your docs now have 2 versions:

- `1.0` at `http://localhost:3000/docs/` for the version 1.0 docs
- `current` at `http://localhost:3000/docs/next/` for the **upcoming, unreleased docs**

1.2 Add a Version Dropdown

To navigate seamlessly across versions, add a version dropdown.


Modify the `docusaurus.config.js` file:

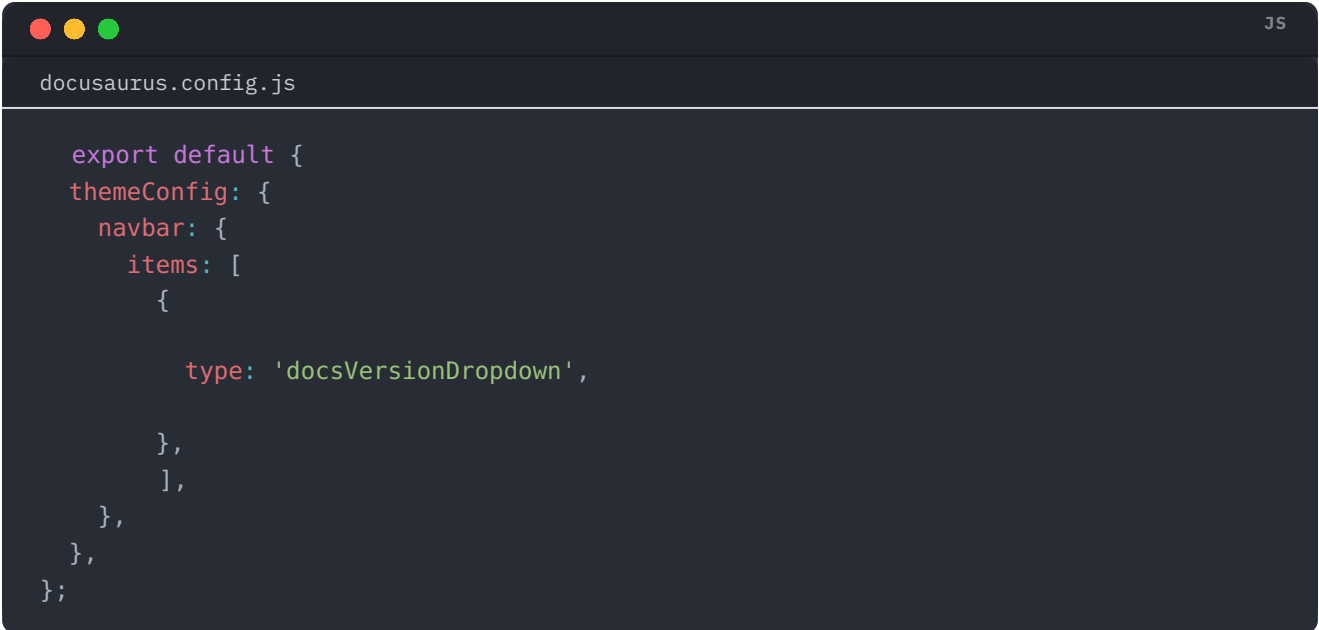

```
docusaurus.config.js

export default {
  themeConfig: {
    navbar: {
      items: [
        {
          type: 'docsVersionDropdown',
        },
      ],
    },
  },
};
```

The docs version dropdown appears in your navbar:

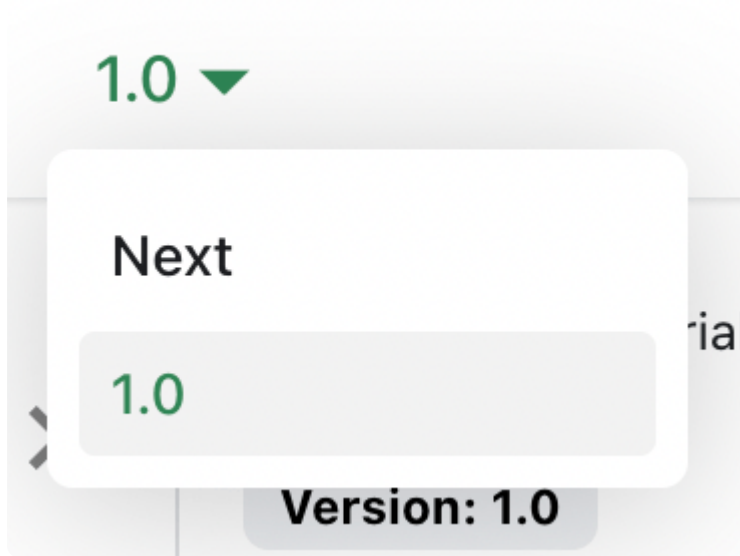

Docs Version Dropdown

[Ouvrir](#)[Télécharger](#)

1.3 Update an existing version

It is possible to edit versioned docs in their respective folder:


- `versioned_docs/version-1.0/hello.md` updates `http://localhost:3000/docs/hello`
- `docs/hello.md` updates `http://localhost:3000/docs/next/hello`

2 Translate your site

Let's translate `docs/intro.md` to French.

2.1 Configure i18n

Modify `docusaurus.config.js` to add support for the `fr` locale:

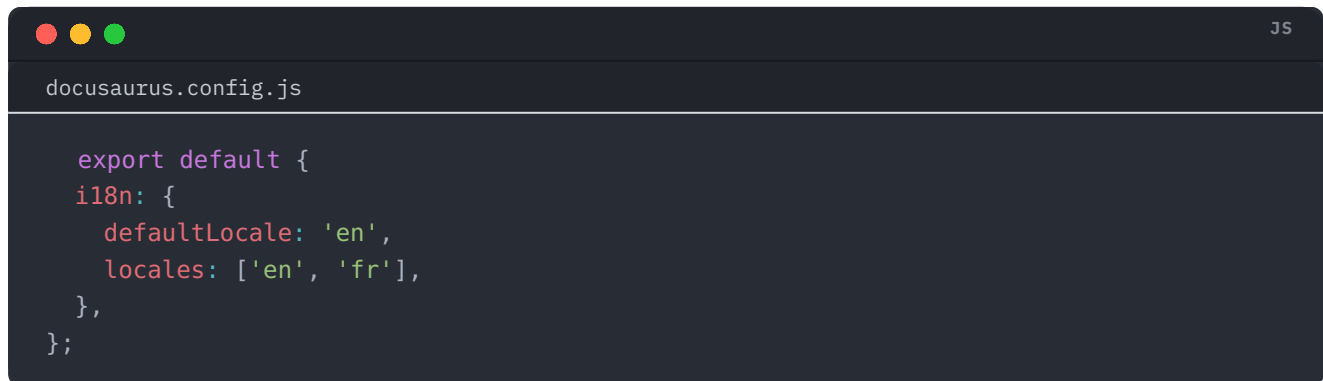


```
JS
docusaurus.config.js

export default {
  i18n: {
    defaultLocale: 'en',
    locales: ['en', 'fr'],
  },
};
```

2.2 Translate a doc

Copy the `docs/intro.md` file to the `i18n/fr` folder:

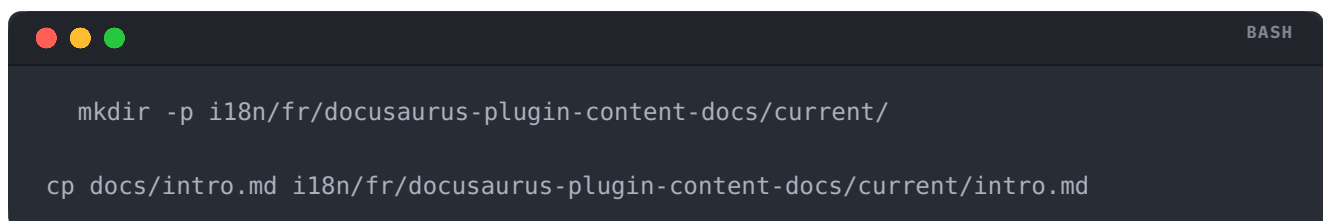

```
BASH

mkdir -p i18n/fr/docusaurus-plugin-content-docs/current/

cp docs/intro.md i18n/fr/docusaurus-plugin-content-docs/current/intro.md
```

Translate `i18n/fr/docusaurus-plugin-content-docs/current/intro.md` in French.

2.3 Start your localized site

Start your site on the French locale:



```
BASH

npm run start -- --locale fr
```

Your localized site is accessible at <http://localhost:3000/fr/> and the `Getting Started` page is translated.

! CAUTION

In development, you can only use one locale at a time.


2.4 Add a Locale Dropdown

To navigate seamlessly across languages, add a locale dropdown.

Modify the `docusaurus.config.js` file:

```
export default {
  themeConfig: {
    navbar: {
      items: [
        {
          type: 'localeDropdown',
        },
      ],
    },
  },
};
```


The locale dropdown now appears in your navbar:

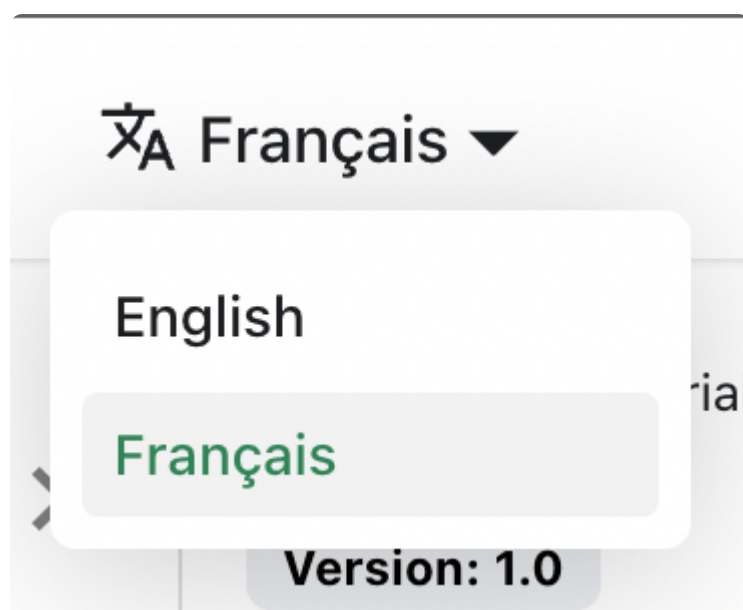

Locale Dropdown

2.5 Build your localized site


Build your site for a specific locale:

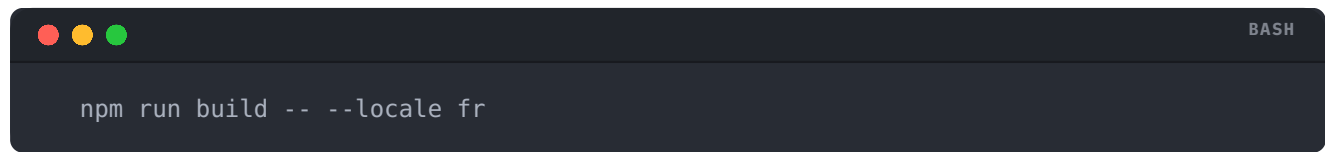

```
npm run build -- --locale fr
```

A terminal window with a dark background and three colored window control buttons (red, yellow, green) in the top-left corner. The text "BASH" is in the top-right corner. The command "npm run build -- --locale fr" is entered in the terminal.

Or build your site to include all the locales at once:

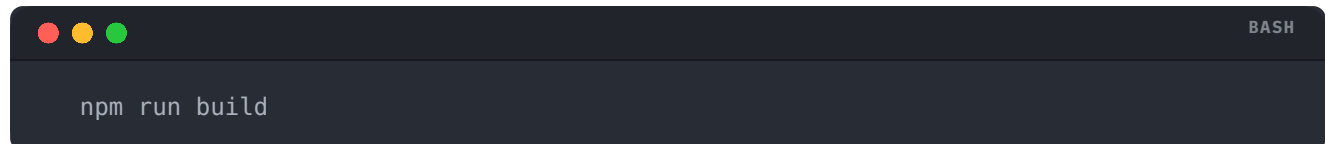

```
npm run build
```

A terminal window with a dark background and three colored window control buttons (red, yellow, green) in the top-left corner. The text "BASH" is in the top-right corner. The command "npm run build" is entered in the terminal.