



USER GUIDE

Docusaurus — User Guide


Write, preview, illustrate and export your documentation

What you can do

- **Write** — author your docs in Markdown / MDX, as usual.
- **Assemble** — reuse fragments with the `#include` directive — no import needed.
- **Illustrate** — embed architecture diagrams (LikeC4) and sketches (tldraw).
- **Preview** — live preview: any edit (even an included fragment) refreshes instantly.
- **Export** — generate one branded PDF and publish the site in a single command.

Assemble with #include

- **Goal** — compose one page from several files.
- write `#include "path/file.md"` on its own line.
 - no import: content is inserted right there.
 - path relative to the file; front matter stripped.
- **Tip** — an `_fragments/` folder (underscore) stay sidebar.

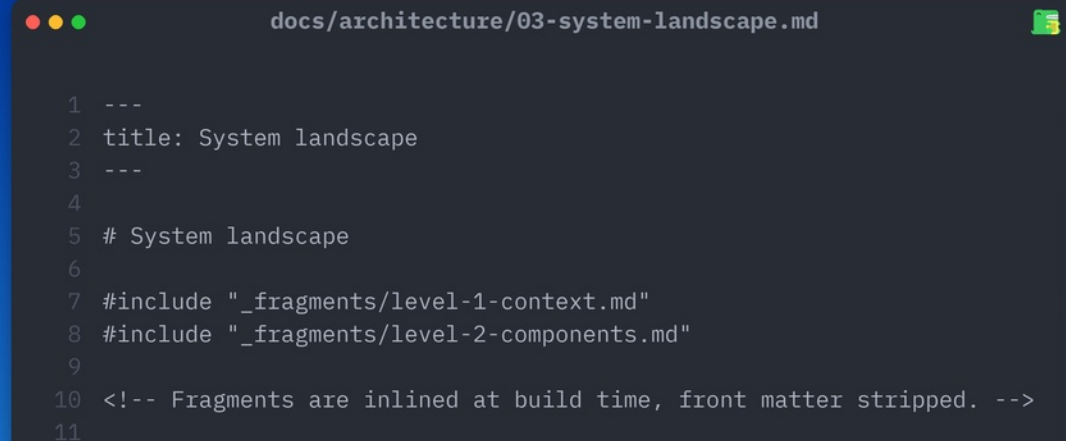A screenshot of a code editor window with a dark theme. The title bar at the top reads 'docs/architecture/03-system-landscape.md'. The editor contains 11 lines of code. Lines 1-3 are front matter: '1 ---', '2 title: System landscape', '3 ---'. Line 4 is empty. Line 5 is a heading: '5 # System landscape'. Line 6 is empty. Line 7 is an include directive: '7 #include "_fragments/level-1-context.md"'. Line 8 is another include directive: '8 #include "_fragments/level-2-components.md"'. Line 9 is empty. Line 10 is a comment: '10 <!-- Fragments are inlined at build time, front matter stripped. -->'. Line 11 is empty. The editor has standard window controls (red, yellow, green buttons) in the top left corner.

```
1 ---
2 title: System landscape
3 ---
4
5 # System landscape
6
7 #include "_fragments/level-1-context.md"
8 #include "_fragments/level-2-components.md"
9
10 <!-- Fragments are inlined at build time, front matter stripped. -->
11
```

Run and preview the site

- **make dev** — starts the local server with live preview.
- **Hot reload** — edit a page or an included fragment → the preview updates itself.
- **make prod** — production build served behind Caddy.
- **No toolchain to install** — everything runs via Docker / docker-compose.

Reusable blocks: "Prerequisites"


- **Markdown partial** — factor a recurring block (e.g. "Prerequisites") into one file.
- **Global MDX component** — usable in any page, with no import.
- **Nested includes** — a fragment can include others (cycles are detected).
- **Benefit** — update the block once → every page follows.

LikeC4 & tldraw

- **LikeC4** — architecture diagrams (C4 model) described as text.
 - /likec4 page to explore the interactive diagram.
 - views: context, components, dev / prod deployments, use cases.
- **tldraw** — /tldraw page for free-form sketches and whiteboarding.
- **Architecture docs** — ready chapters: summary, stakeholders, ADRs, building blocks...

Export the docs to PDF

- **make pdf** — assembles the whole docs into one branded PDF.
- cover page, table of contents (real page numbers), and bookmarks.
- **Customizable** — title, subtitle, baseUrl, pages to exclude
 - e.g. exclude the interactive LikeC4 page (not printable)

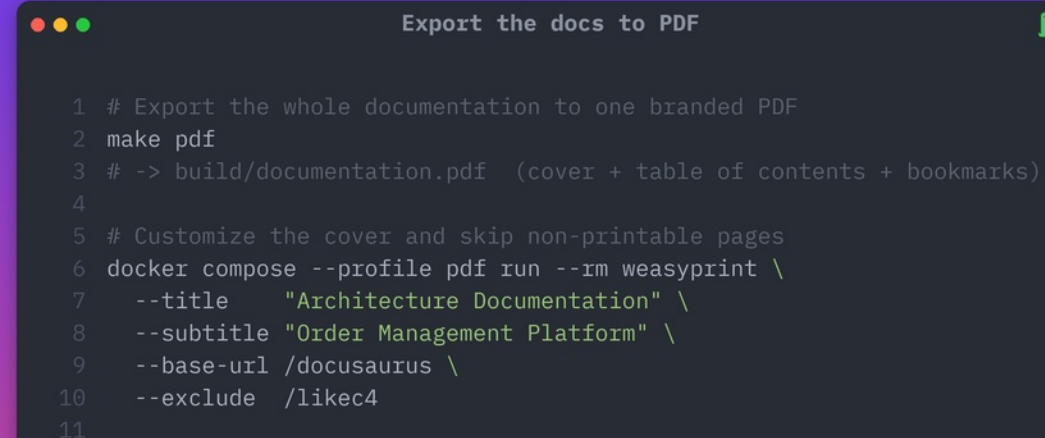


```
1 # Export the whole documentation to one branded PDF
2 make pdf
3 # -> build/documentation.pdf (cover + table of contents + bookmarks)
4
5 # Customize the cover and skip non-printable pages
6 docker compose --profile pdf run --rm weasyprint \
7   --title    "Architecture Documentation" \
8   --subtitle "Order Management Platform" \
9   --base-url /docusaurus \
10  --exclude  /likec4
11
```

What happens on every push

- **Site published** — the site + documentation.pdf are deployed to GitHub Pages.
- **PDF artifact** — on every push / pull request the PDF is built and downloadable.
- **Release PDF** — on each release, the architecture PDF is proposed as a Pull Request.
- **Nothing manual** — you push, the pipeline does the rest.

The essential commands

- **make dev** — local server + live preview.
- **make prod** — production build (Caddy).
- **make pdf** — export the docs to PDF.
- **One entry point** — the Makefile orchestrates chain.

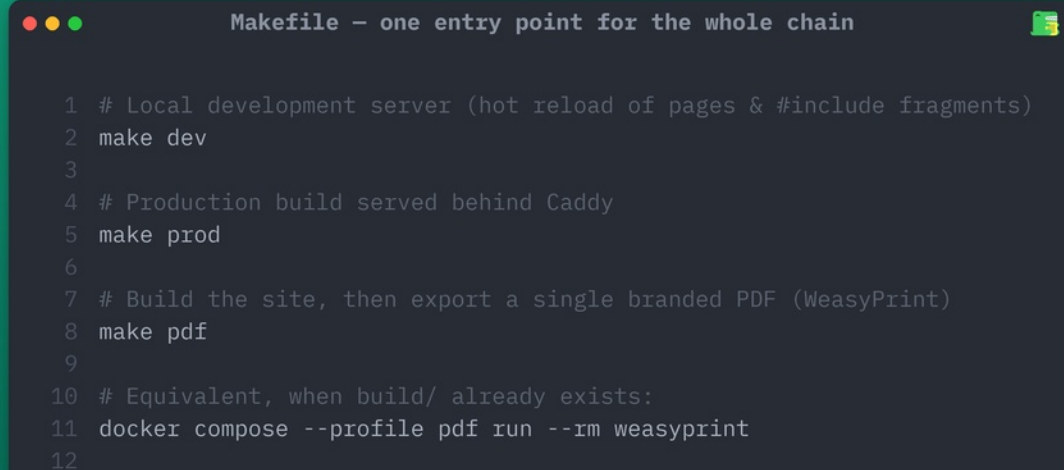

```
1 # Local development server (hot reload of pages & #include fragments)
2 make dev
3
4 # Production build served behind Caddy
5 make prod
6
7 # Build the site, then export a single branded PDF (WeasyPrint)
8 make pdf
9
10 # Equivalent, when build/ already exists:
11 docker compose --profile pdf run --rm weasyprint
12
```

Cheat sheet



- ✓ **make dev** – start the local server (live preview)
- ✓ **#include "file.md"** – assemble reusable fragments
- ✓ **"Prerequisites"** – reuse one block everywhere, single source
- ✓ **LikeC4 / tldraw** – browse the architecture diagrams
- ✓ **make pdf** – export the whole docs as one branded PDF
- ✓ **git push** – site + PDF published automatically (CI/CD)

Happy writing! — Innovatelt-ak / docusaurus