# STATIC FACIAL EXPRESSION RECOGNITION WITH MULTI-LAYER DEEP LEARNING

Presenter: Sicong Huang Advisor: Dr. Anxiao (Andrew) Jiang

There are many factors that can play a role during encoding, which makes the recognition, based on the previous research that has been done in facial recognition, the images in facial action coding system are still very limited. My research builds on the existing more accurate and diverse results by using deep learning with advanced facial landmarks technique and categorical model. This research is focusing on improving the accuracy and diversity of facial expression recognition with deep learning.

### SVM:


- Supported Vector Machine
- Local neural network
- Polynomial kernel with degree of 3-23
- Radial basis function kernel (rbf)

	rbf	poly 3	poly 6	linear	sigmoid
auto					
gamma	89.6059	85.7763	85.0824	82.9353	64.7059
scale					
gamma	72.5294	74.7824	78.4412	85.6882	63.8706


## MLP: Multilayer Perception Global neural network Stochastic gradient descent with adaptive learning rate

Input


Stochastic gradient-based optimizer (adam)

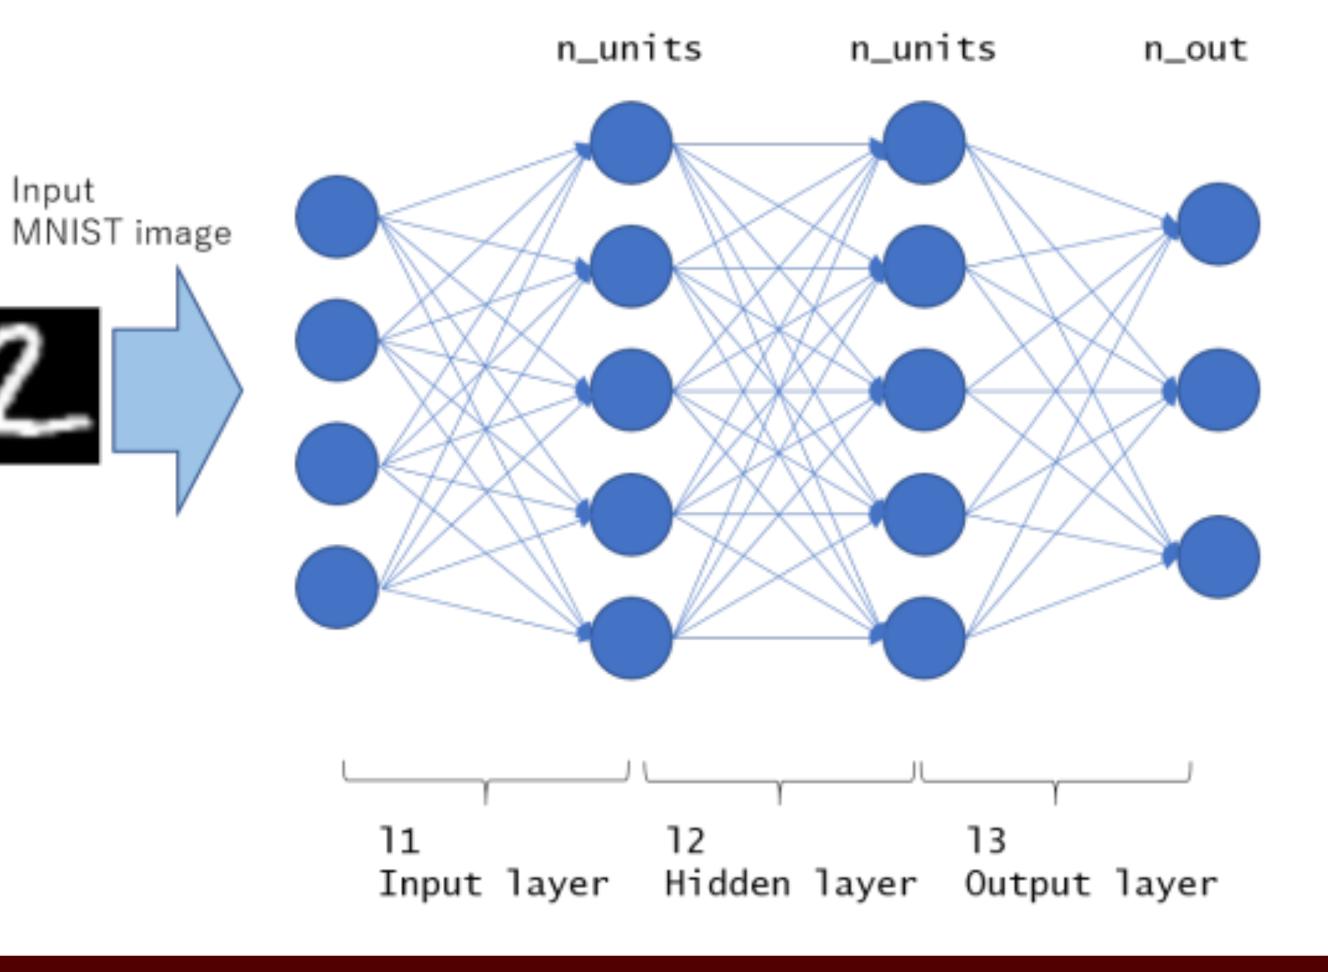

# SVC with linear kernel

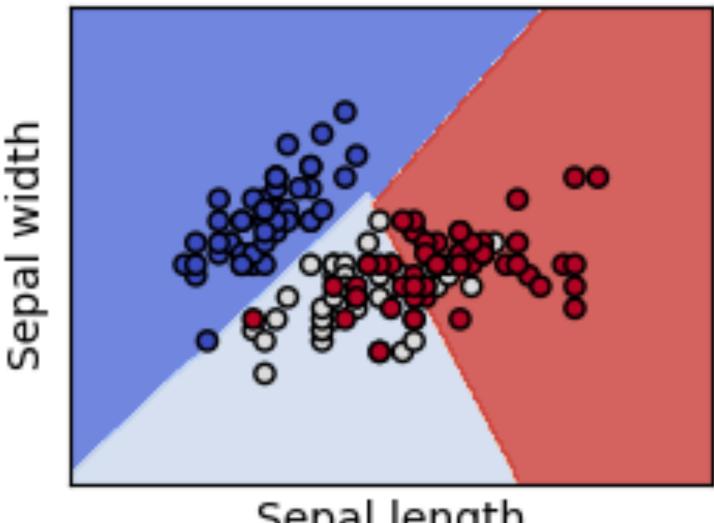



SVC with RBF kernel

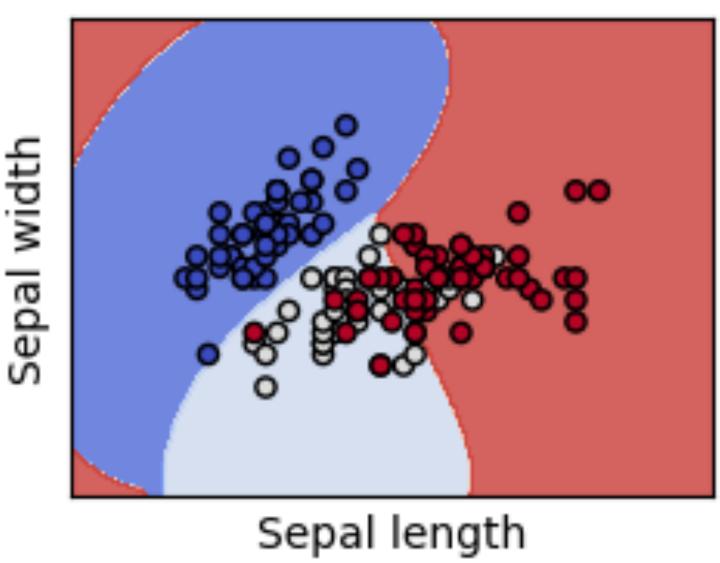


Output

Classification result

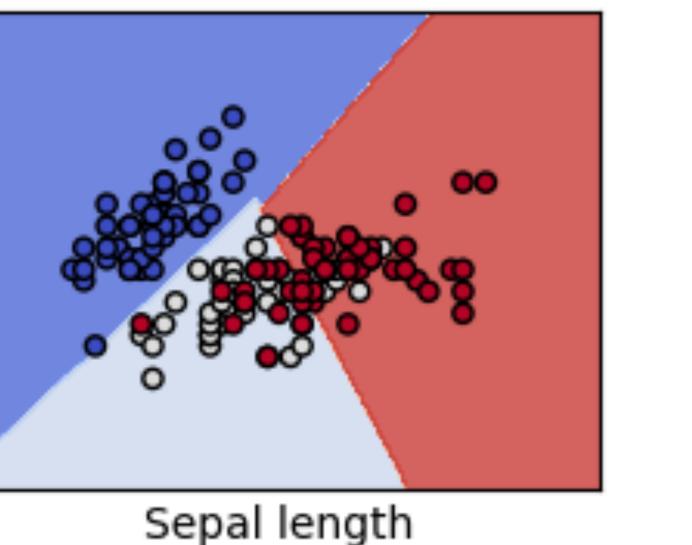

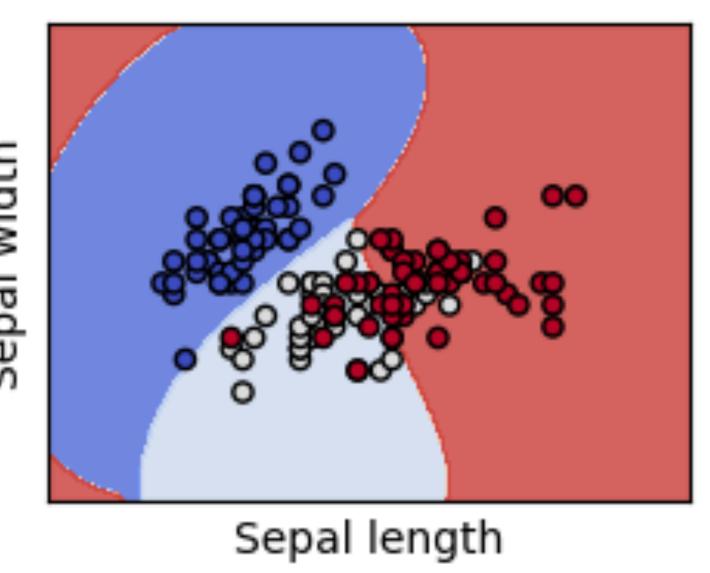


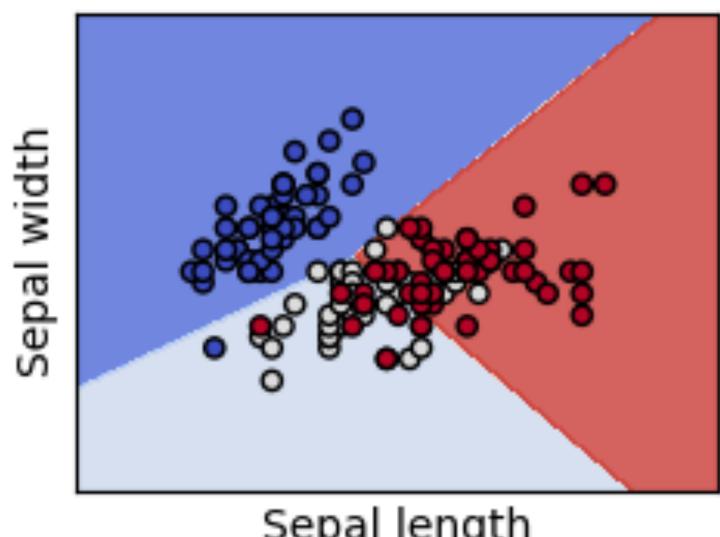

LinearSVC (linear kernel)

Sepal length

SVC with polynomial (degree 3) kernel

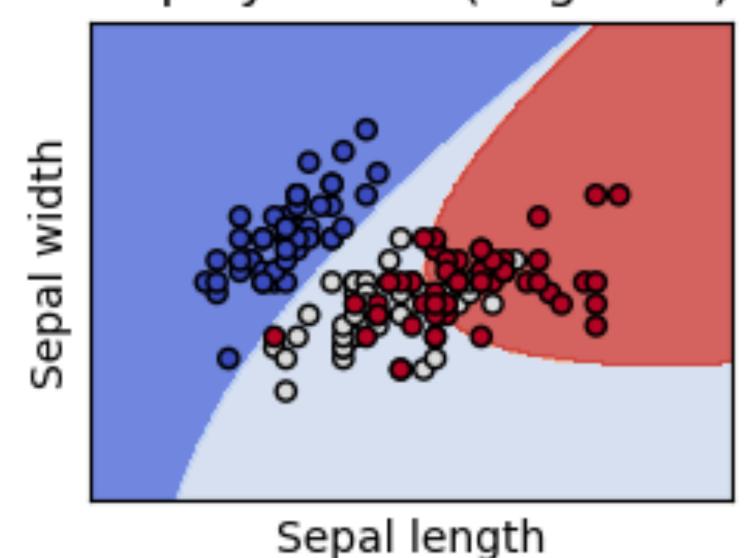

## Different types of smiles

There are 19 types of smiles but only 6 are for happiness Detecting subcategories of happiness

- Happy smiles
- Fake smiles

Smile (standard)	Happy Smile	Fake Smile
89.6059	87.6098	87.2275

### Facial Landmarks

Facial landmark detection is the process of finding points of interest in an image of a human face.

Facial landmarks used in this research:

- Dimpler
- Outer brow raiser

