

Action	App Label	Description
<a href="#">Edit</a>	<a href="#">Profile (Others)</a>	The tabs displayed when users view someone else's profile
<a href="#">Edit</a>	<a href="#">Profile (Self)</a>	The tabs displayed when users view their own profile

<b>Connected Apps</b>		<a href="#">New</a>
Action	Connected App Name	Description
<a href="#">Edit</a>   <a href="#">Manage</a>	<a href="#">Chatter App</a>	

## New Connected App

[Save](#)
[Cancel](#)

### Basic Information

Connected App Name   
 API Name   
 Contact Email   
 Contact Phone   
 Logo Image URL   
 Icon URL   
 Info URL   
 Description

### API (Enable OAuth Settings)

Enable OAuth Settings ☒  
 Enable for Device Flow ☐  
 Callback URL   
 Use digital signatures ☐  
 Selected OAuth Scopes
 

Available OAuth Scopes
 

Access and manage your Chatter data (chatter\_api)  
 Access and manage your Eclair data (eclair\_api)

Selected OAuth Scopes

Access and manage your data (api)

Info URL

### API (Enable OAuth Settings)

[Consumer Key](#) 3MV [REDACTED]
[Consumer Secret](#) [Click to reveal](#)

Selected OAuth Scopes Access and manage your data (api)
 

Callback URL https://www.goo

Enable for Device Flow ☐
 Require Secret for Web Server Flow ☒

## New Custom Setting Definition

**Tip: Use Custom Metadata Types for App Configuration**

If you're thinking of using list custom settings, consider using custom metadata types instead. Unlike list custom settings, you can enable List Custom Settings on the Schema Settings page in Setup.

## Custom Setting Definition

Save

Cancel

Label

Object Name

Setting Type

Visibility

Description

## SFDC\_Custom\_Setting

Create the fields for your custom setting. The data in these fields are cached with the application.

## Custom Setting Definition Detail

Edit

Delete

Manage

Label SFDC\_Custom\_Setting

API Name SFDC\_Custom\_Setting\_\_c

Visibility Public

Namespace Prefix

Last Modified Date 9/30/2018 1:53 AM

## Custom Fields

New

No custom fields defined

## New Custom Field

## Step 2. Enter the details

Field Label

Field Name

Description

Help Text

## Custom Setting Definition

### SFDC\_Custom\_Setting

Create the fields for your custom setting. The data in these fields are cached with the application.

#### Custom Setting Definition Detail

[Edit](#)[Delete](#)[Manage](#)

Label	SFDC_Custom_Setting
API Name	SFDC_Custom_Setting__c
Visibility	Public
Namespace Prefix	
Last Modified Date	9/30/2018 1:53 AM

#### Custom Fields

[New](#)

Action	Field Label	API Name	Data Type	Indexed
<a href="#">Edit</a>   <a href="#">Del</a>	<a href="#">Value</a>	Value__c	Text Area(255)	

## SFDC\_Custom\_Setting Edit

Provide values for the fields you created. This data is cached with the application.

#### Edit SFDC\_Custom\_Setting

[Save](#)[Save & New](#)[Cancel](#)

#### SFDC\_Custom\_Setting Information

Name  [i](#)

Value   
c9...  
Me...

## SFDC\_Custom\_Setting Edit

Provide values for the fields you created. This data is cached with the application.

#### Edit SFDC\_Custom\_Setting

[Save](#)[Save & New](#)[Cancel](#)

#### SFDC\_Custom\_Setting Information

Name  [i](#)

Value

## SFDC\_Custom\_Setting Edit

Provide values for the fields you created. This data is cached with the application.

<b>Edit SFDC_Custom_Setting</b>		<input type="button" value="Save"/>	<input type="button" value="Save &amp; New"/>	<input type="button" value="Cancel"/>
<b>SFDC_Custom_Setting Information</b>				
Name	<input type="text" value="Username"/> <input type="button" value="i"/>			
Value	<input type="text" value="test"/>			

## SFDC\_Custom\_Setting Edit

Provide values for the fields you created. This data is cached with the application.

<b>Edit SFDC_Custom_Setting</b>		<input type="button" value="Save"/>	<input type="button" value="Save &amp; New"/>	<input type="button" value="Cancel"/>
<b>SFDC_Custom_Setting Information</b>				
Name	<input type="text" value="Password"/> <input type="button" value="i"/>			
Value	<input type="text"/>			

## Remote Site Edit

Enter the URL for the remote site. All s-controls, JavaScript OnClick commands in custom buttons, A

<b>Remote Site Edit</b>		<input type="button" value="Save"/>	<input type="button" value="Save &amp; New"/>	<input type="button" value="Cancel"/>
Remote Site Name	<input type="text" value="Source_Org_Endpoint"/>			
Remote Site URL	<input type="text" value="https://login.salesforce.com"/>			
Disable Protocol Security	<input type="checkbox"/> <input type="button" value="i"/>			
Description	<input type="text"/>			
Active	<input checked="" type="checkbox"/>			

## Remote Site Edit

Enter the URL for the remote site. All s-controls, JavaScript OnClick commands in custom buttons, Apex, and A

**Remote Site Edit**

SaveSave & NewCancel

Remote Site Name

Source\_Org\_Endpoint\_to\_Import\_Cases

Remote Site URL

https://ap5.salesforce.com

Disable Protocol Security

☐ i

Description

Active

☒

This instance URL corresponds to the Source Org

https://ap5.salesforce.com/0037F000002YbGq

response

Days

EditDeleteCloneManage E

Opportunities

New Opportunity

No records to display

Child Case Records

Cases

New Case

Action	Case	Subject
Edit   Cls	00001007	Structural breakdown of rotor assembly.
Edit   Cls	00001008	Customer service for portable generators needs beefing up

Switch to Lightning Experiencekunwar singhSetupHelp

+





My Profile

My Settings

Developer Console

Switch to Lightning Experience

Logout

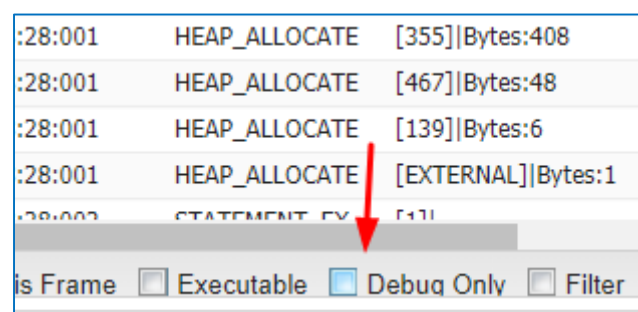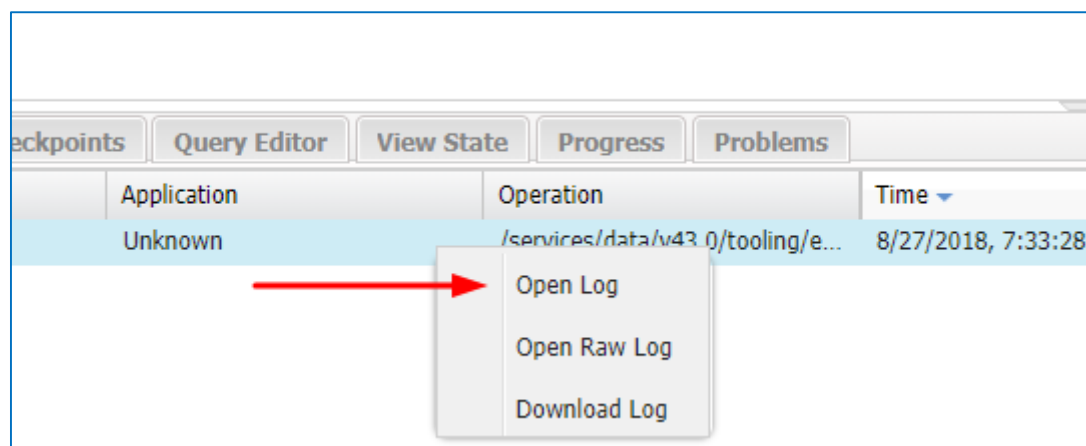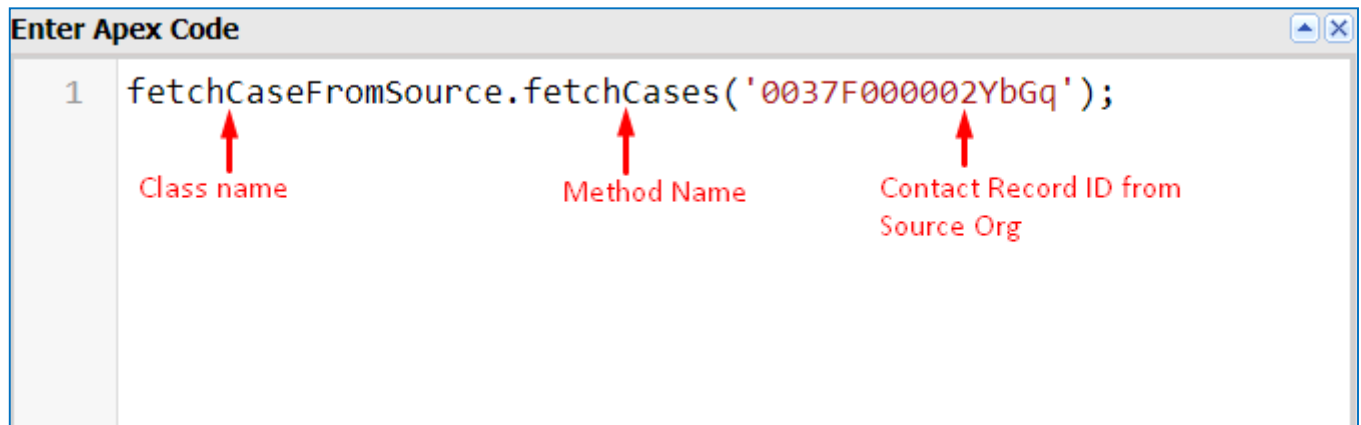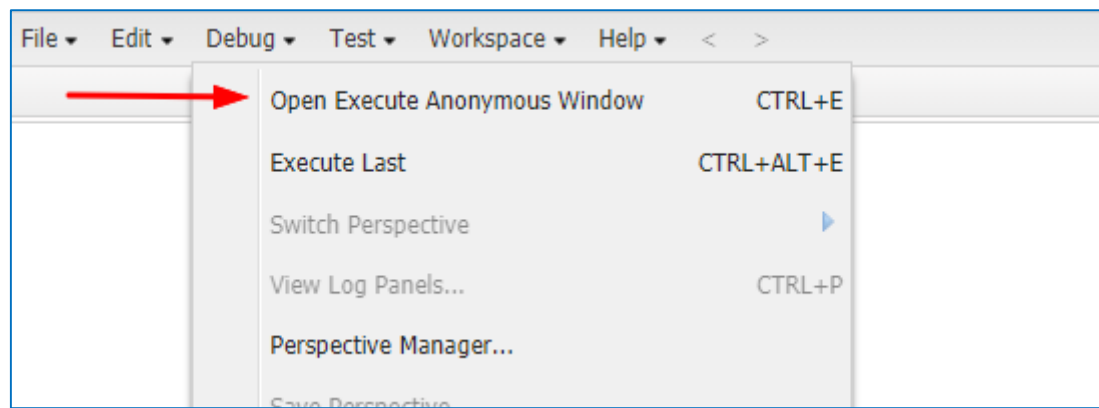

Details	
[29] DEBUG access tokendeserializeResponse:[access_token=SESSION_ID_REMOVED, id=https://login.salesforce.com/id/00D7F000000qdsKUAQ/005	
[38] DEBUG access token----- SESSION_ID_REMOVED	
[49] DEBUG body----- [{"attributes":{"type":"Case","url":"/services/data/v43.0/subjects/Case/5007F000001yekEQAQ"},"Id":"5007F000001yekEQAQ/	
[69] DEBUG Id--- 5007F000001yekEQAQ	
[78] DEBUG Subject--- Structural breakdown of rotor assembly	
[89] DEBUG status--- Closed	← Details of Case records fetched from the Source Org
[99] DEBUG priority--- Medium	
[69] DEBUG Id--- 5007F000001yekFQAQ	
[78] DEBUG Subject--- Customer service for portable generators needs beefing up	
[89] DEBUG status--- Closed	Record ID of one of these Case records after being inserted in the Destination Org →
[99] DEBUG priority--- Low	
[124] DEBUG caseSet----- (Case:{Subject=Structural breakdown of rotor assembly, Status=Closed, Priority=Medium, Id=5006F00001sXJPUQA4},	