



# Credentials whether they want to grant access to their private data, as well as give them a link to your terms of service and privacy policy. This page configures the consent screen for all applications in this project. Verification status Needs verification Application name 💮 The name of the app asking for consent YT-SFDC-Integration Application logo An image on the consent screen that will help users recognize your app download.jpg Browse Support email @ Shown on the consent screen for user support kunwar.research@gmail.com


copes allow your application to access your user's private data. Learn more you add a sensitive scope, such as scopes that give you full access to Gmail or Drive, oogle will verify your consent screen before it's published.			
email			
profile			
openid			





E Google APIs ♣ YT-SFDC ▼  Create OAuth client ID  Application type  Web application  Android Learn more  Chrome App Learn more  iOS Learn more  PlayStation 4  Other  Name ②	Q
Application type  Web application  Android Learn more  Chrome App Learn more  iOS Learn more  PlayStation 4  Other	
Web application Android Learn more Chrome App Learn more iOS Learn more PlayStation 4 Other	
Web client 1	
Restrictions  Enter JavaScript origins, redirect URIs, or both  Authorized JavaScript origins  For use with requests from a browser. This is the origin URI of the client application. It can't contain a wildca (https://*.example.com) or a path (https://example.com/subdir). If you're using a nonstandard port, you mu in the origin URI.	
https://www.example.com	
Authorized redirect URIs  For use with requests from a web server. This is the path in your application that users are redirected to after authenticated with Google. The path will be appended with the authorization code for access. Must have a part of Cannot contain URL fragments or relative paths. Cannot be a public IP address.	
https://www.salesforce.com/in/?ir=1	

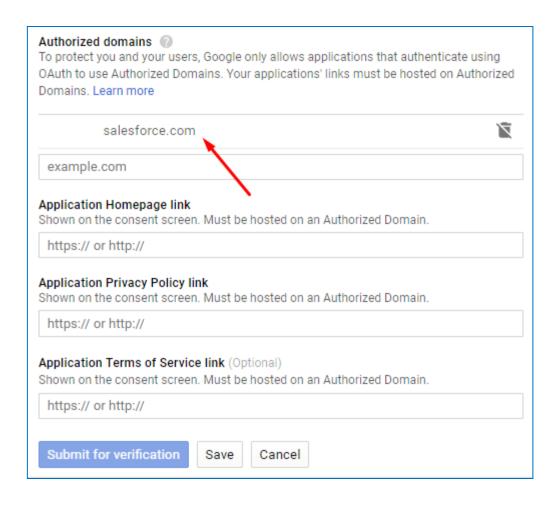

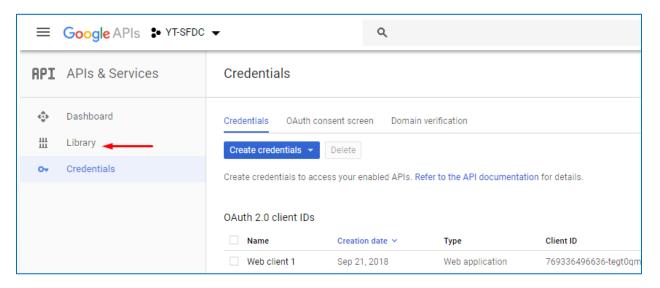

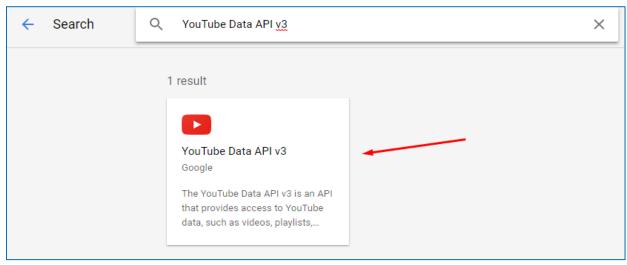

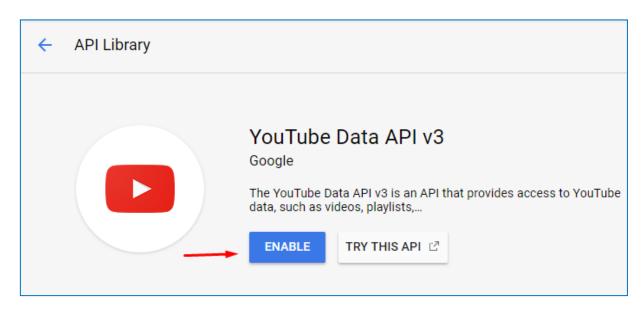

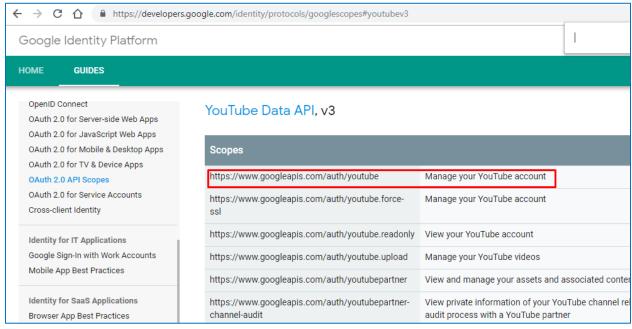

### Obtaining OAuth 2.0 access tokens

The following steps show how your application interacts with Google's OAuth 2.0 server to obtain a user's consent to perform an API request on the user's behalf. Your application must have that consent before it can execute a Google API request that requires user authorization.


Step 1: Send a request to Google's OAuth 2.0 server

To obtain user authorization, send a request to Google's authorization server at


https://accounts.google.com/o/oauth2/v2/auth. This endpoint handles active session lookup, authenticates the user, and obtains user consent. The endpoint is only accessible over SSL, and it refuses HTTP (non-SSL) connections.

The authorization server supports the following query string parameters for installed applications:

Parameters	
client_id	Required. The client ID for your application. You can find this value in the API Console.
redirect_uri	Required. Determines how Google's authorization server sends a response to your app. There are several redirect options available to installed apps, and you will have set up your authorization credentials with a particular redirect method in mind.  The table below shows the appropriate redirect_uriparameter value for each method:

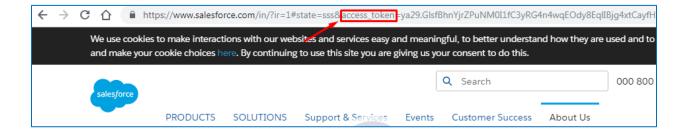

# Remote Site Edit Enter the URL for the remote site. All s-controls, JavaScript OnClick commands in custom buttons, Apex, and AJAX proxy calls Remote Site Edit Save Save & New Cancel Remote Site URL Disable Protocol Security Description Active Save Save & New Cancel

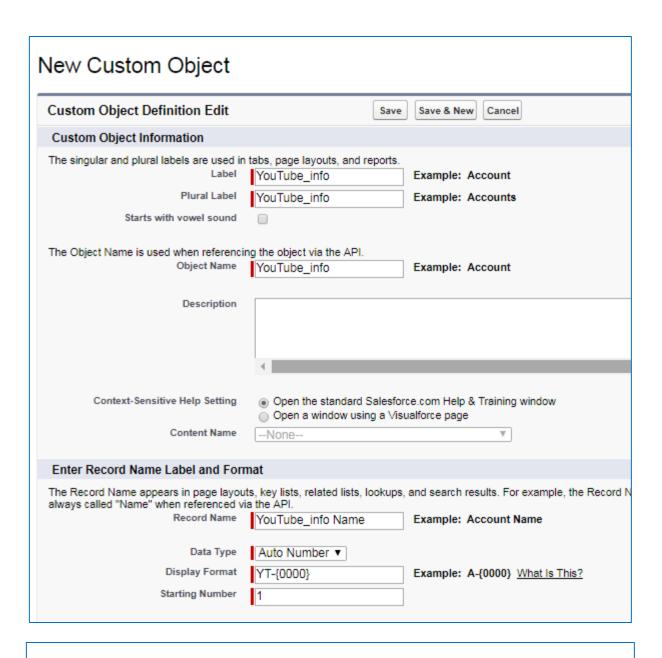



# **Custom Tabs**


You can create new custom tabs to extend Salesforce functionality or to build new application functional


Custom Object tabs look and behave like the standard tabs provided with Salesforce. Web tabs allow yo Visualforce tabs allow you to embed Visualforce pages. Lightning Component tabs allow you to add Light app. Lightning Page tabs allow you to add Lightning Pages to Lightning Experience and the mobile app.




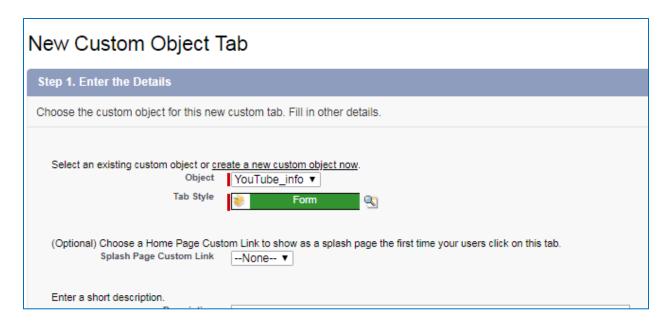


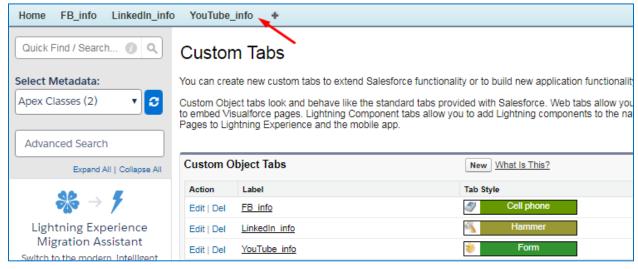


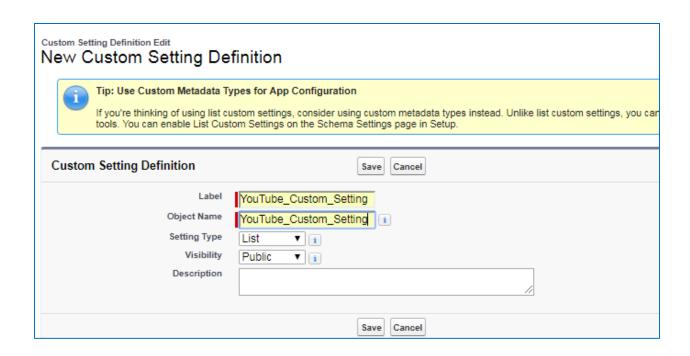


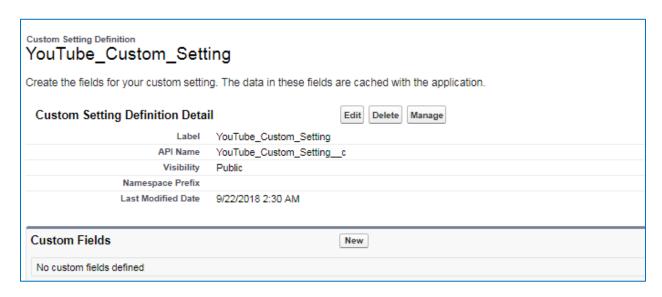

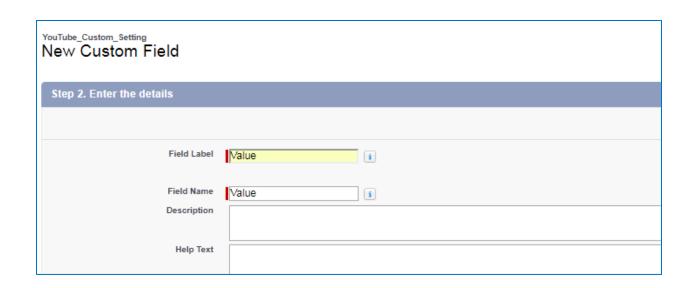


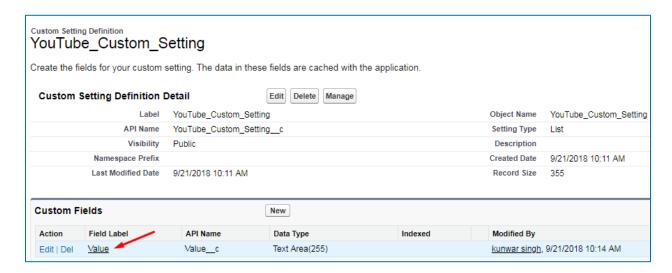


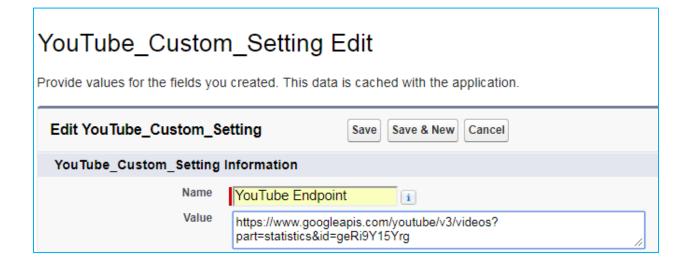


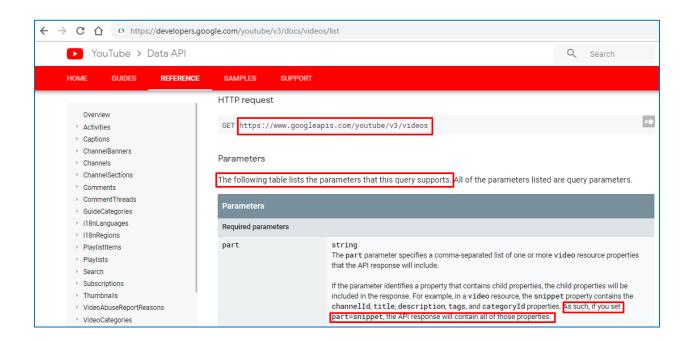





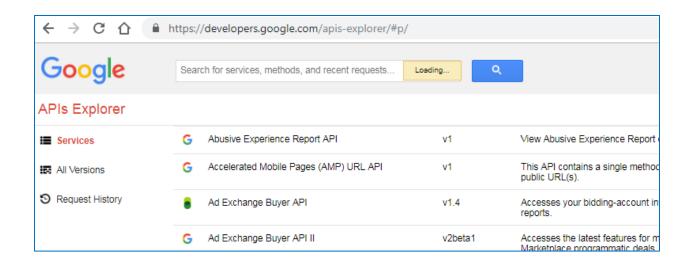


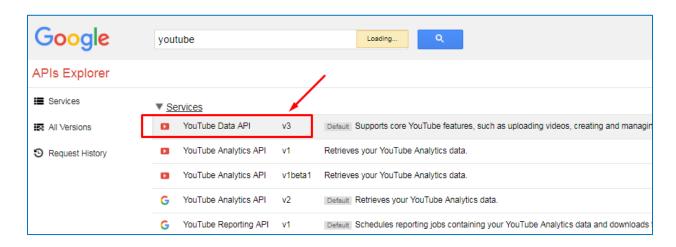

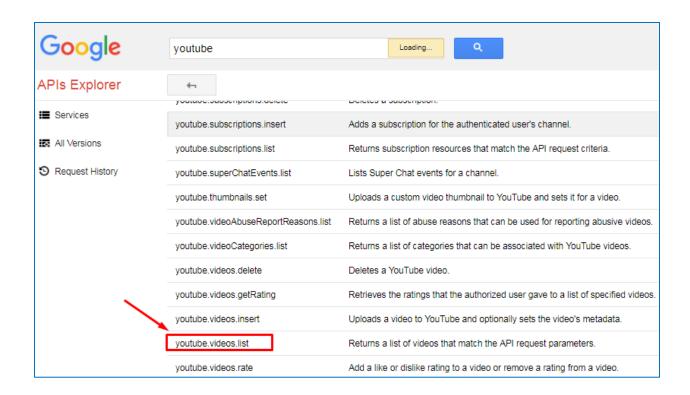

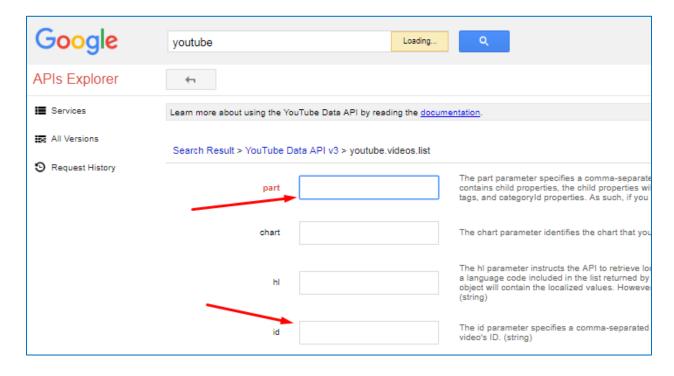

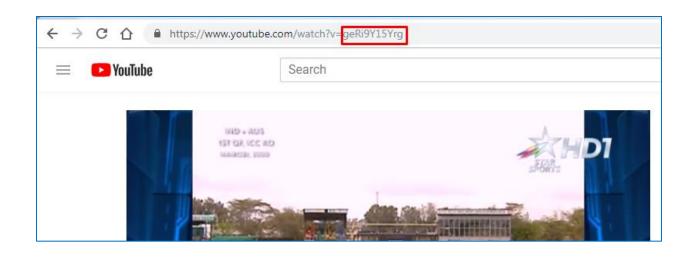

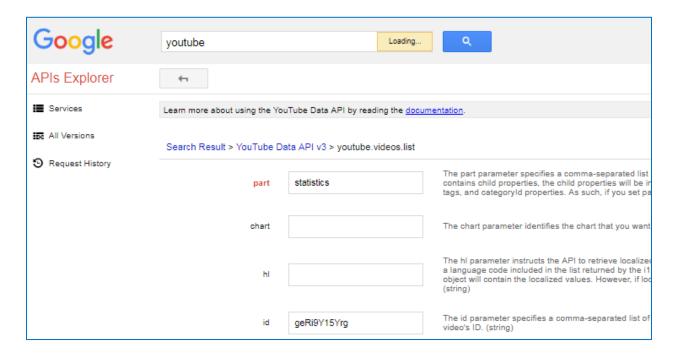

Google	youtube	Loading	Q
APIs Explorer	←		
<b>■</b> Services	maxWidth		The maxWidtl to not violate
All Versions  Request History	myRating		Set this paran
	onBehalfOfContentOwner		Note: This pa request's auth This paramete authenticate of channel. The
	pageToken		The pageToke prevPageToke myRating and
	regionCode		The regionCo conjunction w
	videoCategoryId		The videoCat conjunction w
	fields		Selector spec Use fields edi
	bold red = required	Authorize and execute	


## Select OAuth 2.0 scopes:

Scopes are used to grant an application different levels of access to data on behalf of the end user. Each API may declare one or more scopes. <u>Learn more about OAuth 2.0</u>


YouTube Data API declares the following scopes. Select which ones you want to grant to APIs Explorer.


- https://www.googleapis.com/auth/youtube Manage your YouTube account
- https://www.googleapis.com/auth/youtube.force-ssl Manage your YouTube account
- https://www.googleapis.com/auth/youtube.readonly View your YouTube account
- https://www.googleapis.com/auth/youtube.upload Manage your YouTube videos
- https://www.googleapis.com/auth/youtubepartner
  View and manage your assets and associated content on YouTube
- https://www.googleapis.com/auth/youtubepartner-channel-audit View private information of your YouTube channel relevant during the audit process with a YouTube partner


Add additional scopes (optional):



```
Response
  200
  - Show headers -
   "kind": "youtube#videoListResponse",
   "etag": "\"XI7nbFXu1YBIpL0ayR_gDh3eu1k/AnImrasbX7kWq5G0gswhH7uo_Fg\"",
  -"pageInfo": {
    "totalResults": 1,
    "resultsPerPage": 1
   },
  -"items": [
   -{
     "kind": "youtube#video",
     "etag": "\"XI7nbFXu1YBIpL0ayR_gDh3eu1k/ADg0CjU5ZHM1f-pNEgVUtDpgFiA\"",
     "id": "geRi9Y15Yrg",
    -"statistics": {
    "viewCount": "4717977",
      "likeCount": "12401",
      "dislikeCount": "2349",
      "favoriteCount": "0",
      "commentCount": "630"
     }
    }
   ]
  }
```

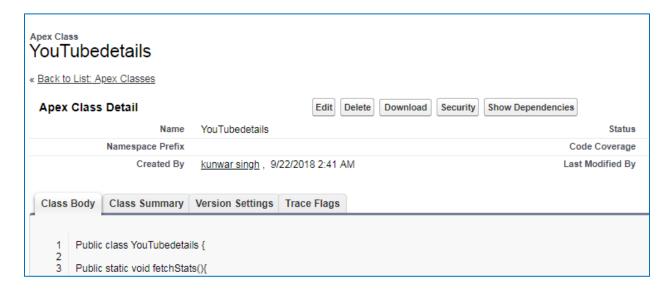

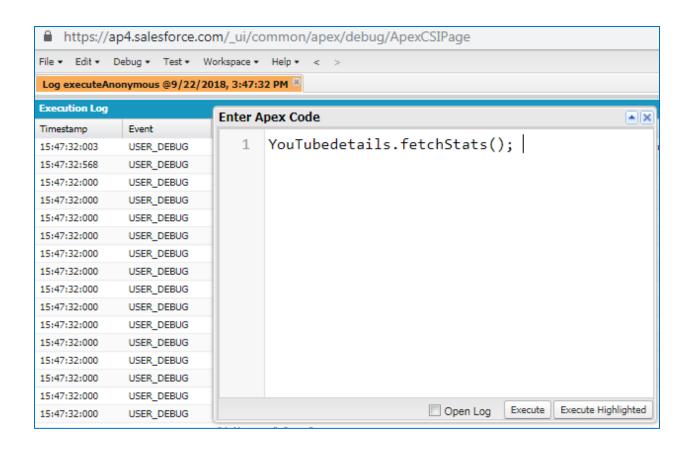



Execution Log				
Timestamp	Event	Details		
15:49:06:003	USER DEBUG	[5] DEBUG b https://www.googleapis.com/youtube/v3/videos?part=statistics&id=geRi9Y15Yr		
15:49:06:552	USER_DEBUG	[16] DEBUG resp{		
15:49:06:000	USER_DEBUG	"kind": "youtube#videoListResponse",		
15:49:06:000	USER_DEBUG	"etag": "\"XI7nbFXulYBIpL0ayR_gDh3eu1k/AnImrasbX7kWq5G0gswhH7uo_Fg\"",		
15:49:06:000	USER_DEBUG	"pageInfo": {		
15:49:06:000	USER_DEBUG	"totalResults": 1,		
15:49:06:000	USER_DEBUG	"resultsPerPage": 1		
15:49:06:000	USER_DEBUG	},		
15:49:06:000	USER_DEBUG	"items": [		
15:49:06:000	USER_DEBUG	{		
15:49:06:000	USER_DEBUG	"kind": "youtube#video",		
15:49:06:000	USER_DEBUG	"etag": "\"XI7nbFXulYBIpL0ayR_gDh3eu1k/ADg0CjU5ZHM1f-pNEgVUtDpgFiA\"",		
15:49:06:000	USER_DEBUG	"id": "geRi9Y15Yrg",		
15:49:06:000	USER_DEBUG	"statistics": {		
15:49:06:000	USER_DEBUG	"viewCount": "4717977",		
15:49:06:000	USER_DEBUG	"likeCount": "12401",		
15:49:06:000	USER_DEBUG	"dislikeCount": "2349",		
15:49:06:000	USER_DEBUG	"favoriteCount": "0",		
15:49:06:000	USER_DEBUG	"commentCount": "630"		
15:40:05:000	LICED DEBLIC			
This Frame	Executable	Debug Only  Filter Click here to filter the log		

