

Sign in




to continue to Google Cloud Platform

Email or phone


[Forgot email?](#)


[More options](#)


NEXT

 Google APIs  GMclient-SFDC 


API APIs & Services

 Dashboard

 Library

 Credentials



Dashboard

 ENABLE APIS AND SERV


No APIs or services are enabled

Browse the [Library](#) to find and use hundreds of available APIs


Popular APIs and services



Select a project

 NEW PROJECT

Search projects and folders



RECENT

ALL

Name	ID
------	----



New Project



You have 11 projects remaining in your quota. Request an increase or delete projects.

[Learn more](#)

[MANAGE QUOTAS](#)

Project Name *

Drive-client



Project ID: drive-client-218502. It cannot be changed later. [EDIT](#)

Location *




No organization

[BROWSE](#)

Parent organization or folder

CREATE

CANCEL

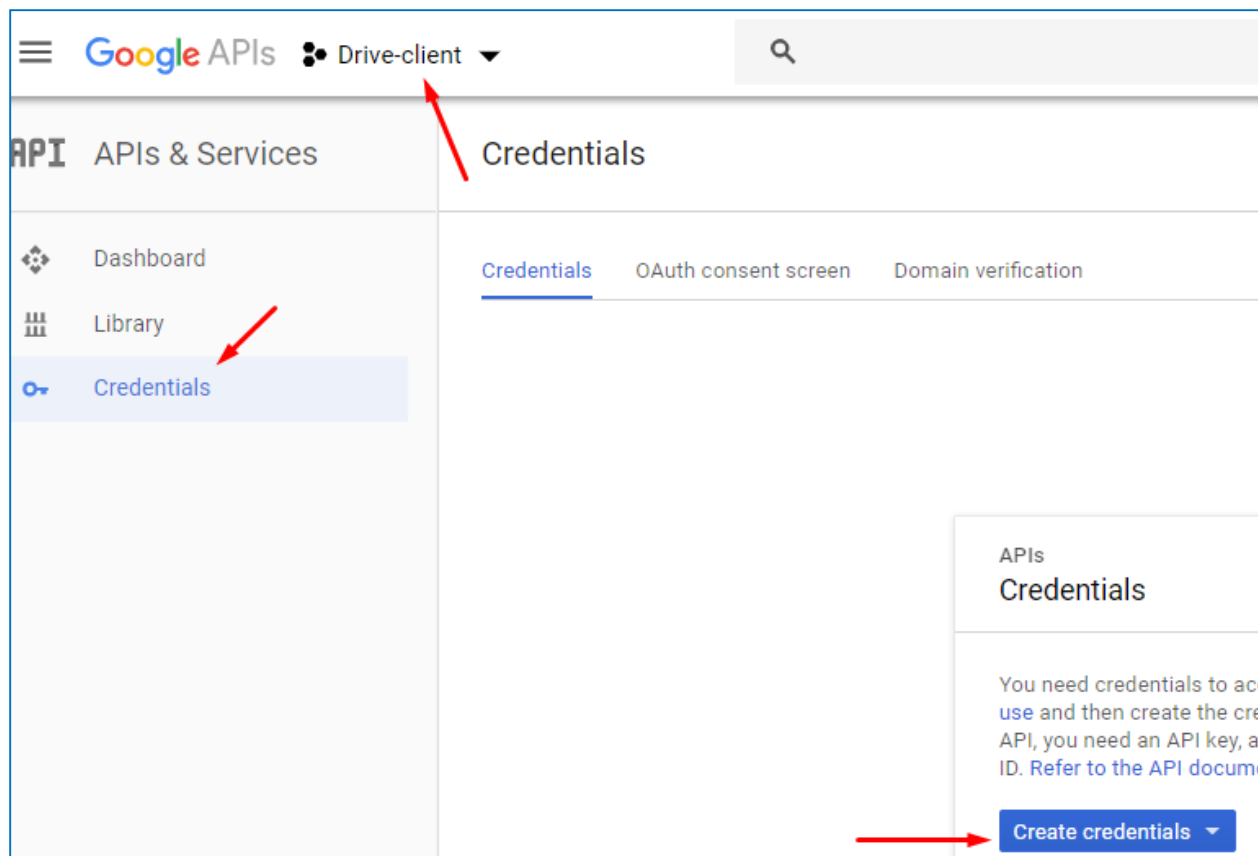

API key

Identifies your project using a simple API key to check quota and access

OAuth client ID

Requests user consent so your app can access the user's data

Service account key

Enables server-to-server, app-level authentication using robot accounts

Help me choose

Asks a few questions to help you decide which type of credential to use

Google APIs

Drive-client

Create OAuth client ID

To create an OAuth client ID, you must first set a product name on the consent screen

Configure consent screen

Credentials

Credentials

OAuth consent screen

Domain verification

Before your users authenticate, this consent screen will allow them to choose whether they want to grant access to their private data, as well as give them a link to your terms of service and privacy policy. This page configures the consent screen for all applications in this project.

Verification status

Not published

Application name

The name of the app asking for consent

Test3

Application logo

An image on the consent screen that will help users recognize your app

Local file for upload

Browse

Support email

Shown on the consent screen for user support

kunwarprince333@gmail.com

Scopes for Google APIs

Scopes allow your application to access your user's private data. [Learn more](#)

If you add a sensitive scope, such as scopes that give you full access to Gmail or Drive, Google will verify your consent screen before it's published.

email

profile

openid

Add scope

Credentials

profile

openid

Add scope

Authorized domains

To protect you and your users, Google only allows applications that authenticate using OAuth to use Authorized Domains. Your applications' links must be hosted on Authorized Domains. [Learn more](#)

force.com



example.com

Application Homepage link

Shown on the consent screen. Must be hosted on an Authorized Domain.

https:// or http://

Application Privacy Policy link

Shown on the consent screen. Must be hosted on an Authorized Domain.

https:// or http://

Application Terms of Service link (Optional)

Shown on the consent screen. Must be hosted on an Authorized Domain.

https:// or http://

Submit for verification

Save

Cancel



Create OAuth client ID

For applications that use the OAuth 2.0 protocol to call Google APIs, you can use an OAuth 2.0 client ID to generate an access token. The token contains a unique identifier. See [Setting up OAuth 2.0](#) for more information.

Application type

- ☒ Web application
- ☐ Android [Learn more](#)
- ☐ Chrome App [Learn more](#)
- ☐ iOS [Learn more](#)
- ☐ PlayStation 4
- ☐ Other

Name ?**Restrictions**

Enter JavaScript origins, redirect URIs, or both [Learn More](#)

Origins and redirect domains must be added to the list of Authorized Domains in the [OAuth consent settings](#).

OAuth client

The client ID and secret can always be accessed from Credentials in APIs & Services

i OAuth is limited to 100 [sensitive scope logins](#) until the [OAuth consent screen](#) is published. This may require a verification process that can take several days.



Here is your client ID

109 [REDACTED] 


Here is your client secret



Q_7 [REDACTED] 


OK


 Drive-client 

API APIs & Services

 Dashboard



 Library 

 Credentials

Dashboard  [ENABLE APIS AND SERVICES](#)

No APIs or services are enabled
Browse the [Library](#) to find and use hundreds of available APIs and s

Popular APIs and services

Google APIs

Drive-client

← Search

Google Drive API

Filter by


2 results

CATEGORY


Developer tools (1)

G Suite (1)

Mobile (1)



Google Drive API
Google




Google
Google

Google APIs

Drive-client

← API Library



Google Drive API

Google

The Google Drive API allows clients to access resources Drive

ENABLE

TRY THIS API

Remote Site Edit

Enter the URL for the remote site. All s-controls, JavaScript OnClick commands in custom buttons, Ap

Remote Site Edit

SaveSave & NewCancel


Remote Site Name

Google

Remote Site URL

https://www.googleapis.com

Disable Protocol Security

☐ 

Description

Active

☒

Visualforce Page

Page Edit

SaveQuick SaveCancelWhere is this used?Component ReferencePreview

Page Information

Label

GDrive_integration_client

Name

GDrive_integration_client

Description

Available for Lightning Experience, Lightning Communities, and the mobile app






☐

Require CSRF protection on GET requests

☐

Visualforce Markup

Version Settings



1 <apex:page>

Visualforce Pages


Visualforce Pages provide a robust and easy to use mechanism to create new and exciting user experiences for


View: All ▾ [Create New View](#)


Developer Console				
Action	Label	Name	Namespace Prefix	Ap
Edit Del Security [?]	GDrive integration client	GDrive integration client		

<https://ap4.salesforce.com/apexpages/setup/listApexPage.apexp?retURL=%2Fui%2Fsetup%2FS>

API APIs & Services

 Dashboard

 Library

 **Credentials**

Credentials

[Credentials](#)

[OAuth consent screen](#)

[Domain](#)

Create credentials ▾

Delete

Create credentials to access your enabled APIs. [Re](#)

OAuth 2.0 client IDs

☐ Name

Creation date ▾

☐ Web client 1

May 22, 2018

Name ?

Web client 1

Restrictions

Enter JavaScript origins, redirect URIs, or both [Learn More](#)

Origins and redirect domains must be added to the list of Authorized Domains in the OAuth 2.0 Client Credentials page.

Authorized JavaScript origins

For use with requests from a browser. This is the origin URI of the client application (https://*.example.com) or a path (https://example.com/subdir). If you're using a non-https origin, you must use http://. Cannot contain URL fragments or relative paths. Cannot be a public IP address.

https://c.ap4.visual.force.com

https://www.example.com

Authorized redirect URIs

For use with requests from a web server. This is the path in your application that uses OAuth 2.0 authentication. The path will be appended with the authorization code fragment. Cannot contain URL fragments or relative paths. Cannot be a public IP address.

https://www.example.com

Save

Cancel

https://c.ap4.visual.force.com/apex/GDrive_integration_client

Authorize

Choose File

No file chosen

Upload file

