




| Credentials | | | |
|---|--------|--|--|
| Credentials OAuth consent screen Domain verification | | | |
| Before your users authenticate, this consent screen will allow them to choose whether they want to grant access to their private data, as well as give them a link to your terms of service and privacy policy. This page configures the consent screen for all applications in this project. | | | |
| Verification status Not published Application name The name of the app asking for consent | | | |
| Product_YT | | | |
| Application logo An image on the consent screen that will help users recognize your app | | | |
| Local file for upload | Browse | | |
| Support email Shown on the consent screen for user support | | | |
| kunwar.research@gmail.com + | | | |
| Scopes for Google APIs Scopes allow your application to access your user's private data. Learn more | | | |


| Scopes for Google APIs Scopes allow your application to access your user's private data. Learn more If you add a sensitive scope, such as scopes that give you full access to Gmail or Drive, Google will verify your consent screen before it's published. | | |
|---|--------|--|
| е | mail | |
| р | rofile | |
| 0 | penid | |
| Add sco | оре | |

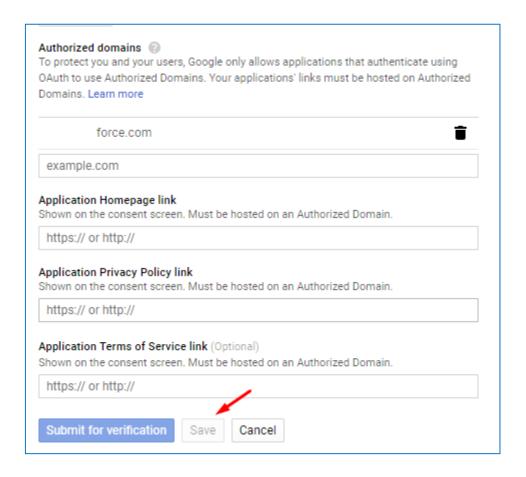


| ← | Create OAuth client ID |
|----------|---|
| | |
| ge | or applications that use the OAuth 2.0 protocol to call Google APIs, you can use an enerate an access token. The token contains a unique identifier. See Setting up OAuformation. |
| | pplication type Web application Android Learn more Chrome App Learn more iOS Learn more PlayStation 4 Other |
| ١ | Web client 1 |
| En | estrictions ter JavaScript origins, redirect URIs, or both Learn More igins and redirect domains must be added to the list of Authorized Domains in the OAuth co |
| | Authorized JavaScript origins For use with requests from a browser. This is the origin URI of the client application. It can (https://*.example.com) or a path (https://example.com/subdir). If you're using a nonstand in the origin URI. |
| | https://www.example.com |
| | |

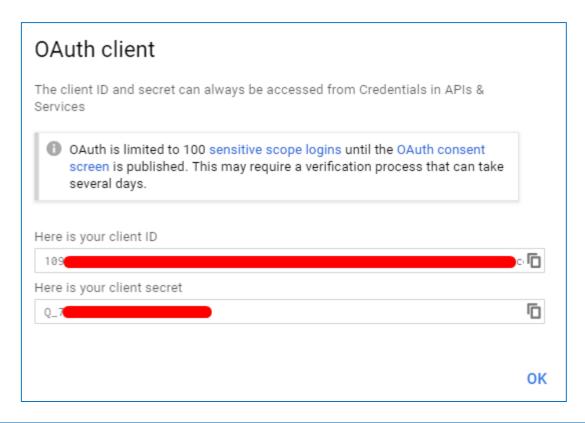

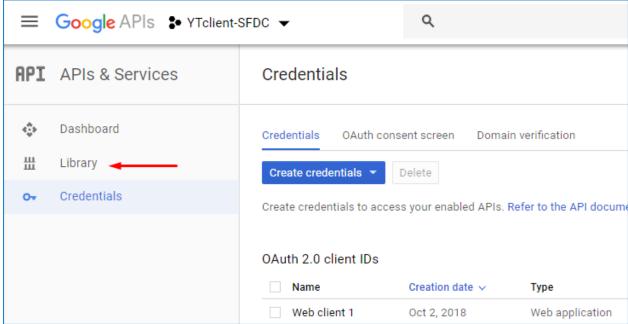


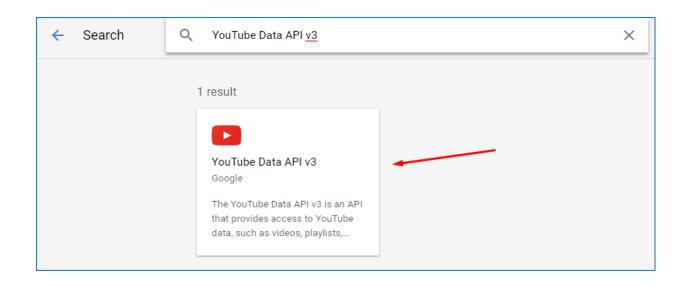


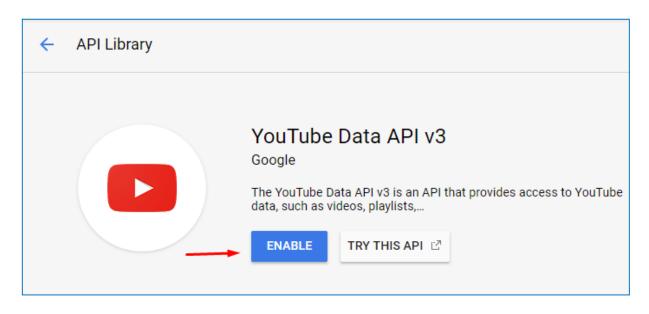



Remote Site Edit Enter the URL for the remote site. All s-controls, JavaScript OnClick commands in custom buttons, Apex, and AJAX proxy calls Remote Site Edit Save Save & New Cancel Remote Site URL https://www.googleapis.com Disable Protocol Security Description Save Save & New Cancel


| New Custom Object | | | | |
|---|---|--|--|--|
| Permissions for this object are disabled for all profiles by default. You can enable object permissions in perr | | | | |
| | | | | |
| Custom Object Definition Edit | Save & New Cancel | | | |
| Custom Object Information | | | | |
| The singular and plural labels are used in tabs, page layouts, and reports. | | | | |
| Label | YT_info_client Example: Account | | | |
| Plural Label | YT_info_client Example: Accounts | | | |
| Starts with vowel sound | | | | |
| | | | | |
| The Object Name is used when reference Object Name | | | | |
| Object Name | YT_info_client Example: Account | | | |
| Description | | | | |
| | | | | |
| | | | | |
| | | | | |
| Context-Sensitive Help Setting | Open the standard Salesforce.com Help & Training window | | | |
| | Open a window using a Visualforce page | | | |
| Content Name | None | | | |
| | | | | |
| Enter Record Name Label and For | mat | | | |
| The Record Name appears in page layouts, key lists, related lists, lookups, and search results. For example, the Rahvays called "Name" when referenced via the API. | | | | |
| Record Name | YT_info_client Name Example: Account Name | | | |
| Data Type | Auto Number ▼ | | | |
| Display Format | YTC-{0000} Example: A-{0000} What Is This? | | | |
| Starting Number | 1 | | | |

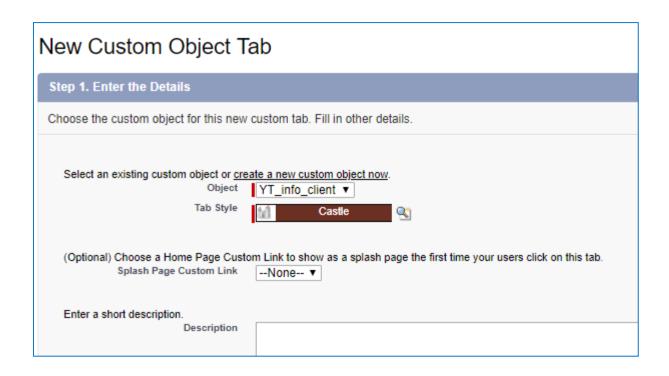


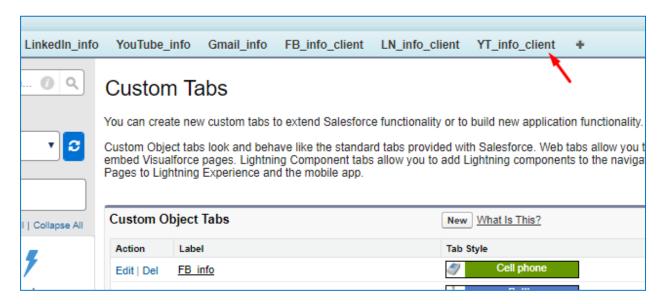


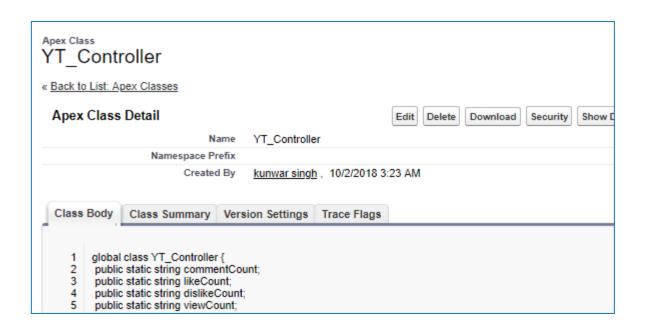

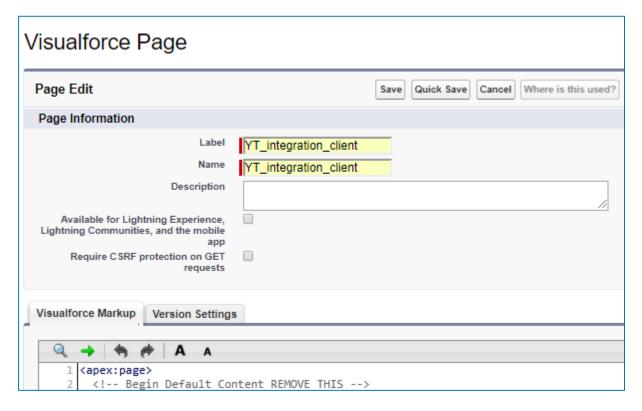

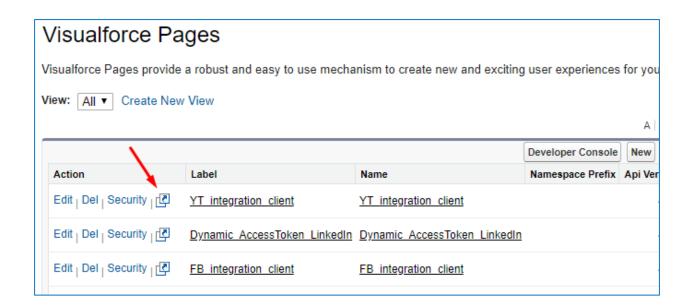



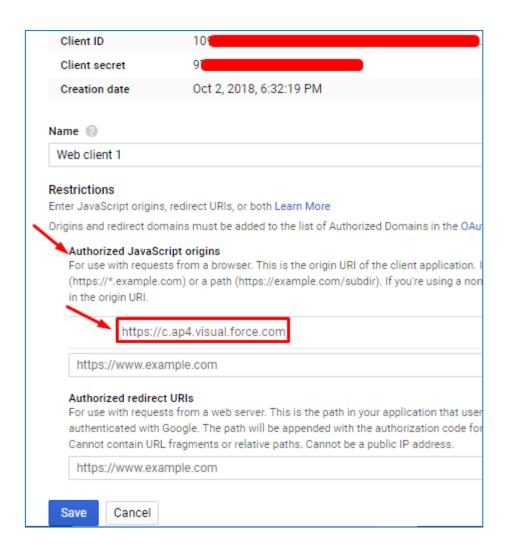

```
// Get API key and client ID from API Console.
// 'scope' field specifies space-delimited list of access scopes

gapi.client.init([
    'clientId': '57656412176-nijcl71ddds5445a9a2g42tnlgg64no.apps.googleusercontent.com',
    'discoveryDocs': ['https://www.googleapis.com/discovery/v1/apis/youtube/v3/rest'],
    'cases': !https://www.googleapis.com/discovery/v1/apis/youtube/v3/rest'],
```



