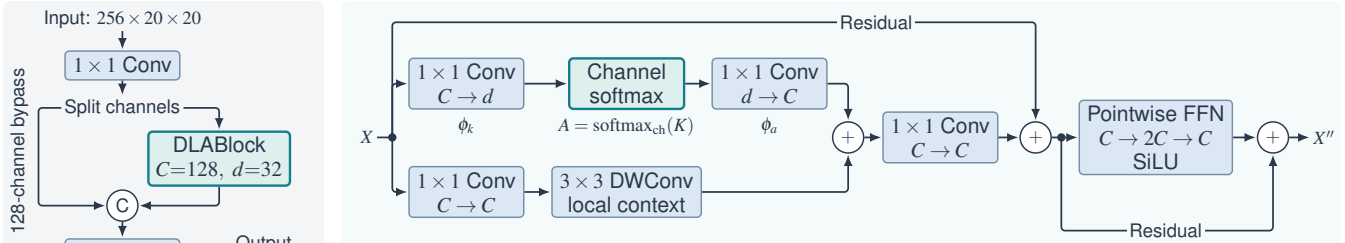
(a) C2DLA module
Input: $256 \times 20 \times 20$
1×1 Conv
Split channels
DLABlock
C=128, d=32
128-channel bypass
C
1×1 Conv
Output
256 channels
(b) DLABlock: channel mixing + local context
Residual
X
1×1 Conv
$C \to d$
ϕ_k
Channel
softmax
$A = \mathrm{softmax}_{\mathrm{ch}}(K)$
1×1 Conv
$d \to C$
ϕ_a
1×1 Conv
$C \to C$
3×3 DWConv
local context
1×1 Conv
$C \to C$
Pointwise FFN
$C \to 2C \to C$
SiLU
Residual
X''
All tensors remain $B \times C \times H \times W$; no spatial affinity matrix or MatMul.