
```
# FIND DRIVE UUID THAT HAS WINDOWS
blkid
/dev/mapper/deb1--vg-swap 1: UUID="b7c4c5a4-40bd-4a4a-bfaa-226abf07df2e" TYPE="swap"
/dev/sdb2: BLOCK_SIZE="512" UUID="58F8B0AFF8B08CAE" TYPE="ntfs" PARTUUID="07d5ec7a-02"
/dev/sdb3: BLOCK_SIZE="512" UUID="A4EA4330EA42FDD4" TYPE="ntfs" PARTUUID="07d5ec7a-03"
/dev/sdb1: LABEL="System Reserved" BLOCK_SIZE="512" UUID="76D4AFBCD4AF7CCD" TYPE="ntfs"
PARTUUID="07d5ec7a-01"
/dev/mapper/deb1--vg-root: UUID="ac1e1092-e501-49bc-b839-67006ef89234" BLOCK_SIZE="4096" TYPE="ext4"
/dev/sda5: UUID="9xmigV-MtN3-tC0m-FjuC-He9P-MEGg-Fr4KLd" TYPE="LVM2_member" PARTUUID="928bac7e-05"
/dev/sda1: UUID="49a1c3fa-1bd5-489d-82d9-b2c6ce6f45e2" BL0CK_SIZE="1024" TYPE="ext2"
PARTUUID="928bac7e-01"
sudo apt install grub-customizer
# EXAMPLE 1
Name: Windows 10 Pro Boot Manager (on /dev/sdb1)
Type: Other
insmod part_msdos
insmod ntfs
set root='hd0,msdos1'
if [ x$feature_platform_search_hint = xy ]; then
 search --no-floppy --fs-uuid --set=root --hint-bios=hd0,msdos1 --hint-efi=hd0,msdos1 --hint-
baremetal=ahci0, msdos1 76D4AFBCD4AF7CCD
else
 search --no-floppy --fs-uuid --set=root 76D4AFBCD4AF7CCD
fi
parttool ${root} hidden-
drivemap -s (hd0) ${root}
chainloader +1
```

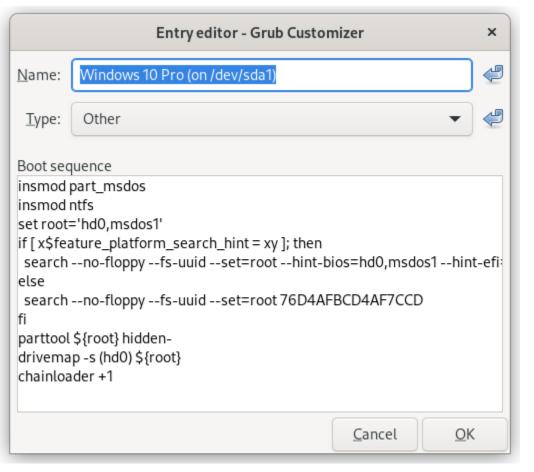

su – root

UNCOMMENT

vi /etc/default/grub

GRUB_DISABLE_OS_PROBER="false"

EXAMPLE 2
Name: Windows 10 Pro Boot Manager (on /dev/nvme0n1p1)
Type: Other
insmod part_gpt
insmod fat
search --no-floppy --fs-uuid --set=root BAE6-96B7
chainloader /EFI/Microsoft/Boot/bootmgfw.efi
EXAMPLE 3
Name: Windows 10 Pro Boot Manager (on /dev/nvme0n1p1)
Type: Other
insmod part_gpt

insmod fat search --no-floppy --fs-uuid --set=root EFC8-2865 chainloader /EFI/Microsoft/Boot/bootmgfw.efi

