Merchant Web Services API

Customer Information Manager (CIM) SOAP Guide

July 2013

Authorize.Net
a CyberSource solution

Authorize.Net Developer Support
http://developer.authorize.net
Authorize.Net LLC 082007 Ver.2.0

Authorize.Net LLC ("Authorize.Net") has made efforts to ensure the accuracy and completeness of the information in this document. However, Authorize.Net disclaims all representations, warranties and conditions, whether express or implied, arising by statute, operation of law, usage of trade, course of dealing or otherwise, with respect to the information contained herein. Authorize.Net assumes no liability to any party for any loss or damage, whether direct, indirect, incidental, consequential, special or exemplary, with respect to (a) the information; and/or (b) the evaluation, application or use of any product or service described herein.

Authorize.Net disclaims any and all representation that its products or services do not infringe upon any existing or future intellectual property rights. Authorize.Net owns and retains all right, title and interest in and to the Authorize.Net intellectual property, including without limitation, its patents, marks, copyrights and technology associated with the Authorize.Net services. No title or ownership of any of the foregoing is granted or otherwise transferred hereunder. Authorize.Net reserves the right to make changes to any information herein without further notice.

Authorize.Net Trademarks

Advanced Fraud Detection Suite™

Authorize.Net®

Authorize.Net Your Gateway to IP Transactions™

Authorize.Net Verified Merchant Seal™

Automated Recurring Billing™

eCheck.Net®

FraudScreen.Net®

Authorize.Net®
a CyberSource solution

Contents

Revision History 6

Chapter 1 **Developer Introduction** 7
Audience For This Guide 7
Integration Methods 7
Standard API 8
Hosted Form 8
Minimum Requirements 8
Payment Processors 10
North American Payment Processors 10
Accepted Card Types 10
Accepted Currencies 10
European Payment Processors 10
Developer Support 11
Software Development Kits 11

Chapter 2 **Executing an API Call** 13
Web Service Locations 13
CIM Functions 14
The validationMode Parameter 15
Authentication 16
Input Parameters for CreateCustomerProfile 17
Input Parameters for CreateCustomerPaymentProfile 23
Input Parameters for CreateCustomerShippingAddress 26
Input Parameters for CreateCustomerProfileTransaction 27
Input Parameters for DeleteCustomerProfile 51
Input Parameters for DeleteCustomerPaymentProfile 51
Input Parameters for DeleteCustomerShippingAddress 52
Input Parameters for GetCustomerProfileIds 52
Input Parameters for GetCustomerProfile 53
Input Parameters for GetCustomerPaymentProfile 53
Input Parameters for GetCustomerShippingAddress 55

Input Parameters for GetHostedProfilePage 55
Input Parameters for UpdateCustomerProfile 57
Input Parameters for UpdateCustomerPaymentProfile 57
Input Parameters for UpdateCustomerShippingAddress 62
Input Elements for UpdateSplitTenderGroup 63
Input Parameters for ValidateCustomerPaymentProfile 65

Chapter 3 Responses 67

CIM Responses 68
Output for CreateCustomerProfileResponse 69
Output for CreateCustomerPaymentProfileResponse 70
Output for CreateCustomerShippingAddressResponse 71
Output for CreateCustomerProfileTransactionResponse 71
Output for DeleteCustomerProfileResponse 72
Output for DeleteCustomerPaymentProfileResponse 72
Output for DeleteCustomerShippingAddressResponse 72
Output for GetCustomerProfileIdsResponse 73
Output for GetCustomerProfileResponse 73
Output for GetCustomerPaymentProfileResponse 76
Output for GetCustomerShippingAddressResponse 79
Output for GetHostedProfilePage 81
Output for UpdateCustomerProfileResponse 81
Output for UpdateCustomerPaymentProfileResponse 81
Output for UpdateCustomerShippingAddressResponse 82
Output for UpdateSplitTenderGroup 82
Output for ValidateCustomerPaymentProfileResponse 83
Duplicate Profile Verification 83

Chapter 4 Using a Hosted Form 85

Designing Your Web Page 86
Implementing a Redirect to Authorize.Net 86
Creating an iframe Popup 88
Add a new payment method 88
Edit payment information 89
Add a new shipping address 90
Edit shipping address 91
Manage payment and shipping 92
Guidelines for Parameter Settings 93

Chapter A **Response Codes** **95**

Index **97**

Revision History

This table lists the changes made in the last six releases of this document:

Publish Date	Update
April 2013	Updated the table of "Payment Processors."
February 2013	Updated the table of "Payment Processors."
November 2012	Added list of "Payment Processors" and currencies, along with associated required fields. Added hostedProfileValidationMode parameter.
August 2012	Moved Using a Hosted Form to Chapter 4. Updated validationMode Parameter section.
November 2011	Updated document format (no content changes)
August 2011	Corrected broken link

Developer Introduction

CHAPTER 1

This guide describes the Web development required to create and manage customer profile information for the purpose of submitting transactions to the Authorize.Net Payment Gateway directly from a Web site or other application using Simple Object Access Protocol (SOAP).

SOAP provides a standards-based mechanism to access Web services from a wide range of platforms. Typically, you access Web services using a SOAP client on your programming environment. The SOAP client typically generates the native objects and interfaces based on a Web Services Description Language (WSDL) that is published by Authorize.Net. The client application initializes the local object and invokes the method as if it is calling a local procedure. The SOAP client generates and parses the underlying extensible markup language (XML) documents that form the basis of the SOAP protocol.

The Authorize.Net Customer Information Manager (CIM) Application Programming Interface (API) provides a mechanism for developers and value-added resellers (VARs) to create, delete, retrieve, and update customer profile information, including payment and address information, by directly integrating client software and the Authorize.Net Payment Gateway.

Please refer to specific SOAP client documentation for details on how to use SOAP-based Web services.

Audience For This Guide

This guide is intended for developers who are responsible for maintaining a merchant's website and integrating it with the Authorize.Net Payment Gateway.

Integration Methods

The two methods for integrating payments, Standard API and Hosted API, can accommodate a range of business needs and coding abilities.

Standard API

You can use the API to submit transaction information to Authorize.Net when your customers enter data on your website. When the customer enters the data, your website calls the API using either XML or SOAP.

The choice of XML or SOAP depends on the programming language you use. For PHP and Ruby, XML is recommended. For C# and other .NET languages, SOAP is recommended. With Java, either will work.

For information regarding requirements for using the API, see "Minimum Requirements" below.

Hosted Form

For a more secure exchange of information, a hosted form enables you to establish a hosted connection on Authorize.Net secure servers. If the merchant needs to transmit sensitive cardholder information (for example, a customer needs to change credit card information or add a new payment method), you can use the hosted form option. With the hosted CIM option, credit card data never flows through your website. You can implement the hosted option using either XML or SOAP.

You must still use the standard API (either SOAP or XML) for some operations, such as creating a transaction. The hosted page only provides functionality for creating, updating, and deleting payment profiles and shipping addresses.

For more information, refer to "Using a Hosted Form," page 85.

Minimum Requirements

Before you begin integrating an Authorize.Net Payment Gateway account, check with the merchant to make sure that the following minimum requirements have already been met.

- The merchant must have a merchant bank account that allows Internet transactions.
- The merchant must have an active Authorize.Net Card Not Present Payment Gateway account.
- The merchant must have signed up for the CIM service.
- The merchant must store account authentication data securely (for example, API login ID, transaction key).
- The merchant's website must use HTTPS.

- The merchant's website must support secure user registration for returning users.

Note

Merchants should avoid storing any type of sensitive cardholder information. However, if a merchant or third party must store sensitive customer business or payment information, they must comply with industry standard storage requirements. See the Developer Security Best Practices White Paper at http://www.authorize.net/files/developerbestpractices.pdf for guidelines.

Payment Processors

The currencies that a merchant can accept through Authorize.Net are determined by their payment processor.

North American Payment Processors

Accepted Card Types

All North American payment processors supported by Authorize.Net accept the following card types:

- American Express
- Diners Club
- Discover
- JCB
- Mastercard
- Visa

Accepted Currencies

Table 1 North American Payment Processors, Accepted Currencies

Payment Processor	Accepted Currencies
Chase Paymentech Tampa Processing Platform	United States Dollar (USD) Canadian Dollar (CAD)
Elavon	United States Dollar (USD) Canadian Dollar (CAD)
First Data Merchant Services (FDMS) Omaha, Nashville, and EFSNet Processing Platforms	United States Dollar (USD)
Global Payments	United States Dollar (USD) Canadian Dollar (CAD)
Heartland Payment Systems	United States Dollar (USD)
TSYS Acquiring Solutions	United States Dollar (USD)
WorldPay Atlanta Processing Platform	United States Dollar (USD)

European Payment Processors

The following European payment processors are supported by Authorize.Net for Card Not

Present (CNP) transactions.

Table 2 European Payment Processors, Accepted Currencies and Card Types

Payment Processor	Accepted Card Types	Accepted Currencies
AIB Merchant Services	■ Mastercard ■ Visa	British Pounds (GBP) Euro (EUR) United States Dollar (USD)
Barclaycard	■ JCB ■ Mastercard ■ Visa	British Pounds (GBP) Euro (EUR)
First Data Merchant Solutions (MSIP platform)	■ Mastercard ■ Visa	British Pounds (GBP)
HSBC Merchant Services	■ Mastercard ■ Visa	British Pounds (GBP) Euro (EUR)
Streamline	■ JCB ■ Mastercard ■ Visa	British Pounds (GBP) Euro (EUR) United States Dollar (USD)

Developer Support

Several resources are available to help you successfully integrate a merchant Web site or other application to the Authorize.Net Payment Gateway.

- The Developer Center at http://developer.authorize.net provides test accounts, sample code, FAQs, and troubleshooting tools.
- If you can't find what you need in the Developer Center, our Integration Team is available to answer your questions by email at integration@authorize.net.
- Be sure to read our "Developer Security Best Practices White Paper" at http://www.authorize.net/files/developerbestpractices.pdf for information on how to maximize the security and reliability of your merchant integration solutions.

If you have suggestions for improving or correcting this guide, send email to documentation@authorize.net.

Software Development Kits

Authorize.Net offers software development kits (SDKs) that present an alternate object-oriented model in several popular languages. Use the SDK to program the core payment

activities (such as error handling and parsing, network communication, and data encoding) that occur behind the scenes.

The SDK provides utility methods to help developers build payment flows for each of the integration methods. You can download the SDKs at http://developer.authorize.net/downloads/.

Executing an API Call

CHAPTER 2

The following sections describe the minimum requirements for executing an API call for managing customer profiles using SOAP.

You can develop a request script in one of two ways:

- Develop a custom script yourself using the API field information provided in this document
- Use Authorize.Net sample code available for free from our Developer Center at http://developer.authorize.net/samplecode.

Note If you choose to use Authorize.Net sample code, please be aware that in order to achieve a successful implementation, you must modify the code with developer test account or the merchant's specific payment gateway account information.

Web Service Locations

The following table shows where to find the API.

Item	Location
Web Service URL in Production	https://api.authorize.net/soap/v1/Service.asmx
Web Service URL in Developer Test	https://apitest.authorize.net/soap/v1/Service.asmx
WSDL	https://api.authorize.net/soap/v1/Service.asmx?WSDL

Note The developer test URL requires the use of a developer test payment gateway account. You can request a test account from our Developer Center at http://developer.authorize.net/testaccount. Developer test accounts cannot be used to test your implementation against the production URL.

CIM Functions

The CIM API comprises these functions:

- CreateCustomerProfile – Create a new customer profile along with any customer payment profiles and customer shipping addresses for the customer profile.
- CreateCustomerPaymentProfile—Create a new customer payment profile for an existing customer profile.
- CreateCustomerShippingAddress—Create a new customer shipping address for an existing customer profile.
- CreateCustomerProfileTransaction—Create a new payment transaction from an existing customer profile.
- DeleteCustomerProfile—Delete an existing customer profile along with all associated customer payment profiles and customer shipping addresses.
- DeleteCustomerPaymentProfile—Delete a customer payment profile from an existing customer profile.
- DeleteCustomerShippingAddress—Delete a customer shipping address from an existing customer profile.
- GetCustomerProfileIds—Retrieve all customer profile IDs you have previously created.
- GetCustomerProfile—Retrieve an existing customer profile along with all the associated customer payment profiles and customer shipping addresses.
- GetCustomerPaymentProfile—Retrieve a customer payment profile for an existing customer profile.
- GetCustomerShippingAddress—Retrieve a customer shipping address for an existing customer profile.
- GetHostedProfilePage—sends a request for access to the hosted CIM page. The response includes a token that enables customers to update their information directly on the Authorize.Net website.
- UpdateCustomerProfile – Update an existing customer profile.
- UpdateCustomerPaymentProfile – Update a customer payment profile for an existing customer profile.
- UpdateCustomerShippingAddress – Update a shipping address for an existing customer profile.

- UpdateSplitTenderGroup – Update the status of a split tender group (a group of transactions each of which pays for part of one order).
- ValidateCustomerPaymentProfile – Verify an existing customer payment profile by generating a test transaction.

The following sections provide information about the input parameters required for executing the functions listed above. All parameters are case sensitive and must be submitted in the order listed here. Parameters are required unless otherwise indicated. Optional parameters should not be submitted unless they contain valid values.

Note

Parameters required for individual API calls are in addition to the authentication parameters required for all API calls.

Note

For .NET programmers: When a parameter is optional, and if you use serialization, then the .NET language you are using automatically creates Boolean properties that indicate whether or not non-nullable parameters are specified. For example, if there is a parameter named *validationMode* that is an Enumeration type, a parameter called *validationModeSpecified* is automatically created. By default, these properties are set to false. If a request passes a value for an optional parameter, be sure to set these properties to true so that the value is not ignored.

The validationMode Parameter

The validationMode parameter enables you to generate a test transaction at the time you create or update a customer profile. The functions CreateCustomerProfile, CreateCustomerPaymentProfile, UpdateCustomerPaymentProfile, and ValidateCustomerPaymentProfile all include a validationMode parameter, which can have one of the following values:

- liveMode—This value is the default setting.

  liveMode generates a transaction to the processor in the amount of $0.01 or $0.00. If successful, the transaction is immediately voided. Visa authorization transactions are changing from $0.01 to $0.00 for all processors. All other credit card types use $0.01. Standard gateway and merchant account fees may apply to the authorization transactions.

  For Visa transactions using $0.00, the billTo address and billTo zip fields are required.
- testMode—Performs field validation only. All fields are validated. However, fields with unrestricted field definitions (such as telephone number) do not generate errors.

  If you select testMode, a $1.00 test transaction is submitted using the Luhn MOD 10 algorithm to verify that the credit card number is in a valid format. This test transaction does not appear on the customer's credit card statement, but it will generate and send a transaction receipt email to the merchant.

- none—When this value is submitted, no additional validation is performed.

When you call the CreateCustomerProfile function, you must use a value of *none* if the request does not include any payment profile information.

When you call the ValidateCustomerPaymentProfile function, you must use either testMode or liveMode.

If a validation transaction is unsuccessful, the profile is not created, and the merchant receives an error.

Note

For information about the hostedProfileValidationMode parameter, see , "hostedProfileValidationMode," on page 94.

Authentication

All Web services calls must be authenticated to ensure that they originate from authorized sources. The merchant Web services API authenticates calls with the API Login ID and Transaction Key.

Table 3 Merchant Authentication

Parameter	Description
merchantAuthentication	**Value**: Contains merchant unique information for purposes of authentication **Type**: MerchantAuthenticationType
• name	**Value**: The valid API Login ID for the developer test or merchant account **Format**: 20 characters **Notes:** Submit the API Login ID used to submit transactions
• transactionKey	**Value**: The valid Transaction Key for the developer test or merchant account **Format**: 16 characters **Notes:** Submit the Transaction Key obtained from the Merchant Interface

Example Authentication with the Login ID and Transaction Key

The authentication information with the merchant's Login ID and Transaction Key is sent in the SOAP:Body tag, as shown below:

```
<soap:Body>
    <FunctionName xmlns="https://api.authorize.net/soap/v1/">
   <merchantAuthentication>
      <name>API Login ID here</name>
      <transactionKey>Transaction Key here</transactionKey>
```

```
    </merchantAuthentication>
    Additional required parameters here
     </FunctionName>
</soap:Body>
```

Note The sample code included in this document uses generic field values. When using or testing sample code, be sure to enter valid field values. Additional sample code is available for download from the Authorize.Net Developer Center at http://developer.authorize.net/samplecode.

Input Parameters for CreateCustomerProfile

This function is used to create a new customer profile including any customer payment profiles and customer shipping addresses.

The following table lists the input parameters for executing an API call to the CreateCustomerProfile function.

Table 4 Input Parameters for CreateCustomerProfile

Field	Description
profile	**Value**: Contains information for the customer profile **Type:** CustomerProfileType **Notes**: At least one of the following fields must be submitted under profile: merchantCustomerId, description, or email.
• merchantCustomerId	**Value**: Merchant assigned ID for the customer Conditional **Format**: Up to 20 characters **Notes**: Required only if no values for both description and email are submitted.
• description	**Value**: Description of the customer or customer profile Conditional **Format**: Up to 255 characters **Notes**: Required only if no values for both merchantCustomerId and email are submitted.
• email	**Value**: Email address associated with the customer profile Conditional **Format**: Up to 255 characters **Notes**: Required if no values for both description and merchantCustomerId are submitted. Required only when using a European payment processor.

Table 4 Input Parameters for CreateCustomerProfile (Continued)

Field	Description
• paymentProfiles	**Value**: Contains payment profiles for the customer profile Optional **Type:** CustomerPaymentProfileType **Notes**: Multiple instances of this parameter and its children can be submitted to create multiple payment profiles for the customer profile.
• customerType	Optional **Type:** CustomerTypeEnum **Format**: individual or business
• billTo	**Type:** CustomerAddressTypeCustomer billing information
• firstName	**Value**: The customer's first name Optional **Format**: Up to 50 characters (no symbols) **Notes**: Required only when using a European payment processor.
• lastName	**Value**: The customer's last name Optional **Format**: Up to 50 characters (no symbols) **Notes**: Required only when using a European payment processor.
• company	**Value**: The name of the company associated with the customer, if applicable Optional **Format**: Up to 50 characters (no symbols)
• address	**Value**: The customer's address Optional **Format**: Up to 60 characters (no symbols) **Notes**: Required only when using a European payment processor.
• city	**Value**: The city of the customer's address Optional **Format**: Up to 40 characters (no symbols) **Notes**: Required only when using a European payment processor.
• state	**Value**: The state of the customer's address Optional **Format**: Up to 40 characters (no symbols) **Notes**: Required only when using a European payment processor.

Table 4 Input Parameters for CreateCustomerProfile (Continued)

Field	Description
• zip	**Value**: The ZIP code of the customer's address Optional **Format**: Up to 20 characters (no symbols) **Notes**: Required only when using a European payment processor.
• country	**Value**: The country of the customer's address Optional **Format**: Up to 60 characters (no symbols) **Notes**: Required only when using a European payment processor.
• phoneNumber	**Value**: The phone number associated with the customer profile Optional **Format**: Up to 25 digits (no letters) For example, (123)123-1234
• faxNumber	**Value**: The fax number associated with the customer profile Optional **Format**: Up to 25 digits (no letters) For example, (123)123-1234
• payment	**Value**: Contains payment profile information for the customer profile **Type**: PaymentSimpleType **Notes**: Can contain CreditCardSimpleType or BankAccountType.
• creditCard	**Value**: Contains credit card payment information for the payment profile **Type**: CreditCardSimpleType **Notes**: This parameter and its children are only required when the payment profile is credit card.
• cardNumber	**Value**: The customer's credit card number **Format**: 13 to 16 digits
• expirationDate	**Value**: The expiration date for the customer's credit card **Format**: YYYY-MM **Notes**: For .Net users, the class System.Runtime.Remoting.Metadata.W3cXsd2001.SoapYearMonth can be used to manage gYearMonth types.

Table 4 Input Parameters for CreateCustomerProfile (Continued)

Field	Description
• cardCode	**Value**: The three- or four-digit number on the back of a credit card (on the front for American Express) Optional **Format**: Numeric **Notes**: This field is required if the merchant would like to use the Card Code Verification (CCV) security feature. For more information, see the *Merchant Integration Guide* at http://www.authorize.net/support/merchant/. cardCode is used only for validation and is not stored in the customer profile. Use it only when submitting validationMode with a value of testMode or liveMode.
• bankAccount	**Value**: Contains bank account payment information for the payment profile **Type**: BankAccountType **Notes**: This parameter and its children are required only when the payment profile is bank account.
accountType	**Value**: The type of bank account for the payment profile Optional **type**: BankAccountTypeEnum **Format**: checking , savings, or businessChecking
routingNumber	**Value**: The routing number of the customer's bank **Format**: 9 digits
accountNumber	**Value**: The customer's bank account number **Format**: 5 to 17 digits
nameOnAccount	**Value**: The customer's full name as listed on the bank account **Format**: Up to 22 characters
echeckType	**Value**: The type of electronic check transaction Optional **Type**: EcheckTypeEnum **Format**: CCD, PPD, TEL, or WEB **Notes**: Currently, the CIM API does not support ARC or BOC transaction types.
bankName	**Value**: The name of the bank associated with the bank account number Optional **Format**: Up to 50 characters
• shipToList	**Value**: Contains shipping address information for the customer profile **Type**: CustomerAddressType
• firstName	**Value**: The customer's first name Optional **Format**: Up to 50 characters (no symbols)

Table 4 Input Parameters for CreateCustomerProfile (Continued)

Field	Description
• lastName	**Value**: The customer's last name Optional **Format**: Up to 50 characters (no symbols)
• company	**Value**: The name of the company associated with the customer, if applicable Optional **Format**: Up to 50 characters (no symbols)
• address	**Value**: The customer's shipping address Optional **Format**: Up to 60 characters (no symbols)
• city	**Value**: The city of the customer's shipping address Optional **Format**: Up to 40 characters (no symbols)
• state	**Value**: The state of the customer's shipping address Optional **Format**: Up to 40 characters (no symbols)
• zip	**Value**: The ZIP code of the customer's shipping address Optional **Format**: Up to 20 characters (no symbols)
• country	**Value**: The country of the customer's shipping address Optional **Format**: Up to 60 characters (no symbols)
phoneNumber	**Value**: The phone number associated with the customer profile Optional **Format**: Up to 25 digits (no letters) For example, (123)123-1234
faxNumber	**Value**: The fax number associated with the customer profile Optional **Format**: Up to 25 digits (no letters) For example, (123)123-1234
validationMode	**Value**: Indicates the processing mode for the request Optional **Format**: none, testMode, or liveMode **Notes**: For more information on use and restrictions of validationMode, see "The validationMode Parameter," page 15.

For information about output for this function, see the section of this document titled "Output for CreateCustomerProfileResponse."

Example 1 CreateCustomerProfile

```
<?xml version="1.0" encoding="utf-8"?>
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xmlns:xsd="http://
www.w3.org/2001/XMLSchema">
<soap:Body>
<CreateCustomerProfile xmlns="https://api.authorize.net/soap/v1/">
<merchantAuthentication>
  <name>API Login ID here</name>
  <transactionKey>Transaction Key here</transactionKey>
</merchantAuthentication>
<profile>
   <merchantCustomerId>Merchant Customer ID here</merchantCustomerId>
   <description>Profile description here</description>
   <email>customer profile email address here</email>
<paymentProfiles>
<CustomerPaymentProfileType>
  <customerType>individual</customerType>
    <payment>
      <creditCard>
        <cardNumber>Credit card number here</cardNumber>
       <expirationDate>Credit card expiration date here</expirationDate>
      </creditCard>
    </payment>
</CustomerPaymentProfileType>
</paymentProfiles>
</profile>
<validationMode>liveMode</validationMode>
</CreateCustomerProfile>
</soap:Body>
</soap:Envelope>
```

Note The sample code included in this document uses dummy field values. When using or testing sample code, be sure to enter valid field values. Additional sample code is available for download from the Authorize.Net Developer Center at http://developer.authorize.net/samplecode.

Input Parameters for CreateCustomerPaymentProfile

This function is used to create a new customer payment profile for an existing customer profile.

The following table lists the input parameters for executing an API call to the CreateCustomerPaymentProfile function.

Table 5 Input Parameters for CreateCustomerPaymentProfile

Field	Description
customerProfileId	**Value**: Payment gateway assigned ID associated with the customer profile **Format**: Numeric
paymentProfile	**Value**: Contains payment information for the customer profile **Type**: CustomerPaymentProfileType
• customerType	Optional **Type**: CustomerTypeEnum **Format**: individual or business
• billTo	CustomerAddressTypeCustomer information
• firstName	**Value**: The customer's first name Optional **Format**: Up to 50 characters (no symbols)
• lastName	**Value**: The customer's last name Optional **Format**: Up to 50 characters (no symbols)
• company	**Value**: The name of the company associated with the customer, if applicable Optional **Format**: Up to 50 characters (no symbols)
• address	**Value**: The customer's address Optional **Format**: Up to 60 characters (no symbols)
• city	**Value**: The city of the customer's address Optional **Format**: Up to 40 characters (no symbols)
• state	**Value**: The state of the customer's address Optional **Format**: Up to 40 characters (no symbols)
• zip	**Value**: The ZIP code of the customer's address Optional **Format**: Up to 20 characters (no symbols)

Table 5 Input Parameters for CreateCustomerPaymentProfile (Continued)

Field	Description
• country	**Value**: The country of the customer's address Optional **Format**: Up to 60 characters (no symbols)
• phoneNumber	**Value**: The phone number associated with the customer's address Optional **Format**: Up to 25 digits (no letters) For example, (123)123-1234
• faxNumber	**Value**: The fax number associated with the customer's address Optional **Format**: Up to 25 digits (no letters) For example, (123)123-1234
• payment	**Value**: Contains payment information for the customer profile **Type**: PaymentSimpleType **Notes**: Can contain CreditCardSimpleType or BankAccountType.
• creditCard	**Value**: Contains credit card payment information for the customer profile **Type**: CreditCardSimpleType **Notes**: This parameter and its children are required only when the payment profile is credit card.
• cardNumber	**Value**: The customer's credit card number **Format**: 13 to 16 digits
• expirationDate	**Value**: The expiration date for the customer's credit card **Format**: YYYY-MM **Notes**: For .Net users, the class System.Runtime.Remoting.Metadata.W3cXsd2001.SoapYearMonth can be used to manage gYearMonth types.
• cardCode	**Value**: The three- or four-digit number on the back of a credit card (on the front for American Express) Optional **Format**: Numeric **Notes**: This field is required if the merchant would like to use the Card Code Verification (CCV) security feature. For more information, see the *Merchant Integration Guide* at /http://www.authorize.net/support/Merchant/default.htm. cardCode is used only for validation and is not stored in the customer profile. Use it only when submitting validationMode with a value of testMode or liveMode.
• bankAccount	**Value**: Contains bank account payment information for the customer profile **Type**: BankAccountType **Notes**: This parameter and its children arerequired only when the payment profile is bank account.

Table 5 Input Parameters for CreateCustomerPaymentProfile (Continued)

Field	Description
• accountType	**Value**: The type of bank account for the payment profile Optional **Type**: BankAccountTypeEnum **Format**: checking, savings, or businessChecking
• routingNumber	**Value**: The routing number of the customer's bank **Format**: 9 digits
• accountNumber	**Value**: The customer's bank account number **Format**: 5 to 17 digits
• nameOnAccount	**Value**: The customer's full name as listed on the bank account **Format**: Up to 22 characters
• echeckType	**Value**: The type of electronic check transaction Optional **Type**: EcheckTypeEnum **Format**: CCD, PPD, TEL, or WEB **Notes**: Currently, the CIM API does not support ARC or BOC transaction types.
• bankName	**Value**: The name of the bank associated with the bank account number Optional **Format**: Up to 50 characters
validationMode	**Value**: Indicates the processing mode for the request **Type**: ValidationModeEnum **Format**: none, testMode, or liveMode **Notes**: For more information on use and restrictions of validationMode, see "The validationMode Parameter," page 15.

For information about output parameters for this function, see the section of this document titled "Output for CreateCustomerPaymentProfileResponse."

Input Parameters for CreateCustomerShippingAddress

This function is used to create a new customer shipping address for an existing customer profile.

The following table lists the input parameters for executing an API call to the CreateCustomerShippingAddress function.

Table 6 Input Parameters for CreateCustomerShippingAddress

Field	Description
customerProfileId	**Value**: Payment gateway assigned ID associated with the customer profile **Format**: Numeric
address	**Value**: Contains shipping address information for the customer profile **Type**: CustomerAddressType
• firstName	**Value**: The customer's first name Optional **Format**: Up to 50 characters (no symbols)
• lastName	**Value**: The customer's last name Optional **Format**: Up to 50 characters (no symbols)
• company	**Value**: The name of the company associated with the customer, if applicable Optional **Format**: Up to 50 characters (no symbols)
• address	**Value**: The customer's shipping address Optional **Format**: Up to 60 characters (no symbols)
• city	**Value**: The city of the customer's shipping address Optional **Format**: Up to 40 characters (no symbols)
• stat	**Value**: The state of the customer's shipping address Optional **Format**: Up to 40 characters (no symbols)
• zip	**Value**: The ZIP code of the customer's shipping address Optional **Format**: Up to 20 characters (no symbols)
• country	**Value**: The country of the customer's shipping address Optional **Format**: Up to 60 characters (no symbols)

Table 6 Input Parameters for CreateCustomerShippingAddress (Continued)

Field	Description
• phoneNumber	**Value**: The phone number associated with the customer's shipping address Optional **Format**: Up to 25 digits (no letters) For example, (123)123-1234
• faxNumber	**Value**: The fax number associated with the customer's shipping address Optional **Format**: Up to 25 digits (no letters) For example, (123)123-1234

For information about output parameters for this function, see the section of this document titled "Output for CreateCustomerShippingAddressResponse."

Input Parameters for CreateCustomerProfileTransaction

This function is used to create a payment transaction from an existing customer profile. You can submit one of six transaction types: Authorization Only, Authorization and Capture, Capture Only, Prior Authorization and Capture, Refund, and Void. For more information on these transaction types, see the *Merchant Integration Guide* at http://www.authorize.net/support/merchant/.

Note The only transaction types that generate a customer receipt email are Authorization Only, Authorization and Capture, and Refund.

For Authorization Only transactions

The following table lists the input parameters for executing an API call to the CreateCustomerProfileTransaction function for an Authorization Only transaction.

Table 7 Input Parameters for CreateCustomerProfileTransaction

Field	Description
transaction	**Value**: Contains transactioninformation **Type**: ProfileTransactionType
• profileTransAuthOnly	**Value**: The transaction type that is being requested **Type**: ProfileTransAuthOnlyType **Notes**: Only one transaction type is allowed per request.

Table 7 Input Parameters for CreateCustomerProfileTransaction (Continued)

Field	Description
• amount	**Value**: The total amount of the transaction **Format**: Up to 4 digits after the decimal point (no dollar symbol) For example, 12.99 or 12.9999 **Notes**: This amount should include all other amounts such as tax amount, shipping amount, etc.
• tax	**Value**: Contains tax information for the transaction Optional **Type**: ExtendedAmountType
• amount	**Value**: The tax amount for the transaction Optional **Format**: Up to 4 digits after the decimal point (no dollar symbol) For example, 12.99 or 12.9999 **Notes**: This amount must be included in the total amount for the transaction.
• name	**Value**: The name of the tax for the transaction Optional **Format**: Up to 31 characters
• description	**Value**: The tax description for the transaction Optional **Format**: Up to 255 characters
• shipping	**Value**: Contains shipping information for the transaction Optional **Type**: ExtendedAmountType
• amount	**Value**: The shipping amount for the transaction Optional **Format**: Up to 4 digits after the decimal point (no dollar symbol) For example, 12.99 or 12.9999 **Notes**: This amount must be included in the total amount for the transaction.
• name	**Value**: The name of the shipping for the transaction Optional **Format**: Up to 31 characters

Table 7 Input Parameters for CreateCustomerProfileTransaction (Continued)

Field	Description
• description	**Value**: The shipping description for the transaction Optional **Format**: Up to 255 characters
• duty	**Value**: Contains duty information for the transaction Optional **Type**: ExtendedAmountType
• amount	**Value**: The duty amount for the transaction Optional **Format**: Up to 4 digits after the decimal point (no dollar symbol) For example, 12.99 or 12.9999 **Notes**: This amount must be included in the total amount for the transaction.
• name	**Value**: The name of the duty for the transaction Optional vUp to 31 characters
• description	**Value**: The duty description for the transaction Optional **Format**: Up to 255 characters
• lineItems	**Value**: Contains line item details about the order Optional **Type**: LineItemType **Notes**: Up to 30 distinct instances of this parameter and its children can be included per transaction to describe items included in the order.
• itemId	**Value**: The ID assigned to the item Optional **Format**: Up to 31 characters
• name	**Value**: A short description of an item Optional **Format**: Up to 31 characters
• description	**Value**: A detailed description of an item Optional **Format**: Up to 255 characters

Table 7 Input Parameters for CreateCustomerProfileTransaction (Continued)

Field	Description
• quantity	**Value**: The quantity of an item Optional **Format**: Up to 4 digits (up to two decimal places)
• unitPrice	**Value**: Cost of an item per unit excluding tax, freight, and duty Optional **Format**: Up to 4 digits with a decimal point (no dollar symbol) For example, 4.95
• taxable	**Value**: Indicates whether the item is subject to tax Optional **Format**: true or false
• customerProfileId	**Value**: Payment gateway assigned ID associated with the customer profile **Format**: Numeric
• customerPaymentProfileId	**Value**: Payment gateway assigned ID associated with the customer payment profile **Format**: Numeric
• customerShippingAddressId	**Value**: Payment gateway assigned ID associated with the customer shipping address Optional **Format**: Numeric **Notes**: If customerShippingAddressId is not passed, shipping information will not be included with the transaction.
• order	**Value**: Contains information about the order Optional **Type**: OrderExType
• invoiceNumber	**Value**: The merchant assigned invoice number for the transaction Optional **Format**: Up to 20 characters (no symbols)
• description	**Value**: The transaction description Optional **Format**: Up to 255 characters (no symbols)

Table 7 Input Parameters for CreateCustomerProfileTransaction (Continued)

Field	Description
• purchaseOrderNumber	**Value**: The merchant assigned purchase order number Optional **Format**: Up to 25 characters (no symbols)
• taxExempt	**Value**: The tax exempt status Optional **Format**: true or false
• recurringBilling	**Value**: The recurring billing status Optional **Format**: true or false
• cardCode	**Value**: The customer's card code (the three- or four-digit number on the back or front of a credit card) Conditional. **Format**: 3 to 4 digits **Notes**: This field is required if the merchant would like to use the Card Code Verification (CCV) security feature. For more information, see the *Merchant Integration Guide* at http://www.authorize.net/support/merchant/
• splitTenderId	**Value**: Payment gateway-assigned number associated with the order. Conditional **Format**: Up to 6 digits **Notes**: This field is required for second and subsequent transactions related to a partial authorizaqtion transaction.
extraOptions	**Value**: Information in name/value pair format that does not exist within CIM, such as customer IP address, etc. Optional **Format**: String **Notes**: For a complete list of the transaction variable names available, review the *AIM Implementation Guide* located at http://www.authorize.net/support/AIM_guide.pdf.

For information about output parameters for this function, see the section of this document titled "Input Parameters for CreateCustomerProfileTransaction."

For Authorization and Capture Transactions

The following table lists the input parameters for executing an API call to the CreateCustomerProfileTransaction function for an Authorization and Capture transaction.

Table 8 Input Parameters for CreateCustomerProfileTransaction

Field	Description
transaction	**Value**: Contains transaction information**Type**: ProfileTransactionType
• profileTransAuthCapture	**Value**: The transaction type that is being requested**Type**: ProfileTransAuthCaptureType **Notes**: Only one transaction type is allowed per request.
• amount	**Value**: The total amount of the transaction **Format**: Up to 4 digits after the decimal point (no dollar symbol) For example, 12.99 or 12.9999 **Notes**: This amount should include all other amounts such as tax amount, shipping amount, etc.
• tax	**Value**: Contains tax information for the transaction Optional**Type**: ExtendedAmountType
• amount	**Value**: The tax amount for the transaction Optional **Format**: Up to 4 digits after the decimal point (no dollar symbol) For example, 12.99 or 12.9999 **Notes**: This amount must be included in the total amount for the transaction.
• name	**Value**: The name of the tax for the transaction Optional **Format**: Up to 31 characters
• description	**Value**: The tax description for the transaction Optional **Format**: Up to 255 characters
• shipping	**Value**: Contains shipping information for the transaction Optional **Type**: ExtendedAmountType

Table 8 Input Parameters for CreateCustomerProfileTransaction (Continued)

Field	Description
• amount	**Value**: The shipping amount for the transaction Optional **Format**: Up to 4 digits after the decimal point (no dollar symbol) For example, 12.99 or 12.9999 **Notes**: This amount must be included in the total amount for the transaction.
• name	**Value**: The name of the shipping for the transaction Optional **Format**: Up to 31 characters
• description	**Value**: The shipping description for the transaction Optional **Format**: Up to 255 characters
• duty	**Value**: Contains duty information for the transaction Optional **Type**: ExtendedAmountType
• amount	**Value**: The duty amount for the transaction Optional **Format**: Up to 4 digits after the decimal point (no dollar symbol) For example, 12.99 or 12.9999 **Notes**: This amount must be included in the total amount for the transaction.
• name	**Value**: The name of the duty for the transaction Optional **Format**: Up to 31 characters
• description	**Value**: The duty description for the transaction Optional **Format**: Up to 255 characters
• lineItems	**Value**: Contains line item details about the order Optional **Type**: LineItemType **Notes**: Up to 30 distinct instances of this parameter and its children can be included per transaction to describe items included in the order.

Table 8 Input Parameters for CreateCustomerProfileTransaction (Continued)

Field	Description
• itemId	**Value**: The ID assigned to the item Optional **Format**: Up to 31 characters
• name	**Value**: A short description of an item Optional **Format**: Up to 31 characters
• description	**Value**: A detailed description of an item Optional **Format**: Up to 255 characters
• quantity	**Value**: The quantity of an item Optional **Format**: Up to 4 digits (up to two decimal places)
• unitPrice	**Value**: Cost of an item per unit excluding tax, freight, and duty Optional **Format**: Up to 4 digits with a decimal point (no dollar symbol) For example, 4.95
• taxable	**Value**: Indicates whether the item is subject to tax Optional **Format**: TRUE or FALSE
• customerProfileId	**Value**: Payment gateway-assigned ID associated with the customer profile **Format**: Numeric
• customerPaymentProfileId	**Value**: Payment gateway-assigned ID associated with the customer payment profile **Format**: Numeric
• customerShippingAddressId	**Value**: Payment gateway-assigned ID associated with the customer shipping address Optional **Format**: Numeric **Notes**: If customerShippingAddressId is not passed, shipping information will not be included with the transaction.
• order	**Value**: Contains information about the order Optional **Type**: OrderExType

Table 8 Input Parameters for CreateCustomerProfileTransaction (Continued)

Field	Description
• invoiceNumber	**Value**: The merchant-assigned invoice number for the transaction Optional **Format**: Up to 20 characters (no symbols)
• description	**Value**: The transaction description Optional **Format**: Up to 255 characters (no symbols)
• purchaseOrderNumber	**Value**: The merchant-assigned purchase order number Optional **Format**: Up to 25 characters (no symbols)
• taxExempt	**Value**: The tax exempt status Optional **Format**: TRUE or FALSE
• recurringBilling	**Value**: The recurring billing status Optional **Format**: TRUE or FALSE
• cardCode	The customer's card code (the three- or four-digit number on the back or front of a credit card) Conditional **Format**: 3 to 4 digits **Notes**: This field is required if the merchant would like to use the Card Code Verification (CCV) security feature. For more information, see the *Merchant Integration Guide* at http://www.authorize.net/support/merchant/default.htm.
• splitTenderId	**Value:** The payment gateway-assigned number associated with the order. Conditional **Format**: Up to 6 digits **Notes**: This field is required for second and subsequent transactions related to a partial authorization transaction.

Table 8 Input Parameters for CreateCustomerProfileTransaction (Continued)

Field	Description
extraOptions	Information in name/value pair format that does not exist within CIM, such as customer IP address, etc. Optional **Format**: String **Notes**: For a complete list of the transaction variable names available, review the *AIM Implementation Guide* located at http://www.authorize.net/support/AIM_guide.pdf.

For information about output parameters for this function, see the section of this document titled "Output for CreateCustomerProfileTransactionResponse."

For Capture Only Transactions

The following table lists the input parameters for executing an API call to the CreateCustomerProfileTransaction function for a Capture Only transaction.

Table 9 Input Parameters for CreateCustomerProfileTransaction

Field	Description
transaction	**Value**: Contains transaction information **Type**: ProfileTransactionType
• profileTransCaptureOnly	**Value**: The transaction type that is being requested **Type**: ProfileTransCaptureOnlyType **Notes**: Only one transaction type is allowed per request.
• amount	**Value**: The total amount of the transaction **Format**: Up to 4 digits after the decimal point (no dollar symbol) For example, 12.99 or 12.9999 **Notes**: This amount should include all other amounts such as tax amount, shipping amount, etc.
• tax	**Value**: Contains tax information for the transaction Optional **Type**: ExtendedAmountType
• amount	**Value**: The tax amount for the transaction Optional **Format**: Up to 4 digits after the decimal point (no dollar symbol) For example, 12.99 or 12.9999 **Notes**: This amount must be included in the total amount for the transaction.
• name	**Value**: The name of the tax for the transaction Optional **Format**: Up to 31 characters
• description	**Value**: The tax description for the transaction Optional **Format**: Up to 255 characters
• shipping	**Value**: Contains shipping information for the transaction Optional **Type**: ExtendedAmountType

Table 9 Input Parameters for CreateCustomerProfileTransaction (Continued)

Field	Description
• amount	**Value**: The shipping amount for the transaction Optional **Format**: Up to 4 digits after the decimal point (no dollar symbol) For example, 12.99 or 12.9999 **Notes**: This amount must be included in the total amount for the transaction.
• name	**Value**: The name of the shipping for the transaction Optional **Format**: Up to 31 characters
• description	**Value**: The shipping description for the transaction Optional **Format**: Up to 255 characters
• duty	**Value**: Contains duty information for the transaction Optional **Type**: ExtendedAmountType
• amount	**Value**: The duty amount for the transaction Optional **Format**: Up to 4 digits after the decimal point (no dollar symbol) For example, 12.99 or 12.9999 **Notes**: This amount must be included in the total amount for the transaction.
• name	**Value**: The name of the duty for the transaction Optional **Format**: Up to 31 characters
• description	**Value**: The duty description for the transaction Optional **Format**: Up to 255 characters
• lineItems	**Value**: Contains line item details about the order Optional **Type**: LineItemType **Notes**: Up to 30 distinct instances of this parameter and its children can be included per transaction to describe items included in the order.
• itemId	**Value**: The ID assigned to the item Optional **Format**: Up to 31 characters

Table 9 Input Parameters for CreateCustomerProfileTransaction (Continued)

Field	Description
• name	**Value**: A short description of an item Optional **Format**: Up to 31 characters
• description	**Value**: A detailed description of an item Optional **Format**: Up to 255 characters
• quantity	**Value**: The quantity of an item Optional **Format**: Up to 4 digits (up to two decimal places)
• unitPrice	**Value**: Cost of an item per unit excluding tax, freight, and duty Optional **Format**: Up to 4 digits with a decimal point (no dollar symbol) For example, 4.95
• taxable	**Value**: Indicates whether the item is subject to tax Optional **Format**: TRUE or FALSE
• customerProfileId	**Value**: Payment gateway assigned ID associated with the customer profile **Format**: Numeric
• customerPaymentProfileId	**Value**: Payment gateway assigned ID associated with the customer payment profile **Format**: Numeric
• customerShippingAddressId	**Value**: Payment gateway assigned ID associated with the customer shipping address Optional **Format**: Numeric **Notes**: If customerShippingAddressId is not passed, shipping information will not be included with the transaction.
• order	**Value**: Contains information about the order Optional **Type**: OrderExType

Table 9 Input Parameters for CreateCustomerProfileTransaction (Continued)

Field	Description
• invoiceNumber	**Value**: The merchant assigned invoice number for the transaction Optional **Format**: Up to 20 characters (no symbols)
• description	**Value**: The transaction description Optional **Format**: Up to 255 characters (no symbols)
• purchaseOrderNumber	**Value**: The merchant assigned purchase order number Optional **Format**: Up to 25 characters (no symbols)
• taxExempt	**Value**: The tax exempt status Optional **Format**: TRUE or FALSE
• recurringBilling	**Value**: The recurring billing status Optional **Format**: TRUE or FALSE
• cardCode	**Value**: The customer's card code (the three- or four-digit number on the back or front of a credit card) Conditional **Format**: 3 to 4 digits **Notes**: This field is required if the merchant would like to use the Card Code Verification (CCV) security feature. For more information, see the *Merchant Integration Guide* at http://www.authorize.net/support/Merchant/default.htm.
• splitTenderId	Value: Payment gateway-assigned number associated with the order. Conditional **Format**: Up to 6 digits **Notes**: This field is only required for second and subsequent transactions related to a partial authorizaqtion transaction.
• approvalCode	**Value**: The authorization code of an original transaction required for a Capture Only Conditional **Format**: 6 characters **Notes**: This field is onlyrequired for the Capture Only transaction type.

Table 9 Input Parameters for CreateCustomerProfileTransaction (Continued)

Field	Description
extraOptions	**Value**: Information in name/value pair format that does not exist within CIM, such as customer IP address, etc. Optional **Format**: String **Notes**: For a complete list of the transaction variable names available, review the *AIM Implementation Guide* located at http://www.authorize.net/support/AIM_guide.pdf.

For information about output parameters for this function, see the section of this document titled "Output for CreateCustomerProfileTransactionResponse."

For Prior Authorization and Capture Transactions

The following table lists the input parameters for executing an API call to the CreateCustomerProfileTransaction function for a Prior Authorization and Capture transaction.

Table 10 Input Parameters for CreateCustomerProfileTransaction

Field	Description
transaction	**Value**: Contains transaction information **Type**: ProfileTransactionType
• profileTransPriorAuthCapture	**Value**: The transaction type that is being requested **Type**: ProfileTransPriorAuth CaptureType **Notes**: Only one transaction type is allowed per request.
• amount	**Value**: The total amount of the transaction **Format**: Up to 4 digits after the decimal point (no dollar symbol) Ex. 12.99 or 12.9999 **Notes**: This amount should include all other amounts such as tax amount, shipping amount, etc.
• tax	**Value**: Contains tax information for the transaction Optional **Type**: ExtendedAmountType **Notes**: Tax information from the original authorization transaction will be used if this field is not submitted.

Table 10 Input Parameters for CreateCustomerProfileTransaction (Continued)

Field	Description
• amount	**Value**: The tax amount for the transaction Optional **Format**: Up to 4 digits after the decimal point (no dollar symbol) for example, 12.99 or 12.9999 **Notes**: This amount must be included in the total amount for the transaction.
• name	**Value**: The name of the tax for the transaction Optional **Format**: Up to 31 characters
• description	**Value**: The tax description for the transaction Optional **Format**: Up to 255 characters
• shipping	**Value**: Contains shipping information for the transaction Optional **Type**: ExtendedAmountType **Notes**: Shipping information from the original authorization transaction will be used if this field is not submitted.
• amount	**Value**: The shipping amount for the transaction Optional **Format**: Up to 4 digits after the decimal point (no dollar symbol) For example, 12.99 or 12.9999 **Notes**: This amount must be included in the total amount for the transaction.
• name	**Value**: The name of the shipping for the transaction Optional **Format**: Up to 31 characters
• description	**Value**: The shipping description for the transaction Optional **Format**: Up to 255 characters
• duty	**Value**: Contains duty information for the transaction Optional **Type**: ExtendedAmountType **Notes**: Duty information from the original authorization transaction will be used if this field is not submitted.

Table 10 Input Parameters for CreateCustomerProfileTransaction (Continued)

Field	Description
• amount	**Value**: The duty amount for the transaction Optional **Format**: Up to 4 digits after the decimal point (no dollar symbol) For example, 12.99 or 12.9999 **Notes**: This amount must be included in the total amount for the transaction.
• name	**Value**: The name of the duty for the transaction Optional **Format**: Up to 31 characters
• description	**Value**: The duty description for the transaction Optional **Format**: Up to 255 characters
• lineItems	**Value**: Contains line item details about the order Optional **Type**: LineItemType **Notes**: Line item information from the original authorization transaction will be used if this field is not submitted. Up to 30 distinct instances of this parameter and its children can be included per transaction to describe items included in the order.
• itemId	**Value**: The ID assigned to the item Optional **Format**: Up to 31 characters
• name	**Value**: A short description of an item Optional **Format**: Up to 31 characters
• description	**Value**: A detailed description of an item Optional **Format**: Up to 255 characters
• quantity	**Value**: The quantity of an item Optional **Format**: Up to 4 digits (up to two decimal places)

Table 10 Input Parameters for CreateCustomerProfileTransaction (Continued)

Field	Description
• unitPrice	**Value**: Cost of an item per unit excluding tax, freight, and duty Optional **Format**: Up to 4 digits with a decimal point (no dollar symbol) For example, 4.95
• taxable	**Value**: Indicates whether the item is subject to tax Optional **Format**: TRUE or FALSE
• customerProfileId	**Value**: Payment gateway-assigned ID associated with the customer profile **Format**: Numeric **Notes**: If a value is submitted for this field, it must be the same ID used for the original authorization transaction.
• customerPaymentProfileId	**Value**: Payment gateway-assigned ID associated with the customer payment profile **Format**: Numeric **Notes**: If a value is submitted for this field, it must be the same ID used for the original authorization transaction.
• customerShippingAddressId	**Value**: Payment gateway-assigned ID associated with the customer shipping address Optional **Format**: Numeric **Notes**: If a value is submitted for this field, it must be the same ID used for the original authorization transaction.
• transId	**Value**: The payment gateway-assigned transaction ID of the original transaction **Format**: Numeric
extraOptions	**Value**: Information in name/value pair format that does not exist within CIM, such as customer IP address, etc. Optional **Format**: String **Notes**: For a complete list of the transaction variable names available, review the *AIM Implementation Guide* located at http://www.authorize.net/support/AIM_guide.pdf.

For information about output parameters for this function, see the section of this document titled "Output for CreateCustomerProfileTransactionResponse."

For Refund Transactions

If you are submitting a refund against a previous CIM transaction, the following guidelines apply:

- include `customerProfileId`, `customerPaymentProfileId`, and `transId`.
- `customerShippingAddressId` is optional.
- `creditCardNumberMasked`, `bankRoutingNumberMasked`, and `bankAccountNumberMasked` do not need to be included, but they will be validated if they are included.

If you are submitting a refund for a non-CIM transaction, the following guidelines apply:

- you must include `transId`, `creditCardNumberMasked` (or `bankRoutingNumberMasked` and `bankAccountNumberMasked`).
- do not include `customerProfileId`, `customerPaymentProfileId`, or `customerShippingAddressId`.

You can also issue an unlinked refund for a CIM transaction. In this case, the following rules apply:

- you must be enrolled in Expanded Credit Capabilities (ECC). For more information about ECC, go to http://www.authorize.net/files/ecc.pdf.
- you must include `customerProfileId` and `customerPaymentProfileId`.
- `customerShippingAddressId` is optional.
- do not include `transId`, `creditCardNumberMasked`, `bankRoutingNumberMasked`, or `bankAccountNumberMasked`.

The following table lists the input parameters for executing an API call to the CreateCustomerProfileTransaction function for a Refund transaction.

Table 11 Input Parameters for CreateCustomerProfileTransaction

Field	Description
transaction	**Value**: Contains transaction information **Type**: ProfileTransactionType
• profileTransRefund	**Value**: The transaction type that is being requested **Type**: ProfileTransRefundType **Notes**: Only one transaction type is allowed per request.
• amount	**Value**: The total amount to be refunded **Format**: Up to 4 digits after the decimal point (no dollar symbol) For example, 12.99 or 12.9999 **Notes**: This amount should include all other amounts such as tax amount, shipping amount, etc.
• tax	**Value**: Contains tax information for the refund Optional **Type**: ExtendedAmountType

Table 11 Input Parameters for CreateCustomerProfileTransaction (Continued)

Field	Description
• amount	**Value**: The tax amount to be refunded Optional **Format**: Up to 4 digits after the decimal point (no dollar symbol) For example, 12.99 or 12.9999 **Notes**: This amount must be included in the total amount for the transaction.
• name	**Value**: The name of the tax for the transaction Optional **Format**: Up to 31 characters
• description	**Value**: The tax description for the transaction Optional **Format**: Up to 255 characters
• shipping	**Value**: Contains shipping information for the refund Optional **Type**: ExtendedAmountType
• amount	**Value**: The shipping amount to be refunded Optional **Format**: Up to 4 digits after the decimal point (no dollar symbol) For example, 12.99 or 12.9999 **Notes**: This amount must be included in the total amount for the transaction.
• name	**Value**: The name of the shipping for the transaction Optional **Format**: Up to 31 characters
• description	**Value**: The shipping description for the transaction Optional **Format**: Up to 255 characters
• duty	**Value**: Contains duty information for the refund Optional **Type**: ExtendedAmountType

Table 11 Input Parameters for CreateCustomerProfileTransaction (Continued)

Field	Description
• amount	**Value**: The duty amount to be refunded Optional **Format**: Up to 4 digits after the decimal point (no dollar symbol) For example, 12.99 or 12.9999 **Notes**: This amount must be included in the total amount for the transaction.
• name	**Value**: The name of the duty for the transaction Optional **Format**: Up to 31 characters
• description	**Value**: The duty description for the transaction Optional Up to 255 characters**Format**:
• lineItems	**Value**: Contains line item details about the refund Optional **Type**: LineItemType **Notes**: Up to 30 distinct instances of this parameter and its children can be included per transaction to describe items included in the order.
• itemId	**Value**: The ID assigned to the item Optional **Format**: Up to 31 characters
• name	**Value**: A short description of an item Optional **Format**: Up to 31 characters
• description	**Value**: A detailed description of an item Optional **Format**: Up to 255 characters
• quantity	**Value**: The quantity of an item Optional **Format**: Up to 4 digits (up to two decimal places)
• unitPrice	**Value**: Cost of an item per unit excluding tax, freight, and duty Optional **Format**: Up to 4 digits with a decimal point (no dollar symbol). For example, 4.95

Table 11 Input Parameters for CreateCustomerProfileTransaction (Continued)

Field	Description
• taxable	**Value**: Indicates whether the item is subject to tax Optional **Format**: TRUE or FALSE
• customerProfileId	**Value**: Payment gateway assigned ID associated with the customer profile Conditional **Format**: Numeric **Notes**: If a value is submitted for this field, it must be the same ID used for the original transaction. For more complete information, see "For Refund Transactions," page 45
• customerPaymentProfileId	**Value**: Payment gateway assigned ID associated with the customer payment profile Conditional **Format**: Numeric **Notes**: If a value is submitted for this field, it must be the same ID used for the original transaction. For more complete information, see "For Refund Transactions," page 45.
• customerShippingAddressId	**Value**: Payment gateway assigned ID associated with the customer shipping address Optional **Format**: Numeric **Notes**: If a value is submitted for this field, it must be the same ID used for the original authorization transaction. For more complete information, see "For Refund Transactions," page 45.
• creditCardNumberMasked	**Value**: The last four digits of the credit card number to be refunded Conditional **Format**: Four Xs followed by the last four digits of the credit card number to be refunded. For example, XXXX1234 **Notes**: If a value is submitted, the last four digits must be the same ones used for the original transaction. For more complete information, see "For Refund Transactions," page 45.

Table 11 Input Parameters for CreateCustomerProfileTransaction (Continued)

Field	Description
• bankRoutingNumberMasked	**Value**: The last four digits of the routing number to be refunded Conditional **Format**: Four Xs followed by the last four digits of the routing number to be refunded. For example, XXXX1234 **Notes**: If a value is submitted, the last four digits must be the same ones used for the original transaction. For more complete information, see "For Refund Transactions," page 45.
• bankAccountNumberMasked	**Value**: The last four digits of the bank account number to be refunded Conditional **Format**: Four Xs followed by the last four digits of the bank account to be refunded. For example, XXXX1234 **Notes**: If a value is submitted, the last four digits must be the same ones used for the original transaction. For more complete information, see "For Refund Transactions," page 45.
• order	**Value**: Contains information about the order Optional
• invoiceNumber	**Value**: The merchant assigned invoice number for the transaction Optional **Format**: Up to 20 characters (no symbols)
• description	**Value**: The transaction description Optional **Format**: Up to 255 characters (no symbols)
• purchaseOrderNumber	**Value**: The merchant assigned purchase order number Optional **Format**: Up to 25 characters (no symbols)
• transId	**Value**: The payment gateway assigned transaction ID of the original transaction. Conditional **Format**: Numeric **Notes**: For more complete information, see "For Refund Transactions," page 45.

Table 11 Input Parameters for CreateCustomerProfileTransaction (Continued)

Field	Description
extraOptions	**Value**: Information in name/value pair format that does not exist within CIM, such as customer IP address, etc. Optional **Format**: String **Notes**: For a complete list of the transaction variable names available, review the *AIM Implementation Guide* located at http://www.authorize.net/support/AIM_guide.pdf.

For information about output parameters for this function, see the section of this document titled "Input Parameters for CreateCustomerProfileTransaction."

For a Void Transaction

The following table lists the input parameters for executing an API call to the CreateCustomerProfileTransaction function for a Void transaction.

Table 12 Input Parameters for CreateCustomerProfileTransaction

Field	Description
transaction	**Value**: Contains transaction information **Type**: ProfileTransactionType
• profileTransVoid	**Value**: The transaction type that is being requested **Type**: ProfileTransVoidType **Notes**: Only one transaction type is allowed per request.
• customerProfileId	**Value**: Payment gateway assigned ID associated with the customer profile Conditional **Format**: Numeric **Notes**: If a value is submitted for this field, it must be the same ID used for the original transaction.
• customerPaymentProfileId	**Value**: Payment gateway assigned ID associated with the customer payment profile Conditional **Format**: Numeric **Notes**: If a value is submitted for this field, it must be the same ID used for the original transaction.

Table 12 Input Parameters for CreateCustomerProfileTransaction (Continued)

Field	Description
• customerShippingAddressId	**Value**: Payment gateway assigned ID associated with the customer shipping address Optional **Format**: Numeric **Notes**: If a value is submitted for this field, it must be the same ID used for the original authorization transaction.
• transId	**Value**: The payment gateway assigned transaction ID of the original transaction. Conditional **Format**: Numeric

Input Parameters for DeleteCustomerProfile

This function is used to delete an existing customer profile along with all associated customer payment profiles and customer shipping addresses.

The following table lists the input parameters for executing an API call to the DeleteCustomerProfile function.

Table 13 Input Parameters for DeleteCustomerProfile

Field	Description
customerProfileId	Payment gateway assigned ID associated with the customer profile Numeric

For information about output parameters for this function, see the section of this document titled "Output for DeleteCustomerProfileResponse."

Input Parameters for DeleteCustomerPaymentProfile

This function is used to delete a customer payment profile from an existing customer profile.

The following table lists the input parameters for executing an API call to the DeleteCustomerPaymentProfile function.

Table 14 Input Parameters for DeleteCustomerPaymentProfile

Field	Description
customerProfileId	**Value**: Payment gateway-assigned ID associated with the customer profile **Format**: Numeric

Table 14 Input Parameters for DeleteCustomerPaymentProfile (Continued)

Field	Description
customerPaymentProfileId	**Value**: Payment gateway assigned ID associated with the customer payment profile **Format**: Numeric

For information about output parameters for this function, see the section of this document titled "Output for DeleteCustomerPaymentProfileResponse."

Input Parameters for DeleteCustomerShippingAddress

This function is used to delete a customer shipping address from an existing customer profile.

The following table lists the input parameters for executing an API call to the DeleteCustomerShippingAddress function.

Table 15 Input Parameters for DeleteCustomerShippingAddress

Field	Description
customerProfileId	**Value**: Payment gateway-assigned ID associated with the customer profile **Format**: Numeric
customerShippingAddressId	**Value**: Payment gateway-assigned ID associated with the customer shipping address **Format**: Numeric

For information about output parameters for this function, see the section of this document "Output for DeleteCustomerShippingAddressResponse."

Input Parameters for GetCustomerProfileIds

This function is used to retrieve all existing customer profile IDs.

The following table lists the input parameters for executing an API call to the GetCustomerProfileIds function.

Table 16 Input Parameters for GetCustomerProfileIds

Field	Description
merchantAuthentication	**Value**: Contains unique merchant information for purposes of authentication
• name	**Value**: The valid API Login ID for the developer test or merchant account **Format**: Up to 25 characters **Notes**: Submit the API Login ID used to submit transactions

Table 16 Input Parameters for GetCustomerProfileIds

Field	Description
• transactionKey	**Value**: The valid Transaction Key for the developer test or merchant account **Format**: 16 characters **Notes**: Submit the Transaction Key obtained from the Merchant Interface

For information about output parameters for this function, see the section of this document titled "Output for GetCustomerProfileIdsResponse."

Input Parameters for GetCustomerProfile

This function is used to retrieve an existing customer profile along with all the associated payment profiles and shipping addresses.

The following table lists the input parameters for executing an API call to the GetCustomerProfile function.

Table 17 Input Parameters for GetCustomerProfile

Field	Description
customerProfileId	**Value**: Payment gateway-assigned ID associated with the customer profile **Format**: Numeric

For information about output parameters for this function, see the section of this document titled "Output for GetCustomerProfileResponse."

Input Parameters for GetCustomerPaymentProfile

This function is used to retrieve a customer payment profile for an existing customer profile.

The following table lists the input parameters for executing an API call to the GetCustomerPaymentProfile function.

Table 18 Input Parameters for GetCustomerPaymentProfile

Field	Description
customerProfileId	**Value**: Payment gateway-assigned ID associated with the customer profile **Format**: Numeric
customerPaymentProfileId	**Value**: Payment gateway-assigned ID associated with the customer payment profile **Format**: Numeric

For information about output parameters for this function, see the section of this document titled "Output for GetCustomerProfileResponse."

Input Parameters for GetCustomerShippingAddress

This function is used to retrieve a customer shipping address for an existing customer profile.

The following table lists the input parameters for executing an API call to the GetCustomerShippingAddress function.

Table 19 Input Parameters for GetCustomerShippingAddress

Field	Description
customerProfileId	**Value**: Payment gateway-assigned ID associated with the customer profile **Format**: Numeric
customerShippingAddressId	**Value**: Payment gateway-assigned ID associated with the customer shipping address **Format**: Numeric

For information about output parameters for this function, see the section of this document titled "Output for GetCustomerShippingAddressResponse."

Input Parameters for GetHostedProfilePage

Use this function to initiate a request for direct access to the Authorize.Net website.

The following table lists the input parameters for executing an API call to the GetHostedProfilePage function.

Table 20 Input Parameters for GetHostedProfilePage

Field	Description
customerProfileId	**Value**: Payment gateway assigned ID associated with the customer profile **Format:** Numeric
hostedProfileSettings	**Value**: Optional. This is an array of settings for the session.
• settingName	**Value**: Optional. One of: • hostedProfileReturnUrl • hostedProfileReturnUrlText • hostedProfileHeadingBgColor • hostedProfilePageBorderVisible • hostedProfileIFrameCommunicatorUrl • hostedProfileValidationMode
• settingValue	**Value**: See "Guidelines for Parameter Settings," page 93 for a detailed description of these parameters.

Example

```
<?xml version="1.0" encoding="utf-8"?>
<soap:Envelope xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns:xsd="http://www.w3.org/2001/XMLSchema" xmlns:soap="http://
schemas.xmlsoap.org/soap/envelope/">
  <soap:Body>
    <GetHostedProfilePage xmlns="https://api.authorize.net/soap/v1/">
      <merchantAuthentication>
        <name>string</name>
        <transactionKey>string</transactionKey>
      </merchantAuthentication>
      <customerProfileId>111111</customerProfileId>
      <hostedProfileSettings>
        <setting>
          <settingName>string</settingName>
          <settingValue>string</settingValue>
        </setting>
        <setting>
          <settingName>string</settingName>
          <settingValue>string</settingValue>
        </setting>
      </hostedProfileSettings>
    </GetHostedProfilePage>
  </soap:Body>
</soap:Envelope>
```

Input Parameters for UpdateCustomerProfile

This function is used to update an existing customer profile.

The following table lists the input parameters for executing an API call to the UpdateCustomerProfile function.

Table 21 Input Parameters for UpdateCustomerProfile

Field	Description
profile	**Value**: Contains payment information for the customer profile **Type**: CustomerProfileExType
• merchantCustomerId	**Value**: Merchant assigned ID for the customer Optional **Format:** Up to 20 characters
• description	**Value**: Description of the customer or customer profile Optional **Format:** Up to 255 characters
• email	**Value**: Email address associated with the customer profile Optional **Format:** Up to 255 characters
• customerProfileId	**Value**: Payment gateway assigned ID associated with the customer profile **Format:** Numeric

For information about output parameters for this function, see the section of this document titled "Output for UpdateCustomerProfileResponse."

Input Parameters for UpdateCustomerPaymentProfile

This function is used to update a payment profile for an existing customer profile.

The following table lists the input parameters for executing an API call to the UpdateCustomerPaymentProfile function.

Note

If some fields in this request are not submitted or are submitted with a blank value, the values in the original profile are removed. As a best practice to prevent this from happening, call `GetCustomerPaymentProfile` before calling `UpdateCustomerPaymentProfile`. That will return all current information including masked payment information. Then, simply change the field that needs updating and use that to call `UpdateCustomerPaymentProfile`.

Table 22 Input Parameters for UpdateCustomerPaymentProfile

Field	Description
customerProfileId	**Value**: Payment gateway-assigned ID associated with the customer profile **Format:** Numeric
paymentProfile	**Value**: Contains payment information for the customer profile **Type**: CustomerPaymentProfileExType **Notes**: Sensitive information that is not being updated can be masked.
• customerType	Optional **Type**: CustomerTypeEnum **Format:** individual or business **Notes**: If this field is not submitted in the request, or submitted with a blank value, the original value will be removed from the profile.
• billTo	**Type**: CustomerAddressType **Notes**: If this entire section is not submitted, the original billing information for the profile will stay the same. If updating only one or more elements under billTo, all elements must be submitted with their valid values to prevent the original values from being removed.
• firstName	**Value**: The customer's first name Optional **Format:** Up to 50 characters (no symbols) **Notes**: If this field is not submitted in the request, or submitted with a blank value, the original value will be removed from the profile.
• lastName	**Value**: The customer's last name Optional **Format:** Up to 50 characters (no symbols) **Notes**: If this field is not submitted in the request, or submitted with a blank value, the original value will be removed from the profile.
• company	**Value**: The name of the company associated with the customer, if applicable Optional **Format:** Up to 50 characters (no symbols) **Notes**: If this field is not submitted in the request, or submitted with a blank value, the original value will be removed from the profile.
• address	**Value**: The customer's address Optional **Format:** Up to 60 characters (no symbols) **Notes**: If this field is not submitted in the request, or submitted with a blank value, the original value will be removed from the profile.

Table 22 Input Parameters for UpdateCustomerPaymentProfile (Continued)

Field	Description
• city	**Value**: The city of the customer's shipping address Optional **Format:** Up to 40 characters (no symbols) **Notes**: If this field is not submitted in the request, or submitted with a blank value, the original value will be removed from the profile.
• state	**Value**: The state of the customer's address Optional **Format:** Up to 40 characters (no symbols) **Notes**: If this field is not submitted in the request, or submitted with a blank value, the original value will be removed from the profile.
• zip	**Value**: The ZIP code of the customer's address Optional **Format:** Up to 20 characters (no symbols) **Notes**: If this field is not submitted in the request, or submitted with a blank value, the original value will be removed from the profile.
• country	**Value**: The country of the customer's address Optional **Format:** Up to 60 characters (no symbols) **Notes**: If this field is not submitted in the request, or submitted with a blank value, the original value will be removed from the profile.
• phoneNumber	**Value**: The phone number associated with the customer's address Optional **Format:** Up to 25 digits (no letters) For example, (123)123-1234 **Notes**: If this field is not submitted in the request, or submitted with a blank value, the original value will be removed from the profile.
• faxNumber	**Value**: The fax number associated with the customer's address Optional **Format:** Up to 25 digits (no letters) For example, (123)123-1234 **Notes**: If this field is not submitted in the request, or submitted with a blank value, the original value will be removed from the profile.
• payment	**Value**: Contains payment information for the customer profile **Type**: PaymentSimpleType **Notes**: Can contain CreditCardSimpleType or BankAccountType.

Table 22 Input Parameters for UpdateCustomerPaymentProfile (Continued)

Field	Description
• creditCard	**Value**: Contains credit card payment information for the customer profile Conditional **Type**: CreditCardSimpleType **Notes**: This parameter and its children are only required when the payment profile is credit card.
• cardNumber	**Value**: The customer's credit card number **Format:** 13 to 16 digits Number can also be masked, for example, XXXX1111 **Notes**: If the value is masked, the last four digits must match the original value in the profile. If a masked value is submitted, the original value will not be updated.
• expirationDate	**Value**: The expiration date for the customer's credit card **Format:** YYYY-MM Number can also be masked, for example, XXXX **Notes**: If a masked value is submitted, the original value will not be updated. For .Net users, the class System.Runtime.Remoting.Metadata.W3cXsd2001.SoapYearMonth can be used to manage gYearMonth types.
• cardCode	**Value**: The three- or four-digit number on the back of a credit card (on the front for American Express) Optional **Format:** Numeric **Notes**: This field is required if the merchant would like to use the Card Code Verification (CCV) security feature. For more information, see the *Merchant Integration Guide* at http://www.authorize.net/support/Merchant/default.htm. cardCode is only used for validation and is not stored in the customer profile. It should only be used when submitting validationMode with a value of testMode or liveMode.
• bankAccount	**Value**: Contains bank account payment information for the customer profile Conditional **Type**: BankAccountType **Notes**: This parameter and its children are only required when the payment profile is bank account.

Table 22 Input Parameters for UpdateCustomerPaymentProfile (Continued)

Field	Description
• accountType	**Value**: The type of bank account for the payment profile Optional **type**: BankAccountTypeEnum **Format:** checking, savings, or businessChecking **Notes**: If this field is not submitted in the request, or submitted with a blank value, the original value will be removed from the profile.
• routingNumber	**Value**: The routing number of the customer's bank **Format:** 9 digits Number can also be masked, for example, XXXX1111 **Notes**: If the value is masked, the last four digits must match the original value in the profile. If a masked value is submitted, the original value will not be updated.
• accountNumber	**Value**: The customer's bank account number **Format:** 5 to 17 digits Number can also be masked, for example, XXXX1111 **Notes**: If the value is masked, the last four digits must match the original value in the profile. If a masked value is submitted, the original value will not be updated.
• nameOnAccount	**Value**: The customer's full name as listed on the bank account **Format:** Up to 22 characters **Notes**: If this field is not submitted in the request, or submitted with a blank value, the original value will be removed from the profile.
• echeckType	**Value**: The type of electronic check transaction Optional **Type**: EcheckTypeEnum **Format:** CCD, PPD, TEL, or WEB **Notes**: Currently, the CIM API does not support ARC or BOC transaction types. If this field is not submitted in the request, or submitted with a blank value, the original value will be removed from the profile.
• bankName	**Value**: The name of the bank associated with the bank account number Optional **Format:** Up to 50 characters **Notes**: If this field is not submitted in the request, or submitted with a blank value, the original value will be removed from the profile.

Table 22 Input Parameters for UpdateCustomerPaymentProfile (Continued)

Field	Description
• customerPaymentProfileId	**Value**: Payment gateway-assigned ID associated with the customer payment profile **Format:** Numeric
validationMode	**Value**: Indicates the processing mode for the request **Format:** none, testMode, or liveMode **Notes**: For more information on use and restrictions of validationMode, see "The validationMode Parameter," page 15.

To test the validity of new payment information, call ValidateCustomerPaymentProfile after successfully updating the payment profile. See the section of this document titled "Input Parameters for ValidateCustomerPaymentProfile" for more information.

For information about output parameters for this function, see the section of this document titled "Input Parameters for UpdateCustomerPaymentProfile."

Input Parameters for UpdateCustomerShippingAddress

This function is used to update a shipping address for an existing customer profile.

The following table lists the input parameters for executing an API call to the UpdateCustomerShippingAddress function.

Table 23 Input Parameters for UpdateCustomerShippingAddress

Field	Description
customerProfileId	**Value**: Payment gateway-assigned ID associated with the customer profile **Format**: Numeric
address	**Value**: Contains shipping address information for the customer profile type: CustomerAddressExType
• firstName	**Value**: The customer's first name Optional **Format**: Up to 50 characters (no symbols)
• lastName	**Value**: The customer's last name Optional **Format**: Up to 50 characters (no symbols)
• company	**Value**: The name of the company associated with the customer, if applicable Optional **Format**: Up to 50 characters (no symbols)

Table 23 Input Parameters for UpdateCustomerShippingAddress (Continued)

Field	Description
• address	**Value**: The customer's shipping address Optional **Format**: Up to 60 characters (no symbols)
• city	**Value**: The city of the customer's shipping address Optional **Format**: Up to 40 characters (no symbols)
• state	**Value**: The state of the customer's shipping address Optional **Format**: Up to 40 characters (no symbols)
• zip	**Value**: The ZIP code of the customer's shipping address Optional **Format**: Up to 20 characters (no symbols)
• country	**Value**: The country of the customer's shipping address Optional **Format**: Up to 60 characters (no symbols)
• phoneNumber	**Value**: The phone number associated with the customer's shipping address Optional **Format**: Up to 25 digits (no letters) For example, (123)123-1234
• faxNumber	**Value**: The fax number associated with the customer's shipping address Optional **Format**: Up to 25 digits (no letters) For example, (123)123-1234
• customerShippingAddressId	**Value**: Payment gateway-assigned ID associated with the customer shipping address **Format**: Numeric

For information about output parameters for this function, see the section of this document titled "Output for UpdateCustomerShippingAddressResponse."

Input Elements for UpdateSplitTenderGroup

This function is used to update the status of an existing order that contains multiple transactions with the same `splitTenderId`.

The following table lists the input parameters for executing an API call to the UpdateSplitTenderGroup function.

Table 24 Input Elements for UpdateSplitTenderGroup

Field	Description
splitTenderId	**Value**: Payment gateway-assigned number associated with the order. Required **Format**: Numeric
splitTenderStatus	**Value**: Indicates the status of all transactions associated with the order. **Format**: voided, or completed. **Notes**: Use voided to void the entire order; use completed to indicate there are no further transactions in this order.

Input Parameters for ValidateCustomerPaymentProfile

This function is used to verify an existing customer payment profile by generating a test transaction. No customer receipt emails are sent when ValidateCustomerPaymentProfile. is called

The following table lists the input parameters for executing an API call to the ValidateCustomerPaymentProfile function.

Table 25 Input Parameters for ValidateCustomerPaymentProfile

Field	Description
customerProfileId	**Value:** Payment gateway-assigned ID associated with the customer profile **Format**: Numeric
customerPaymentProfileId	**Value:** Payment gateway-assigned ID associated with the customer payment profile **Format**: Numeric
customerShippingAddressId	**Value:** Payment gateway-assigned ID associated with the customer shipping address Optional **Format**: Numeric **Notes**: If customerShippingAddressId is not passed, shipping information will not be included with the transaction.
cardCode	**Value:** The three- or four-digit number on the back of a credit card (on the front for American Express) Optional **Format**: Numeric **Notes**: This field is required if the merchant would like to use the Card Code Verification (CCV) security feature. For more information, see the *Merchant Integration Guide* at http://www.authorize.net/support/Merchant/default.htm. cardCode is used only for validation and is not stored in the customer profile. It should be used only when submitting validationMode with a value of testMode or liveMode.
validationMode	**Value:** Indicates the processing mode for the request **Format**: testMode or liveMode **Notes**: For more information on use and restrictions of validationMode, see "The validationMode Parameter," page 15.

For information about output parameters for this function, see the section of this document titled "Output for ValidateCustomerPaymentProfileResponse."

Note

The sample code included in this document uses dummy field values. When using or testing sample code, be sure to enter valid field values. Additional sample code is available for download from the Authorize.Net Developer Center at http://developer.authorize.net/samplecode.

Responses

CHAPTER 3

The response from the payment gateway to the API call is a set of fields that provides information about the status of the request.

The following table lists output for API calls.

Table 26 Payment gateway responses

Field	Description
• resultCode	**Value**: Contains additional information about the results of the request **Type**: MessageTypeEnum **Format**: Ok or Error
messages	**Value**: Contains the result code and text **Type**: MessagesTypeMessage **Notes**: Provides more details about the error(s).
• code	**Value**: A code that represents the reason for the error **Format**: String **Notes**: See the "Response Codes" section of this document for possible values.
• text	**Value**: A text description of the error **Format**: String **Notes**: See the "Response Codes" section of this document for possible values.

CIM Responses

The example below illustrates the structure of a typical response from the payment gateway for any of the CIM API calls.

Response example

```
<?xml version="1.0" encoding="utf-8"?>
<soap:Envelope xmlns:soap="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xmlns:xsd="http://
www.w3.org/2001/XMLSchema">
   <soap:Body>
      <CreateCustomerProfileResponse xmlns="https://api.authorize.net/
soap/v1/">
         <CreateCustomerProfileResult>
         <resultCode>Ok</resultCode>
         <messages>
         <code>I00001</code>
         <text>Successful</text>
         </messages>
         <customerProfileId>1259</customerProfileId>
         </CreateCustomerProfileResult>
      </CreateCustomerProfileResponse>
   </soap:Body>
</soap:Envelope>
```

Output for CreateCustomerProfileResponse

The following table lists the additional output returned from the payment gateway for an API call to the CreateCustomerProfile function.

Table 27 Output for CreateCustomerProfileResponse

Field	Description
CreateCustomerProfileResult	**Value**: Contains the result of the API request to create a customer profile **Type**: CreateCustomerProfileResponseType **Notes**: See the "Response Codes" section of this document for possible values.
• customerProfileId	**Value**: Payment gateway assigned ID associated with the customer profile **Format**: Numeric **Notes**: This output is present only for successful requests.
• customerPaymentProfileIdList	**Value**: A list of all payment profile IDs created with the request Optional **Format**: Numeric **Notes**: This output is present only for requests that contain one or more payment profiles. The payment profile IDs are returned in the same order as they were in the request.
• customerShippingAddressIdList	**Value**: A list of all shipping profile IDs created with the request Optional **Format**: Numeric **Notes**: This output is present only for requests that contain multiple shipping profiles. The shipping profile IDs are returned in the same order as they were in the request.
• validationDirectResponseList	**Value**: A list of the direct response results for the validation transaction for each payment profile. Optional **Format**: String See the *Advanced Integration Guide* at http://www.authorize.net/support/AIM_guide.pdf for details about information included in the payment gateway transaction response. **Notes**: This output is present only if the ValidationMode input element is passed with a value of testMode or liveMode. The list is returned in the same order as the payment profiles were submitted in the request.

Note

The CreateCustomerProfileResponse returns onlythe assigned customerProfileId for the created profile. To retrieve the customerPaymentProfileId and the customerShippingId that may also be created when using the CreateCustomerProfile function, you must submit the GetCustomerProfile function using the assigned customerProfileId for that customer profile.

Output for CreateCustomerPaymentProfileResponse

The following table lists the output returned from the payment gateway for an API call to the CreateCustomerPaymentProfile function.

Table 28 Output for CreateCustomerPaymentProfileResponse

Field	Description
CreateCustomerPaymentProfileResult	**Value**: Contains the result of the API request to create a customer payment profile **Type**: CreateCustomerPaymentProfileResponseType **Notes**: See the"Response Codes" section of this document for possible values.
• customerPaymentProfileId	**Value**: Payment gateway assigned ID associated with the customer payment profile **Format**: Numeric **Notes**: This output is present only for successful requests.
• validationDirectResponse	**Value**: Contains detailed information about the result of the transaction. **Format**: String See the *Advanced Integration Guide* at http://www.authorize.net/support/AIM_guide.pdf for details about information included in the payment gateway transaction response. **Notes**: This output is present only if the ValidationMode input parameter is passed with a value of testMode or liveMode.

Output for CreateCustomerShippingAddressResponse

The following table represents the output returned from the payment gateway for an API call to the CreateCustomerShippingAddress function.

Table 29 Output for CreateCustomerShippingAddressResponse

Field	Description
CreateCustomerShippingAddressResult	**Value**: Contains the result of the API request to create a customer shipping address **Type**: CreateCustomerShippingAddressResponseType **Notes**: See the "Response Codes" section of this document for possible values.
• customerShippingAddressId	**Value**: Payment gateway assigned ID associated with the customer shipping address **Format**: Numeric **Notes**: This output is present only for successful requests.

Output for CreateCustomerProfileTransactionResponse

The following table represents the output returned from the payment gateway for an API call to the CreateCustomerProfileTransaction function.

Table 30 Output for CreateCustomerProfileTransactionResponse

Field	Description
CreateCustomerProfileTransactionResult	**Value**: Contains the result of the API request to create a customer profile transaction **Type**: CreateCustomerProfileTransactionResponseType **Notes**: See the "Response Codes" section of this document for possible values.
• directResponse	**Value**: Contains detailed information about the result of the transaction. **Format**: String See the *Advanced Integration Guide* at http://www.authorize.net/support/AIM_guide.pdf for details about information included in the payment gateway transaction response. **Notes**: Transactions created from a customer profile behave the same as regular transactions - you and your customer will receive all associated email notifications. Additionally, all fraud settings, including FDS filters and AVS and CCV settings, will be enforced.

Output for DeleteCustomerProfileResponse

The following table lists the output returned from the payment gateway for an API call to the DeleteCustomerProfile function.

Table 31 Output for DeleteCustomerProfileResponse

Field	Description
DeleteCustomerProfileResult	**Value**: Contains the result of the API request to delete a customer profile **Type**: DeleteCustomerProfileResponseType **Notes**: See the "Response Codes" section of this document for possible values.

Output for DeleteCustomerPaymentProfileResponse

The following table lists the output returned from the payment gateway for an API call to the DeleteCustomerPaymentProfile function.

Table 32 Output for DeleteCustomerPaymentProfileResponse

Field	Description
DeleteCustomerPaymentProfileResult	**Value**: Contains the result of the API request to delete a customer payment profile **Type**: DeleteCustomerPaymentProfileResponseType **Notes**: See the "Response Codes" section of this document for possible values.

Output for DeleteCustomerShippingAddressResponse

The following table lists the output returned from the payment gateway for an API call to the DeleteCustomerShippingAddress function.

Table 33 Output for DeleteCustomerShippingAddressResponse

Field	Description
DeleteCustomerShippingAddressResult	**Value**: Contains the result of the API request to delete a customer shipping address **Type**: DeleteCustomerShippingAddressResponseType **Notes**: See the "Response Codes" section of this document for possible values.

Output for GetCustomerProfileIdsResponse

The following table lists the output returned from the payment gateway for an API call to the GetCustomerProfileIds function.

Table 34 Output for GetCustomerProfileIdsResponse

Field	Description
GetCustomerProfileIdsResult	**Value**: Contains the result of the API request to get all customer profile IDs **Type**: GetCustomerProfileIdsResponseType **Notes**: See the "Response Codes" section of this document for possible values.
ids	**Value**: Payment gateway assigned IDs associated with the customer profiles **Format**: Numeric **Notes**: This output is present only for successful requests.

Output for GetCustomerProfileResponse

The following information lists the output returned from the payment gateway for an API call to the GetCustomerProfile function.

GetCustomerProfileResult

- Value: Contains the result of the API request to get a customer profile
- Type: GetCustomerProfile ResponseType
- Notes: See the "Response Codes" section of this document for possible values.

Table 35 Output for GetCustomerProfileResponse

Field	Description
profile	**Value**: Contains information for the customer profile. **Type**: CustomerProfileMasked Type
• customerProfileId	**Value**: Payment gateway-assigned ID associated with the customer profile. **Format**: Numeric **Notes**: This output is present only for successful requests.
• merchantCustomerId	**Value**: Merchant-assigned ID for the customer. Optional **Format**: Up to 20 characters.
• description	**Value**: Description of the customer or customer profile. Optional **Format**: Up to 255 characters

Table 35 Output for GetCustomerProfileResponse (Continued)

Field	Description
• email	**Value**: Email address associated with the customer profile. Optional **Format**: Up to 255 characters
• paymentProfiles	**Value**: Contains payment profiles for the customer profile**. Type**: CustomerPaymentProfileMaskedType**.**
• customerPaymentProfileId	**Value**: Payment gateway assigned ID associated with the customer payment profile **Format**: Numeric
• payment	**Value**: Contains payment profile information for the customer profile. **Type**: PaymentMaskedType
• creditCard	**Value**: Contains credit card payment information for the customer profile**. Type**: CreditCardMaskedType
• cardNumber	**Value**: The customer's credit card number. **Format**: 13 to 16 digits **Notes**: All sensitive payment information in the output is masked.
• expirationDate	**Value**: The expiration date for the customer's credit card. **Format**: YYYY-MM **Notes**: All sensitive payment information in the output is masked.
• bankAccount	**Value**: Contains bank account payment information for the customer profile. **Type**: BankAccountMaskedType
• routingNumber	**Value**: The routing number of the customer's bank. **Format**: 9 digits **Notes**: All sensitive payment information in the output is masked.
• accountNumber	**Value**: The customer's bank account number. **Format**: 5 to 17 digits **Notes**: All sensitive payment information in the output is masked.
driversLicense	**Value**: Contains the customer's driver's license information. **Type**: DriversLicenseMasked Type **Notes**: This field is no longer supported in CIM requests and is returned only for profiles that were created under the SecureSource product.
• state	**Value**: The state of the customer's driver's license. **Format**: A valid two-character state code. **Notes**: This field is no longer supported in CIM requests and is returned only for profiles that were created under the SecureSource product.

Table 35 Output for GetCustomerProfileResponse (Continued)

Field	Description
• number	**Value**: The customer's driver's license number. **Format**: 5 to 20 characters. **Notes**: This field is no longer supported in CIM requests and is returned only for profiles that were created under the SecureSource product. All sensitive payment information in the output is masked.
• dateOfBirth	**Value**: The date of birth listed on the customer's driver's license. **Format**: YYYY-MM-DD **Notes**: This field is no longer supported in CIM requests and is returned only for profiles that were created under the SecureSource product. All sensitive payment information in the output is masked.
• taxId	**Value**: The customer's Social Security Number or tax ID. **Format**: 9 digits **Notes**: This field is no longer supported in CIM requests and is returned only for profiles that were created under the SecureSource product. All sensitive payment information in the output is masked.
• shipToList	**Value**: Contains shipping address profile information for the customer profile. **Type**: CustomerAddressExType
• customerShippingAddressId	**Value**: Payment gateway-assigned ID associated with the customer shipping address. **Format**: Numeric
• firstName	**Value**: The customer's first name. Optional **Format**: Up to 50 characters (no symbols)
• lastName	**Value**: The customer's last name. Optional **Format**: Up to 50 characters (no symbols)
• company	**Value**: The name of the company associated with the customer, if applicable. Optional **Format**: Up to 50 characters (no symbols)
• address	**Value**: The customer's shipping address. Optional **Format**: Up to 60 characters (no symbols)
• city	**Value**: The city of the customer's shipping address. Optional **Format**: Up to 40 characters (no symbols)

Table 35 Output for GetCustomerProfileResponse (Continued)

Field	Description
• state	**Value**: The state of the customer's shipping address. Optional **Format**: Up to 40 characters (no symbols)
• zip	**Value**: The zip code of the customer's shipping address. Optional **Format**: Up to 20 characters (no symbols)
• country	**Value**: The country of the customer's shipping address. Optional **Format**: Up to 60 characters (no symbols)
• phoneNumber	**Value**: The phone number associated with the customer's shipping address. Optional **Format**: Up to 25 digits (no letters) For example, (123)123-1234
• faxNumber	**Value**: The fax number associated with the customer's shipping address. Optional **Format**: Up to 25 digits (no letters) For example, (123)123-1234

Output for GetCustomerPaymentProfileResponse

The following table lists the output returned from the payment gateway for an API call to the GetCustomerPaymentProfile function.

GetCustomerPaymentProfileResult

- **Value**: Contains the result of the API request to get a customer payment profile
- **Type**: GetCustomerPaymentProfileResponseType
- **Notes**: See the "Response Codes" section of this document for possible values.

Table 36 Output for GetCustomerPaymentProfileResponse

Field	Description	
• paymentProfile	**Value**: Contains payment information for the customer profile	**Type**: CustomerPaymentProfileMaskedType

Table 36 Output for GetCustomerPaymentProfileResponse (Continued)

Field	Description	
• customerPaymentProfileId	**Value**: Payment gateway assigned ID associated with the customer payment profile	**Format**: Numeric
• customerType		**Type**: CustomerTypeEnum **Format**: individual or business
• billTo	**Type**: CustomerAddressTypeCustomer's billing information.	
• firstName	**Value**: The customer's first name **Format**: Up to 50 characters (no symbols)	
• lastName	**Value**: The customer's last name **Format**: Up to 50 characters (no symbols)	
• company	**Value**: The name of the company associated with the customer, if applicable **Format**: Up to 50 characters (no symbols)	
• address	**Value**: The customer's address **Format**: Up to 60 characters (no symbols)	
• city	**Value**: The city of the customer's address **Format**: Up to 40 characters (no symbols)	
• state	**Value**: The state of the customer's address **Format**: Up to 40 characters (no symbols)	
• zip	**Value**: The ZIP code of the customer's address **Format**: Up to 20 characters (no symbols)	
• country	**Value**: The country of the customer's address **Format**: Up to 60 characters (no symbols)	
• phoneNumber	**Value**: The phone number associated with the customer's address **Format**: Up to 25 digits (no letters) For example, (123)123-1234	
• faxNumber	**Value**: The fax number associated with the customer's address **Format**: Up to 25 digits (no letters) For example, (123)123-1234	
• payment	**Value**: Contains payment profile information for the customer profile **Type**: PaymentMaskedType	
• creditCard	**Value**: Contains credit card payment information for the payment profile **Type**: CreditCardMaskedType	

Table 36 Output for GetCustomerPaymentProfileResponse (Continued)

Field	Description
• cardNumber	**Value**: The customer's credit card number **Format**: 13 to 16 digits **Notes**: All sensitive payment information in the output is masked.
• expirationDate	**Value**: The expiration date for the customer's credit card **Format**: YYYY-MM **Notes**: All sensitive payment information in the output is masked.
• bankAccount	**Value**: Contains bank account payment information for the payment profile **Type**: BankAccountMasked Type
• accountType	**Value**: The type of bank account for the payment profile **Format**: checking, savings, or businessChecking
• routingNumber	**Value**: The routing number of the customer's bank **Format**: 9 digits **Notes**: All sensitive payment information in the output is masked.
• accountNumber	**Value**: The customer's bank account number **Format**: 5 to 17 digits **Notes**: All sensitive payment information in the output is masked.
• nameOnAccount	**Value**: The customer's full name as listed on the bank account **Format**: Up to 22 characters
• echeckType	**Value**: The type of electronic check transaction **Format**: CCD, PPD, TEL, or WEB **Notes**: Currently, the CIM API does not support ARC or BOC transaction types.
• bankName	**Value**: The name of the bank associated with the bank account number **Format**: Up to 50 characters
driversLicense	**Value**: Contains the customer's driver's license information **type**: DriversLicenseMasked Type **Notes**: This field is no longer supported in CIM requests and is returned only for profiles that were created under the SecureSource product.
• state	**Value**: The state of the customer's driver's license **Format**: A valid two-character state code **Notes**: This field is no longer supported in CIM requests and is returned only for profiles that were created under the SecureSource product.

Table 36 Output for GetCustomerPaymentProfileResponse (Continued)

Field	Description
• number	**Value**: The customer's driver's license number **Format**: Between 5 and 20 characters **Notes**: This field is no longer supported in CIM requests and is returned only for profiles that were created under the SecureSource product. All sensitive payment information in the output is masked.
• dateOfBirth	**Value**: The date of birth listed on the customer's driver's license **Format**: YYYY-MM-DD **Notes**: This field is no longer supported in CIM requests and is returned only for profiles that were created under the SecureSource product. All sensitive payment information in the output is masked.
• taxId	**Value**: The customer's Social Security Number or tax ID **Format**: 9 digits **Notes**: This field is no longer supported in CIM requests and is returned only for profiles that were created under the SecureSource product. All sensitive payment information in the output is masked.

Output for GetCustomerShippingAddressResponse

The following table lists the output returned from the payment gateway for an API call to the GetCustomerShippingAddress function.

GetCustomerShippingAddressResult

- **Value**: Contains the result of the API request to get a customer shipping address
- **Type**: GetCustomerShippingAddressResponseType
- **Notes**: See the "Response Codes" section of this document for possible values.

Table 37 Output for GetCustomerShippingAddressResponse

Field	Description
GetCustomerShippingAddressResult	**Value**: Contains the result of the API request to get a customer shipping address **Type**: GetCustomerShippingAddressResponseType **Notes**: See the "Response Codes" section of this document for possible values.

Table 37 Output for GetCustomerShippingAddressResponse (Continued)

Field	Description
• address	**Value**: Contains shipping address information for the customer profile **Type**: CustomerAddress ExType
• customerShippingAddressId	**Value**: Payment gateway-assigned ID associated with the customer shipping address **Format**: Numeric
• firstName	**Value**: The customer's first name **Format**: Up to 50 characters (no symbols)
• lastName	**Value**: The customer's last name **Format**: Up to 50 characters (no symbols)
• company	**Value**: The name of the company associated with the customer, if applicable **Format**: Up to 50 characters (no symbols)
• address	**Value**: The customer's address **Format**: Up to 60 characters (no symbols)
• city	**Value**: The city of the customer's address **Format**: Up to 40 characters (no symbols)
• state	**Value**: The state of the customer's address **Format**: Up to 40 characters (no symbols)
• zip	**Value**: The ZIP code of the customer's address **Format**: Up to 20 characters (no symbols)
• country	**Value**: The country of the customer's address **Format**: Up to 60 characters (no symbols)
• phoneNumber	**Value**: The phone number associated with the customer's address **Format**: Up to 25 digits (no letters) For examaple, (123)123-1234
• faxNumber	**Value**: The fax number associated with the customer's address **Format**: Up to 25 digits (no letters) For example, (123)123-1234

Output for GetHostedProfilePage

The following table lists the output returned from the payment gateway for an API call to the GetHostedProfilePage function.

Table 38 Output for GetHostedProfilePage

Field	DESCRIPTION
Token	**Value**: string **Format**: An encrypted string that the merchant must include when posting to the Authorize.Net web page. **Notes**: If not used within 15 minutes of the original API call, this token expires.

The customer's browser posts the token, Authorize.Net validates it, and makes sure the timestamp is less than 15 minutes old.

For more complete information on how to use hosted CIM access, see Chapter 4, "Using a Hosted Form," on page 85.

Output for UpdateCustomerProfileResponse

The following table lists the output returned from the payment gateway for an API call to the UpdateCustomerProfile function.

Field	Description
UpdateCustomerProfileResult	**Value**: Contains the result of the API request to update a customer profile **Type**: UpdateCustomerProfileResponseType **Notes**: See the "Response Codes" section of this document for possible values.

Output for UpdateCustomerPaymentProfileResponse

The following table lists the output returned from the payment gateway for an API call to the UpdateCustomerPaymentProfile function.

Table 39 Output for UpdateCustomerPaymentProfileResponse

Field	Description
UpdateCustomerPaymentProfileResult	**Value**: Contains the result of the API request to update a customer payment profile **Type**: UpdateCustomerPaymentProfileResponseType **Notes**: See the "Response Codes" section of this document for possible values.

Table 39 Output for UpdateCustomerPaymentProfileResponse (Continued)

Field	Description
validationDirectResponse	**Value**: Contains detailed information about the result of the transaction. Optional **Format**: String **Notes**: See the *Advanced Integration Guide* at http://www.authorize.net/support/AIM_guide.pdf for details about information included in the payment gateway transaction response. This output is only present if the ValidationMode input element is passed with a value of testMode or liveMode.

Output for UpdateCustomerShippingAddressResponse

The following table lists the output returned from the payment gateway for an API call to the UpdateCustomerShippingAddress function.

Table 40 Output for UpdateCustomerShippingAddressResponse

Field	Description
UpdateCustomerShippingAddressResult	**Value**: Contains the result of the API request to update a customer shipping address **Type**: UpdateCustomerShippingAddressResponseType **Notes**: See the "Response Codes" section of this document for possible values.

Output for UpdateSplitTenderGroup

The following table lists the output returned from the payment gateway for an API call to the UpdateSplitTenderGroup function.

Table 41 Output for UpdateSplitTenderGroup

Field	Description
UpdateSplitTenderGroupResult	**Value**: Contains the result of the API request to update a split tender group **Type**: UpdateSplitTenderGroupResponseType **Notes**: See the "Response Codes" section of this document for possible values.

Output for ValidateCustomerPaymentProfileResponse

The following table represents the output returned from the payment gateway for an API call to the ValidateCustomerPaymentProfile function.

Table 42 Output for ValidateCustomerPaymentProfileResponse

Field	Description
ValidateCustomerPaymentProfileResult	**Value**: Contains the result of the API request to validate a customer payment profile **Type**: ValidateCustomerPaymentProfileResonseType **Notes**: See the "Response Codes" section of this document for possible values.
• directResponse	**Value**: Contains detailed information about the result of the transaction. **Format**: String See the *Advanced Integration Guide* at http://www.authorize.net/support/AIM_guide.pdf for details about information included in the payment gateway transaction response.

Duplicate Profile Verification

When you submit calls to the CreateCustomerProfile, CreateCustomerPaymentProfile, and CreateCustomerShippingAddress functions, the payment gateway checks certain fields in each request to ensure that a profile with that same information does not already exist. If a profile already exists that contains the values being submitted in the new request, then the payment gateway returns an error message. If the duplicate profile is a customer profile, the error message contains the ID of the already-created profile. The duplicate profile verification serves as a safeguard against accidental duplicate submissions.

The following table lists the fields for each function that cannot match any other profile already created. An error will occur only if all the values for each field being submitted match all the values for each field in the already existing profile.

Table 43 Duplicate Profile Verification

Function	Fields Used for Duplicate Profile Verification
CreateCustomerProfile	• merchantCustomerId • description • email

Table 43 Duplicate Profile Verification (Continued)

Function	Fields Used for Duplicate Profile Verification
CreateCustomerPaymentProfile	• customerProfileId • cardNumber • accountNumber • routingNumber • billToFirstName • billToLastName • billToAddress • billToZip
CreateCustomerShippingAddress	• customerProfileId • firstName • lastName • address • zip • phoneNumber

CHAPTER 4

Using a Hosted Form

Merchants can use a hosted form to connect their customers directly to Authorize.Net if they need to transmit sensitive data such as changes in payment profiles. The purpose of the hosted form option is to collect data, not to process payments. The hosted form is designed by you, and the content within that form is hosted by Authorize.Net.

Although there are many ways that a hosted form can be implemented, the steps typically include:

Step 1 A customer registers an account with a merchant website.

Step 2 The merchant calls Authorize.Net API method CreateCustomerProfile to create an empty profile.

- Input: customer's email address and/or other identifier that the merchant uses to identify this customer.
- Output: customer profile ID.

Step 3 The customer logs on to the merchant website.

Step 4 The merchant calls Authorize.Net API method GetHostedProfilePage to get a token.

- Inputs: customer profile ID and a list of settings that control how the customer interacts with the Authorize.Net page. See "Guidelines for Parameter Settings," page 93 for a description of the settings.
- Output: token (expires in 15 minutes).

Step 5 The merchant displays a button on their website.

Step 6 The customer clicks the button. Depending on your setup, they are either directed to the Authorize.Net page, or the Authorize.Net page is opened within the merchant's website as a lightbox popup with an iframe.

Step 7 The customer makes changes to their payment or shipping information.

Step 8 The customer returns to the merchant website by clicking a button or closing the popup.

Step 9 The merchant calls Authorize.Net API method GetCustomerProfile to see changes made by the customer.

- Input: customer profile ID.
- Output: list of payment profiles with sensitive fields masked, list of shipping addresses.

Step 10 The merchant can call CreateCustomerProfileTransaction at any time to charge the customer.

Designing Your Web Page

There are three ways to integrate your website with the Authorize.Net Payment Gateway:

- Direct the customer to Authorize.Net to manage payments and shipping all on one page. See the "Example of a Redirect to the Hosted Page," page 87.
- Open a lightbox popup with an iframe within your web page so that the customer can manage payments and shipping all within one popup.
- Open a lightbox popup with an iframe within your web page so that the customer can add or edit individual payment profiles and shipping addresses. Screen examples begin on page 89.

A lightbox popup in an iframe is similar to a popup window, but it does not open a new browser page. Instead, it appears on top of other elements on the page. For an example, see "Add Payment," page 89.

Implementing a Redirect to Authorize.Net

To implement hosted CIM access by using a redirect to Authorize.Net, follow these steps.

Step 1 When you receive the token returned by the GetHostedProfilePage function call, put a hidden form somewhere on your page (the value for the token will be the value returned by the function call).

If you are using the test environment, replace `secure.authorize.net/profile/manage` with `test.authorize.net/profile/manage`.

Example Opening a New Page for the Authorize.Net Host

```
<form method="post" action="https://secure.authorize.net/profile/manage"
id="formAuthorizeNetPage" style="display:none;">

<input type="hidden" name="Token"
value="pfGaUNntoTxZYeqqYDjGCQ4qyCHcsXGXLJ2i7MPCEiH6CH5n5qKqcl8EBiTClxu01B
SeH5eZg7LVUVVzw5kJKVMitQ3pyMB5UZCduMWd6Ku9aT2gyFm69EKMGfyWPmI4p+Bb4TJf2F0
7rInSrn2MWlM6f2xd7aRu1XBn0WXoPxK1j9FMGX2CNCoCBp3cOXB7"
/>

</form>
```

Step 2 Add a button on your page that redirects the customer to Authorize.Net's secure site. You can customize the text:

```
    <input type="button" onclick= "document.getElementById(
'formAuthorizeNetPage').submit();">Manage my payment and shipping
information</button>
```

In this example, the `Manage my payment and shipping information` button directs users to the Authorize.Net Customer Information Manager Hosted page, where they can:

- Create a new payment profile
- Update or delete current credit card or bank information
- Enter a new shipping address
- Update or delete current shipping address

A link on the bottom of the page returns customers to the merchant's website.

The following figure shows what customers see when they are connected to the Authorize.Net hosted page.

Figure 1 Example of a Redirect to the Hosted Page

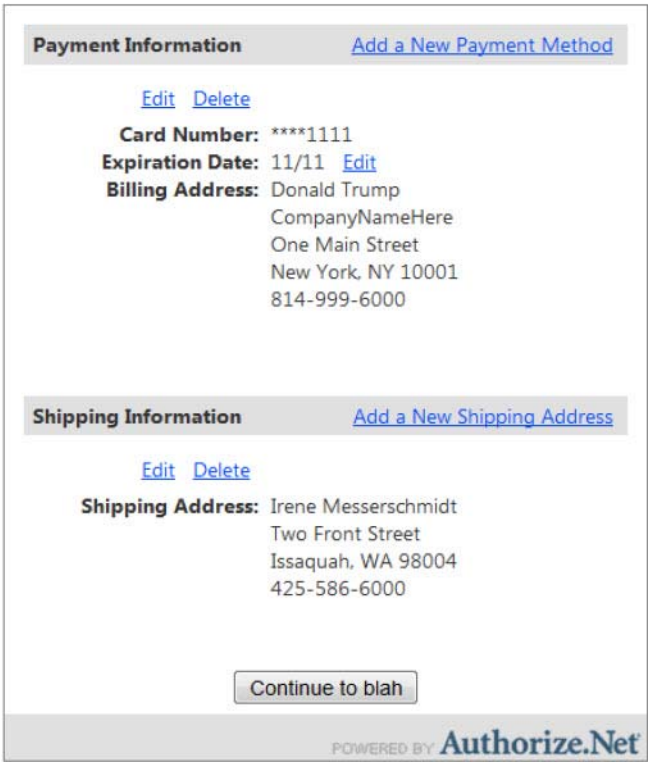

Creating an iframe Popup

To open the Authorize.Net hosted page in a popup inside your web page, follow these steps:

- place an <iframe> tag on your page. Add other elements around it, such as a tag and some images to give it borders and shading. Make it appear in the middle of your page, covering anything else that might be on the page.
- Put a hidden <form> tag on your page with a hidden field inside it that includes the token from the call to the GetHostedProfilePage API function. The <form> tag should have a target attribute pointing to the id or name of the iframe. The Authorize.Net hosted page provides a way to dynamically change the size of your popup so that there are no scroll bars.

For the full documentation of this integration method, download the sample application at http://developer.authorize.net/downloads/samplecode/, listed under Customer Information Manager (CIM). You can find zip files containing all the necessary HTML code as well as instructions to create iframe popups for managing payment and shipping information on the same page, or separately.

You can design your popup so that it manages either the payment and shipping information on the same page, or you can add buttons that manage payment and shipping information separately.

The following illustrations show popup examples, with their associated buttons.

Add a new payment method

The following HTML code adds a button labeled “Add a New Payment Method” which, when clicked, opens an iframe:

```
<button onclick="AuthorizeNetPopup.openAddPaymentPopup()">Add a New
Payment Method</button>
```

Figure 2 Add Payment

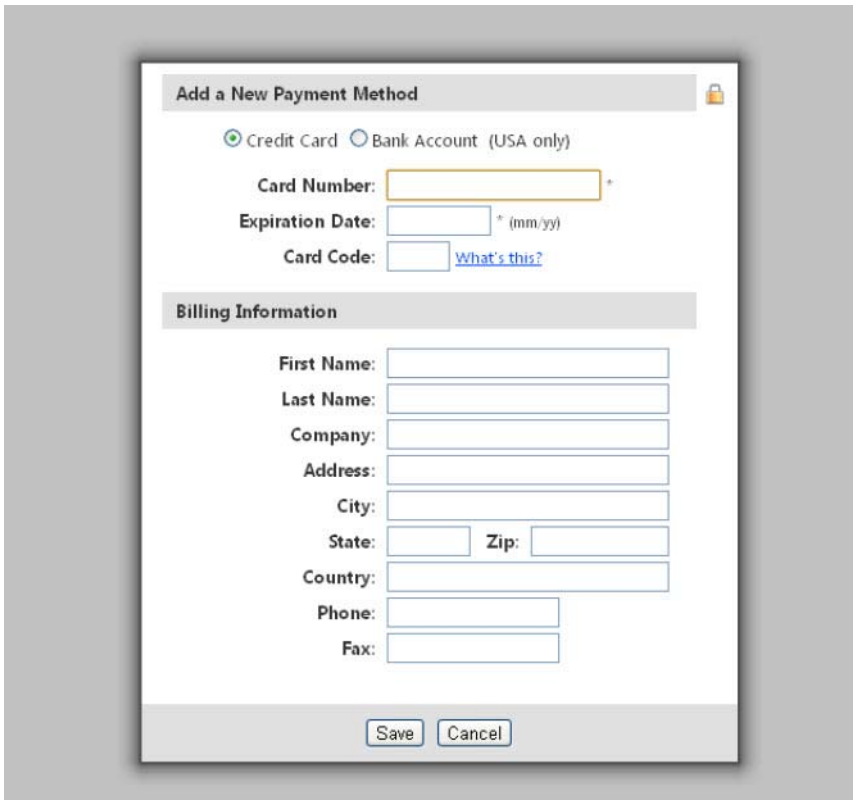

Edit payment information

The following HTML code adds a button labeled “Edit Payment Method” which, when clicked, opens an iframe:

```
<button onclick="AuthorizeNetPopup.openEditPaymentPopup('123456')">Edit
Payment Method</button>
```

Replace ‘`123456`’ with the payment profile ID.

Add a button with the PaymentProfileId for each payment profile.

Figure 3 Edit Payment Information

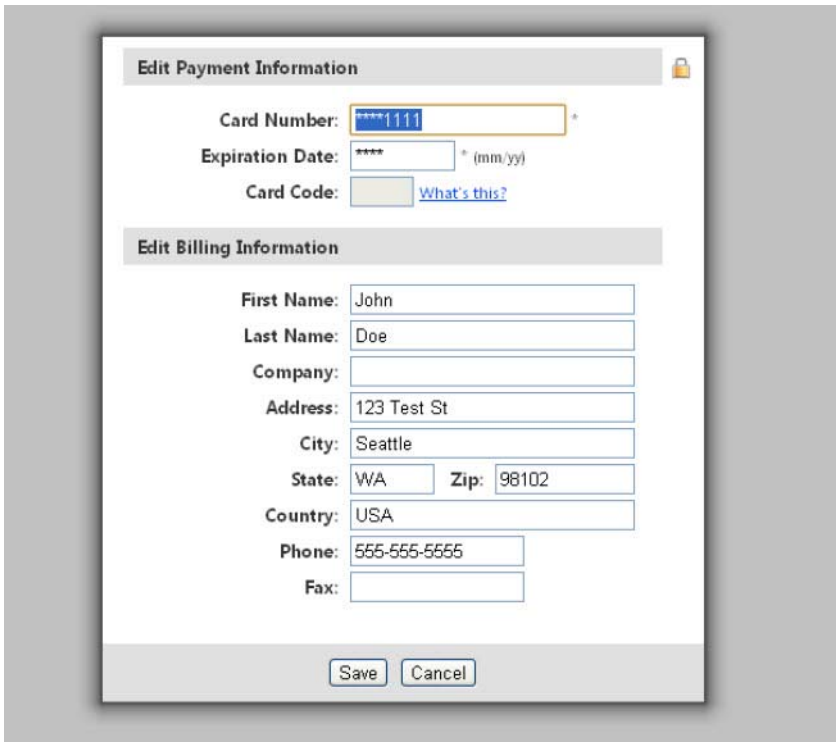

Add a new shipping address

The following HTML code adds a button labeled “Add a new shipping address” which, when clicked, opens an iframe:

```
<button onclick="AuthorizeNetPopup.openAddShippingPopup()">Add a New
Shipping Address</button>
```

Figure 4 Add a New Shipping Address

Edit shipping address

The following code adds a button labeled “Edit shipping address” which, when clicked, opens an iframe:

```
<button onclick="AuthorizeNetPopup.openEditShippingPopup(‘123456’)">Edit
Shipping Address</button>
```

Replace ‘123456’ with the shipping address ID.

Add a button with the ShippingAddressId for each shipping address.

Figure 5 Edit Shipping Address

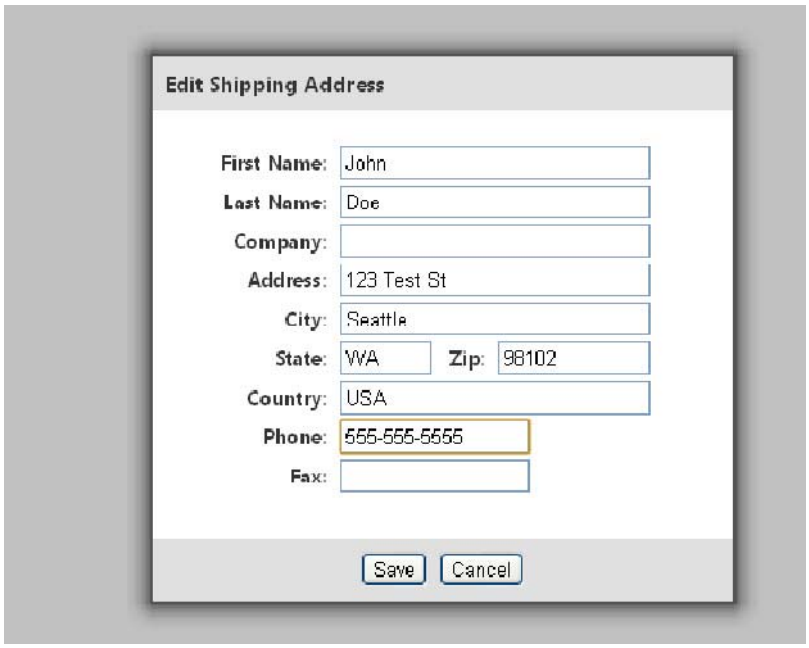

Manage payment and shipping

Enter the following HTML code to add a button labeled “Manage my payment and shipping information” which, when clicked, opens an iframe:

```
<button onclick="AuthorizeNetPopup.openManagePopup()">Manage my payment
and shipping information</button>
```

Figure 6 Manage Payment and Shipping

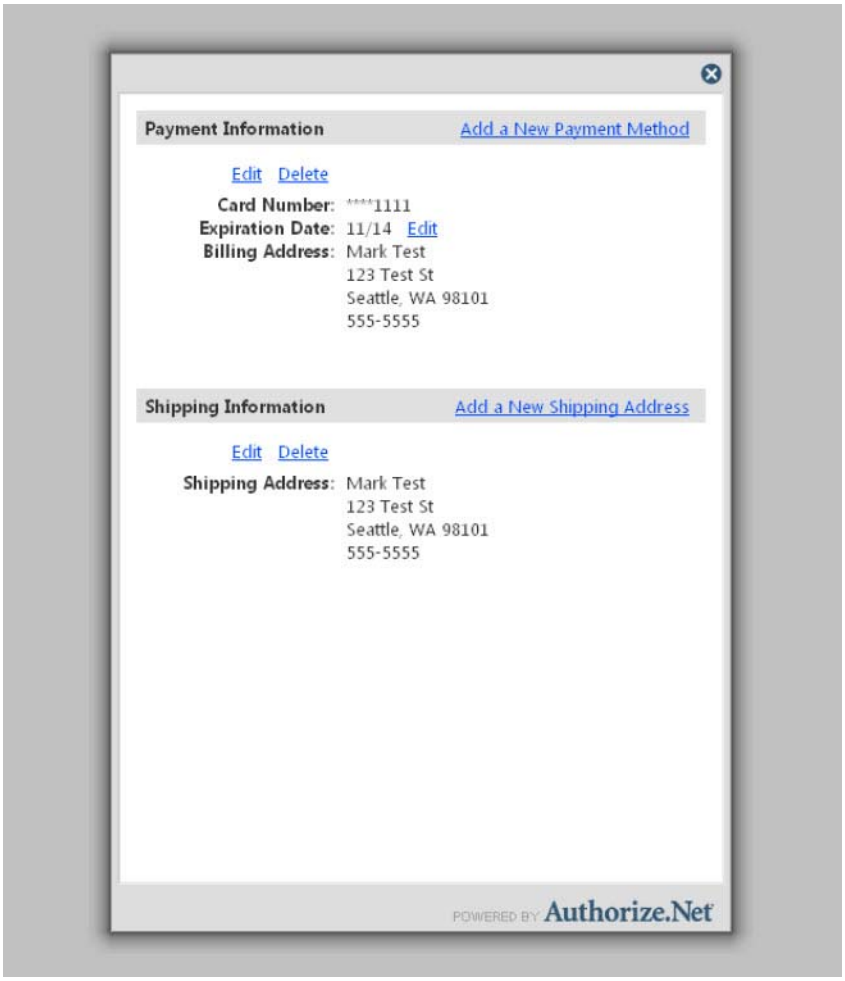

Guidelines for Parameter Settings

To integrate to the hosted page as a redirect, pass *hostedProfileReturnUrl* and *hostedProfileReturnUrlText*. The parameter *hostedProfilePageBorderVisible=true* is optional.

To integrate to the hosted page as a popup, pass *hostedProfilePageBorderVisible=false* and *hostedProfileIFrameCommunicatorUrl*.

The following table shows possible settings:

Table 44 Parameter Settings

Parameter	Description
hostedProfileReturnUrl	Enter the URL for the page the customer returns to when the hosted session ends. Do not pass this setting for iframes or popups. The return URL is validated to verify that it begins with *http://* or *https://*.
hostedProfileReturnUrlText	Enter the text to display on the button that returns the customer to your website. The value can be any text up to 200 characters. If you do not pass this parameter, the default button text is *Continue*. Do not pass this setting for iframes or popups.
hostedProfilePageBorderVisible	Enter true or false. Must be false for iframes or popups, and must be true for redirects.
hostedProfileHeadingBgColor	Enter a hex color string such as #e0e0e0. The background color of the section headers changes from gray to a custom color.
hostedProfileIFrameCommunicatorUrl	Enter the URL to a page that can communicate with the merchant's main page using javascript. This enables you to dynamically change the size of the popup so there are no scroll bars. This parameter is required only for iframe or lightbox applications.
hostedProfileValidationMode	■ liveMode—This value is the default setting. liveMode generates a transaction to the processor in the amount of $0.01 or $0.00. If successful, the transaction is immediately voided. Visa authorization transactions are changing from $0.01 to $0.00 for all processors. All other credit card types use $0.01. Standard gateway and merchant account fees may apply to the authorization transactions. For Visa transactions using $0.00, the billTo address and billTo zip fields are required. ■ testMode—Performs field validation only. All fields are validated. However, fields with unrestricted field definitions (such as telephone number) do not generate errors. If you select testMode, a $1.00 test transaction is submitted using the Luhn MOD 10 algorithm to verify that the credit card number is in a valid format. This test transaction does not appear on the customer's credit card statement, but it will generate and send a transaction receipt email to the merchant. If a validation transaction is unsuccessful, the profile is not created, and the merchant receives an error.

APPENDIX

A

Response Codes

The following table lists the common response codes and texts for requests to the Customer Information Manager API.

Table 45 Response Codes

Code	Text	Description
I00001	Successful	The request was processed successfully.
I00003	The record has already been deleted.	The record has already been deleted.
E00001	An error occurred during processing. Please try again.	An unexpected system error occurred while processing this request.
E00002	The content-type specified is not supported.	The only supported content-types are text/xml and application/xml.
E00003	An error occurred while parsing the XML request.	This is the result of an XML parser error.
E00004	The name of the requested API method is invalid.	The name of the root node of the XML request is the API method being called. It is not valid.
E00005	The merchantAuthentication.transactionKey is invalid or not present.	Merchant authentication requires a valid value for transaction key.
E00006	The merchantAuthentication.name is invalid or not present.	Merchant authentication requires a valid value for name.
E00007	User authentication failed due to invalid authentication values.	The name/and or transaction key is invalid.
E00008	User authentication failed. The payment gateway account or user is inactive.	The payment gateway or user account is not currently active.
E00009	The payment gateway account is in Test Mode. The request cannot be processed.	The requested API method cannot be executed while the payment gateway account is in Test Mode.
E00010	User authentication failed. You do not have the appropriate permissions.	The user does not have permission to call the API.
E00011	Access denied. You do not have the appropriate permissions.	The user does not have permission to call the API method.
E00013	The field is invalid.	One of the field values is not valid.
E00014	A required field is not present.	One of the required fields was not present.
E00015	The field length is invalid.	One of the fields has an invalid length.
E00016	The field type is invalid.	The field type is not valid.

Table 45 Response Codes (Continued)

Code	Text	Description
E00019	The customer taxId or driversLicense information is required.	The customer tax ID or driver's license information (driver's license number, driver's license state, driver's license DOB) is required for the subscription.
E00027	The transaction was unsuccessful.	An approval was not returned for the transaction.
E00029	Payment information is required.	Payment information is required when creating a subscription or payment profile.
E00039	A duplicate record already exists.	A duplicate of the customer profile, customer payment profile, or customer address was already submitted.
E00040	The record cannot be found.	The profileID, paymentProfileId, or shippingAddressId for this request is not valid for this merchant.
E00041	One or more fields must contain a value.	All of the fields were empty or missing.
E00042	The maximum number of payment profiles allowed for the customer profile is {0}.	The maximum number of payment profiles for the customer profile has been reached.
E00043	The maximum number of shipping addresses allowed for the customer profile is {0}.	The maximum number of shipping addresses for the customer profile has been reached.
E00044	Customer Information Manager is not enabled.	The payment gateway account is not enabled for Customer Information Manager (CIM).
E00051	The original transaction was not issued for this payment profile.	If the customer profile ID, payment profile ID, and shipping address ID are included, they must match the original transaction.

Index

A B C D E F G H I J K L M N O P Q R S T U V W X Y Z

A

Authentication 16

C

cardholder information
security 9
CIM Functions
summary 14
CIM Responses 68
CreateCustomerPaymentProfile 23
CreateCustomerPaymentProfileResponse 70
CreateCustomerProfile 17
CreateCustomerProfileResponse 69
CreateCustomerProfileTransaction 27
Authorization and Capture 32
Authorization Only 27
Capture Only 37
Refund 45
CreateCustomerProfileTransactionResponse 71
CreateCustomerShippingAddress 26
CreateCustomerShippingAddressResponse 71

D

DeleteCustomerPaymentProfile 51
DeleteCustomerPaymentProfileResponse 72
DeleteCustomerProfile 51
DeleteCustomerProfileResponse 72
DeleteCustomerShippingAddress 52
DeleteCustomerShippingAddressResponse 72
Developer Support 11
Duplicate Profile Verification 83

G

GetCustomerPaymentProfile 53
GetCustomerPaymentProfileResponse 76
GetCustomerProfile 53
GetCustomerProfileIds 52
GetCustomerProfileIdsResponse 73
GetCustomerShippingAddress 55
GetCustomerShippingAddressResponse 79
getHostedProfilePage 55
response 81

H

hostedProfilePage
input 55
output 81

L

lightbox popup 86

M

Minimum Requirements 8

P

Profiles
duplicate 83

R

refund transactions 45

A B C D E F G H I J K L M N O P Q R S T U V W X Y Z

refunds
    unlinked 45

S

sample code 13

security
    best practices 9

SOAP
    about 7

T

transactions
    refund 45

U

unlinked credit 45

UpdateCustomerPaymentProfile 57

UpdateCustomerPaymentProfileResponse 81

UpdateCustomerProfile 57

UpdateCustomerProfileResponse 81

UpdateCustomerShippingAddress 62

UpdateCustomerShippingAddressResponse 82

V

ValidateCustomerPaymentProfile 65

ValidateCustomerPaymentProfileResponse 83

W

Web Service Locations 13