


Pop-11 and the Robot Army

Poplog as the engine behind AI agents and the machines they command

David J. Kordsmeier and Claude

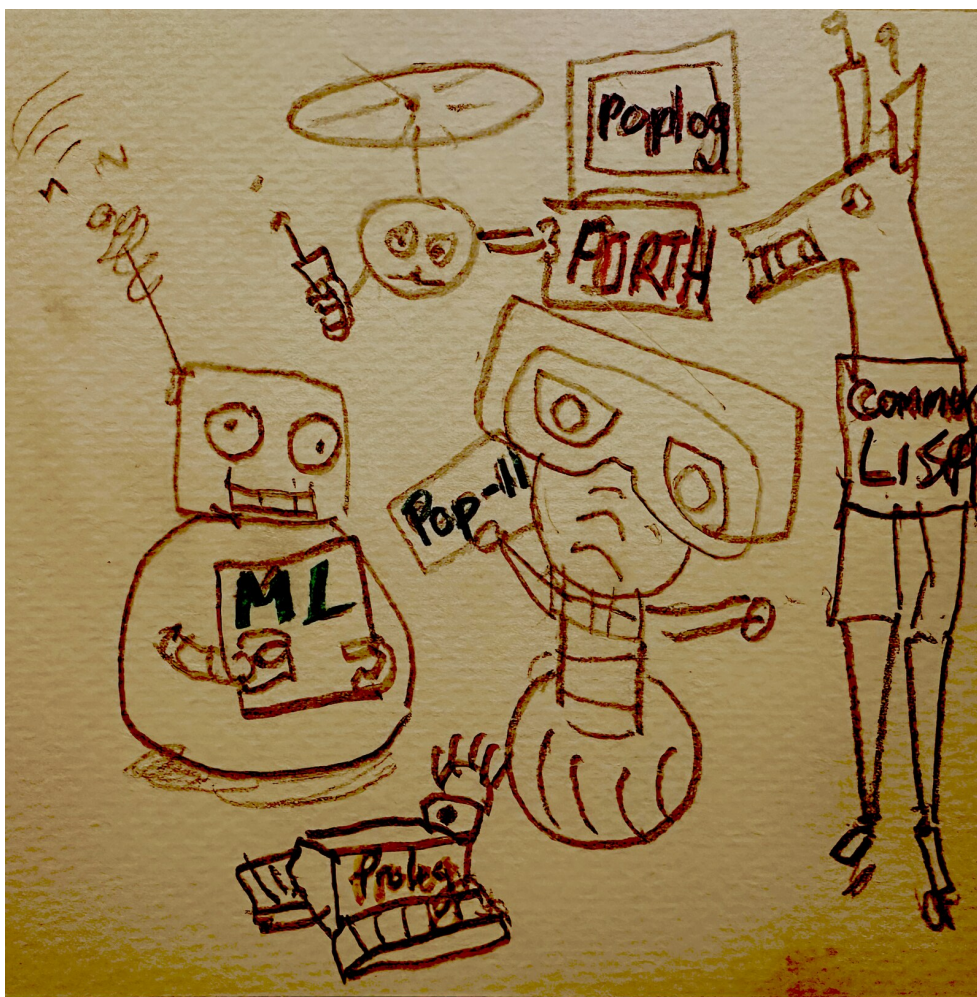

Cover art by David J. Kordsmeier · Edition 1.8, September 2026


Authors. Written by David J. Kordsmeier and Claude, Anthropic’s AI model, working together in Claude Code: the framing, the examples and the verification were done in one live session against the source tree, with Claude drafting and running and Kordsmeier directing, reviewing and drawing.

Five robots, one engine. The languages on the cover — Pop-11, Prolog, Common Lisp, Standard ML and Forth — are the five front-ends of the Poplog system, and this book is about using them, from a live session driven by an AI agent, to run a fleet. It accompanies the source tree at github.com/IoTone/poplog, a maintained fork of the Poplog system developed at the University of Sussex. Every listing in it was executed against that tree on Apple Silicon while the text was written; the outputs shown are the outputs obtained, and the full programs live at [examples/robotarmy/](#) in the repository.

Copyright. Written 2026 by David J. Kordsmeier, Claude and the Poplog contributors. To the extent possible under law, the authors have waived all copyright and related rights to this book — text, listings, diagrams and cover art — under the Creative Commons CC0 1.0 Universal public domain dedication (creativecommons.org/publicdomain/zero/1.0). Copy it, translate it, teach from it. The example programs in [examples/robotarmy/](#) are part of the Poplog source tree and carry its licence. Poplog itself is free software.

Contents

1	The premise, and why Poplog	1	5.5	Crossing between them	18
1.1	The two-level virtual machine	1	6	Hosting a language of your own	20
1.2	Incremental compilation, measured	1	6.1	Plant VM code, don't emit machine code	20
1.3	The saved image	2	6.2	Three tiers of effort	21
1.4	Where it runs	3	6.3	Tier 3: registering a subsystem	21
1.5	Further reading	4	6.4	The other starting point: extend what is there	21
2	Quickstart	5	7	The C interface: orders a robot can trust	22
2.1	Getting a Poplog	5	7.1	The mechanisms, briefly	22
2.2	The first session	5	7.2	The shim discipline	22
2.3	Running files	6	7.3	Declaring it: <code>exload</code>	23
2.4	Documentation, in the system	6	7.4	Calling it: <code>exacc</code>	23
2.5	Editing and long-lived sessions	6	7.5	Building and shipping the shim	24
3	Pop-11 fundamentals	8	7.6	Images, handles, and when not to bother	25
3.1	Syntax at a glance	8	8	The fleet rewrites itself	26
3.2	Words and strings	8	8.1	The transport	26
3.3	Lists, and the quoting trap	8	8.2	Forth over the wire	27
3.4	Procedures	9	8.3	Pop-11 source over the wire	28
3.5	The open stack	9	8.4	Specs over the wire	29
3.6	Control structures	9	8.5	Falling into step	29
3.7	Scope, and <code>dlocal</code>	10	8.6	Backtracking across machines	34
3.8	The list matcher	10	8.7	What the fleet has seen lately	35
3.9	Objects: <code>Objectclass</code>	11	8.8	A classifier small enough to be honest	37
4	Running the fleet	12	8.9	What this is really showing	38
4.1	Telemetry triage: regexps, done Poplog's way	12	9	Where to go next	39
4.2	The command post: a web service in pure Pop-11	13	9.1	The documentation you already have	39
4.3	Orders in plain words	14	9.2	Four decades of teaching material	39
4.4	The map, briefly	14	9.3	Reading the source	39
4.5	The commander's image	14	9.4	Benchmarks, ports, and the state of the project	40
5	The five robots	16	A	Cheat sheet	41
5.1	Prolog	16	A.1	Syntax	41
5.2	Common Lisp	17	A.2	Blocks — every opener has a closer	41
5.3	Standard ML	17	A.3	Declarations	41
5.4	Forth	18	A.4	Mishap decoder	42
			A.5	Files, processes, tables	42
			A.6	Regular expressions	42
			A.7	The Robot Army examples	42
			A.8	Running things	43



The premise, and why Poplog

You have a fleet. Scouts, sappers, medics, haulers — a few today, a few hundred later — each one reporting telemetry, each one waiting for orders. Above them sits an AI agent that reads the reports, decides, and issues the orders; and that agent needs a tool that can hold the whole picture of the fleet in one place, change its own behaviour while running, and never make the fleet wait on a build.

That tool, in this book, is Poplog. Not because it is the newest thing to hand but because three properties it has had since the 1980s turn out to be exactly what an agent-driven command post wants.

- **The compiler is a procedure in the running system.** Defining a new behaviour — a new order, a new triage rule — costs about fifteen microseconds and produces native machine code. An agent can extend its own tooling mid-mission.
- **The whole session is a value.** The heap — the fleet registry, every compiled procedure, every rule learned so far — can be written to a file in milliseconds and restored in a new process. A command post that survives a restart, or forks, is a file copy.
- **Five languages share it.** Pop-11 is the core; Prolog, Common Lisp, Standard ML and Forth are compiled onto the same virtual machine and live in the same heap. The chain of command is a Prolog relation; the robots' control words are Forth; the typed sensor model is ML; and one ?- at the Pop-11 prompt reaches any of them.

Poplog is not a language. It is a language toolkit that ships with five languages already built on it, and this chapter is about the machinery that makes the three properties above true.

1.1 The two-level virtual machine

Poplog's central idea is a split that lets language implementation and machine porting proceed independently.


- **Above the line**, a language front-end reads source and *plants* instructions for an abstract stack machine — the Poplog VM. It does this by calling about forty ordinary Pop-11 procedures (`sysPUSHQ`, `sysCALL`, `sysPROCEDURE`, ...). A front-end is a Pop-11 program. It contains no assembly and no knowledge of any CPU.
- **Below the line**, a back-end translates planted VM code into real instructions for the host architecture. This is where a port lives: the x86-64, AArch64, RISC-V and ARM32 code generators are each one directory under `pop/src/syscomp/`.

The two halves never meet. A language hosted on the VM inherits every port for free — the Forth on the cover was written once, in Pop-11, and runs natively on Apple Silicon, on a Raspberry Pi 5 and on a StarFive RISC-V board with no per-platform work. That matters for a fleet, because the robots and the command post will not be the same kind of machine.

1.2 Incremental compilation, measured

“Incremental” here means what it says: the compiler is a procedure in the running system, and compiling a definition is an ordinary call. There is no build step, no link step, and no separate compile-time world.

```
vars t0 = systime(), k;
for k from 1 to 10000 do
```

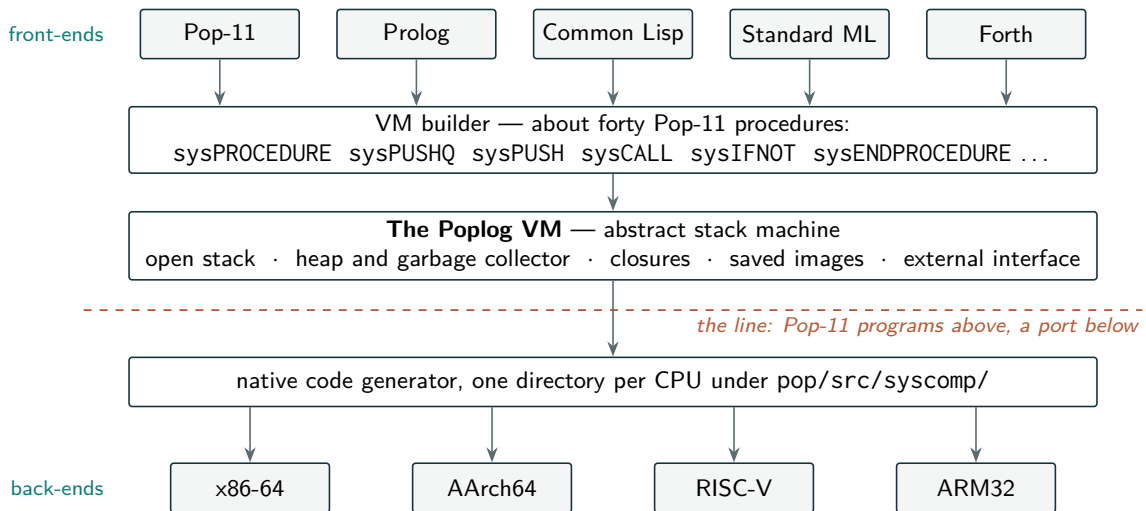

The two-level VM (§1.1). A front-end plants abstract instructions through the VM builder; a back-end turns them into machine code. Add a language and every port gets it; add a port and every language gets it.

```

pop11_compile(stringin('define gen_' sys_<< k sys_<<
                    '(x); x + ' sys_<< k sys_<< ' enddefine;'));
endfor;
npr('10000 definitions compiled in ' sys_<< ((system() - t0) * 10) sys_<< ' ms CPU');
gen_9999(1) =>

```

```

10000 definitions compiled in 150 ms CPU
** 10000

```

Fifteen microseconds per definition, each one a real, callable, garbage-collected, natively compiled procedure. When compilation is that cheap you stop treating it as an event: an agent that has just learned a better triage rule from the last hour's telemetry defines it and moves on.

For calibration, the project's benchmark suite compares the same workloads against CPython on identical hardware (BENCHMARKS.md in the tree has the methodology and the full matrix):

Workload	Poplog (x86-64)	Python 3.13	Python 3.10
nfib29 — 1.35M recursive calls	14.5 ms	3.67× slower	8.56×
intloop10M — tight integer loop	61.5 ms	5.60×	6.26×
lists — 1M cons cells, allocate + walk	11.4 ms	7.20×	7.76×
closures1M — 100k closures, 1M calls	22.0 ms	2.13×	3.00×
compile500 — runtime-compile ×500	66.7 ms	0.12×	0.08×

The last row is the honest one: Python wins it, because `compile()` produces bytecode while Poplog produces machine code. Poplog is doing strictly more work and still lands within an order of magnitude. On the other rows — calls, loops, allocation, closures — the native code shows.

1.3 The saved image

Because the VM owns the whole heap, the whole heap can be written to a file and read back. `syssave` does exactly that; the resulting `.psv` image contains your data *and* your compiled procedures.

```

$ popsession checkpoint post.psv      # 10,000 procedures live in the heap
2.9M post.psv
$ popsession restore post.psv         # a fresh process, 64 ms including spawn

```

```
$ gen_9999(1) =>
** 10000
```

This is how the shipped languages arrive: `clisp.psv`, `prolog.psv` and `pml.psv` are each an image of a Pop-11 system that has already compiled a language on top of itself. It is also what makes a command post durable: the fleet registry and every order-handling procedure survive a restart together, as one file.

What is *not* in the image

Heap state restores; operating-system state does not. Open sockets to the robots, open files, and pointers into C libraries are stale after a restore. The discipline is simply to reopen them — Chapter 7 returns to this.

1.3.1 Why Prolog in the era of LLMs?

A large language model is very good at the part of command that is fuzzy — reading a garbled telemetry line, guessing what an operator meant, drafting a plan — and unreliable at the part that must be exact. Whether `sq2` may order `r4` is not a matter of judgement; it is a fact about the chain of command, and an agent that holds it only in its context window will eventually get it wrong, confidently.

Prolog is the tool for that other part. A relation is a few clauses you can read; a query either succeeds or fails; a proof is a trace you can print and audit. The pattern this book uses — the model *proposes*, the logic *checks* — keeps each side doing what it is good at: the LLM writes `[unit r4 advance to ridge]`, and `can_order/2` in `examples/robotarmy/chain.pl` decides, deterministically, whether the post is entitled to issue it (§5.5). Backtracking gives the same rules a second life as generators: *which units may I order?* is one query, not a loop. And because the rules are data in the image rather than weights in a model, the agent can add a clause, retract one, and see the consequence immediately — with every change in the saved image, and in the history.

Poplog’s particular contribution is that the fact base and the agent’s tools share one heap: a Prolog query from the Pop-11 prompt costs one `?-`, not a foreign-function call and a serialisation. That is the reason the chain of command in this book is written in Prolog and nothing else.

1.4 Where it runs

OS	Architecture	Status
Linux	x86-64	Supported — reference platform
Linux	AArch64	Supported — Raspberry Pi 5, MediaTek Genio 720
macOS	Apple Silicon	Supported — native Mach-O, C ↔ Pop call-backs
Linux	RISC-V RV64GC	Supported — self-hosting on StarFive Vision-Five
Linux	ARM32 (v6/v7)	Supported — long-standing port, Raspberry Pi 1–3
Solaris / FreeBSD	x86 / x86-64	Supported — upstream ports
Windows	x86-64	Not yet ported (WSL2 runs the Linux build)

“Supported” means it builds, self-hosts, and runs all the languages. The first four rows are benchmarked in this fork — and the Pi and the RISC-V board are the kind of hardware a robot actually carries.

1.5 Further reading

Poplog has a long paper trail, and much of it is still the best explanation of why the system is shaped the way it is.

- **Where it came from.** Aaron Sloman, *The Evolution of Poplog and Pop-11 at Sussex University* (1989), in *POP-11 Comes of Age*, ed. J.A.D.W. Anderson — the first-hand account, from POP-2 on an Elliott 4130 in Edinburgh in 1972 to the Sussex system: cogaffarchive.org/sloman.pop11.pdf. Wikipedia’s POP-2, POP-11 and Poplog entries are the short versions, with the Burstall and Popplestone lineage.
- **Learning the language.** The Pop-11 Primer, the standard text for experienced programmers, and the Birmingham teaching corpus (the TEACH files that teach serves in-system) are preserved at the Poplog Archive, poplogarchive.getpoplog.org; `tools/fetch-learning.sh` in this tree pulls them in (§8.2). Stephen Leach’s *Hidden Gems of Pop-11* is a short tour of what the language does that others do not, and a good next read after Chapter 3.
- **Learning Prolog.** *Learn Prolog Now!* (Blackburn, Bos and Striegnitz) is the standard free course, from facts and rules through unification, recursion, lists and cut, with exercises: lpn.swi-prolog.org. Markus Triska’s *The Power of Prolog* (metalevel.at/prolog) is the next one — how to think in relations rather than translate loops. Inside Poplog, `teach prolog` is a 1982 introduction written for Pop-11 users, and the `pop/plog/teach/` files (`prologinpop`, `why`, `tracer`) explain Prolog in terms of Pop-11 and show how to make a program justify its answers.
- **The system itself.** `ref vmcode` and `ref subsystem` are the VM and subsystem specifications behind the diagram in §1.1. hebis.ch/poplog is the cleaned-up upstream source this fork descends from; GetPoplog maintains the archive and packaged distributions.



2.1 Getting a Poplog

Three ways in, fastest first.

1. A relocatable binary (about a 2 MB download). This unpacks a ready-built basepop11 plus libraries under `~/.local/share/pop11-skill`, and finishes with a live smoke test:

```
curl -fsSL https://raw.githubusercontent.com/IoTone/poplog/master/tools/install-skill.sh | sh
```

2. From source. Poplog bootstraps from a small seed binary, `corepop`, which is vendored for the ported platforms:

```
git clone https://github.com/IoTone/poplog && cd poplog
./configure && make all
```

`make all` builds the core system, then compiles the Prolog, Common Lisp and Standard ML front-ends and saves each as an image under `target/psv/`. See `INSTALL` for the details.

3. Nix. A flake builds and bootstraps everything from source with no manual seed or toolchain setup:

```
nix run .#pop11          # or .#prolog / .#clisp / .#pml
nix shell .#poplog       # put all five front-ends on $PATH
```

2.2 The first session

```
$ ./poplog pop11
Sussex Poplog (Version 16.019997 ...)
Copyright (c) 1982-1999 University of Sussex. All rights reserved.

Setpop
: 6 * 7 =>
** 42
```

The prompt is `:` and the workhorse is `=>`, which prints whatever the preceding expression left, prefixed with `**`. Two more you will use constantly: `npr(x)` prints `x` and a newline, and `=>` is `=>` with fuller structure printing.

Statements end with a semicolon. An expression followed by `=>` does not need one — `=>` terminates it.

When something goes wrong you get a *mishap*: a diagnostic naming the error, the culprits, and the chain of procedures that was running.

```
: 'three' + 4 =>
;;; MISHAP - NUMBER(S) NEEDED
;;; INVOLVING: 'three' 4
;;; PRINT DOING
;;; DOING      : + pop_setpop_compiler
```

The session survives. Fix the expression and carry on — this is the normal working rhythm, not an exceptional one.

2.3 Running files

A Pop-11 source file is just a sequence of statements, so there is no `main`:

```
./poplog basepop11 myprog.p          # compile and run, then enter the REPL
./poplog basepop11 myprog.p </dev/null # ...or run and exit
```

Inside a session, `load 'myprog.p'`; does the same thing, and uses `foo`; loads library `foo` from the library search list if it is not already loaded — this is how you reach `lib json`, `lib crypto`, `objectclass`, and the rest.

2.4 Documentation, in the system

Poplog ships its own manual — over 900 files — and it is queryable from the prompt. The three kinds matter:

- `help name` — practical, task-shaped. Start here.
- `ref name` — the exhaustive reference for a primitive or a subsystem.
- `teach name` — tutorials, many of them the original Birmingham AI course material.

```
: help matches
: ref regexp
: teach json
```

The same corpus is published as a website by a Pop-11 program in the tree (`tools/gen-docs.sh`) at <https://iotone.github.io/poplog/>, with an `llms.txt` for AI assistants.

2.5 Editing and long-lived sessions

Because the interesting object is a *running heap*, the tooling in this fork is built to talk to one rather than to a file.


- **VED**, the built-in editor: `ved myfile.p`. ENTER 11 compiles the current line into the live system, ENTER 1mr the marked range, ENTER 1cp the current procedure.
- **LSP** (`tools/pop11-lsp`): diagnostics come from the real compiler with `pop_syntax_only` set, so your file is type-checked by the thing that would compile it, and nothing in it runs. A Neovim plugin ships in `editors/nvim/`.
- **VS Code** and **Zed** (`editors/vscode/`, `editors/zed/`): syntax highlighting, outline and bracket support for `.p`, `.pop11` and `.ph`, both built on the `tree-sitter-pop11` grammar. VS Code installs from the `pop11-vscode-v.vsix` on the releases page; Zed as a dev extension pointed at `editors/zed`. Either client can run the LSP server above for real-compiler diagnostics. An Emacs mode with a live listener is in `editors/emacs/`.
- **Swank** (`tools/pop11-swank`): the other half — a live session an editor can attach to. Output streams as it is produced, mishaps arrive as data with real frames, and a runaway loop can be interrupted. The Emacs package in `editors/emacs/` is the client; `teach swank` is the walkthrough.
- **MCP** (`tools/pop11-mcp`): the same idea for agents, and the way the general of the Robot Army actually gives orders. A persistent, natively compiled session exposed as four tools — `pop11_eval`, `pop11_help`, `pop11_checkpoint`, `pop11_state`. Register it with `claude mcp add -scope project pop11 - tools/pop11-mcp` and the agent has the command post in its hands.

All three servers sit on one transport, `pop/lib/lib/jsonrpc.p`, itself written in Pop-11.

The working pattern

Start one session and keep it. Define helpers once; call them thereafter. Redefinition is instant and applies to every later call, so a procedure is something you *sculpt* in a live image rather than edit-compile-run. Checkpoint the image when the session has earned something worth keeping.

CHAPTER 3



Pop-11 fundamentals

Pop-11 reads like an Algol-descended imperative language and behaves like a Lisp with a stack machine underneath: infix syntax, block keywords that always close, dynamic typing, garbage collection, first-class procedures, an extensible reader. What makes it distinctive is the *open stack*, and almost everything idiomatic follows from it. The examples in this chapter are the pieces of `examples/robotarmy/fleet.p`, the core of the Robot Army.

3.1 Syntax at a glance

```
;;; comments run from three semicolons to end of line
vars charge = 100;          ;;; a global (permanent) variable
charge - 10 -> charge;      ;;; ASSIGNMENT POINTS RIGHT: value -> destination
npr('charge ' sys_<< charge); ;;; print a line; sys_<< concatenates anything
charge =>                    ;;; the REPL's printer: "** 90"
```

The assignment arrow is the first thing to internalise: `-> x` reads “into x”. It points that way because assignment is a stack operation — the value is already there, and the arrow says where to put it.

3.2 Words and strings

```
'advance to ridge' ;;; single quotes: a mutable vector of characters
"r1"                ;;; double quotes: a WORD -- an interned symbol, not a string
```

This is the single most common beginner error, and it has a silent cousin. Words are interned: every `"r1"` is the same object. Strings are not: two `'r1'`s are two objects that merely print alike. Poplog’s default hash table, `newproperty`, matches keys by *identity*, so a registry keyed by unit id must use words:

```
vars fleet = newproperty([], 64, false, true);
90 -> fleet("r1");
fleet("r1") =>          ;;; ** 90
fleet('r1') =>          ;;; ** <false> -- a different object, silently
```

Use words as keys, or use `newmapping`, which compares with `=`. Both are right; silently missing is not.

3.3 Lists, and the quoting trap

An order in the Robot Army is a list of words, and list brackets *quote* their contents, like Lisp’s `'(...)`:

```
vars order = [unit r1 advance to ridge];
order(2) =>          ;;; ** r1
```

So `[unit u advance to target]` is a list of the literal words `unit u advance to target`. To build an order from values, escape with `^` (one item) or `^^` (splice a list):

```
vars u = "r4", target = "ridge", squad = [r1 r2];
[unit ^u advance to ^target] =>      ;;; ** [unit r4 advance to ridge]
[all ^^squad hold] =>                ;;; ** [all r1 r2 hold]
```

Vectors, `{1 2 3}`, are the constant-time-subscript counterpart.

3.4 Procedures

A procedure's result is whatever it leaves behind; there is no `return` statement, and the last expression is the value. A procedure may leave *several* results, which the caller collects in reverse order:

```
define split_order(o); hd(o), tl(o) enddefine;
vars verb, rest;
split_order([advance to ridge]) -> rest -> verb;    ;; verb = advance, rest = [to ridge]
```

Closures are made by partial application with `% . . . %`:

```
define drain(charge, n); charge - n enddefine;
vars step_cost = drain(% 2 %);    ;; every step costs 2%
step_cost(100) =>                ;; ** 98
```

And every accessor has an *updater* — the procedure that runs when it appears on the left of an arrow. That is why `roster(2)` both reads and writes:

```
vars roster = [r1 r2 r3];
"r9" -> roster(2);
roster =>                ;; ** [r1 r9 r3]
```

3.5 The open stack

There is one user-visible stack, and the calling convention does not hide it. A procedure can leave zero, one, or a hundred results, and the number need not be known until it runs. `fleet.p` uses this for the roster: `units()` walks the registry and leaves every robot on the stack, and the *caller* chooses the container.

```
define units();
  approperty(fleet, procedure(k, v); v endprocedure);
enddefine;

define muster(); [% units() %] enddefine;    ;; a list of every unit

define fit_for_duty();
  lvars r;
  [% for r in muster() do
    if rb_charge(r) >= 25 then r endif    ;; leave it, or don't
  endfor %]
enddefine;
```

`[% . . . %]` means “run this, and make a list of everything it left”. That one construct replaces most of what other languages need generators, varargs, spread operators and comprehensions for. It also makes Forth nearly free to host (§5.4): Forth's data stack *is* this stack.

Why this matters for performance

Because results are passed on the stack rather than boxed into tuples, multiple return values cost nothing, and neither does a procedure that sometimes returns nothing. The `nfib` and `closures1M` benchmark rows in Chapter 1 are measuring this calling convention.

3.6 Control structures

Every opener has a matching closer.

```
if charge < 25 then recall() elseif charge < 60 then light_duty() else deploy() endif;
unless linked then hail() endunless;
for r in muster() do ... endfor;    for i from 1 to n do ... endfor;
```

```

while cond do ... endwhile;      repeat ... quitif(done); ... endrepeat;

define readiness(charge);
  switchon charge
    case < 25 then 'return to base'
    case < 60 then 'light duty only'
    else 'fit for duty'
  endswitchon
enddefine;
readiness(20) =>                ;;; ** return to base

```

3.7 Scope, and dlocal

`vars` declares a permanent (global) identifier; `lvars` declares a lexical local inside a procedure — prefer `lvars`. `constant` and `lconstant` are their immutable counterparts.

`dlocal` has no close equivalent elsewhere: it gives a variable a new value for the *dynamic extent* of a call and restores the old value on exit — whether the procedure returns, jumps out, or is unwound by a mishap. Here an order is relayed down three echelons, and the indent follows it:

```

vars echelon = '';
define relay(order, depth);
  dlocal echelon = echelon >< '> ';
  npr(echelon sys_>< order);
  if depth > 1 then relay(order, depth - 1) endif;
enddefine;
relay('advance', 3);

```

```

> advance
> > advance
> > > advance

```

After `relay` returns, `echelon` is empty again. The same mechanism is how Poplog rebinds output streams and the compiler's own state safely — it is Pop-11's answer to `try...finally`, and it is declarative.

3.8 The list matcher

Pop-11's pattern matcher works on lists and is built into the language with the `matches` operator: `?x` binds one item, `??x` binds a segment, `=` matches one item without binding. It is what turns an order into an action in `fleet.p`:

```

vars id, place, n;                ;;; pattern variables must be permanent (vars)

define obey(order) -> reply;
  lvars r;
  'unintelligible' -> reply;
  if order matches [unit ?id advance to ?place] then
    fleet(id) -> r;
    if r then
      place -> rb_place(r);
      rb_charge(r) - 10 -> rb_charge(r);
      'unit ' sys_>< id sys_>< ' advancing to ' sys_>< place -> reply
    else 'no such unit: ' sys_>< id -> reply endif
  elseif order matches [unit ?id recharge ?n] then
    ...
  elseif order matches [report] then
    '' sys_>< length(fit_for_duty()) sys_>< ' of ' sys_><
    length(muster()) sys_>< ' units fit for duty' -> reply
  endif;

```

```
enddefine;
```

```
[report] -> 3 of 4 units fit for duty
[unit r1 advance to ridge] -> unit r1 advancing to ridge
[unit r9 advance to ridge] -> no such unit: r9
```

A trap worth naming

The matcher assigns through the *permanent* identifier, so pattern variables declared with `lvars` are silently not filled in — you get `<undef>`. Declare them `vars`.

The same matcher, plus a dozen lines of ranking and reassembly, is the whole of ELIZA; `examples/eliza.p` in the tree is a faithful implementation of Weizenbaum's original.

3.9 Objects: Objectclass

Objectclass is Pop-11's CLOS-like object system: classes with slots, and generic procedures with methods dispatched on argument class. A robot is one:

```
uses objectclass;


define :class Robot;
  slot rb_id    = "unknown";
  slot rb_kind  = "scout";      ;; scout | sapper | medic | hauler
  slot rb_charge = 100;
  slot rb_place = "base";
enddefine;

define :method print_instance(r:Robot);
  printf('<%p %p %p%% at %p>\n',
        [% rb_kind(r), rb_id(r), rb_charge(r), rb_place(r) %]);
enddefine;

define enlist(id, kind) -> r;
  newRobot() -> r;
  id -> rb_id(r); kind -> rb_kind(r);
  r -> fleet(id);
enddefine;
```

```
<scout r1 90% at base>
<sapper r2 100% at base>
```

Slots come with accessors *and* updaters for free, which is why `rb_charge(r)` works on both sides of the arrow in `obey`.



Running the fleet

Four programs that do the fleet's real work. Each was run against the tree while this chapter was written; the transcripts are the actual output. The listings here are excerpts — the full programs are at `examples/robotarmy/` on GitHub, and each runs from the repository root.

4.1 Telemetry triage: regexps, done Poplog's way

Every robot streams telemetry, and the first job of the command post is to read it faster than it arrives. `examples/robotarmy/telemetry.p` makes one pass over a fleet log and answers three questions: how much of each level, which units are in trouble, and what was slowest.

Poplog ships a full regexp engine (ref `regexp`) — but with inverted syntax, and this catches everyone exactly once. **The escape character is @, not backslash, and . * [] ^ \$ are literal by default.** A pattern pasted in from any other engine compiles without complaint and then matches almost nothing.

PCRE	Poplog	PCRE	Poplog
.	@.	x?	x@{0,1@}
*	@*	x{m,n}	x@{m,n@}
[abc]	@[abc@]	^ \$	@^ @ \$
x+	x@{1,@}	(x)	@(x@)

There is no alternation (`|`) and no lookahead: compile one pattern per branch. In exchange, `regexp_compile` hands back a *compiled procedure* you define once and then call at native speed.

```
uses regexp;
vars err, match_ms, err2, match_unit;
regexp_compile('@[0-9@]{1,@} ms') -> (err, match_ms);    ;; "1420 ms"
regexp_compile('r@[0-9@]{1,@}') -> (err2, match_unit);  ;; "r7"

define triage(path) -> (levels, trouble, slowest, slow_unit);
  lvars dev, rep, line, lev, i, n, ms, unit;
  newproperty([], 8, 0, true) -> levels;    ;; default 0: += needs no branch
  newproperty([], 32, 0, true) -> trouble;
  0 -> slowest; false -> slow_unit;
  sysopen(path, 0, "line") -> dev;
  line_repeater(dev, inits(4096)) -> rep;    ;; size the buffer generously
  repeat
    rep() -> line;
    quitif(line == termin);
    match_unit(1, line, false, false) -> (i, n);
    if i then consword(substring(i, n, line)) -> unit else false -> unit endif;
    for lev in [INFO WARN ERROR] do
      if issubstring(lev sys_>< ' ', 1, line) then
        levels(lev) + 1 -> levels(lev);
        if unit and lev /= "INFO" then trouble(unit) + 1 -> trouble(unit) endif
      endif
    endfor;
    match_ms(1, line, false, false) -> (i, n);
    if i then
      strnumber(substring(i, n - 3, line)) -> ms;
      if ms and ms > slowest then ms -> slowest; unit -> slow_unit endif
    endif;
  endrepeat;
enddefine;
```

```
$ ./poplog basepop11 examples/robotarmy/telemetry.p </dev/null
INFO: 5
WARN: 2
ERROR: 3

units by fault count:
  r7 2
  r5 1
  r3 1
  r4 1

slowest operation: 2750 ms (r5)
```

Two idioms are doing quiet work. `newproperty([], 8, 0, true)` gives a table whose *default is 0*, so incrementing an unseen unit needs no initialisation branch. And `line_repeater` returns a procedure that yields one line per call and `termin` at end of file — the standard Poplog shape for a stream, and the same shape `sys_obey_linerep` uses for the output of a shell command. Note `consword`: the unit id is interned so it can key a property.

4.2 The command post: a web service in pure Pop-11

The agent does not type at the Pop-11 prompt; it talks HTTP. `examples/robotarmy/c2.p` composes `lib http_server`, `lib json` and `fleet.p` into the command post: the roster as JSON, one unit's status, and orders as plain text. Unknown routes answer 404 and a mishap inside a handler answers 500 without taking the post down. The whole program is the handler.

```
define handler(req) -> resp;
  lvars path = req('path'), obj, r, u;
  if path = '/fleet' then
    http_json({% applist(muster(), unit_json) %}) -> resp;
  elseif path = '/status' then
    allbutfirst(5, req('query')) -> u;          ;; "unit=r1"
    fleet(consword(u)) -> r;
    if r then http_json(unit_json(r)) -> resp else false -> resp endif;
  elseif path = '/order' then
    newmapping([], 4, false, true) -> obj;
    obey(words_of(req('body'))) -> obj('reply');
    http_json(obj) -> resp;
  elseif path = '/boom' then
    mishap(0, 'deliberate handler failure');    ;; server answers 500
  else
    false -> resp;                             ;; server answers 404
  endif;
enddefine;

http_serve_n(port, handler, count);
```

```
$ ./poplog basepop11 examples/robotarmy/c2.p 8099
$ curl -s localhost:8099/fleet
[{"charge":100,"kind":"scout","place":"base","id":"r1"},
 {"charge":100,"kind":"sapper","place":"base","id":"r2"}, ...]
$ curl -s -d 'unit r1 advance to ridge' localhost:8099/order
{"reply":"unit r1 advancing to ridge"}
$ curl -s 'localhost:8099/status?unit=r1'
{"charge":90,"kind":"scout","place":"ridge","id":"r1"}
$ curl -s -o /dev/null -w '%{http_code}\n' localhost:8099/boom
500
```

`lib json` maps JSON onto Pop-11 directly: an object becomes a `newmapping` property, an array a vector, a string a string of UTF-8 bytes, and `null` the distinguished word `json_null`, kept apart from `false`. Member order is not preserved — properties are hash tables — which is why the

keys above come out in the order they do. `teach json` walks through how the library itself was built, bug included.

4.3 Orders in plain words


An order arrives at `/order` as text and obey wants a list of words, so `c2.p` has a five-line bridge, and it is worth seeing because it is the whole of what “parsing” costs here:

```
define words_of(s) -> 1;
  lvars w;
  [% for w in str_split(str_trim(s), ` `) do
    if w /= '' then
      if strnumber(w) then strnumber(w) else consword(w) endif
    endif
  endfor %] -> 1;
enddefine;
```


After that the matcher in §3.8 does the rest. Adding an order is adding an `elseif . . . matches` clause — and because redefinition is instant, the agent can add one to the running post and issue it in the same breath.

4.4 The map, briefly

Poplog’s graphics were historically tied to X. This fork adds an optional native backend built on Dear ImGui, chosen at build time with `./configure --experimental-graphics: Metal + Cocoa` on macOS, or `SDL3 + OpenGL3` on macOS or Linux, which picks Wayland, X11, KMS/DRM or headless software rendering at run time. The classic `rc_graphic` turtle library runs on it unchanged, which is enough to draw a fleet on a map.

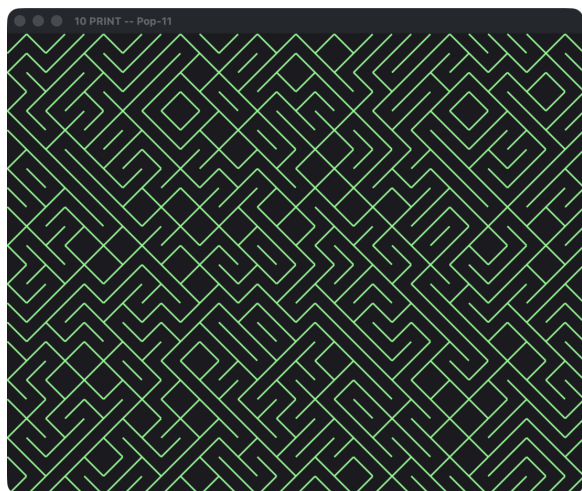

examples/tenprint.p — the 10 PRINT maze

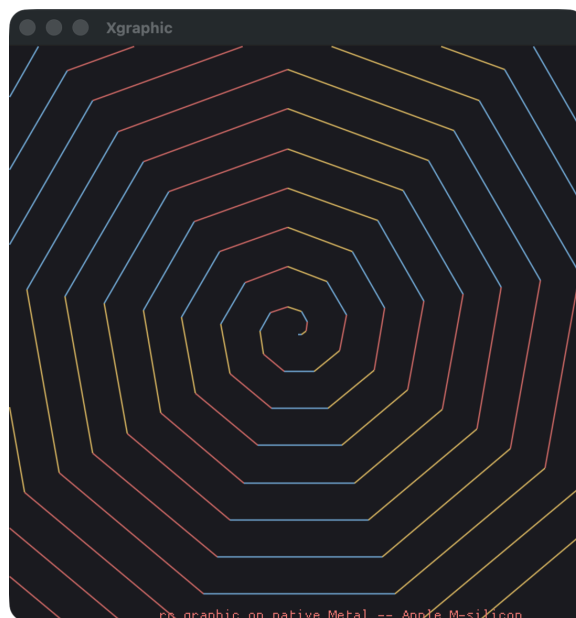

`rc_graphic` turtle on the Metal backend

Graphics are strictly opt-in: the default build, and `nix build .#poplog`, are console-only.

4.5 The commander’s image

The last example is not a program but a habit. Because compiling is microseconds and saving the heap is milliseconds, the natural unit of work is a *session* that accumulates the state of the fleet, with snapshots at the points worth returning to.

```
$ popsession start --name post          # boot (~50 ms)
$ popsession send  --name post -f examples/robotarmy/fleet.p  # define once
$ popsession send  --name post -c "obey([report]) =>"         # ~1 ms per call
$ popsession checkpoint --name post post-0800.psv            # freeze heap + procedures
$ popsession restore   --name post post-0800.psv             # a new process, fully loaded
```

The image contains the compiled procedures, so restoring is not re-loading:

```
$ ls -lh post.psv
2.9M post.psv          # a heap holding 10,000 compiled procedures
$ time popsession restore post.psv
0.064 total            # including process spawn
$ gen_9999(1) =>
** 10000
```

Two cautions, both from §1.3. A restore rolls the *whole* session back — anything defined after the snapshot is gone, so re-checkpoint after adding to a restored session. And handles into the operating system or into C libraries go stale across a restore; reopen them rather than trusting them.

The five robots



The robots on the cover are the five front-ends of Poplog, and they are not bindings, bridges or embeddings. Each is a compiler written in Pop-11 that plants code for the same VM, and the result lives in the same heap as everything else. Switching language switches the *reader*; it does not switch worlds. In the Robot Army each language does the job it is best at: Prolog holds the chain of command, ML types the sensor model, Lisp plans, Forth runs on the robot.

```
Sussex Poplog (Version 16.019997 Wed Jun 10 21:42:09 PDT 2026)
Copyright (c) 1982-1999 University of Sussex. All rights reserved.

Setprolog
?- 6 * 7 =>
== 42
?- define twice(x); x = 2 enddefine;
?- maplist([1 2 3 4 5], twice) =>
== [2 4 6 8 10]
?- length([the quick brown fox]) =>
== 4
?- 'D'
== []
```

Pop-11 — the core language

```
Sussex Poplog (Version 16.019997 Wed Jun 10 21:42:09 PDT 2026)
Copyright (c) 1982-1999 University of Sussex. All rights reserved.
Prolog (Version 3.2)

Setprolog
?- X is 6 * 7, write('6 * 7 = '), write(X), nl.
6 * 7 = 42
X = 42 ?
yes
?- [First | Rest] = [red, green, blue], write('first = '), write(First), nl.
First = red
Rest = [green, blue] ?
yes
?- (7 > 3 -> write('7 > 3 holds')) ; write(no), nl.
7 > 3 holds
yes
?- 'D'
== []
```

Prolog — Edinburgh syntax

```
Sussex Poplog (Version 16.019997 Wed Jun 10 21:42:09 PDT 2026)
Copyright (c) 1982-1999 University of Sussex. All rights reserved.
Common Lisp (Version 2.0)

Setlisp
== (= 6 7)
42
== (mapcar (function (lambda (x) (= x x))) '(1 2 3 4 5))
(1 4 9 16 25)
== (defun fact (n) (if (= n 0) 1 (= n (fact (- n 1)))))
FACT
== (fact 10)
3628800
== 'D'
== []
```

Common Lisp — CLTL2

```
Sussex Poplog (Version 16.019997 Wed Jun 10 21:42:09 PDT 2026)
Copyright (c) 1982-1999 University of Sussex. All rights reserved.
Standard ML (Version 2.1)

Setml
- print "Standard ML on Poplog:\n";
"Standard ML on Poplog:\n"
- val it = "Standard ML on Poplog:\n" : string
- fun fact n = if n = 0 then 1 else n * fact (n-1);
- val fact = fn : int -> int
- print (makestring (fact 12) ^ "\n");
"479001600\n"
- val it = "479001600\n" : string
- map (fn x => x + 1) [10, 20, 30];
- val it = [11, 21, 31] : int list
- print "done!\n";
"done!\n"
- val it = "done!\n" : string
- 'D'
== []
```

Standard ML — type inference

Four front-ends, one engine, one banner — captured on the Apple Silicon build. Each image is the same basepop11 with a different language compiled into it.

5.1 Prolog

Edinburgh-syntax Prolog, implemented as 51 Pop-11 files under `pop/plog/src/` — reader, term representation, unification, clause store and control. Because it is open Pop-11 rather than a sealed engine, extending it with new built-ins is an afternoon's work, not a fork.

```
commands(commander, sq1).      commands(sq1, r1).      commands(sq2, r3).
commands(commander, sq2).      commands(sq1, r2).      commands(sq2, r4).
```

```
% X may order Y if X commands Y directly, or commands someone who may
can_order(X, Y) :- commands(X, Y).
can_order(X, Z) :- commands(X, Y), can_order(Y, Z).
reports_to(Unit, Boss) :- commands(Boss, Unit).
obeys(Unit, From) :- can_order(From, Unit).
```

```
$ ./poplog basepop11 -target/psv/prolog.psv
?- ['examples/robotarmy/chain.pl'].
examples/robotarmy/chain.pl consulted
yes
?- can_order(commander, r4).
yes
?- reports_to(r4, Who).
Who = sq2
```

```
?- obeys(r1, sq2).
no
?- can_order(sq1, U).
U = r1    U = r2
```

The full file is `examples/robotarmy/chain.pl`. A relation, two clauses of recursion, and the question every unit must ask of every order — *is this from up my own chain?* — is answered by the engine rather than by code.

A small surprise

Poplog's Prolog is deliberately lean: list predicates such as `member/2` and `append/3` are *not* built in. Several library files under `pop/plog/lib/` define them, or you write the two clauses yourself — which, for a system whose point is that you can see and change the engine, is in keeping.

5.2 Common Lisp

Compatible with most of CLTL2. It is a genuine Common Lisp — packages, macros, `format`, the condition system — compiled to native code by the same back-end as everything else.

```
(defparameter *fleet* '((r1 scout 90) (r2 sapper 100) (r4 scout 20)))
(defun charge (u) (third u))
(defun fit-for-duty (fleet)
  (remove-if (lambda (u) (< (charge u) 25)) fleet))
(print (mapcar #'first (fit-for-duty *fleet*)))
(print (reduce #'+ (mapcar #'charge *fleet*)))
```

```
(R1 R2)
210
```

Remember that the reader upcases: `sq` and `SQ` are the same symbol, and `#`, `..`, `,`, `@` and `:` are reader macros. `help poplisp` is a translation table for Pop-11 programmers arriving in Lisp, and `help poplisp` documents the mixed-language interface.

5.3 Standard ML

A full Standard ML with Hindley–Milner type inference, and the strongest demonstration that the VM is language-agnostic: static typing, pattern-matching function clauses and polymorphism all sit on the same dynamically typed heap.

```
datatype unit = Scout of int | Sapper of int | Medic of int;
fun charge (Scout c) = c | charge (Sapper c) = c | charge (Medic c) = c;
fun fit u = charge u >= 25;
val fleet = [Scout 90, Sapper 100, Scout 20, Medic 55];
List.filter fit fleet;
List.length (List.filter fit fleet);
```

```
val charge = fn : unit -> int
val fit = fn : unit -> bool
val fleet = [Scout(90), Sapper(100), Scout(20), Medic(55)] : unit list
val it = [Scout(90), Sapper(100), Medic(55)] : unit list
val it = 3 : int
```

A unit that is not one of the three constructors cannot be built, and a `charge` that forgets a case is a compile error — the type-checker is where ML's surprises live, not the runtime. (Its other habit: an unannotated `fun sq x = x * x` is rejected, because `*` is overloaded and there is nothing to resolve it against.)

5.4 Forth

Those three, with Pop-11 itself, are classic Poplog. This fork adds a fifth, and it is the shortest route to understanding why hosting on the VM is cheap: **Forth’s data stack is the Poplog user stack**. A Forth primitive is an ordinary open-stack Pop-11 procedure — `+` is `define f_plus(x,y); x+y enddefine` — and no data structure is interposed at all.

Colon definitions are not threaded code. `: name . . . ;` is transpiled to a Pop-11 procedure and run through the incremental compiler, so a Forth word is a real native procedure; `if/else/then`, `begin/until`, `begin/while/repeat`, `do/loop`, `recurse` and `exit` map onto Pop-11 constructs at compile time.

```
variable charge 100 charge !
variable steps 0 steps !

: drain charge @ swap - charge ! ;          \ ( n -- ) spend n% of charge
: step steps @ 1+ steps ! 2 drain ;
: low? charge @ 25 < ;
: status charge @ . steps @ . cr ;          \ prints: charge steps

\ walk n steps, stopping early if the battery gets low
: patrol 0 do low? if leave then step loop status ;

10 patrol
30 patrol
```

```
$ tools/forth.sh < examples/robotarmy/patrol.fth
80 10          <- ten steps, 80% left
24 38          <- asked for thirty more; stopped at 24% after 28
forth> testbench
21 passed, 0 failed ALL OK (0.273 ms)
```

That is `examples/robotarmy/patrol.fth`: a robot’s control vocabulary in nine lines, each word a native procedure the moment it is defined.

The core covers arithmetic, about forty stack, comparison, bitwise and I/O words, native colon definitions, the control words above, counted loops with `i/j/leave`, `variable/constant/@/!`, a return stack (`>r r@ r>`), and string literals. It is younger and leaner than the mature four — no `+loop`, `create does>` or `value yet`, and it is case-sensitive. Because it is pure Pop-11 it runs on every platform Poplog does; the built-in `testbench` is 21/21 on both macOS arm64 and RISC-V. Implementation: `pop/forth/src/forth.p`, 523 lines.

5.5 Crossing between them

All five share one image, so crossing is a change of reader, not a marshalling boundary.

From any language back to Pop-11, type `pop11`:

```
$ ./poplog basepop11 -target/psv/clisp.psv
(print (* 6 7))
42
pop11
: [a b c] <> [d] =>
** [a b c d]
```

```
$ ./poplog basepop11 +target/psv/pml.psv
val x = 6 * 7;
val x = 42 : int
pop11
: [a b c] <> [d] =>
** [a b c d]
```

From Pop-11 into Prolog, the syntax word `?-` runs a goal inline, against the same clause store:

```
: vars order = [unit r4 advance to ridge];
: ?- ['examples/robotarmy/chain.pl'].
: ?- can_order(sq2, r4), write(yes_sq2_may_order_r4), nl.
yes_sq2_may_order_r4
yes
: ?- can_order(sq1, r4).
no
: rev(order) =>
** [ridge to advance r4 unit]
```

So the Pop-11 command `post` can ask the Prolog chain of command whether an order is legitimate before `obey` ever sees it.

Defining Prolog predicates in Pop-11 is a documented form (`help define_prolog`) — useful when a predicate wants a data structure or an I/O facility that is easier to reach from Pop-11:


```
define :prolog hello/0(contn);
  lvars contn;
  printf('Hello world\n');
  chain(contn);          ;;; call the continuation = succeed
enddefine;
```

```
?- hello.
Hello world
yes
```

The continuation-passing shape is not incidental: it is how Poplog’s Prolog represents “and then carry on solving”, so a Pop-11 predicate that calls `chain(contn)` succeeds once, and one that calls it in a loop is a generator with backtracking.

Which image has which language

Each shipped image contains the languages compiled into it. `prolog.psv` has Pop-11 and Prolog; `clisp.psv` has Pop-11 and Common Lisp; `pml.psv` has Pop-11 and ML. Forth is pure library code — `uses forth` works anywhere. To get several at once, build an image that loads them, exactly as `make` builds these.



Hosting a language of your own

Sooner or later the fleet wants its own language — a terse orders notation the agent can emit and a robot can read — and Chapter 5’s front-ends are not privileged. The API they target is public, and a new language is an ordinary Pop-11 program. This chapter is the recipe; `HOSTING-LANGUAGES.md` in the tree is the longer version, and `ref vmcode` is the specification.

6.1 Plant VM code, don’t emit machine code

You write a **reader**, a **parser**, and then calls to about forty **VM-builder** procedures that plant abstract instructions. The back-end turns those into native code for whatever CPU you are on.

To plant...	call
a literal constant	<code>sysPUSHQ(item)</code>
the value of a variable	<code>sysPUSH(word)</code>
a store into a variable	<code>sysPOP(word)</code>
a call of a named procedure	<code>sysCALL(word)</code>
a call of a literal procedure	<code>sysCALLQ(item)</code>
start / end of a procedure	<code>sysPROCEDURE(props, nargs) ... sysENDPROCEDURE()</code>
locals, dynamic locals	<code>sysLVARs, sysLOCAL, sysNEW_LVAR</code>
control flow	<code>sysLABEL, sysGOTO, sysIFSO, sysIFNOT, sysGO_ON</code>
a permanent assignment	<code>sysPASSIGN(item, token)</code>
a syntax word / macro	<code>sysSYNTAX</code>

The whole model fits in six lines. Here we build, at run time, the equivalent of `define add1(x); x fi_+ 1 enddefine`:

```
define build_add1() -> p;
  sysPROCEDURE(false, 1);      ;; open a 1-argument procedure
  sysPUSHQ(1);                 ;; push literal 1 -> stack: x 1
  sysCALL("fi_+");             ;; fast integer add -> stack: x+1
  sysENDPROCEDURE() -> p;      ;; p is now a real compiled procedure
enddefine;

vars add1 = build_add1();
isprocedure(add1) =>           ;; ** <true>
pdnargs(add1)    =>           ;; ** 1
add1(41)         =>           ;; ** 42
```

Execute level

Planting must happen *while something is running*, not at the top level of a file being compiled — at the top level you get `sysEXECUTE: NOT AT EXECUTE LEVEL`. Wrap the plant sequence in a procedure and call it, as above.

That is the entire trick. A compiler for your language is a tree walk that emits the right `sys. . .` calls. What you get for free, without writing a line of assembly: native code generation on every port, the garbage collector, the open stack, closures, recursion, the incremental compiler, the external interface, the REPL, and saved images.

For the reader, you can reuse Pop-11’s `itemiser` (`incharitem` over `proglis`, documented in `ref popcompile`) with your own character table — for a whitespace-delimited language like Forth it needs almost no configuration — or write your own, as Prolog does with its operator-precedence

reader.

6.2 Three tiers of effort

Tier	What you get	Effort
1. Embedded interpreter	A plain Pop-11 program: a dictionary and an eval loop. No VM compilation.	days
2. VM-compiling front-end	Parse, then plant — genuinely native definitions, closures, recursion, full interop. <i>The Poplog way</i> .	1–3 weeks
3. Full subsystem	Tier 2 plus registration: its own REPL, prompt, banner, file extension and saved image.	+1–3 days

The tiers stack. Build tier 1 as a throwaway to pin the semantics with no compiler in the way, replace its core with planting, then wrap the subsystem around it.

6.3 Tier 3: registering a subsystem

A subsystem is a record in `sys_subsystem_table` with a name, a file extension, a prompt, a title, search lists, and an eight-slot procedure vector in a fixed order (`ref subsystem`):

```
constant myforth_subsystem_procedures =
  {% forth_compile,    ;; SS_COMPILER  <- the only substantial one
    identfn,          ;; SS_RESET    (between top-level reads)
    identfn,          ;; SS_SETUP    (on startup)
    Forth_banner,     ;; SS_BANNER
    identfn,          ;; SS_INITCOMP (compile a standard prelude)
    erase,            ;; SS_POPARG1  (handle a command-line argument)
    identfn,          ;; SS_VEDSETUP (editor; no-op if you skip Ved)
    identfn,          ;; SS_XSETUP   (X; no-op if you skip graphics)
  %};
```

Only `SS_COMPILER` is real work — it is your tier-2 compiler. The rest can start as `identfn`/`erase` stubs. One macro then makes the language reachable by name from a Pop-11 prompt:

```
define global macro forth;
  "forth" -> sys_compiler_subsystem(`c`);
enddefine;
```

Finally, build an image the way the shipped languages are built — a `mkimage` invocation that loads your sources and installs `mylang.psv` — and you have `poplog mylang`, live subsystem switching, and your language on every platform Poplog runs on. The four existing subsystems under `pop/lisp/`, `pop/pml/`, `pop/plog/` and `pop/forth/` are the templates; each is a `*_subsystem_procedures` file, a compiler, and a Makefile rule.

6.4 The other starting point: extend what is there

Not every new language needs to be new. The shipped Prolog is 51 files of ordinary Pop-11, so a specialised variant has an enormous head start: reuse the term reader, unification and clause store, and replace only the *control* — a different search order, tabling, constraint propagation, a custom resolution rule. Adding built-ins and operators to the existing engine is hours; swapping the control regime is days to weeks, scaling with how much of the engine you replace.



The C interface: orders a robot can trust

A unit in the field must not obey an order just because it arrived. The command post signs every order under a key the unit was given at enlistment, and the unit refuses anything that does not verify. The cryptography comes from OpenSSL, and reaching it is the job of Poplog's foreign-function interface — which has existed since 1987 and is unusually deep: external code is loaded into the *running* image by Poplog's own dynamic linker, declared with a syntax form, and called with argument conversion that understands Poplog's data representation. This chapter shows the path this fork actually uses in production libraries, then names the alternatives and the traps.

7.1 The mechanisms, briefly

<code>external_do_load</code>	The primitive: a mark item, a list of object files or shared libraries, and a list of symbol specifications. Procedural.
<code>exload</code>	The declarative syntax form over it — name the library, name the functions, give their types. Start here.
<code>exacc</code>	The syntax form that <i>calls</i> an external function or accesses external data, converting arguments and results.
<code>cons_access</code>	Builds an accessor procedure for a field of an external structure.
<code>lib external, lib newexternal</code>	Older higher-level layers; see <code>help external</code> and <code>help newexternal</code> .

The reference material is `ref external` (mechanisms and data representation), `ref defstruct` (structures) and `ref external_data`.

7.2 The shim discipline

The libraries in this fork — `lib crypto` over OpenSSL, `popcurl` over `libcurl`, `poppcrc` over PCRE — all go through a small C shim rather than binding the library's own API directly. That is a deliberate rule, and it is worth stating plainly:

Bind a shim, not the library

Keep the `exload` surface to a handful of **non-variadic** functions with **explicit lengths** and **caller-allocated buffers**, and keep object lifecycle entirely on the C side. Variadic calls through the FFI are hazardous — notably on Apple `arm64`, where the variadic calling convention differs from the regular one — and library handle lifetimes are exactly what a garbage collector should not be guessing about.

A shim is usually fifty lines. Here are two of the seven functions behind `lib crypto`:

```
/* pop/extern/popcrypto/popcrypto_shim.c */
#include <openssl/evp.h>
#include <openssl/hmac.h>

/* digest of data[0..len) with a named algorithm; writes raw bytes to
   out, returns the digest length, or -1 */
int pcr_digest(const char *alg, const void *data, long len,
               unsigned char *out)
{
    const EVP_MD *md = EVP_get_digestbyname(alg);
    unsigned int n = 0;
```

```

    if (!md) return -1;
    if (!EVP_Digest(data, (size_t)len, out, &n, md, NULL)) return -1;
    return (int)n;
}

int pcr_random(unsigned char *buf, long n)
{
    return RAND_bytes(buf, (int)n) == 1 ? 0 : -1;
}

```

Note the shape: no allocation crosses the boundary, every buffer has an explicit length, and every failure is a negative return rather than an exception or an `errno` the caller must remember to read.

7.3 Declaring it: exload

```

uses crypto;    ;; ...is, inside, this:

exload popcrypto
  #_IF sys_file_exists(sysfileok('$usepop/pop/extern/popcrypto/popcrypto.dylib'))
  ['$usepop/pop/extern/popcrypto/popcrypto.dylib']
  #_ELSE
  ['$usepop/pop/extern/popcrypto/popcrypto.so']
  #_ENDIF
(language C)
  lconstant
    pcr_digest(alg, data, len, out)          :int,
    pcr_hmac(alg, key, keylen, data, len, out) :int,
    pcr_random(buf, n)                       :int,
    pcr_pbkdf2(alg, pass, passlen, salt, saltlen, iters, out, outlen) :int,
    pcr_version()                           :exptr,
    ;;; ...and pcr_gcm_encrypt / pcr_gcm_decrypt
  ;
endexload;

```

Three things are happening. `popcrypto` is the *mark item* — the tag under which this set of symbols is loaded and can be unloaded. `#_IF` is a compile-time conditional, so one source file picks the right shared-library extension on macOS and Linux. And each declaration gives the argument names and the *result* type: `:int` for a C int, `:exptr` for a pointer (Poplog wraps it in an external-pointer record; `exacc_ntstring` pulls a C string out of one). The full type vocabulary — `:byte`, `:short`, `:int`, `:long`, `:sfloat`, `:dfloat`, pointers, arrays and structures — is in `ref external`.

7.4 Calling it: exacc

```

lconstant OUTMAX = 64;    ;;; SHA-512 is the widest digest

define crypto_digest(alg, data) -> raw;
  lvars n, out = inits(OUTMAX);    ;;; caller allocates the buffer
  unless isstring(alg) and isstring(data) then
    mishap(alg, data, 2, 'crypto_digest: two strings needed')
  endunless;
  exacc pcr_digest(cstr(alg), data, length(data), out) -> n;
  if n < 0 then
    mishap(alg, 1, 'crypto_digest: unknown algorithm')
  endif;
  substring(1, n, out) -> raw;
enddefine;

```

```

: uses crypto;
: crypto_digest_hex('sha256', 'hello poplog') =>
** 8b05ad6e876a9ce82062d33918c82d6b9bfac5b0f1cb575bb4dc8cd70762c6ae

```

```
: crypto_version() =>
** OpenSSL 3.6.3 9 Jun 2026
```

On top of that, the signed order is a dozen lines — `examples/robotarmy/signed_orders.p`:

```
vars fleet_key = 'a shared secret, provisioned at enlistment';

;;; wire format: <hex mac> <space> <order text>
define sign_order(text) -> wire;
  crypto_hmac_hex('sha256', fleet_key, text) <> ' ' <> text -> wire
enddefine;

define verify_order(wire) -> text;
  lvars sp = locchar(` `, 1, wire), mac, body;
  false -> text;
  if sp then
    substring(1, sp - 1, wire) -> mac;
    allbutfirst(sp, wire) -> body;
    if mac = crypto_hmac_hex('sha256', fleet_key, body) then body -> text endif
  endif
enddefine;
```

```
on the wire: 81bdc45a...581146c3 unit r1 advance to ridge
genuine:     unit r1 advance to ridge
tampered:    <false>          <- one character of the order changed
replayed:    <false>          <- a real signature on a different order
```

7.4.1 Two traps that bite immediately

Pop-11 strings are not null-terminated. They are counted byte vectors, so a string passed where C expects `char *` must be terminated explicitly. `lib crypto` does it in one line:

```
define lconstant cstr(s);
  s <> consstring(0, 1)      ;;; append a NUL
enddefine;
```

Data arguments do not need this — they are passed with an explicit length, which is the better interface anyway.

Packed fields versus full fields. Poplog integers and floats are tagged in ordinary records and vectors. Passed as direct arguments they are converted for you; passed *inside* a structure they are not, and the C side sees encoded nonsense. An integer array destined for C must therefore be built with a packed representation (`intvec` and friends), not `newarray`. Strings made with `inits(n)` are packed byte vectors, which is exactly why they serve as C buffers above.

7.5 Building and shipping the shim

The shim is built by a small script, not by the main `make`, so a Poplog without OpenSSL still builds:

```
tools/build-popcrypto.sh      # -> pop/extern/popcrypto/popcrypto.{so,dylib}
```

```
if command -v pkg-config >/dev/null 2>&1 && pkg-config --exists libcrypto; then
  flags="$(pkg-config --cflags --libs libcrypto)"
else
  flags="-lcrypto"
fi
cc -O2 -shared -fPIC -o "$lib" "$src" $flags
```

And the library fails loudly at load time if the shim is missing, rather than mysteriously at the first call:

```
unless sys_file_exists(sysfileok('$usepop/pop/extern/popcrypto/popcrypto.so'))
or sys_file_exists(sysfileok('$usepop/pop/extern/popcrypto/popcrypto.dylib'))
then
    mishap(0, 'lib crypto: shim not built -- run tools/build-popcrypto.sh first')
endunless;
```

Both `lib json` and its FFI-based sibling `lib crypto` are validated on x86-64, AArch64 (Raspberry Pi 5) and RISC-V; `tools/test-crypto.sh` is the acceptance suite and `tools/test-remote.sh` host reruns it anywhere with a built tree. That matters more than usual for FFI code, because calling conventions are exactly what differs between ports — the RISC-V float ABI, for instance, was found and fixed by running these suites.

7.6 Images, handles, and when not to bother

External state does not survive `sys save`. Library handles, open connections and `exptr` values are stale after a restore — the right shape for a binding is to *mishap cleanly* on a stale handle rather than crash, and the fix is always to reopen. Procedures, by contrast, survive fine, so a restored image is ready to work as soon as you reconnect its resources.

Finally: the FFI is not always the answer. Poplog can stream the output of a shell command as a line repeater, and for a one-off that is often enough:

```
vars r = sys_obey_linerep('set +e; curl -s https://example.com/api | jq -r ".id"');
```

Note `set +e`: the command line runs under `errexit`, so without it the first failing command aborts the whole pipeline *silently* — empty output and no error.

The trade-off against the FFI is a process per call, and it is not subtle: on the machine this chapter was written on, 100 round trips through `sys_obey_linerep('echo hi')` took 284 ms of wall time — about 2.8 ms each — against an unmeasurable zero for 100 in-image calls. Use a shim when the call sits in a loop; use the pipe when it does not.

CHAPTER 8

The fleet rewrites itself



Everything so far has happened inside one process. A fleet is not one process. This chapter puts the robots on a network and gives them the one capability that makes Poplog worth choosing for the job: a robot can be sent something over UDP and *become able to do it* — not by loading a plugin or dispatching through a table, but by compiling the arrival into native machine code and carrying on.

Three things travel well, and they are not equally good. Source in a language the robot can read. A *spec* that needs no reader at all. And, notably, **not** a saved image: a .psv is tied to its architecture and its build, so the one artefact that carries a whole living heap is the one that cannot cross a heterogeneous fleet. That constraint shapes everything below.

Everything here is in `examples/robotarmy/` and was run between real machines while this chapter was written: a command post on macOS arm64, a robot on Linux x86-64 over a tailnet, and a Raspberry Pi 5 on Linux aarch64.

The Pi is worth a note, because it is what a fleet actually looks like. It is not on the tailnet; it sits on the x86-64 box's local network, so the Mac cannot address it at all and the x86-64 machine has to act as the command post for that leg. Nothing in the code knows or cares — a robot is a host and a port — but it is a reminder that “the fleet” is rarely one flat network.

8.1 The transport

`examples/robotarmy/fleetnet.p` is the whole network layer: datagram sockets, signing, and chunking, in about ninety lines.

```
uses unix_sockets;

define net_open(port) -> sock;
  sys_socket(`i`, `D`, false) -> sock;          ;; `D` = SOCK_DGRAM
  [* ^port] -> sys_socket_name(sock);           ;; bind; * is INADDR_ANY
enddefine;

define net_send(sock, host, port, msg);
  if length(msg) > NET_MTU then
    mishap(length(msg), 1, 'net_send: payload exceeds NET_MTU -- chunk it')
  endif;
  sys_socket_send(sock, msg, length(msg), 0, [^host ^port]);
enddefine;
```

The trap that costs an hour

`sys_socket_recv` leaves a byte count on the stack (and the sender's address). `sys_socket_send` leaves **nothing**. Writing the symmetric-looking `vars r = sys_socket_send(. . .)` underflows the open stack — and nothing complains there. The mishap surfaces in the *compiler*, on a later line, pointing at an innocent string constant: BAD SUBSCRIPT FOR INDEXED STACK ACCESS inside `read_strcon`. Under other orderings the same underflow arrives as a bare `[fatal] sig=11` with no Pop-11 diagnostic at all. `net_send` wraps it so no caller meets it again; `docs/bugs/sys-socket-send-returns-nothing.md` has the details.

8.1.1 Signing, and why it is in the transport

Three of the four things below *compile what they receive*. That makes the signature check part of the transport rather than a courtesy the handler might remember:

```

define net_sign(text) -> wire;
  crypto_hmac_hex('sha256', fleet_key, text) <> ' ' <> text -> wire
enddefine;

define net_verify(wire) -> text;          ;;; false unless genuinely ours
  ...
enddefine;

```

A robot that cannot verify a datagram does not act on it, and above all does not hand it to a compiler. Chapter 7 built the HMAC; this is what it was for.

8.1.2 Sizing, measured

NET_MTU is 1200 bytes. That is not a guess. The tailnet interface reports an MTU of 1380, and a 1372-byte don't-fragment ping to the peer is already dropped while 1200 passes:

200 bytes: OK	1200 bytes: OK
800 bytes: OK	1372 bytes: BLOCKED

Forth words are tens of bytes and fit comfortably. Pop-11 source does not, so long messages go out as numbered chunks, <id>:<seq>:<total>:<payload>, **each signed in its own right** — otherwise an attacker could slip an extra chunk into a message whose other parts are genuine. Verified at 7992 bytes over 8 datagrams, reassembled byte-identical.

8.2 Forth over the wire

The smallest useful thing to send. `examples/robotarmy/fthwire.p` listens, verifies, and hands the payload to `forth_run` — which, as §5.4 explained, transpiles a colon definition to Pop-11 and runs it through the incremental compiler. The new word is native code.

```

$ ./poplog basepop11 examples/robotarmy/fthwire.p 9600      # the robot

$ ... --tell 100.70.154.54 9600 ': patrol 0 do 1 + loop ;'
ok
$ ... --tell 100.70.154.54 9600 '0 10 patrol .'
10

```

The word was taught in the first datagram and executed in the second. The robot had never heard of `patrol`. Recursion crosses just as happily: `: fib dup 2 < if drop 1 else dup 1 - recurse swap 2 - recurse + then ; 20 fib .` comes back 10946.

Those addresses are real: the robot was a Linux x86-64 box and the command post an arm64 Mac. The word arrived as text and left as x86-64 instructions.

8.2.1 Three mechanisms hold it together

None of them is plumbing; all three are Chapter 3 material doing real work.

Capturing the output. Forth prints through `cucharout`, so rebinding the sink for the dynamic extent of the call collects whatever the word printed — and `dlocal` restores it however the call exits, including when the word blows up.

```

define fw_capture(p) -> out;
  lvars acc = [];
  dlocal ucharout = procedure(c); conspair(c, acc) -> acc endprocedure;
  p();
  consstring(#! applist(rev(acc), identfn) |#) -> out;
enddefine;

```

Trapping a bad word. A word that mishaps must not take the robot with it. The idiom is `lib`

jsonrpc's:

```
define fw_trapped(src);
  dlocal interrupt =
    procedure(); false -> fw_ok; exitfrom(fw_trapped) endprocedure;
  forth_run(src);
enddefine;
```

Repairing the stack. This is the subtle one. `exitfrom` unwinds the call chain but *not* the open stack — and Forth's data stack **is** that stack (§5.4), so a word that died holding values would poison the next order. After a deliberate crash, `.s` must report an empty stack, and it does:

```
<- nosuchword
-> ERROR executing: nosuchword
<- : sq dup * ; 9 sq .
-> 81
<- .s
-> <0>
```

Measured

500 round trips on loopback — sign, send, verify, compile a brand-new native word, run it, reply — in **20 ms of client CPU**; the whole program including engine startup ran in 84 ms. Twenty cross-machine round trips fit inside a 0.186 s program.

8.3 Pop-11 source over the wire

`examples/robotarmy/deploy.p` is the same idea one level up: the payload is Pop-11, it arrives in as many signed chunks as it takes, and `pop11_compile` puts it into the running robot.

The demonstration is redefinition. Same process, same call, no restart:

```
define escort(n); n * 3 enddefine;      -> compiled ok
npr(escort(7));                        -> 21
define escort(n); n * 100 + 1 enddefine; -> compiled ok
npr(escort(7));                        -> 701
```

Nothing was reloaded and nothing was dispatched through. The identifier `escort` now names different machine code, and every later caller gets it — which is exactly the behaviour §1.2 measured at fifteen microseconds a definition, now happening at the far end of a network.

A real capability behaves the same. `deployments/patrol_order.p` is 1898 bytes of route planning — two chunks — and the moment it lands the robot can do something it could not do a second earlier:

```
--file ... patrol_order.p              -> compiled ok
npr(describe_patrol(plan_patrol(
  [[ridge 4] [creek 2] [tower 9] [mill 3]], 10))); -> creek -> mill -> ridge [cost 9]
```

(tower is left out: it would break the budget of 10.)

8.3.1 What it refuses

malformed source	ERROR compiling deployment, robot keeps serving
still knows what it learned	alpha -> beta [cost 6]
unsigned deployment	refused - no backdoor — never reaches the compiler
the signed one	plan_patrol present (signed, accepted)

The unsigned payload carried `define backdoor`. The robot was asked afterwards whether `backdoor` existed, and it did not.

8.4 Specs over the wire

Source still needs a front-end for the language it is written in. `examples/robotarmy/plant.p` sends neither Forth nor Pop-11 — it sends an abstract instruction list, and the robot plants VM code from it directly with the builder procedures of Chapter 6:

```
plant
name double
nargs 1
pushq 2
call fi_*
```

```
define pl_plant(nargs, instrs) -> p;
  lvars ins, op, arg;
  sysPROCEDURE(false, nargs);
  for ins in instrs do
    hd(ins) -> op; hd(tl(ins)) -> arg;
    if op == "pushq" then sysPUSHQ(arg)
    elseif op == "call" then sysCALL(arg)
    ...
  endfor;
  sysENDPROCEDURE() -> p;
enddefine;
```

Send those five lines to three machines:

	plant	call double 21
macOS arm64	planted double/1 as native code, 2 instrs	42
Linux x86-64	planted double/1 as native code, 2 instrs	42
Linux aarch64	planted double/1 as native code, 2 instrs	42

Nothing architecture-specific crossed the wire. Each robot’s own back-end turned the same spec into its own instructions — and this is the thing no bytecode VM gives you, because there is no interpreter at the far end. The spec became *machine code* on both.

A larger one behaves identically: `name score / nargs 2 / call fi_* / pushq 10 / call fi_+` answers 52 to `call score 6 7` on both architectures. A bad opcode gives `ERROR` planting and the robot keeps serving.

The Pi leg was driven from the x86-64 machine rather than the Mac, for the routing reason above — an x86-64 command post planting aarch64 code, which is the same trick pointing a third way.

Two traps

Planting must happen while something is running. At the top level of a file being compiled it mishaps with `sysEXECUTE: NOT AT EXECUTE LEVEL`, which is why `pl_plant` is a procedure and not inline code.

fi_* does not type-check. An early version of the call path wrote `sys_<< fast_apply(p)`, which pushes the empty string *on top of* the argument already on the stack, so the planted procedure consumed `"` instead of 21. The fast integer operations skip type checks, so the answer came back `210.0` — quiet nonsense rather than a mishap. Apply first, format second.

8.5 Falling into step

The last one sends no code at all — only numbers — and is the clearest picture of a fleet behaving as one thing. Each robot in `examples/robotarmy/swarm.p` carries a phase and a rhythm of its own, broadcasts its phase every tick, and pulls itself towards whatever it hears:

$$\theta' = \theta + \omega dt + \frac{K}{N} \sum_{\text{peers}} \sin(\theta_{\text{peer}} - \theta)$$

Left alone, robots with different natural rhythms drift apart forever. Coupled, they pull each other into lockstep — with no leader, no clock and no central authority. (Kuramoto’s model; the same arithmetic describes fireflies and pendulum clocks sharing a beam.)

Four separate OS processes, coupled only by signed datagrams. Measured by the order parameter R , where 0 is chaos and 1 is perfect lockstep:

elapsed	phases					R
0.00 s	0.00	1.70	3.40	5.10		0.085
0.75 s	0.59	2.29	5.12	0.48		0.422
1.50 s	1.50	2.08	1.30	1.85		0.954
3.00 s	3.76	3.88	3.99	4.13		0.991
5.97 s	1.94	2.06	2.18	2.31		0.990

The rows are seconds rather than tick numbers, for the reason §8.5.2 gets to: a tick is not a fixed amount of time, so it is not an axis. R passes 0.985 about 1.75 s in and never drops below it again. They hold a constant phase *lag* rather than identical phases, which is the right answer for oscillators with different natural frequencies.

The staying is the whole signal. A rising R proves nothing on its own: four uncoupled oscillators drift past one another and R climbs on the way past, purely by coincidence. Only a plateau is entrainment.

The measurement that was wrong for a week

This table used to end at $R = 0.911$, and it was an artefact. `net_poll` was built on `sys_input_waiting`, which answers `false` forever on a datagram socket — even with a datagram queued that a blocking `recv` returns at once. So `seen` was always 0, the coupling term never fired, and every robot free-ran. No error was raised: a poll returning nothing is exactly what a quiet network looks like.

Every printed phase was reproducible from $(id \cdot 1.7 + \omega t) \bmod 2\pi$ with no network term at all. The tell was that a run across two machines matched the single-machine run to the last digit — impossible over any real link, and proof that nothing in the output depended on the network. The fix is `sys_device_wait`, which is `select(2)` and is what `pop/ref/sockets` tells you to use:

```
define net_ready(sock) -> yes;
  lvars rd;
  sys_device_wait([sock], [], [], 0) -> (rd, , );
  rd /== [] -> yes;
enddefine;
```

Robots now report their traffic, so a silent poll cannot hide again:


```
robot 0 done -- heard 717 peer messages over 240 ticks, 0 sends dropped
```

717 is 3×239 : every peer, every tick. When it was broken, this line would have read 0. Assert on the traffic, not on whether output appeared. See [examples/robotarmy/docs/bugs/sys-input-waiting-blind-on-sockets.md](#).

8.5.1 Across machines, the fleet locks in pieces

Everything above is four processes on one host. Spread the fleet across real machines — two robots each on macOS arm64, Linux x86-64 and a Raspberry Pi — and it no longer locks as one. Each machine’s pair holds at 0.97 for the whole run; the fleet as a whole wanders between 0.32 and 0.97, mean 0.69, and never settles.

The obvious explanation is latency, and it is wrong. It was the explanation printed here in edition 1.2: the tick is 20 ms, the measured RTT was 4–108 ms, so a remote phase must arrive stale and the coupling must fail. The link later became direct — 4.6–16.3 ms, mean 7.2 — putting every

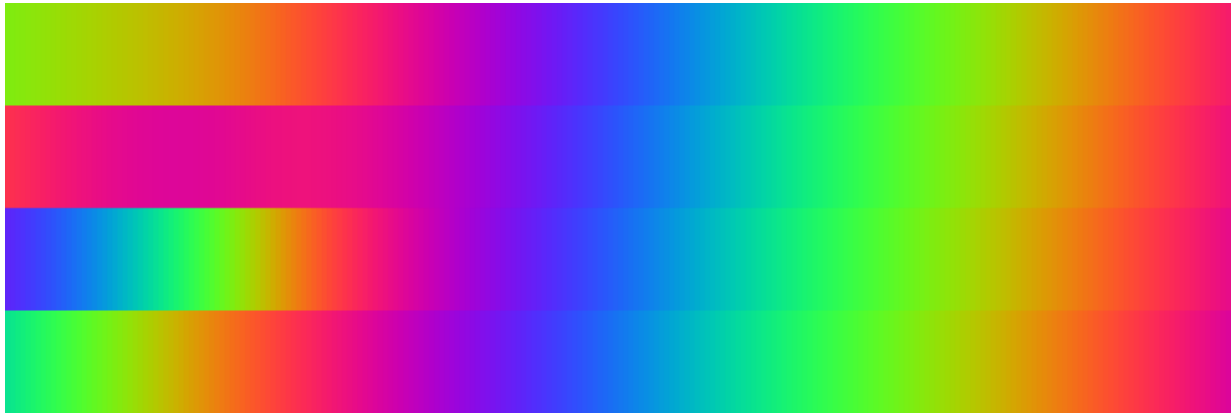

Four robots falling into step. Time runs left to right, one band per robot, colour is phase. At the far left the bands are visibly out of register, each cycling at its own rate; within the first quarter they lock and every column is one colour across all four for the rest of the run. Set $K = 0$ in the source to remove the coupling and watch them never converge — and note that they never line up again, which is what the broken poll was silently producing.

remote phase comfortably inside the tick it describes. The result did not change at all: mean 0.70 against 0.69. A fivefold drop in latency that changes nothing is not a latency effect.

What actually differs between the machines is how long a tick *takes*:

	nominal 20 ms	nominal 100 ms
macOS arm64	25.1 ms	104.5 ms
Linux x86-64	20.2 ms	100.3 ms
Raspberry Pi	20.1 ms	—

The Mac carries about 4.5 ms of fixed overhead per tick, the others almost none. A robot advances its phase by ωdt per tick, so a machine whose ticks are 25% longer advances its robots 25% slower *in real time* — a frequency error far larger than the 0.35 spread between the ω values the model was given. Robots on one machine share that error exactly and stay commensurate. Robots on different machines do not.

Group the same run by machine and the prediction is sharp: the two machines that tick alike should lock to each other *across the network*, and only the odd one out should drift.

group	mean R	
mac pair	0.974	one machine
linux pair	0.969	one machine
pi pair	0.967	one machine
linux + pi (four robots)	0.952	two machines, ticks matched
mac + linux (four robots)	0.607	two machines, ticks differ
all six	0.690	

Four robots spread across two different machines, two architectures and a network link hold 0.952 — as tightly as any single machine. The same number of robots spanning the Mac collapses to 0.607. The fleet does not partition along the lines of the network. It partitions along lines of *clock rate*.

Shrink the mismatch and the beat slows accordingly. At a 100 ms tick the Mac's fixed overhead is 4.2% rather than 25%, and the fleet stays coherent several times longer — 0.969 at tick 60, still 0.890 at tick 300 — before drifting apart. It does not lock permanently, because a 4.2% error

is still more than this K can absorb; it beats more slowly, which is what the model says should happen.

The lesson is not about UDP. Kuramoto’s model assumes every oscillator shares one clock, and the program quietly substituted “one tick of my own loop” for it. That substitution is invisible on one machine, where every process ticks alike, and it is the dominant term as soon as the fleet spans machines that do not. Coupling across a network is not the hard part — agreeing what a unit of time *is* turns out to be.

8.5.2 The fix: stop counting ticks

Two changes, neither of which needs the machines to agree about what time it is. The first is to advance by the time that actually passed:

```
lvars now = sys_microtime(), dt = (now - last) / 1000000.0;
if dt < 0.0 or dt > CLOCK_JUMP then DT -> dt endif;    ;; clock step
now -> last;
phase + omega * dt -> phase;
if seen > 0 then phase + (K / seen) * sum * dt -> phase endif;
```

A machine whose loop is slower simply takes a bigger step, so a 25 ms tick and a 20 ms tick describe the same trajectory. `sys_microtime` is microsecond resolution and purely local. The guard matters: it is a wall-clock reading, so an NTP correction can hand you a negative or enormous `dt`, and one such step would otherwise throw the robot across the circle.

The second is to make a message describe a *rate*, not just a position. Each robot broadcasts its phase *and its* omega; a listener stamps the arrival with its own clock and carries that phase forward:

```
;;; on arrival
sys_microtime() -> subscr(v(who + 1, p_at));
;;; when coupling, later
(now - subscr(v(j + 1, p_at))) / 1000000.0 -> age;
sum + sin(subscr(v(j + 1, p_phase)
+ subscr(v(j + 1, p_omega) * age - phase) -> sum;
```

Note what is *not* on the wire: a send timestamp. Carrying the sender’s clock would require the two machines to agree on an epoch. Stamping on arrival requires only that they agree on the length of a second, which the first change already guarantees. No NTP, no offset estimation, no shared epoch — and coupling now uses the last thing each peer said rather than only what happened to arrive during this tick, so a dropped datagram costs precision rather than a missed beat.

The same fleets that would not lock, measured after lock and over the whole run:

	mean R	min	max
two machines, counting ticks	0.665	0.002	0.976
two machines, on the clock	0.990	0.989	0.992
six robots / three machines, ticks	0.690	0.309	0.977
six robots / three machines, clock	0.972	0.970	0.975

Spreads of 0.003 and 0.005, where before they swung the whole range and never settled. The partition is gone, and it was never the network.

The clearest sign is in what the robots report. Over one 40-second run the two on macOS completed 1601 ticks, the two on Linux 1942 and 1944, the two on the Pi 1978 — and all six held 0.972 throughout. Three machines doing visibly different amounts of work, agreeing on the physics anyway, because none of them is counting.

One more thing had to change with it. Once a tick is no longer a fixed length, a tick *count* is not a duration: 1200 ticks is 30s on one machine and 24s on the other, so the fleet stopped in pieces and the measurement picked up a tail of robots coupling to peers that had already exited. Ending the run on the clock (SWARM_SECONDS) keeps the fleet together — the same correction as the dynamics, one level up.

Measure the plateau, not the peak

Watching the live display, the fleet hits $R = 0.97$ about ten seconds in and looks globally locked. It is not — that is the top of a beat, and a few seconds later it is at 0.31. The earlier version of this section reported a single such sample as a settled result.

This is the same error as the one in the callout above, one level up: there the measurement was of a network that was never consulted, here it is of a transient read as a steady state. A synchronisation claim needs the value to *hold* across a run several times longer than the time it took to get there.

Then a third, which is why this section has been rewritten twice. Having measured the beat correctly, edition 1.2 explained it by latency, because the link was slow and the explanation fit. Nobody had varied the latency. When the link later became five times faster the result was unchanged, and the real cause — machines that disagree about how long a tick is — had been sitting in plain sight the whole time.

All three mistakes look like a good result if you stop early: stop before checking the traffic, stop before the plateau, or stop before varying the thing you have blamed. A measurement that is consistent with your explanation is not evidence for it until something that would distinguish them has been tried.

8.5.3 A send that fails is a dropped datagram, not a dead robot

Starting all four robots on Linux at the same instant used to kill one with MISHAP - ERROR SENDING TO SOCKET (Operation not permitted). Staggering the launch by a second made it vanish, and it never reproduced in isolation — not against a dead port, not under a 400-datagram burst — so the kernel-side cause is still unidentified. The handling does not depend on knowing it. UDP sends are advisory, and the kernel reports some failures late and against the wrong call, so `net_send` counts a failure and carries on, while genuine programming errors still mishap:

```
vars net_send_errors = 0;

define net_send(sock, host, port, msg);
  if length(msg) > NET_MTU then
    mishap(length(msg), 1, 'net_send: payload exceeds NET_MTU -- chunk it')
  endif;
  procedure;
    dlocal interrupt =
      procedure;
        net_send_errors + 1 -> net_send_errors;
        exitfrom(net_send);
      endprocedure;
    sys_socket_send(sock, msg, length(msg), 0, [^host ^port]);
  endprocedure();
enddefine;
```

`dlocal interrupt` again — the same mechanism that sandboxes a Forth word in §8.2, here turning a fatal error into a counter. The count is reported at exit, so a fleet quietly shedding traffic is visible rather than merely slow.

8.5.4 Drawing without a graphics build

That figure was produced by a console-only Poplog. The image is a PPM, written by redirecting the character sink to a file — the same `dlocal` `cucharout` trick that captures a Forth word's output:

```
lvars out = discout(path);
```

```
dlocal cucharout = out;
emit();                      ;;; ordinary printf calls land in the file
out(termin);
```

If you would rather watch it live than look at a picture afterwards, build with the experimental graphics backend and drive `rc_graphic` from the same loop:

```
./configure --experimental-graphics    # Metal on macOS, SDL3+OpenGL on Linux
make
```

This is opt-in for a reason — it is newer than the rest of the system, it pulls in Dear ImGui, and the default build (and `nix build .#poplog`) stays console-only. `gfx_spec()` reports the running backend. SDL3 picks its display transport at run time, so the same build serves Wayland, X11, KMS/DRM *and* headless software rendering — which is how the project’s own CI renders graphics with no display attached (`tools/validate-gfx-headless.sh`).

The trap, for the third time

Poplog’s trig functions take **degrees** by default. `sin` of a small radian argument then returns something nearly linear, the coupling term never changes sign, and the robots simply drift — no error, no warning, just a demonstration that quietly does not work. `swarm.p` sets `true -> popradians` at the top, exactly as `examples/microgpt/microgpt.p` does, and for the same reason.

8.6 Backtracking across machines

`examples/robotarmy/chain.pl` in §5.2 held the whole org chart on one machine. A real fleet does not work that way: each squad knows who it commands, and nobody holds the whole picture. `examples/robotarmy/chainnet.p` splits the same relation across nodes and lets Prolog’s own backtracking put it back together.

The join is two clauses, and nothing below them can tell that a network exists:

```
commands(X, Y) :- local_commands(X, Y).
commands(X, Y) :- remote_commands(X, Y).

can_order(X, Y) :- commands(X, Y).
can_order(X, Z) :- commands(X, Y), can_order(Y, Z).
```

`local_commands/2` is ordinary Prolog facts. `remote_commands/2` is *Pop-11* — a procedure that does a UDP round trip. The mechanism is `define :prolog`, which takes a continuation:

```
define :prolog remote_commands/2(x, y, contn);
  lvars x, y, contn, xd, key, p;
  prolog_deref(x) -> xd;
  if isprologvar(xd) then '*' else xd sys_>< '' endif -> key;
  for p in chain_ask(key) do
    prolog_unifyc(x, hd(p),
      procedure;
        prolog_unifyc(y, hd(tl(p)), contn);
      endprocedure);
  endfor;
enddefine;
```

`prolog_unifyc` establishes a real choice point, binds, calls the continuation, and unwinds the bindings afterwards. Calling it once per answer is what makes this *nondeterministic*: Prolog backtracks into the next machine’s answer exactly as it would into the next clause of a local predicate. That is the whole trick, and it is only available because Prolog and Pop-11 share one heap (§5.1) — there is no serialisation boundary between the two, so a Pop-11 procedure can simply *be* a predicate.

A node answers from its local facts only and never recurses into `can_order`. That is what stops two nodes asking each other the same question forever: the recursion lives entirely in the asking node's Prolog, and each hop over the wire is a single flat lookup.

8.6.1 Three machines, one relation

The command `post` runs on macOS arm64 and knows two facts. Squad 1 lives on Linux x86-64, squad 2 on a Raspberry Pi:

```
# on each squad machine
./poplog basepop11 examples/robotarmy/chainnet.p \
  --serve 9821 examples/robotarmy/chain-sq1.pl

# on the command post
./poplog basepop11 examples/robotarmy/chainnet.p \
  --ask examples/robotarmy/chain-post.pl "$LNX:9821,$PI:9822" \
  '(can_order(commander, X), write(X), nl, fail ; true)'
```

```
sq1      <- local
sq2      <- local
r1       <- from the Linux box
r2       <- from the Linux box
r3       <- from the Pi
r4       <- from the Pi
```

And the query that must fail, does: `can_order(sq1, r4)` answers no, because squad 1 does not command squad 2's robot. A relation that only ever says yes is not a relation.

8.6.2 When a node is down

Take squad 2's machine away and ask again:

```
sq1 sq2 r1 r2
```

The chart is *smaller*, not wrong. That is the right failure mode for a relation — a peer that does not answer contributes no solutions, and the rest still resolve. It is also the honest limitation: this design cannot distinguish “no such subordinate” from “the machine that knew about it is unreachable”. A fleet that needs that distinction has to say so in the relation itself, rather than inferring it from silence.

Two more limits worth naming. Every remote call is a fresh round trip with no cache, so the same question asked twice during one proof costs two datagrams — and backtracking asks the same question often. And an unreachable node costs the full timeout on every call that consults it. Neither hurts a chart this size; both would need attention before this resolved a chain of command with thousands of units in it.

8.7 What the fleet has seen lately

§8.6 distributed a relation that never changes. An org chart is a fixture: it is the same at midnight as at noon, and a fact about it is true or it is not. `examples/robotarmy/sightnet.p` distributes the other kind — each robot records what it saw, the record expires, and any robot can ask the fleet a question with a *when* in it: what has anyone seen in the last five minutes that I do not already know about?

Three decisions carry the weight, and each avoids a trap the rest of this chapter has already paid for.

8.7.1 Ages on the wire, not timestamps

The obvious design puts a timestamp on each sighting and compares them. It does not survive contact with the fleet. The Raspberry Pi in these measurements was running with NTP inactive and had drifted 21 seconds ahead of the Mac; a timestamp from it was not comparable with anything. The general form of the problem is the one §8.5 spent three editions getting wrong: these machines agree about how long a second lasts and they do not agree about what time it is.

So the wire carries an *age*. A node says “I saw this 47 seconds ago”, which is a duration, and the asking node stamps it against its own clock on arrival:

```
;;; answer: 'o <id>|<label>|<conf>|<age> ...'
sane_age((now - subscr(4, r)) / 1000000.0) -> age;
nextif(age > max_age);
```

This needs no NTP, no offset estimation and no shared epoch. It is the same correction `swarm.p` needed, one layer up.

Fixing the clock is not a reason to undo this

The Pi’s NTP was later repaired — it now measures +0.16s against this machine, inside the ssh round trip. That is not an argument for putting timestamps back on the wire. A disciplined clock still *steps*, forwards and back, and a design should not depend on a daemon being healthy on every node.

The repair in fact introduced a failure mode the Pi did not have while it was merely wrong: a backward step makes an age negative, which sails straight through an “older than the window?” test and reports a sighting from the future, while a forward step expires the whole store at once. `swarm.p` already guarded its `dt` against exactly this; `sightnet.p` did not, until fixing the clock made it reachable. `sane_age/1` now clamps both ends.

8.7.2 Expiry is the owner’s job

A node prunes its own store and nobody prunes anyone else’s. A sighting that nobody ever asks for still expires. `SIGHT_TTL` defaults to a day and is overridable, because a 24-hour boundary that cannot be demonstrated without waiting 24 hours is a boundary nobody checks:

```
SIGHT_TTL=86400 -> seeded 7 sightings, 6 survive (one was 25h old)
SIGHT_TTL=600 -> seeded 7 sightings, 3 survive
```

8.7.3 Dedup by sequence, not by content

Each robot numbers its own sightings. A requestor remembers the highest sequence it has seen from each robot and sends those marks with the query, so the reply carries only what is new — which also keeps it inside one datagram. Hashing the content instead would collide the moment two frames of the same quiet corridor looked alike, and a fleet would go blind exactly where nothing was happening.

The watcher shows it: the first poll returns the backlog, and every poll after returns precisely one new row per node per reel tick, never a repeat.

```
** ALERT cat (0.91 confidence) seen 22.0 s ago -- r2-1
8 new rows, 2 alerts
2 new rows, 0 alerts
2 new rows, 0 alerts
** ALERT cat (0.86 confidence) seen 0.5 s ago -- r2-14
2 new rows, 2 alerts
```

8.7.4 Prolog asks, Pop-11 holds

The store is mutable and expiring, which is exactly why Pop-11 owns it and Prolog reads it through a define `:prolog` predicate — one heap, no marshallng, no serialisation boundary. Local store and remote fleet are reached the same way, so the rules cannot tell them apart:

```
sighting(Id,R,L,C,A) :- local_sighting(Id,R,L,C,A).
sighting(Id,R,L,C,A) :- remote_sighting(Id,R,L,C,A).

recently(Id,R,L,C,A) :- sighting(Id,R,L,C,A), A <= 300.
today(Id,R,L,C,A)    :- sighting(Id,R,L,C,A), A <= 86400.
```

Verified across three machines and three architectures, with macOS arm64 asking and a Linux box and a Pi serving. A frame behind a sighting can be fetched too, in as many signed chunks as it takes — the same mechanism `examples/robotarmy/deploy.p` uses for source, and byte-identical on arrival.

8.8 A classifier small enough to be honest

The labels above were canned. `examples/robotarmy/vision.p` makes them real, with a network trained in Pop-11 rather than imported from somewhere else — and the interesting decision is how small it is.

A $256 \rightarrow 16 \rightarrow 4$ network cannot tell a cat from a dog in a photograph. Nothing that size can, and a transformer over image patches would be slower and no better. What it *can* do is recognise a small fixed vocabulary of markers under controlled conditions, which is what a fleet watching for painted signs actually needs. So the classes are shapes, and what a shape *means* is left to Prolog, where it is data:

```
means(circle, cat).      means(triangle, hazard).
alarming(cat).          alarming(hazard).

suspicious(Id,R,M,A) :- recently(Id,R,Shape,C,A), C >= 0.8,
                        means(Shape,M), alarming(M).
```

A live fleet can be taught a new sign, or a new alarm, with `examples/robotarmy/deploy.p` and no restart. The accuracy below is real but easy by construction — four well-separated shapes, jittered in position and size, with light sensor noise. Saying so is part of reporting it.

8.8.1 Train through the graph, infer without it

Two measurements decided the shape of this. Training runs through the scalar autograd of `examples/robotarmy/examples/microgpt/microgpt.p` — a Pop-11 port of Karpathy’s micrograd — at 275 samples/second: fine for 240 samples, hopeless for anything real, so we train once, twelve epochs in ten seconds.

Inference does not need the graph at all. A `Value` carries its children and their local derivatives so that `v_backward` can walk them; none of that is wanted to answer “what is this?”. Dropping it for plain floats measured a **30×** speedup, with another 23% from `fast_subscr`, which skips the bounds check:

	classifications/sec
macOS arm64	9121
Linux x86-64	7717
Pi aarch64	3417

All three report 100% held-out accuracy *and identical confidences to six decimal places*. Same weights, same answers, three architectures — which is the assurance that matters after a chapter’s

worth of arithmetic bugs.

Weights are data, not code

The first version of the exporter wrote weights as Pop-11 source, making the compiler build a 4096-element literal to get 4096 numbers into a vector. That is the wrong mechanism on its own terms — and on the Pi it also turned out to be a way to crash the engine with SIGILL, reproducibly, on files that macOS arm64 and Linux x86-64 compile without complaint.

The failing set is non-monotonic: 500 floats pass, 550 through 2500 fail, 3000 and above pass again. It moves when `popdprecision` changes. The same file crashes one program and not another. That looks more like heap-layout-dependent corruption than a code-generator threshold, but it is not diagnosed, and `examples/robotarmy/docs/bugs/aarch64-large-literal-sigill.md` says so rather than guessing in the reader's direction.

Weights are now written as plain numbers and read back with `line_repeater` and `strnumber`. That works everywhere, loads faster, and is what should have been done first.

8.8.2 What the fleet sees

With weights present, `sightnet.p`'s reel stops inventing labels: it renders a frame, classifies it, and records the network's answer. A fetch returns the frame that was actually classified, so a requestor can pull the evidence rather than take the label on trust.


```
[reel] r1 saw circle (drawn circle, 0.99 confidence), 1 held
r1-5 / cat / 3.7          <- saw/4: shape resolved to meaning
r1-3 / hazard / 11.8
```

Which is the whole arrangement in three lines: a network says what shape it saw, Prolog says what that shape means, and the fleet decides whether to care — each in the language that suits it, all in one process.

8.9 What this is really showing

Strip the theme away and the chapter makes one claim: **the unit of deployment can be smaller than a program**. A word, a procedure, a handful of VM instructions — signed, sent, compiled on arrival, live in a process that never stopped. The fleet is not running software that was installed; it is running software that arrived.

That is only practical because compiling is cheap enough to do casually (§1.2), because the compiler is a procedure in the running system rather than a separate program (§2.2), and because the VM's back-ends make the same abstract code native on every port (Chapter 6). Take any one of those away and you are back to shipping containers.



Where to go next

9.1 The documentation you already have

The in-tree corpus is over 900 files and it is the primary source for everything in this book. From any prompt:

```
: help matches      ;;; practical, task-shaped
: ref vmcode        ;;; the exhaustive reference -- and the VM spec
: teach json        ;;; tutorials, including how lib json was built
```

The same material is published at <https://iotone.github.io/poplog/>, regenerated on every push by a Pop-11 program; `llms.txt` there is for AI assistants. The handful of entries worth reading early: `help external` and `ref external` (Chapter 7), `ref vmcode` and `ref subsystem` (Chapter 6), `ref regexp`, `help json`, `help crypto`, and `teach swank`.

9.2 Four decades of teaching material

Poplog was the vehicle for a great deal of university AI teaching, and most of it survives. The tree does not vendor any of it; one script fetches it from public archives and wires it into `help/teach` inside the system:

```
tools/fetch-learning.sh list      # what's available
tools/fetch-learning.sh --all     # about 30 MB into learn/
```

<code>hidden-gems</code>	Small idiomatic demos of what makes Pop-11 distinctive: the open stack, updaters, dynamic lists, coroutines, <code>dlocal</code> , the GC, extensible syntax.
<code>bhamteach</code>	The Birmingham introductory-AI course — pattern-matching chatbots, grammars and parsing, story generation, recursion exercises.
<code>packages</code>	The classic package tree: <code>SimAgent</code> and <code>Poprulebase</code> , <code>popvision</code> , <code>rclib</code> , neural nets, Braitenberg vehicles.
<code>paradigms</code>	A UMASS programming-language-paradigms course taught in Pop-11 (1997–2000).
<code>primer</code>	The Pop-11 Primer — the standard text for experienced programmers.
<code>examples</code>	Curated teaching examples: <code>Othello</code> , <code>Life</code> , <code>robolang</code> .

Upstream licences apply per pack; each records its origin in `learn/pack/.source`.

9.3 Reading the source

Poplog is written mostly in itself, which makes it unusually approachable.

- `pop/src/` — the core: `vm_plant.p` and `vm_control.p` are the VM builder from Chapter 6; `syscomp/` holds one directory per CPU back-end.
- `pop/lib/lib/` — the library, and the best source of idiomatic Pop-11 at length. `json.p`, `crypto.p`, `http_server.p`, `jsonrpc.p`, `swank.p` and `forth.p` are all readable in an afternoon each.
- `pop/plog/`, `pop/lisp/`, `pop/pml/`, `pop/forth/` — the four front-ends, i.e. four worked answers to Chapter 6.
- `examples/` — runnable programs: the HTTP service, ELIZA, a Z-machine interpreter, graphics demos.

9.4 Benchmarks, ports, and the state of the project

BENCHMARKS.md carries the full cross-platform, cross-language matrix with its methodology; the numbers quoted in Chapter 1 are drawn from it. The PORTING-*.md files are the working notes from the AArch64, Apple Silicon and RISC-V ports — including the bugs, which is the part usually missing from porting documentation and the part most useful to the next porter. Windows is the one platform still marked TODO.

If you take one idea away

It is that a compiler cheap enough to call in a loop changes what a command post can be. Everything distinctive here — live redefinition, saved images, five languages in one heap, an editor that talks to a running process, an agent that keeps a session warm across tool calls and teaches it new orders mid-mission — falls out of fifteen microseconds per definition. The full Robot Army is at `examples/robotarmy/`; start with `fleet.p` and give it an order.



Cheat sheet

A.1 Syntax

<code>;;; text</code>	comment to end of line
<code>value -> x</code>	assignment; the arrow points at the destination
<code>expr =></code>	print the result(s), prefixed **
<code>expr ==></code>	as <code>=></code> but prints structure in full
<code>npr(x)</code>	print <code>x</code> and a newline
<code>a sys_>< b</code>	concatenate anything into a string
<code>a >< b</code>	concatenate two strings
<code>'text'</code>	string (mutable, counted, <i>not</i> NUL-terminated)
<code>"word"</code>	word — an interned symbol
<code>[a b c]</code>	list; contents are <i>quoted</i>
<code>[^x ^(e) ^^xs]</code>	... with <code>x</code> , <code>e</code> evaluated and <code>xs</code> spliced
<code>{1 2 3}</code>	vector
<code>[% e %] {% e %}</code>	list/vector of everything <code>e</code> leaves on the stack
<code>p(% a %)</code>	closure: <code>p</code> partially applied to <code>a</code>

A.2 Blocks — every opener has a closer

<code>define f(a, b); ... enddefine;</code>	<code>if ... then ... elseif ... else ... endif</code>
<code>define f(a) -> r; ... enddefine;</code>	<code>unless ... then ... endunless</code>
<code>procedure(a); ... endprocedure</code>	<code>for i from 1 to n do ... endfor</code>
<code>define :class C; slot s = v; enddefine;</code>	<code>for x in list do ... endfor</code>
<code>define :method m(x:C); ... enddefine;</code>	<code>while c do ... endwhile</code>
<code>section \$-name => exports; ... endsection;</code>	<code>repeat ... quitif(c); ... endrepeat</code>
<code>exload tag [libs] ... endexload;</code>	<code>switchon e case < 0 then ... endswitchon</code>

A.3 Declarations

`vars` permanent (global) — required for matcher pattern variables. `lvars` lexical local — the default choice inside a procedure. `constant`, `lconstant` their immutable forms. `dlocal x = v` rebind for the dynamic extent of the call, restored on *any* exit.

A.4 Mishap decoder

DECLARING VARIABLE x	(a warning) you used an undefined name — usually a typo or a missing <code>define</code>
NUMBER(S) NEEDED	arithmetic on a non-number, often the value of that undefined name
STRING NEEDED	a word "x" was passed where a string 'x' was wanted — check the quotes
ILLEGAL DECLARATION OF WORD	the name is already a protected system identifier; re-name
MISPLACED EXPRESSION ITEM	syntax: usually a missing keyword or a construct used with the wrong shape
EXECUTING NON-PROCEDURE	calling something that is not a procedure — often an undefined name
CAN'T RESTORE - NOT SAME SYSTEM AND VERSION	the .psv image predates the current <code>basepop11</code> ; rebuild the images
sysEXECUTE: NOT AT EXECUTE LEVEL	VM planting attempted at compile-time top level — wrap it in a procedure

A.5 Files, processes, tables

```
;;; read a file line by line
vars dev = sysopen('/path/file', 0, "line");
vars rep = line_repeater(dev, inits(4096));    ;;; buffer size = max line length
repeat
  rep() -> line;
  quitif(line == termin);
  if issubstring('ERROR', 1, line) then ... endif;
endrepeat;

sysobey('ls /tmp > /tmp/out');                ;;; run a command
vars r = sys_obey_linerep('set +e; grep pat file');    ;;; ...and stream it

newproperty([], 50, false, true) -> tbl;    ;;; hash table, keys matched by ==
newmapping([], 50, false, true) -> m;      ;;; ...keys matched by =
```

`line_repeater` truncates lines longer than its buffer, so size `inits(n)` generously. `sys_obey_linerep` runs its command line under `errexit`: prefix `set +e`; whenever a failure is expected.

A.6 Regular expressions

The escape character is `@`; `.` `*` `[ ]` `^` `$` are literal unless escaped; there is no alternation and no lookahead.

```
vars err, p;
regexp_compile('ERROR @[0-9@]{1,@}') -> (err, p);    ;;; test err -- false = ok
p(1, 'ERROR 42 happened', false, false) -> (i, n);    ;;; -> 1 8
substring(i, n, 'ERROR 42 happened') =>              ;;; ** ERROR 42
```

Case-insensitive: `regexp_compile(s, 1, false)`, or `@i` in the pattern. `p` is a compiled procedure — define it once, reuse it.

A.7 The Robot Army examples

All at `examples/robotarmy/`; each runs from the repository root.

File	Ch.	What it shows
fleet.p	3, 4	Robot class, word-keyed registry, <code>muster()</code> on the open stack, <code>obey()</code> on the matcher
telemetry.p, fleet.log	4	One-pass log triage: <code>line_repeater</code> , default-valued properties, <code>@-regexps</code>
c2.p	4	The command post: <code>http_server</code> + <code>json</code> over <code>fleet.p</code>
chain.pl	5	The chain of command in Prolog
patrol.fth	5	Robot control words in Forth, with an early <code>leave</code>
signed_orders.p	7	HMAC-signed orders through <code>lib crypto</code>

A.8 Running things

<code>./poplog pop11</code>	Pop-11 REPL
<code>./poplog basepop11 -target/psv/prolog.psv</code>	Prolog
<code>./poplog basepop11 -target/psv/clisp.psv</code>	Common Lisp
<code>./poplog basepop11 +target/psv/pml.psv</code>	Standard ML
<code>tools/forth.sh</code>	Forth
<code>./poplog basepop11 prog.p</code>	run a Pop-11 file
<code>tools/pop11-lsp tools/pop11-swank tools/pop11-mcp</code>	editor and agent servers