

Name: Mu In Nasif
Roll: 001910501036
System Programming
Assignment 1

Q1: Write and test a MASM program to Display your name and program title on the output screen.
Code:

```
.model small
.stack 100h
.data
x db "Name - Mu In Nasif$"
y db "Program title - Assignment1 Program1$"
.code
main proc
mov ax,@data
mov ds,ax
lea dx,x
mov ah,09h
int 21h


mov dl,0ah
mov ah,02h
int 21h

mov dl,0dh
mov ah,02h
int 21h

lea dx,y
mov ah,09h
int 21h

mov ah,4ch
int 21h
main endp
end
```

output:

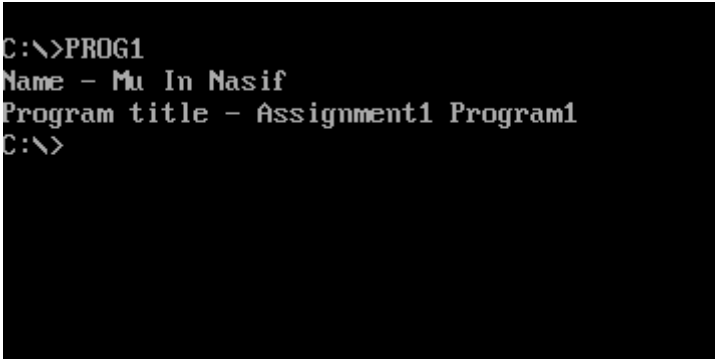

```
C:\>PROG1
Name - Mu In Nasif
Program title - Assignment1 Program1
C:\>
```

Q2: Write and test a MASM program to convert a letter from uppercase to lowercase.


Code:

```
.model small
.stack 100h
.data
.code
main proc
mov ah,01h
int 21h
add al,32
mov bl,al

mov dl,0ah
mov ah,02h
int 21h
mov dl,0dh
mov ah,02h
int 21h

mov dl,bl
mov ah,02h
int 21h
mov ah,4ch
int 21h
main endp
end
```

output:

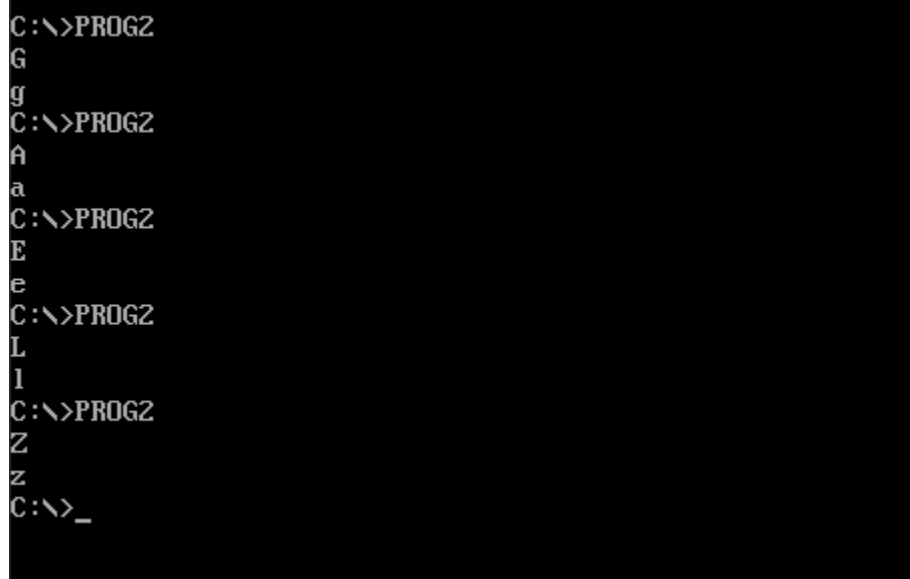

```
C:\>PROG2
G
g
C:\>PROG2
A
a
C:\>PROG2
E
e
C:\>PROG2
L
l
C:\>PROG2
Z
z
C:\>_
```

Q3: Write and test a MASM program to add two Hexadecimal Numbers

Code:

```
.model small
.stack 100h

.data
inputPrompt DB 13,"Enter a 16 bit number: $"
num1 DW ?
num2 DW ?
num DW ?
sum DW ?
sumCarry DW 00h
sumPrompt DB 10,"The sum is: $"

.code
mov ax,@data
mov ds,ax
call main
mov ah,4ch
int 21h

main proc

    ;taking input for first number
    lea dx, inputPrompt
    mov ah,9
    int 21h
    call getNum
    mov num1,ax

    ;taking input for second number
    lea dx, inputPrompt
    mov ah,9
    int 21h
    call getNum
    mov num2,ax

    ;performing addition
    mov ax,num1
    add ax,num2
    jnc noCarry
    inc sumCarry
noCarry:
    mov sum,ax

    ;output for sum
    lea dx,sumPrompt
    mov ah,9
    int 21h
    mov ax,sumCarry
    mov num,ax
```

```

        call outputNum
        mov ax,sum
        mov num,ax
        call outputNum

        ret
main endp

;function to take 16 bit number input
getNum proc
    push cx
    push dx

    mov dx, 0000
    mov ax, 0000
    mov cl, 4

    getNumber:

    call getChar
    cmp al, 13
    je inputDone
    cmp al, 10
    je inputDone

    shl dx,cl
    sub al, 48
    cmp al, 9
    jle isNumber
    sub al, 7

    isNumber:
    or dl, al

    jmp getNumber

    inputDone:
    mov ax, dx

    pop dx
    pop cx
    ret
getNum endp

;fucntion to take in character
getChar proc
    mov ah,1
    int 21h
    ret
getChar endp

```

```

; program to output a 16 bit number stored in num
outputNum proc
    push cx
    push dx

    mov cl, 4
    mov dx, num
    mov dl,dh
    shr dl,cl
    and dl, 0fh
    cmp dl,0ah
    jl isNumber4
    add dl,7
isNumber4:
    add dl,48
    mov ah, 2
    int 21h

    mov dx, num
    mov dl,dh
    and dl, 0fh
    cmp dl, 0ah
    jl isNumber3
    add dl, 07h
isNumber3:
    add dl,48
    mov ah, 2
    int 21h

    mov cl, 4
    mov dx, num
    shr dl,cl
    and dl, 0fh
    cmp dl,0ah
    jl isNumber2
    add dl,7
isNumber2:
    add dl,48
    mov ah, 2
    int 21h

    mov dx, num
    and dl, 0fh
    cmp dl, 0ah
    jl isNumber1
    add dl, 07h
isNumber1:
    add dl,48
    mov ah, 2
    int 21h

```

```
    pop dx
    pop cx
    ret
outputNum endp
```

end

output:



```
C:\>PROG3
Enter a 16 bit number: 2A
Enter a 16 bit number: 1B

The sum is: 00000045
C:\>PROG3
Enter a 16 bit number: 1
Enter a 16 bit number: 2

The sum is: 00000003
C:\>PROG3
Enter a 16 bit number: 5
Enter a 16 bit number: 9

The sum is: 0000000E
C:\>_
```

Q4: Write and test a MASM program to find the second max and second min from an array.

Code :

```
.model small
.stack 100h

.data
prompt_0 db 'enter the number of array elements :',0dh,0ah,'$'
prompt_1 db 'enter the array elements :',0dh,0ah,'$'
prompt_2 db 'the 2nd maximum is : $'
prompt_3 db 'the 2nd minimum is : $'

array dw 50 dup(0)

s dw ?
max dw ?
min dw ?

.code
main proc

    mov ax, @data                ; initialize ds
    mov ds, ax

    lea dx, prompt_0             ; load and display the string prompt_0
    mov ah, 9
    int 21h

    mov ah,1                      ;for taking input
    int 21h

    input1:
        cmp al,0dh                ;compare whether the
pressed key is 'enter' or not
        je line1                  ;if it is equal to
'enter' then stop taking first value

        and al,0fh                ;convert it's ascii
value to real value by masking

        shl bx, 1
        shl bx, 1
        shl bx, 1
        shl bx, 1
        or  bx,al                  ;making 'or' will add
the current value with previous value

        int 21h
        jmp input1

    line1:
        lea dx, prompt_1          ; load and display the string prompt_1
        mov ah, 9
        int 21h

        lea si, array             ; set si=offset address of array
        mov s,bx
        mov cx, bx                ; set cx=bx

        @read_array:              ; loop label
```

```

        mov ah,1                                ;for taking input
        int 21h

        xor dx,dx

        input2:
        cmp al,0dh                                ;compare whether the
pressed key is 'enter' or not
        je line2                                ;if it is equal to
'enter' then stop taking first value

        and al,0fh                                ;convert it's ascii value
to real value by masking

        shl dx,1
        shl dx,1
        shl dx,1
        shl dx,1
        or  dl,al                                ;making 'or' will add
the current value with previous value

        int 21h
        jmp input2

        line2:
        mov [si], dx                            ; set [si]=ax
        add si, 2                                ; set si=si+2

        mov dl, 0ah                            ; line feed
        mov ah, 2                                ; set output function
        int 21h                                ; print a character

        loop @read_array                        ; jump to label @read_array while cx!
=0
        ; array input done

        lea si,array
        mov ax,bx
        dec ax
        xor bx,bx
        xor cx,cx
        mov bx,word ptr[si]                    ;store the maximum
        mov cx,word ptr[si]                    ;store the 2nd
        add si, 2

        ; loop to find max and 2nd max
arrayloop2:

        cmp word ptr[si],bx
        jl max2
        mov cx,bx
        mov bx,word ptr[si]

        max2:
        cmp word ptr[si],cx
        jl incre
        cmp word ptr[si],bx
        je incre
        mov cx,word ptr[si]

        incre:
        add si, 2
        dec ax

```



```

jnz arrayloop2

; now bx has max cx has 2nd max
mov max,bx
; displaying the prompt
lea dx,prompt_2
mov ah,09h
int 21h

; display contents of cx
mov bx,cx

mov dh,bh
shr dh, 1
shr dh, 1
shr dh, 1
shr dh, 1
and dh,0fh

add dh,'0'
mov dl,dh
mov ah,2
int 21h

mov dh,bh
and dh,0fh
add dh,'0'
mov dl,dh
mov ah,2
int 21h

mov dh,b1
shr dh, 1
shr dh, 1
shr dh, 1
shr dh, 1
and dh,0fh
add dh,'0'
mov dl,dh
mov ah,2
int 21h

mov dh,b1
and dh,0fh
cmp dh,10
add dh,'0'
mov dl,dh
mov ah,2
int 21h

mov dl, 0ah                ; line feed
mov ah, 2                  ; set output function
int 21h                    ; print a character

lea si,array
mov ax,s
dec ax
mov bx,max

; loop to find min and 2nd min
arrayloop3:

```

```

    cmp word ptr[si],bx
    jg min2
    mov cx,bx
    mov bx,word ptr[si]

min2:
    cmp word ptr[si],cx
    jg incre2
    cmp word ptr[si],bx
    je incre2
    mov cx,word ptr[si]

incre2:
    add si, 2
    dec ax

    jnz arrayloop3

; now bx has min cx has 2nd min

; displaying the prompt
    lea dx,prompt_3
    mov ah,09h
    int 21h

; display contents of cx
    mov bx,cx

    mov dh,bh
    shr dh, 1
    shr dh, 1
    shr dh, 1
    shr dh, 1
    and dh,0fh

    add dh,'0'
    mov dl,dh
    mov ah,2
    int 21h

    mov dh,bh
    and dh,0fh
    add dh,'0'
    mov dl,dh
    mov ah,2
    int 21h

    mov dh,bl
    shr dh, 1
    shr dh, 1
    shr dh, 1
    shr dh, 1
    and dh,0fh
    add dh,'0'
    mov dl,dh
    mov ah,2
    int 21h

    mov dh,bl
    and dh,0fh
    cmp dh,10
    add dh,'0'
    mov dl,dh
    mov ah,2

```

```
int 21h
```

```
exit:
```

```
mov ah, 4ch
```

```
;return control to dos
```

```
int 21h
```

```
main endp
```

```
end main
```

output:

```
C:\>PROG4
enter the number of array elements :
5
enter the array elements :
1
3
4
7
9
the 2nd maximum is : 0007
the 2nd minimum is : 0003
C:\>
```

Q5: Write and test a MASM program to display a terminating message.

Code :

```
.MODEL SMALL
.STACK 100H

.DATA
    TERM_PROMPT DB ':::::::::TERMINATE MESSAGE:::::::::$'

.CODE
    MAIN PROC
        MOV AX, @DATA
        MOV DS, AX

        LEA DX, TERM_PROMPT
        MOV AH, 9
        INT 21H

        MOV AH, 4CH
        INT 21H
    MAIN ENDP
END MAIN
```

output:



```
C:\>PROG5
:::::::::TERMINATE MESSAGE::::::::
C:\>
```

Q6: Write and test a MASM program to Take a character from the keyboard and print it.

Code:

```
.model small
.stack 100H

.data
    msg1 db 10,13,"Enter a character: $"
    msg2 db 10,13,"entered : $"

.code
    main proc

        mov ax,@data
```

```

mov ds,ax

;display input prompt
lea dx, msg1
mov ah,09h
int 21h

;accept a character
mov ah, 01h
int 21h

;al has the character
;display prompt
lea dx, msg2
mov ah,09h
int 21h

;display the character
mov dl,al
mov ah,02h
int 21h

mov ah, 4ch
int 21h

main endp
end main

```

output:

```

C:\>PROG6

Enter a character: A
entered : A
C:\>PROG6

Enter a character: 4
entered : 4
C:\>PROG6

Enter a character: 9
entered : 9
C:\>PROG6

Enter a character: a
entered : a
C:\>_

```

Q7: Write and test a MASM program to validate second numbers is less than the first.

Code :

```
.model small
.stack 100h
.data
    mes1 db 0ah,0dh,"Enter 1st number:$"
    mes2 db 0ah,0dh,"Enter 2nd number:$"
    mes3 db 0ah,0dh,"First number is greater than second number$"
    mes4 db 0ah,0dh,"Second number is greater than first number$"
    mes5 db 0ah,0dh,"The two numbers are equal$"
.code
main proc
    mov ax,@data
    mov ds,ax
    lea dx,mes1
    mov ah,09h
    int 21h

    mov ah,01h
    int 21h

    mov bl,al
    lea dx,mes2
    mov ah,09h
    int 21h

    mov ah,01h
    int 21h

    cmp bl,al
    jg cond1
    jl cond2
    lea dx,mes5
    mov ah,09h
    int 21h

    mov ah,4ch
    int 21h

cond1:
    lea dx,mes3
    mov ah,09h
    int 21h

    mov ah,4ch
    int 21h
cond2:
    lea dx,mes4
    mov ah,09h
    int 21h
```

```

        mov ah,4ch
        int 21h
main endp
end

```

output:

```

C:\>PROG7

Enter 1st number:4
Enter 2nd number:6
Second number is greater than first number
C:\>PROG7

Enter 1st number:A
Enter 2nd number:7
First number is greater than second number
C:\>PROG7

Enter 1st number:B
Enter 2nd number:B
The two numbers are equal
C:\>

```

Q8: Write and test a MASM program to find maximum and minimum from an array.

Code :

```

.model small
.stack 100h

.data
prompt_0 db 'enter the number of array elements :',0dh,0ah,'$'
prompt_1 db 'enter the array elements :',0dh,0ah,'$'
prompt_2 db 'the maximum is : $'
prompt_3 db 'the minimum is : $'

array dw 50 dup(0)

s dw ?

.code
main proc

        mov ax, @data                ; initialize ds
        mov ds, ax

        lea dx, prompt_0             ; load and display the
string prompt_0
        mov ah, 9
        int 21h

```

```

        mov ah,1                                ;for taking
input
        int 21h

        input1:
        cmp al,0dh                              ;compare
whether the pressed key is 'enter' or not
        je line1                                ;if it is
equal to 'enter' then stop taking first value

        and al,0fh                              ;convert it's
ascii value to real value by masking

        shl bx, 1
        shl bx, 1
        shl bx, 1
        shl bx, 1
        or  bl,al                                ;making 'or'
will add the current value with previous value

        int 21h
        jmp input1

        line1:
        lea dx, prompt_1                        ; load and display the
string prompt_1
        mov ah, 9
        int 21h

        lea si, array                          ; set si=offset address of
array

        mov cx, bx                              ; set cx=bx

        @read_array:                            ; loop label

        mov ah,1                                ;for taking
input
        int 21h

        xor dx,dx

        input2:
        cmp al,0dh                              ;compare
whether the pressed key is 'enter' or not
        je line2                                ;if it is
equal to 'enter' then stop taking first value

        and al,0fh                              ;convert it's
ascii value to real value by masking

        shl dx,1

```



```

    shl dx,1
    shl dx,1
    shl dx,1
    or  dl,al                                ;making 'or'
will add the current value with previous value

```

```

    int 21h
    jmp input2

```

```

line2:
    mov [si], dx                ; set [si]=ax
    add si, 2                   ; set si=si+2

```

```

    mov dl, 0ah                ; line feed
    mov ah, 2                  ; set output function
    int 21h                    ; print a character

```

```

    loop @read_array           ; jump to label
@read_array while cx!=0
    ; array input done

```

```

    lea si,array
    mov ax,bx
    dec ax
    xor bx,bx
    xor cx,cx
    mov bx,word ptr[si] ;store the maximum
    mov cx,word ptr[si] ;store the minimum
    add si, 2

```

```

; loop to find max and min
arrayloop2:

```

```

    cmp word ptr[si],bx
    jg maximum

```

```

    cmp word ptr[si],cx
    jl minimum

```

```

    jmp incre
maximum:
    mov bx,word ptr[si]
    jmp incre

```

```

minimum:
    mov cx,word ptr[si]

```

```

incre:
    add si, 2
    dec ax

```

```

    jnz arrayloop2

```

```

; displaying the prompt
lea dx,prompt_2
mov ah,09h
int 21h

; display contents of bx
output:                                     ;level for
printing their sum

mov dh,bh
shr dh, 1
shr dh, 1
shr dh, 1
shr dh, 1
and dh,0fh

add dh,'0'
mov dl,dh
mov ah,2
int 21h

mov dh,bh
and dh,0fh
add dh,'0'
mov dl,dh
mov ah,2
int 21h

mov dh,b1
shr dh, 1
shr dh, 1
shr dh, 1
shr dh, 1
and dh,0fh
add dh,'0'
mov dl,dh
mov ah,2
int 21h

mov dh,b1
and dh,0fh
cmp dh,10
add dh,'0'
mov dl,dh
mov ah,2
int 21h

mov dl, 0ah                                ; line feed
mov ah, 2                                  ; set output function
int 21h                                    ; print a character

; displaying the prompt
lea dx,prompt_3

```

```
mov ah,09h
int 21h

; display contents of cx
mov bx,cx
```

```
mov dh,bh
shr dh, 1
shr dh, 1
shr dh, 1
shr dh, 1
and dh,0fh
```

```
add dh,'0'
mov dl,dh
mov ah,2
int 21h
```

```
mov dh,bh
and dh,0fh
add dh,'0'
mov dl,dh
mov ah,2
int 21h
```

```
mov dh,b1
shr dh, 1
shr dh, 1
shr dh, 1
shr dh, 1
and dh,0fh
add dh,'0'
mov dl,dh
mov ah,2
int 21h
```

```
mov dh,b1
and dh,0fh
cmp dh,10
add dh,'0'
mov dl,dh
mov ah,2
int 21h
```

```
exit:
mov ah, 4ch
int 21h
```

;return control

to dos

```
main endp
end main
```

output:

```
C:\>PROGB
enter the number of array elements :
5
enter the array elements :
2
4
1
3
6
the maximum is : 0006
the minimum is : 0001
C:\>
```

Q9: Write and test a MASM program to loop until the user decides to quit.

Code :

```
.model small
.stack 100h
.data
    mes1 db 0dh, 0ah, "Enter 1 to exit: ", "$"
    mes2 db 0dh, 0ah, "Iterating...", "$"
.code
main proc
    mov ax,@data
    mov ds,ax
loop1:
    lea dx,mes2
    mov ah,09h
    int 21h


    lea dx,mes1
    mov ah,09h
    int 21h
```

```
        mov ah,01h
        int 21h

        cmp al,'1'
        jne loop1
        mov ah,4ch
        int 21h

    main endp
end
```

output:

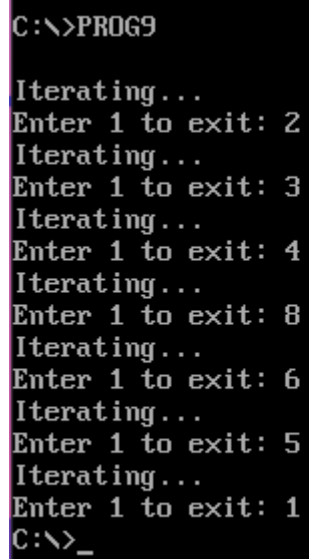

```
C:\>PROG9

Iterating...
Enter 1 to exit: 2
Iterating...
Enter 1 to exit: 3
Iterating...
Enter 1 to exit: 4
Iterating...
Enter 1 to exit: 8
Iterating...
Enter 1 to exit: 6
Iterating...
Enter 1 to exit: 5
Iterating...
Enter 1 to exit: 1
C:\>_
```

Q10: Write and test a MASM program to print all the characters from A-Z.

Code :

```
.model small
.stack 100h
.data
.code
    main proc
        mov cx,26
        mov dl,'A'
    looplabel:
        mov ah,02h
        int 21h

        inc dl
        loop looplabel
        mov ah,4ch
        int 21h

    main endp
end
```

output:



```
C:\>PROG10
ABCDEFGHIJKLMNOPQRSTUVWXYZ
C:\>
```