DeepWiki Ip-59/TeachAI

Edit Wiki Share

Ask Devin about Ip-59/TeachAI

Fast


Menu

Overview

Relevant source files

TeachAI is an interactive AI tutor running inside Jupyter Notebook (**`TeachAI.ipynb`**) designed to teach Python and related subjects [README.md:1-3] (**`python-basics`** , **`data-analysis`** , **`machine-learning`** , **`web-development`** , **`python-for-finance`**) [README.md:53-64]. It generates personalized course syllabi, lessons, interactive examples, quizzes, and practical control tasks dynamically via the OpenAI API [README.md:3, DESCRIPTION.md:14]. The system requires no external database or fine-tuned models [README.md:14, DESCRIPTION.md:34], managing all session state locally in **`data/state.json`** [README.md:14, DESCRIPTION.md:32] and logging activity to **`logs/`** [README.md:14, DESCRIPTION.md:31].

Sources: **`README.md:1-67`** , **`DESCRIPTION.md:1-35`** , **`TeachAI.ipynb:1-24`**

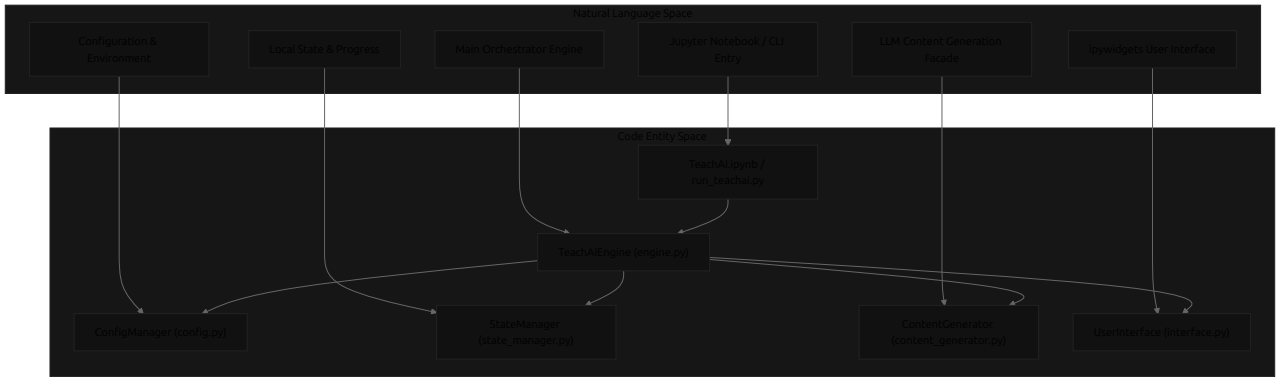

Sources: **`README.md:69-88`** , **`engine.py:23-47`** , **`DESCRIPTION.md:52-79`**

1.1. Getting Started & Configuration

The setup workflow relies on installing dependencies specified in **`requirements.txt`** and supplying a local **`.env`** configuration file based on **`.env.sample`** [README.md:20-32]. The system requires an active OpenAI API key and a configured HTTP/HTTPS proxy (**`OPENAI_PROXY`** or **`HTTPS_PROXY`**)

Ask Devin about Ip-59/TeachAI

Fast

For details, see Getting Started & Configuration.

Sources: `README.md:18-67`, `DESCRIPTION.md:40-49`, `engine.py:79-118`

1.2. Entrypoints: run_teachai.py and TeachAI.ipynb

System startup is handled by invoking `start_jupyter()` from `run_teachai.py` or executing the initialization cell within `TeachAI.ipynb` [TeachAI.ipynb:30-33, README.md:36-46]. The entrypoint initializes `TeachAIEngine` (`engine.py`) [README.md:49], which checks system readiness, evaluates previous session states, and loads the `StartupDashboard` if an active session exists [DESCRIPTION.md:57-58]. During Jupyter development, managing module import order and kernel reloads is critical for proper state retention across interactive cell executions.

For details, see Entrypoints: run_teachai.py and TeachAI.ipynb.

Sources: `TeachAI.ipynb:1-34`, `README.md:34-49`, `engine.py:23-47`, `DESCRIPTION.md:56-59`

1.3. Project Documentation & Archive

The repository includes comprehensive Russian-language design and architectural documentation (`ОПИСАНИЕ_ПРОЕКТА_TEACHAI.md`, `DESCRIPTION.md`), agent instructions, and user guides [README.md:5-6, README.md:138-143]. Additionally, the `archive/` directory contains legacy prototype notebooks, presentation materials, and early implementation iterations that are excluded from the core runtime execution path [README.md:120-121].

For details, see Project Documentation & Archive.

Sources: `README.md:5-6, 120-121, 136-143`, `DESCRIPTION.md:1-6`

Ask Devin about Ip-59/TeachAI

Fast