Nama: Iqbal Mahandika Putra


Npm: 202010225268

Kelas: TF3A6

Praktikum Metode Numerik Pertemuan 3

1. Script Metode Lagrange

```
# Interpolasi Lagrange
import numpy as np
#Membaca Jumlah titik data
n = int(input('Masukkan jumlah titik data: '))
# Membuat array ukuran n x n dan inist.
x = np.zeros((n))
y = np.zeros((n))
# Membaca titik data
print('Masukkan data x dan y: ')
for i in range(n):
  x[i] = float(input( 'x[' +str(i) + ']='))
 y[i] = float(input('y['+str(i)+']='))
#Membaca Interpolasi titik
xp = float(input('Masukkan x yang diinginkan: '))
#Inisiasi interpolasi
yp = 0
# Implementasi Interpolasi Lagrange
for i in range(n):
 p = 1
  for j in range(n):
    if i != j:
     p = p * (xp - x[j])/(x[i] - x[j])
  yp = yp + p * y[i]
#Displaying output
print('Nilai interpolasi untuk %.3f adalah %.3f.' % (xp, yp))
```

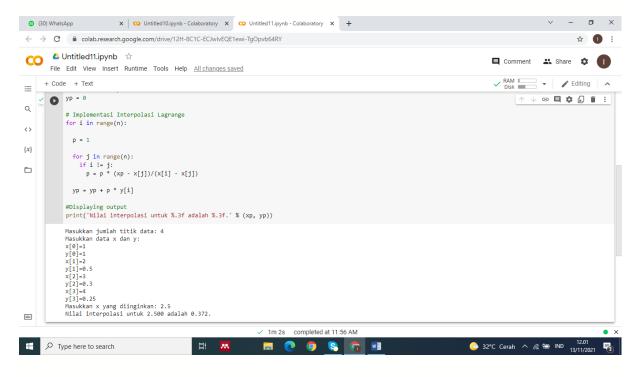

2. Script Metode Regresi Linear

```
import numpy as np
import pandas as pd
from matplotlib import pyplot as plt
from sklearn.linear model import LinearRegression
df = pd.DataFrame([[1,1],[2,1.2],[3,1.8],[4,2.5],[5,3.6],[6,4.7],[7,6.6]
],[8,9.1]])
df.columns = ['x', 'y']
x train = df['x'].values[:,np.newaxis]
y train = df['y'].values
lm = LinearRegression()
lm.fit(x_train,y_train) #fase training
print('Coefficent :' + str(lm.coef_))
print('intercept :' + str(lm.intercept ))
x \text{ test} = [[7],[8]] \# \text{data yang akan diprediksi}
p = lm .predict(x test) #fase prediksi
print('hasil prediksi :' + str(p)) #hasil prediksi
#prepare plot
pb = lm.predict(x train)
dfc = pd.DataFrame({'x': df['x'], 'y':pb})
plt.scatter(df['x'],df['y'])
plt.plot(dfc['x'], dfc['y'], color='red', linewidth=2)
plt.xlabel('Dosis dalam mgr')
plt.ylabel('Berat dalam gr')
plt.show()
```

