

Internet Application Development Semester Project-Ivory Haya



Group Members

Iqra Batool

Takreem Atif

CIS(23 – 27)

Submitted to

Sir Irfan Hameed

Task 1 : Project Proposal	4
Project Title	4
Introduction	4
Objectives	4
Main Features	5
Admin	5
Sales Person	5
Customer	5
State Management	5
Validation	6
Data Security	6
Task 2 :Software Requirement Specification	6
Purpose	6
Scope	6
User Types	6
Admin	7
Sales Person	7
Customer	7
Functional Requirements	7
Non Functional Requirements	7
Task 3 : Analysis and Design Models	8
Use Case Model	8
Introduction	8
Actors	8

Admin Use Cases	8
Sales Person Use Cases	8
Customer Use Cases	8
Use Case Diagram	9
Activity Diagram : Customer Purchase Flow	10
Sequence Diagram	12
Class Diagram	15
Task 3A – Component Model And Deployment Model	17
Component Model	17
Deployment Model	19
Task 4 – Database Models	21
ER Model	21
Relational Model	22
Relational Tables	24
Physical Model	27
SQL Implementation	29
Task 5 – Website Code	39
Task 6 – Project Hosting on Somee	84
.....	84
Task 7 – Website Testing	85
New User Registration	85
Salesperson Login	90
Customer Login	92

Task 1 : Project Proposal

Project Title

Ivory Haya – Online Abaya Shopping Web Application

Introduction

Ivory Haya is a web-based e-commerce application developed for online Abaya shopping. The system allows customers to browse products, add items to cart, place orders, and manage purchases online. The application also provides role-based access for Admin, Sales Person, and Customers.

The project is developed using:

Technology	Purpose
ASP.NET Web Forms	Frontend
C#	Backend Logic
SQL Server	Database
ADO.NET	Database Connectivity
HTML/CSS	UI Design

Objectives

- To provide an online platform for Abaya shopping
- To manage products, users, inventory, and orders
- To implement role-based authentication
- To maintain customer order records
- To implement secure login and validation

Main Features

Admin

- Manage Users(Deactivate Customers)
- Manage Products
- Manage Orders
- Customer Segmentation

Sales Person

- Manage Inventory
- Update Product Stock

Customer

- Register/Login
- Browse Products
- Search Products
- Add To Cart
- Place Orders
- Payment Selection
- View Orders

State Management

The project uses Session variables for maintaining user information after login.

Example:

```
Session["UserID"]  
Session["Role"]  
Session["FullName"]
```

Validation

- Empty Field Validation
- Login Validation
- Duplicate Email Prevention
- Numeric Validation for Price/Stock

Data Security

- Role-based Access
- SQL Parameters used
- Session Authentication
- Deactivated User Restriction

Task 2 :Software Requirement Specification

Purpose

The purpose of Ivory Haya is to provide an online shopping platform for Abaya with role-based functionalities.

Scope

The application allows:

- Customers to purchase products
- Admin to manage the system
- Sales Person to manage inventory

User Types

Admin

Admin manages users, products, and customer orders.

Sales Person

Sales Person updates inventory and stock quantities.

Customer

Customer can register, login, browse products, add products to cart, and place orders.

Functional Requirements

- User Registration
- Login Authentication
- Product Management
- Inventory Management
- Cart Management
- Order Placement
- Payment Option
- Session Management
- Role-Based Dashboard

Non Functional Requirements

- User-friendly Interface
- Data Security
- Fast Response Time
- Database Integrity
- Validation Support

Task 3 : Analysis and Design Models

Use Case Model

Introduction

The Use Case Model describes the interaction between users and the Ivory Haya system. Different users perform different operations according to their roles.

Actors

1. Admin
2. Sales Person
3. Customer

Admin Use Cases

- Login
- Manage Users
- Manage Products
- Manage Orders
- Deactivate Users
- Customer Segmentation


Sales Person Use Cases

- Login
- Manage Inventory

Customer Use Cases

- Register
- Login
- Search Products
- Add To Cart
- Place Order
- Select Payment
- View Orders

Use Case Diagram

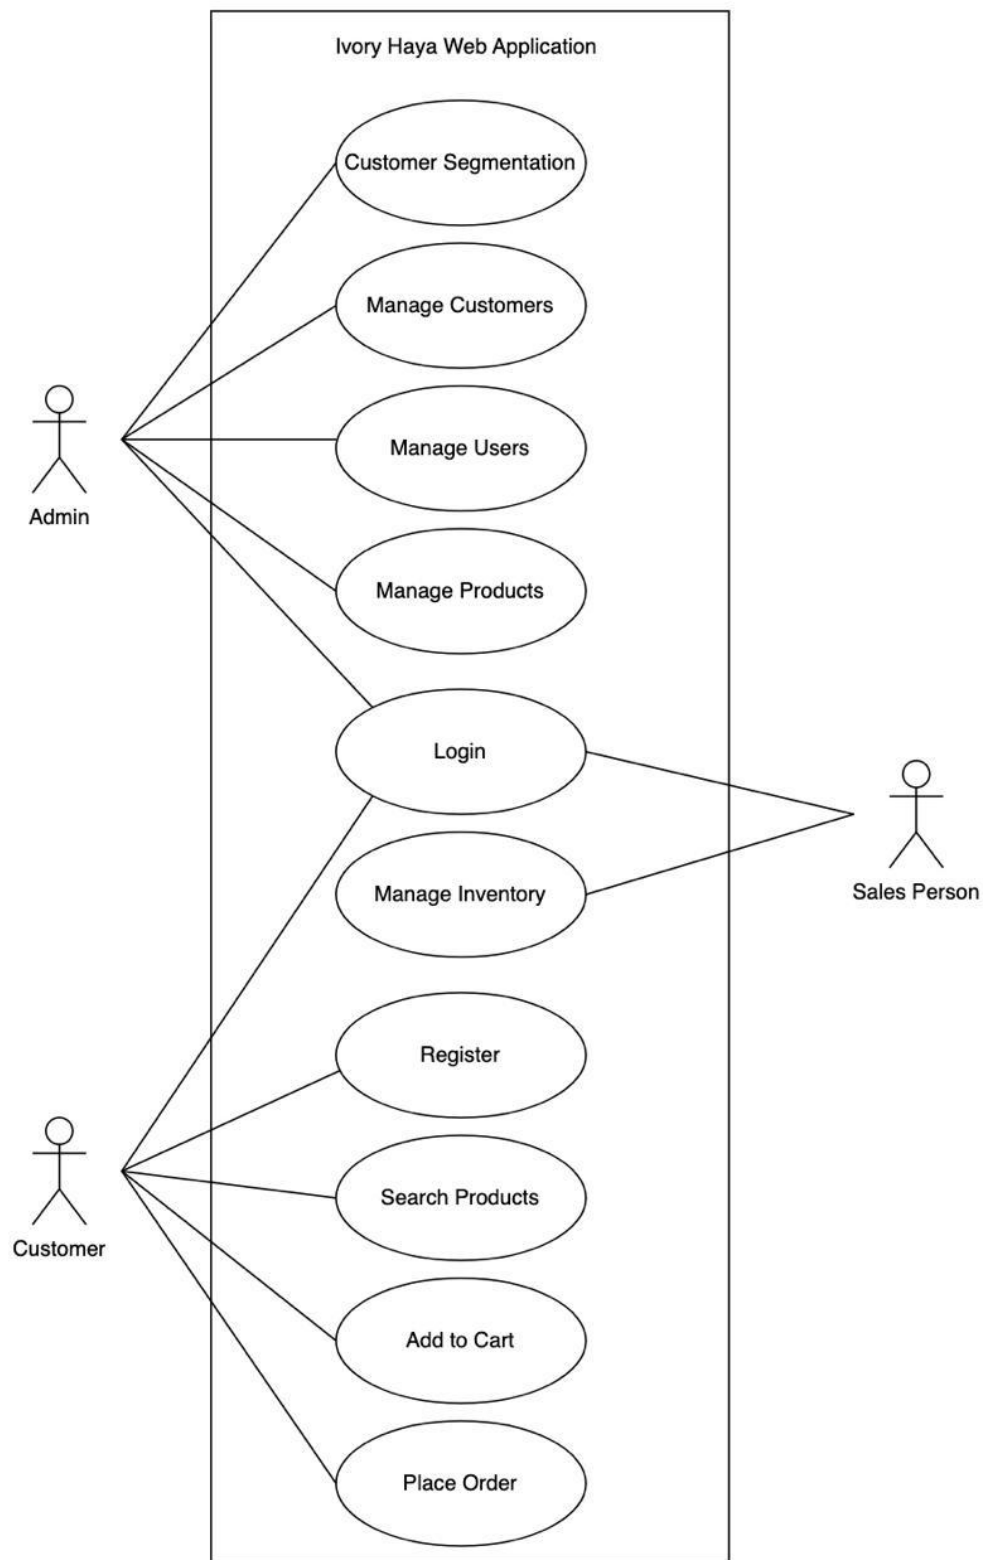


Explanation

The Use Case Diagram represents the functionalities available in the system. Admin manages users, products, and orders. Sales Person manages inventory and stock updates. Customer can browse products, add items to cart, and place orders online.

Activity Diagram : Customer Purchase Flow

Introduction

The Activity Diagram represents the workflow of customer activities inside the system from login to order placement.

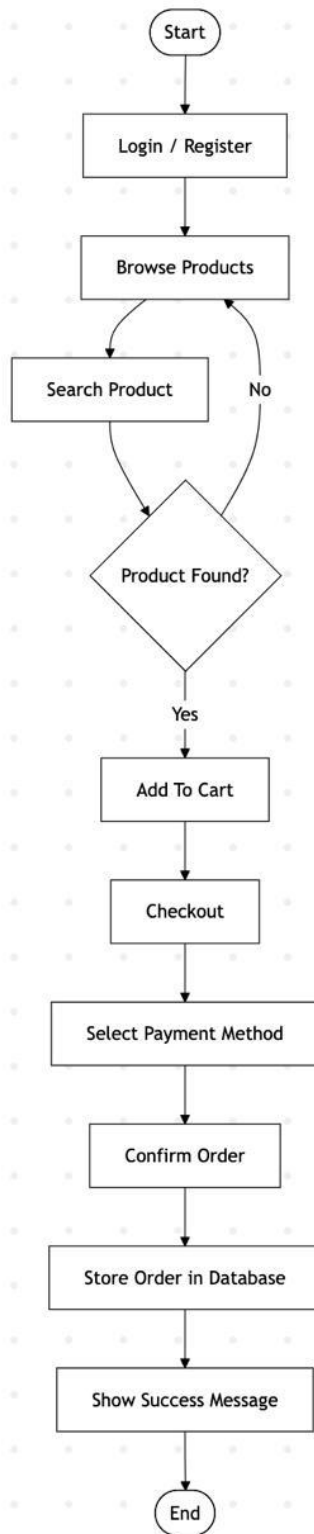

Explanation


The diagram shows the complete shopping process of the customer. The customer first logs into the system, browses products, adds products to cart, selects payment method, and finally places the order successfully.

Sequence Diagram

Introduction

The Sequence Diagram shows the interaction between pages, database, and users during execution of different operations in the system.


Login Sequence Diagram

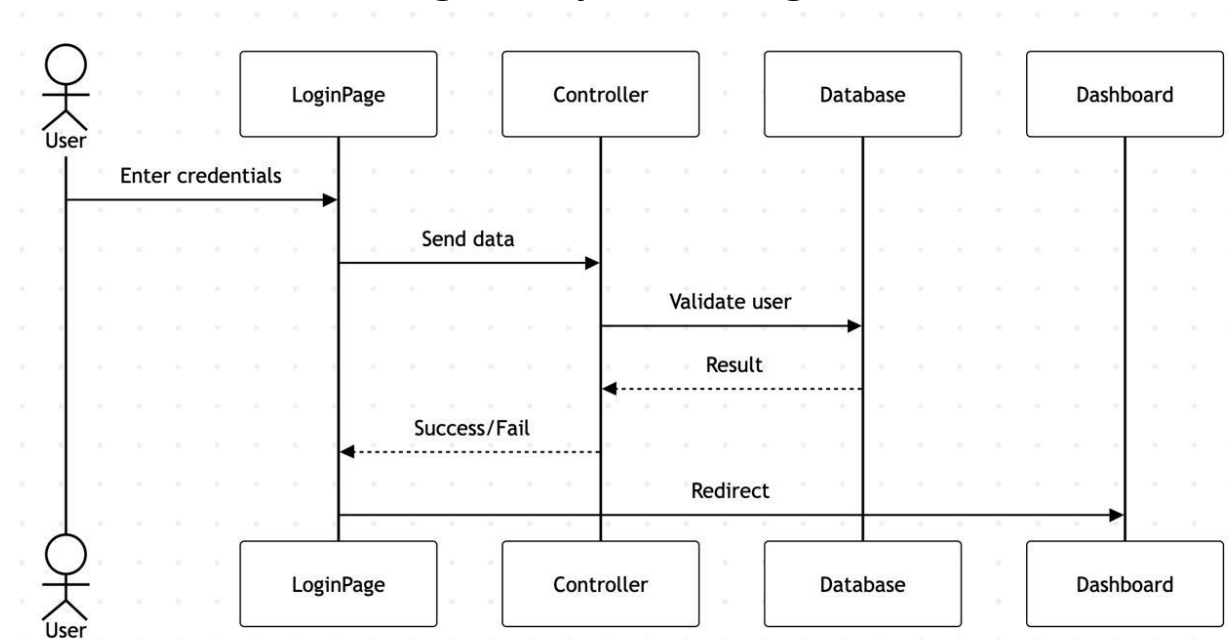

Explanation

The Login Sequence Diagram explains how the system verifies user credentials. The user enters email and password, the database validates the information, and the system redirects the user to the dashboard after successful login.


Order Placement Diagram

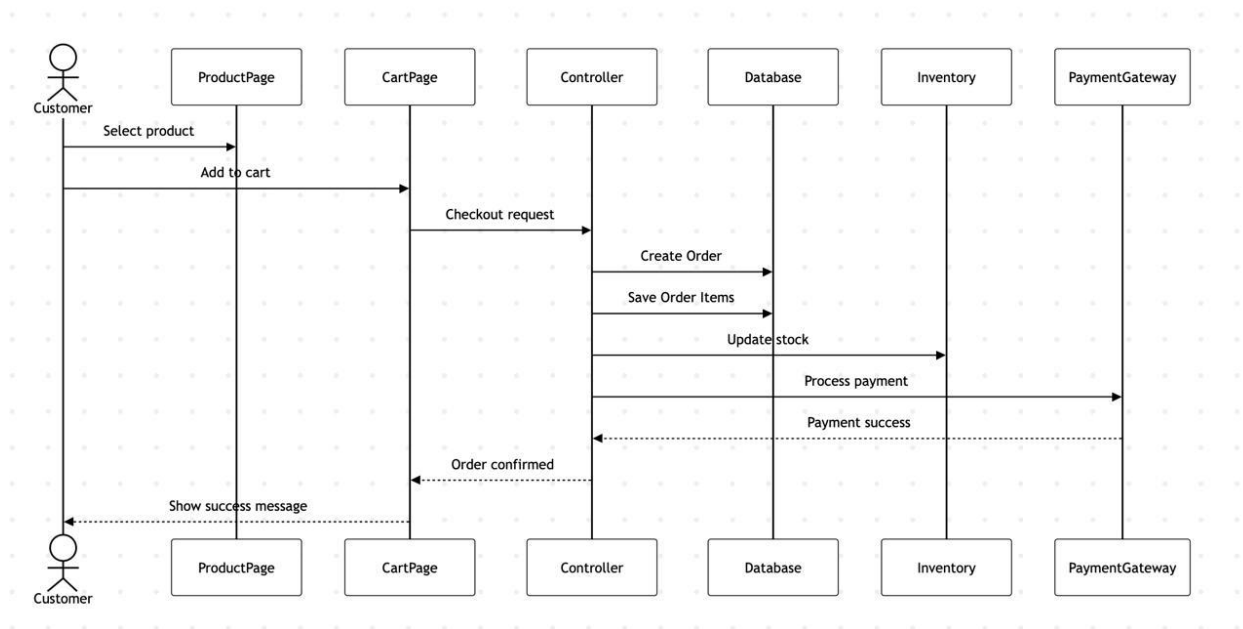

Explanation

The Order Placement Diagram shows the process of placing an order. The customer adds products into cart, the order is stored in the database, order items are inserted, and cart items are cleared after successful order placement.

Admin Login & Manage Product

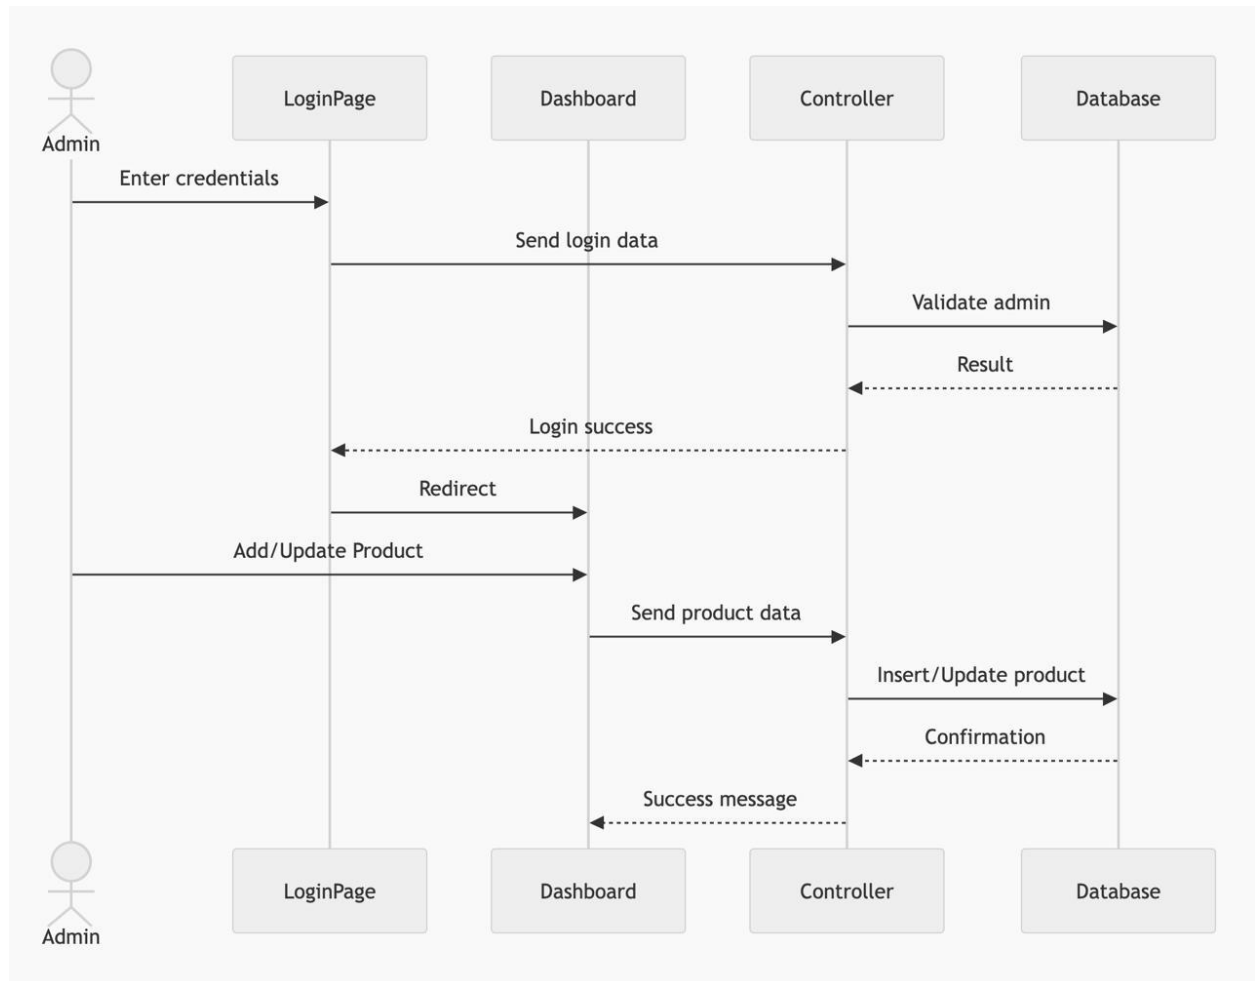

Explanation

This sequence diagram shows how admin logs into the system and manages products. Admin can add, update, or remove products from the system database.


Class Diagram

Introduction

The class diagram represents the structure of the system including classes, attributes, and relationships.

Diagram Explanation

The class diagram contains important classes such as Users, Products, Orders, Cart, and Categories. These classes work together to manage the overall functionality of the system.

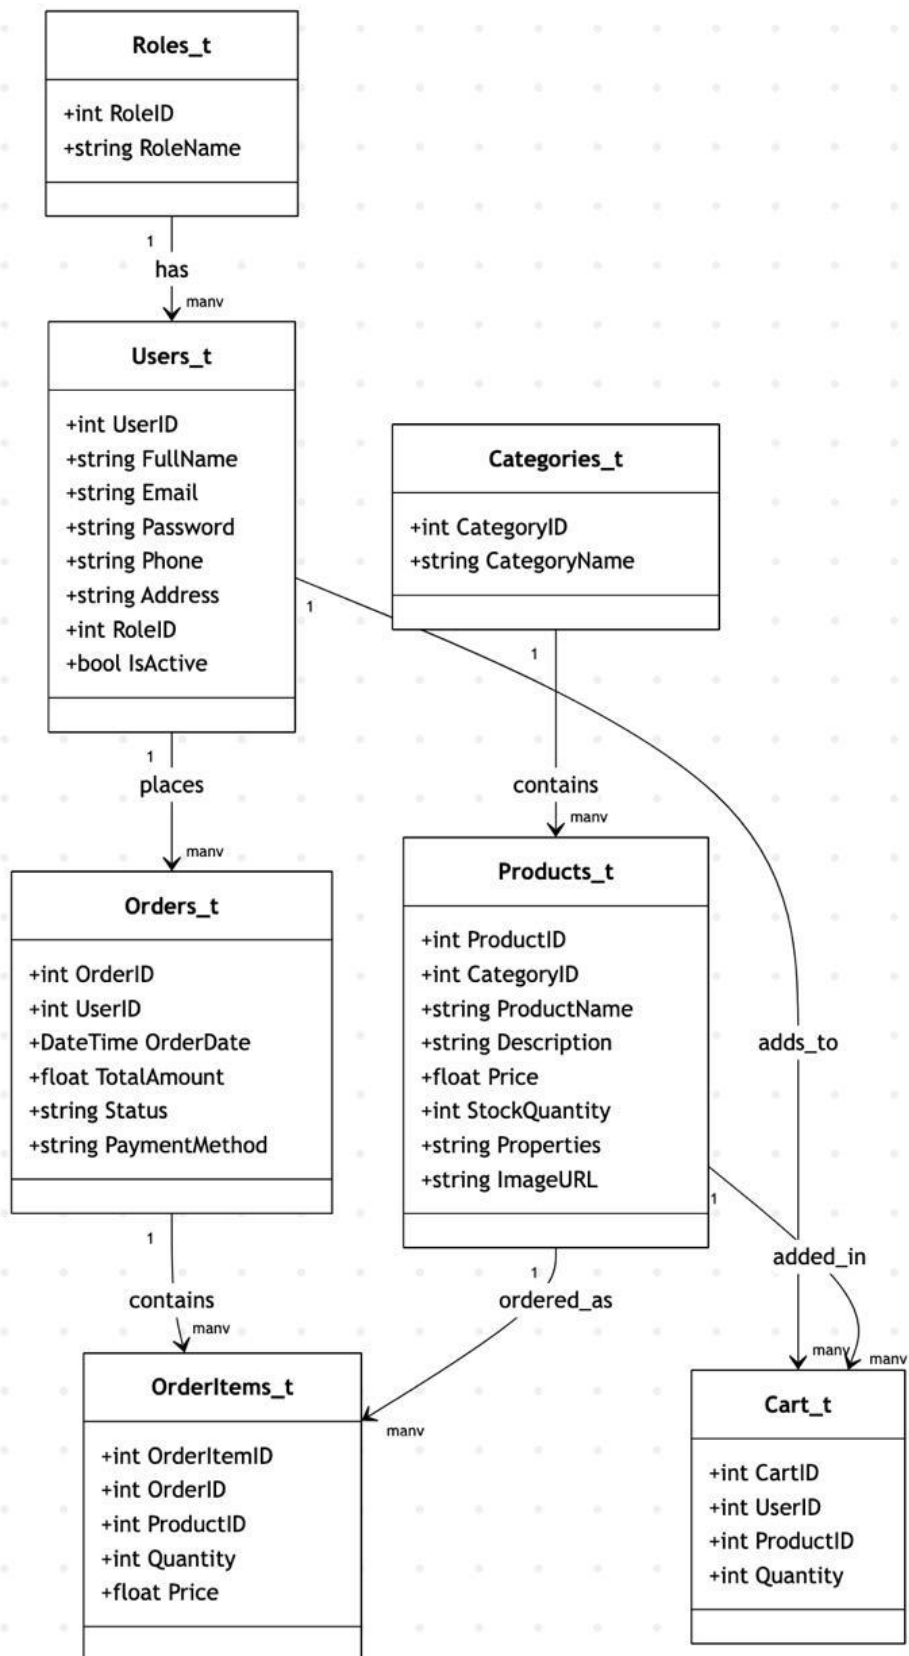

Task 3A – Component Model And Deployment Model

Component Model


Introduction

The Component Model represents different software modules of the Ivory Haya application and how they interact with each other.

Components

1. Login Component
2. Registration Component
3. Dashboard Component
4. Product Management Component
5. Cart Component
6. Order Component
7. Inventory Component
8. Database Component

Diagram

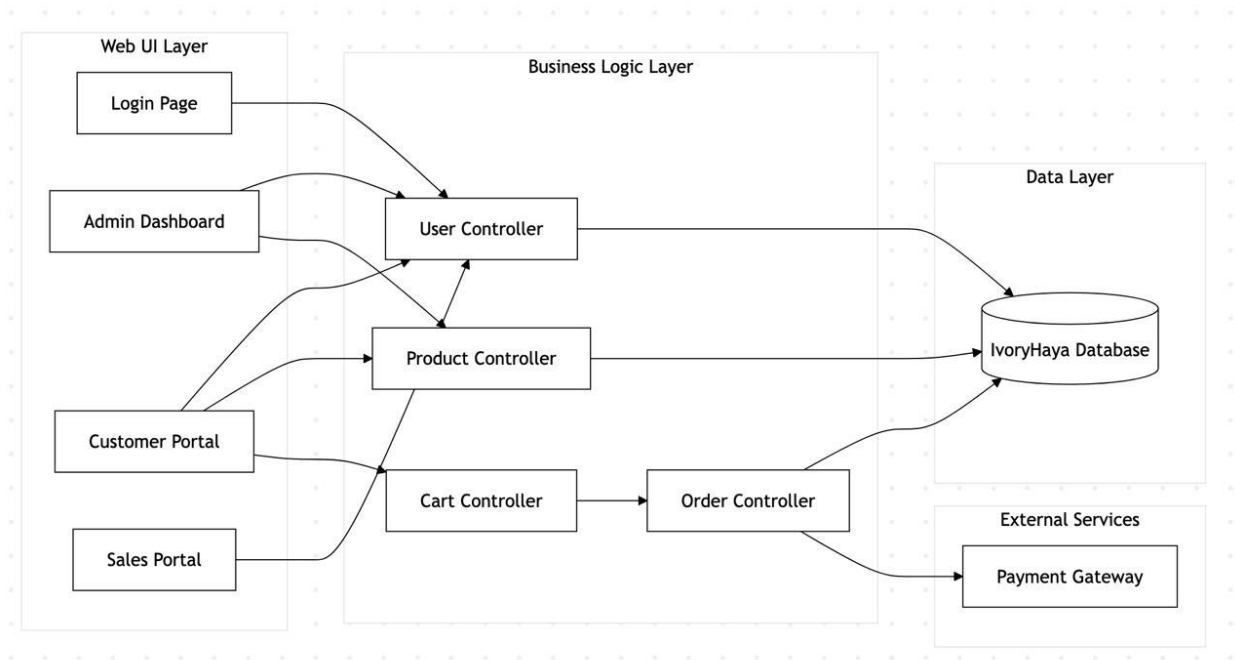

Explanation

The component diagram shows the connection between frontend pages, backend logic, and database components. ASP.NET pages interact with C# code and ADO.NET to perform database operations.

Deployment Model

Introduction

The Deployment Diagram represents the physical structure of the web application including client machine, web server, and database server.

Nodes

Client Machine

- Web Browser

The client node represents users who access the system through a web browser. Users can login, browse products, manage cart, and place orders.

Web Server

- ASP.NET Application
- IIS Server


The web server hosts the ASP.NET application and processes user requests. It handles authentication, business logic, validation, and session management.

Database Server

- SQL Server

The database server stores all system data including users, products, orders, and cart details using SQL Server.

Diagram

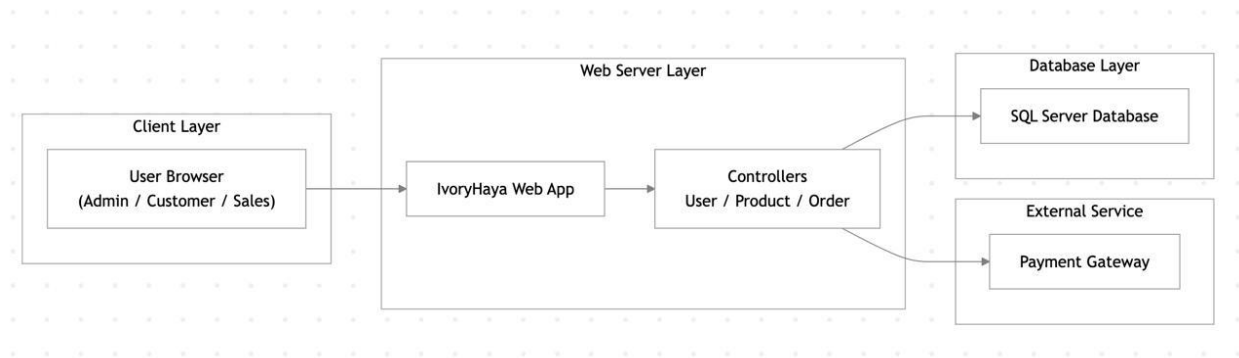


Explanation

The deployment diagram shows that users access the system through a web browser. The application runs on IIS server while SQL Server stores all application data and records

Task 4 – Database Models

ER Model

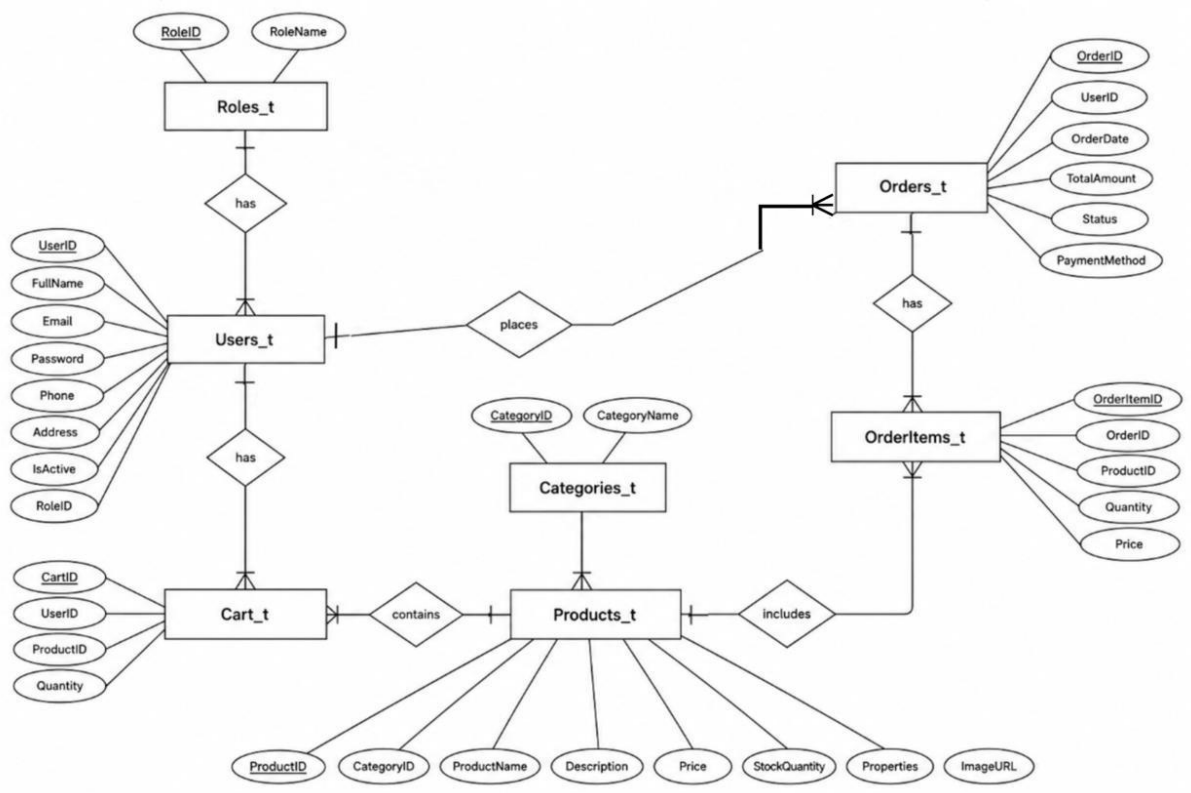

Explanation

The ER model of the Ivory Haya system represents the relationships between key entities such as Users, Roles, Products, Categories, Cart, Order, and OrderItems. Each user is assigned a role and can add products to a cart and place multiple orders. Each order consists of multiple order items, which link products with quantity and price details. Products are categorized under specific categories, ensuring organized data management. The model clearly defines how users interact with products and orders, maintaining data integrity and supporting efficient operations of the system.

Relational Model

Entity: Users_t

Attribute	Optional/ Required	Single/ Composite	Simple/ Multivalued	Stored/ Derived	Notes
UserID	Required	Single	Simple	Stored	Primary Key
FullName	Required	Single	Simple	Stored	User Full Name
Email	Required	Single	Simple	Stored	Unique
Password	Required	Single	Simple	Stored	User Password
Phone	Optional	Single	Simple	Stored	Contact Number
Address	Optional	Single	Simple	Stored	User Address
IsActive	Required	Single	Simple	Stored	Default = 1
RoleID	Optional*	Single	Simple	Stored	Foreign Key → Roles_t

Entity: Categories_t

Attribute	Optional/ Required	Single/ Composite	Simple/ Multivalued	Stored/ Derived	Notes
CategoryID	Required	Single	Simple	Stored	Primary Key
CategoryName	Required	Single	Simple	Stored	Category Name

Entity: Products_t

Attribute	Optional/ Required	Single/ Composite	Simple/ Multivalued	Stored/ Derived	Notes
ProductID	Required	Single	Simple	Stored	Primary Key
CategoryID	Optional*	Single	Simple	Stored	Foreign Key → Categories_t
ProductName	Required	Single	Simple	Stored	Product Name
Description	Optional	Single	Simple	Stored	Product Details
Price	Optional	Single	Simple	Stored	Product Price
StockQuantity	Optional	Single	Simple	Stored	Available Stock
Properties	Optional	Single	Simple	Stored	Color, Size, Fabric etc.
ImageURL	Optional	Single	Simple	Stored	Product Image Path

Entity: Order_t

Attribute	Optional/ Required	Single/ Composite	Simple/ Multivalued	Stored/ Derived	Notes
OrderID	Required	Single	Simple	Stored	Primary Key
UserID	Optional*	Single	Simple	Stored	Foreign Key → Users_t
OrderDate	Required	Single	Simple	Stored	Default GETDATE()
TotalAmount	Optional	Single	Simple	Stored	Total Bill Amount
Status	Optional	Single	Simple	Stored	Completed/Pending etc.
PaymentMethod	Optional	Single	Simple	Stored	Card, JazzCash, COD

Entity: OrderItems_t

Attribute	Optional/ Required	Single/ Composite	Simple/ Multivalued	Stored/ Derived	Notes
OrderItemID	Required	Single	Simple	Stored	Primary Key
OrderID	Optional*	Single	Simple	Stored	Foreign Key → Orders_t
ProductID	Optional*	Single	Simple	Stored	Foreign Key → Products_t
Quantity	Optional	Single	Simple	Stored	Quantity Ordered
Price	Optional	Single	Simple	Stored	Unit Price

Entity: Cart_t

Attribute	Optional/ Required	Single/ Composite	Simple/ Multivalued	Stored/ Derived	Notes
CartID	Required	Single	Simple	Stored	Primary Key
UserID	Optional*	Single	Simple	Stored	Foreign Key → Users_t
ProductID	Optional*	Single	Simple	Stored	Foreign Key → Products_t
Quantity	Optional	Single	Simple	Stored	Quantity Added

Relational Tables

Roles_t

Key	Attribute
PK	RoleID
	RoleName

Users_t

Key	Attribute
PK	UserID
	FullName
	Email
	Password
	Phone
	Address
	IsActive
FK	RoleID

Categories_t

	Attribute
PK	CategoryID
	CategoryName

Products_t

	Attribute
PK	ProductID
FK	CategoryID
	ProductName
	Description
	Price
	StockQuantity
	Properties

	ImageURL
--	----------

Order_t


	Attribute
PK	OrderID
FK	UserID
	OrderDate
	TotalAmount
	Status
	PaymentMethod

OrderItems_t

	Attribute
PK	OrderItemID
FK	OrderID
FK	ProductID
	Quantity
	Price

Cart_t

	Attribute
PK	CartID
FK	UserID
FK	ProductID
	Quantity

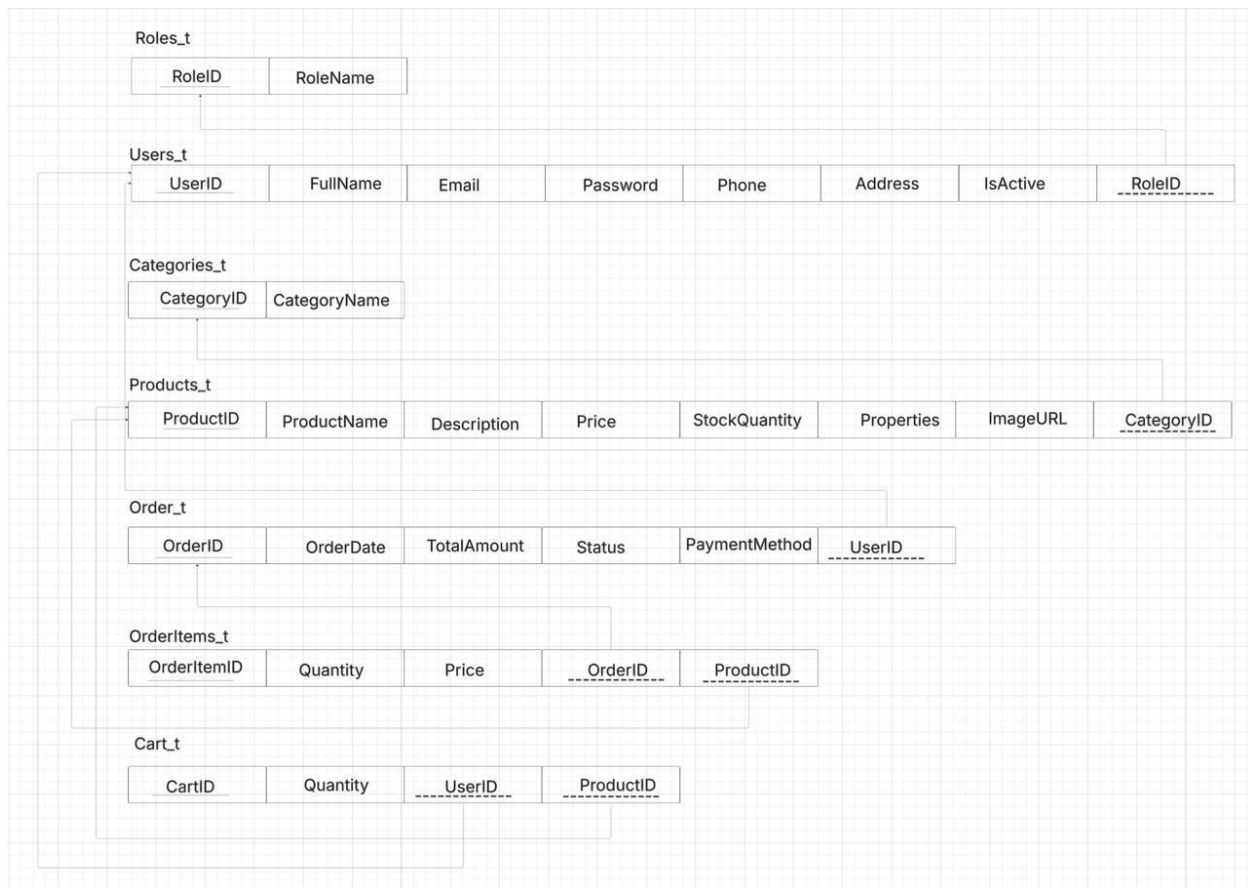

Normalization of Relational Model

The relational database of the Ivory Haya system is normalized to ensure data consistency, eliminate redundancy, and maintain integrity.

First Normal Form (1NF):

All tables are in 1NF as each attribute contains atomic (indivisible) values. There are no repeating groups or multi-valued attributes. For example, in the Products_t table, attributes such as ProductName, Price, and StockQuantity store single values.

Second Normal Form (2NF):

The database is in 2NF because all non-key attributes are fully functionally dependent on the primary key. For instance, in the OrderItems_t table, attributes like Quantity and Price depend entirely on OrderItemID, and not partially on any subset of the key.

Third Normal Form (3NF):

The database satisfies 3NF as there are no transitive dependencies. Non-key attributes do not depend on other non-key attributes. For example, RoleName is stored in a separate Roles_t table instead of being repeated in the Users_t table, ensuring better normalization.

Physical Model

Roles_t

Column	Data Type	Constraint
RoleID	INT	PK, IDENTITY(1,1)
RoleName	VARCHAR(50)	NOT NULL

Users_t

Column	Data Type	Constraint
UserID	INT	PK, IDENTITY(1,1)
FullName	VARCHAR(100)	NOT NULL
Email	VARCHAR(100)	UNIQUE, NOT NULL
Password	VARCHAR(255)	NOT NULL
Phone	VARCHAR(20)	NULL
Address	VARCHAR(255)	NULL
IsActive	BIT	DEFAULT 1
RoleID	INT	FK

Categories_t

Column	Data Type	Constraint
CategoryID	INT	PK, IDENTITY(1,1)
CategoryName	VARCHAR(100)	NOT NULL

Products_t

Column	Data Type	Constraint
ProductID	INT	PK, IDENTITY(1,1)
CategoryID	INT	FK
ProductName	VARCHAR(150)	NOT NULL
Description	TEXT	NULL
Price	DECIMAL(10,2)	NULL
StockQuantity	INT	NULL
Properties	VARCHAR(255)	NULL
ImageURL	VARCHAR(255)	NULL

Order_t

Column	Data Type	Constraint
OrderID	INT	PK, IDENTITY(1,1)
UserID	INT	FK
OrderDate	DATETIME	DEFAULT GETDATE()
TotalAmount	DECIMAL(10,2)	NULL
Status	VARCHAR(50)	NULL
PaymentMethod	VARCHAR(50)	NULL

OrderItems_t

Column	Data Type	Constraint
OrderItemID	INT	PK, IDENTITY(1,1)
OrderID	INT	FK
ProductID	INT	FK
Quantity	INT	NULL
Price	DECIMAL(10,2)	NULL

Cart_t

Column	Data Type	Constraint
CartID	INT	PK, IDENTITY(1,1)
UserID	INT	FK
ProductID	INT	FK
Quantity	INT	NULL

SQL Implementation

```
CREATE DATABASE IvoryHaya;
```

```
USE IvoryHaya;
```

```
CREATE TABLE Roles_t
```

```
(  
    RoleID INT PRIMARY KEY IDENTITY(1,1),  
    RoleName VARCHAR(50) NOT NULL  
)
```

```
CREATE TABLE Users_t
```

```
(  
    UserID INT PRIMARY KEY IDENTITY(1,1),  
    FullName VARCHAR(100) NOT NULL,  
    Email VARCHAR(100) UNIQUE NOT NULL,  
    Password VARCHAR(255) NOT NULL,  
    Phone VARCHAR(20),  
    Address VARCHAR(255),  
    RoleID INT,  
  
    FOREIGN KEY (RoleID) REFERENCES Roles_t(RoleID)  
)
```

```
CREATE TABLE Categories_t
```

```
(  
    CategoryID INT PRIMARY KEY IDENTITY(1,1),  
    CategoryName VARCHAR(100) NOT NULL  
)
```

```
CREATE TABLE Products_t
(
    ProductID INT PRIMARY KEY IDENTITY(1,1),
    CategoryID INT,
    ProductName VARCHAR(150) NOT NULL,
    Description TEXT,
    Price DECIMAL(10,2),
    StockQuantity INT,
    Properties VARCHAR(255),
    ImageURL VARCHAR(255),

    FOREIGN KEY (CategoryID) REFERENCES Categories_t(CategoryID)
)
```

```
CREATE TABLE Order_t
(
    OrderID INT PRIMARY KEY IDENTITY(1,1),
    UserID INT,
    OrderDate DATETIME DEFAULT GETDATE(),
    TotalAmount DECIMAL(10,2),
    Status VARCHAR(50),
    PaymentMethod VARCHAR(50),

    FOREIGN KEY (UserID) REFERENCES Users_t(UserID)
)
```

```
CREATE TABLE OrderItems_t
(
    OrderItemID INT PRIMARY KEY IDENTITY(1,1),
    OrderID INT,
```

```

        ProductID INT,

        Quantity INT,

        Price DECIMAL(10,2),


        FOREIGN KEY (OrderID) REFERENCES Order_t(OrderID),

        FOREIGN KEY (ProductID) REFERENCES Products_t(ProductID)

    )


CREATE TABLE Cart_t

(

    CartID INT PRIMARY KEY IDENTITY(1,1),

    UserID INT,

    ProductID INT,

    Quantity INT,


    FOREIGN KEY (UserID) REFERENCES Users_t(UserID),

    FOREIGN KEY (ProductID) REFERENCES Products_t(ProductID)

)


INSERT INTO Roles_t (RoleName)

VALUES

('Admin'),

('SalesPerson'),

('Customer')


INSERT INTO Users_t

(FullName, Email, Password, Phone, Address, RoleID)

VALUES

```

```
( 'Admin User', 'admin@gmail.com', 'admin123', '03001234567', 'Islamabad', 1),
( 'Sales User', 'sales@gmail.com', 'sales123', '03111234567', 'Lahore', 2),
( 'Ayesha Khan', 'ayesha@gmail.com', '123', '03211234567', 'Rawalpindi', 3),
( 'Fatima Noor', 'fatima@gmail.com', '123', '03331234567', 'Karachi', 3),
( 'Sara Ali', 'sara@gmail.com', '123', '03451234567', 'Faisalabad', 3),
( 'Hina Malik', 'hina@gmail.com', '123', '03010000001', 'Lahore', 3),
( 'Zara Ahmed', 'zara@gmail.com', '123', '03010000002', 'Karachi', 3),
( 'Noor Fatima', 'noor@gmail.com', '123', '03010000003', 'Islamabad', 3),
( 'Maham Ali', 'maham@gmail.com', '123', '03010000004', 'Rawalpindi', 3),
( 'Areeba Khan', 'areeba@gmail.com', '123', '03010000005', 'Faisalabad', 3),
( 'Iqra Noor', 'iqra@gmail.com', '123', '03010000006', 'Multan', 3),
( 'Sana Sheikh', 'sana@gmail.com', '123', '03010000007', 'Peshawar', 3),
( 'Eman Tariq', 'eman@gmail.com', '123', '03010000008', 'Sialkot', 3),
( 'Rabia Aslam', 'rabia@gmail.com', '123', '03010000009', 'Hyderabad', 3),
( 'Komal Shah', 'komal@gmail.com', '123', '03010000010', 'Quetta', 3);
```

```
INSERT INTO Categories_t (CategoryName)
```

```
VALUES
```

```
( 'Casual'),
( 'Formal'),
( 'Luxury'),
( 'Wedding');
```

```
INSERT INTO Products_t
```

```
(CategoryID, ProductName, Description, Price, StockQuantity, Properties, ImageURL)
```

```
VALUES
```

```
(1, 'Black Casual Abaya', 'Simple everyday abaya', 4500, 20, 'Black | Medium | Nidha Fabric', 'images/abaya1.jpg'),
```



```

(1,'Grey Front Open Abaya','Stylish front open abaya',5500,15,'Grey | Large | Korean
Nidha','images/abaya2.jpg'),

(2,'Formal Pearl Abaya','Elegant formal wear',7000,10,'Black | Medium | Pearl
Work','images/abaya3.jpg'),

(3,'Luxury Gold Abaya','Premium luxury abaya',12000,5,'Black-Gold | Large | Luxury
Fabric','images/abaya4.jpg'),

(4,'White Wedding Abaya','Beautiful bridal abaya',18000,3,'White | Medium | Bridal
Collection','images/abaya5.jpg'),

(1,'Blue Casual Abaya','Daily wear abaya',5000,12,'Blue | Medium |
Nidha','images/abaya6.jpg'),

(2,'Stone Formal Abaya','Formal stylish abaya',8500,8,'Stone | Large | Pearl
Work','images/abaya7.jpg'),

(3,'Royal Black Luxury Abaya','Luxury premium abaya',15000,5,'Black | XL | Luxury
Fabric','images/abaya8.jpg'),

(4,'Golden Wedding Abaya','Wedding special abaya',22000,4,'Golden | Medium |
Bridal','images/abaya9.jpg');

```

```

INSERT INTO Order_t

```

```

(UserID, TotalAmount, Status, PaymentMethod)

```

```

VALUES

```

```

(3,11500,'Completed','Card'),

(3,18000,'Completed','JazzCash'),

(3,4500,'Completed','Cash On Delivery'),


(4,19000,'Completed','Card'),

(4,12000,'Completed','JazzCash'),


(5,30000,'Completed','Card'),

(5,18000,'Completed','Cash On Delivery'),

(5,22000,'Completed','Card'),

```

(6,10000,'Completed','Card'),

(7,12500,'Completed','JazzCash'),

(7,25000,'Completed','Card'),

(7,7000,'Completed','Cash On Delivery'),

(8,18000,'Completed','Card'),

(8,4500,'Completed','JazzCash'),

(9,22000,'Completed','Card'),

(9,15000,'Completed','Card'),

(10,30500,'Completed','JazzCash'),

(10,7000,'Completed','Cash On Delivery'),

(11,12000,'Completed','Card'),

(11,18000,'Completed','JazzCash'),

(12,5000,'Completed','Card'),

(12,15500,'Completed','Card'),

(13,22000,'Completed','JazzCash'),

(13,4500,'Completed','Cash On Delivery'),

(14,8500,'Completed','Card'),

(14,12000,'Completed','Card'),

(15,18000,'Completed','JazzCash'),

```
(15,30000,'Completed','Card');
```

```
INSERT INTO OrderItems_t
```

```
(OrderID, ProductID, Quantity, Price)
```

```
VALUES
```

```
-- Order 1
```

```
(1,1,1,4500),
```

```
(1,3,1,7000),
```

```
-- Order 2
```

```
(2,5,1,18000),
```

```
-- Order 3
```

```
(3,1,1,4500),
```

```
-- Order 4
```

```
(4,4,1,12000),
```

```
(4,3,1,7000),
```

```
-- Order 5
```

```
(5,4,1,12000),
```

```
-- Order 6
```

```
(6,5,1,18000),
```

```
(6,4,1,12000),
```

```
-- Order 7
```

(7,5,1,18000),

-- Order 8

(8,9,1,22000),

-- Order 9

(9,2,1,5500),

(9,1,1,4500),

-- Order 10

(10,2,1,5500),

(10,3,1,7000),

-- Order 11

(11,5,1,18000),

(11,4,1,12000),

-- Order 12

(12,3,1,7000),

-- Order 13

(13,5,1,18000),

-- Order 14

(14,1,1,4500),

-- Order 15

(15,9,1,22000),

-- Order 16

(16,8,1,15000),

-- Order 17

(17,9,1,22000),

(17,2,1,5500),

-- Order 18

(18,3,1,7000),

-- Order 19

(19,4,1,12000),

-- Order 20

(20,5,1,18000),

-- Order 21

(21,6,1,5000),

-- Order 22

(22,7,1,8500),

(22,6,1,5000),

-- Order 23

(23,9,1,22000),

-- Order 24

```
(24,1,1,4500),
```

```
-- Order 25
```

```
(25,7,1,8500),
```

```
-- Order 26
```

```
(26,4,1,12000),
```

```
-- Order 27
```

```
(27,5,1,18000),
```

```
-- Order 28
```

```
(28,5,1,18000),
```

```
(28,4,1,12000);
```

```
INSERT INTO Cart_t
```

```
(UserID, ProductID, Quantity)
```

```
VALUES
```

```
(3,1,1),
```

```
(3,3,1),
```

```
(4,4,1),
```

```
(5,5,1),
```

```
(7,2,1);
```

```
ALTER TABLE Users_t
```

```
ADD IsActive BIT DEFAULT 1;
```

```
ALTER TABLE Products_t
```

```
ADD IsActive BIT DEFAULT 1;
```

```
select * from Users_t
```

```
select * from Roles_t
```

```
select * from Categories_t
```

```
select * from Cart_t
```

```
select * from OrderItems_t
```

```
select * from Orders_t
```

```
select * from Products_t
```

Task 5 – Website Code

Login.aspx

```
<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="Login.aspx.cs"
Inherits="PVFC.Login" %>
<!DOCTYPE html>
<html><head runat="server">
  <title>Login</title>

  <style>

    body {
      font-family: Arial;
      background-color: #f4f4f4;
      margin: 0;
      padding: 0;
    }

    .container {
      width: 400px;
```

```

        margin: 60px auto;
        background: white;
        padding: 30px;
        border-radius: 10px;
        box-shadow: 0px 0px 10px #ccc;
        text-align: center;
    }

    h2 {
        color: #333;
        margin-bottom: 25px;
    }

    .textbox {
        width: 90%;
        padding: 10px;
        border: 1px solid #ccc;
        border-radius: 5px;
    }

    .btn {
        background-color: black;
        color: white;
        border: none;
        padding: 10px 20px;
        cursor: pointer;
        border-radius: 5px;
    }

    .btn:hover {
        background-color: #444;
    }

    .message {
        color: red;
        font-weight: bold;
    }

    .demo-box {
        margin-top: 25px;
        background-color: #f9f9f9;
        padding: 15px;
        border-radius: 8px;
        text-align: left;
        border: 1px solid #ddd;
    }

    .demo-box h3 {
        margin-top: 0;
        color: #222;
    }

    .register-link {
        margin-top: 20px;
    }

    .register-link a {
        text-decoration: none;
        color: black;
        font-weight: bold;
    }

```



```

        .register-link a:hover {
            color: #666;
        }
    </style>
</head>
<body>
<form id="form1" runat="server">

    <div class="container">

        <h2>Ivory Haya Login</h2>

        <p>Email</p>

        <asp:TextBox ID="txtEmail"
            runat="server"
            CssClass="textbox">
        </asp:TextBox>

        <br /><br />

        <p>Password</p>

        <asp:TextBox ID="txtPassword"
            runat="server"
            TextMode="Password"
            CssClass="textbox">
        </asp:TextBox>

        <br /><br />

        <asp:Button ID="btnLogin"
            runat="server"
            Text="Login"
            CssClass="btn"
            OnClick="btnLogin_Click" />

        <br /><br />

        <asp:Label ID="lblMessage"
            runat="server"
            CssClass="message">
        </asp:Label>

        <!-- DEMO ACCOUNTS -->

        <div class="demo-box">

            <h3>Demo Accounts</h3>

            <b>Admin</b><br />
            Email: admin@gmail.com<br />
            Password: admin123

            <br /><br />

            <b>Sales Person</b><br />
            Email: sales@gmail.com<br />
            Password: sales123
        </div>
    </div>
</form>

```

```

        <br /><br />

        <b>Customer</b><br />
        Email: ayesha@gmail.com<br />
        Password: 123

    </div>

    <!-- REGISTER LINK -->

    <div class="register-link">

        New User?
        <a href="Register.aspx">Register Here</a>

    </div>

</div>
</form>
</body></html>

```

Login.aspx.cs

```

using System;using System.Configuration;using System.Data.SqlClient;
namespace PVFC
{
    public partial class Login : System.Web.UI.Page
    {
        protected void btnLogin_Click(object sender, EventArgs e)
        {

            string ConnectionString =
            ConfigurationManager.ConnectionStrings["PVFCCConnectionString"].ConnectionString;

            SqlConnection connect= new SqlConnection(ConnectionString);

            string ssqQuery = "SELECT Users_t.UserID, " +
                               "Users_t.FullName, " +
                               "Roles_t.RoleName " +
                               "FROM Users_t " +
                               "INNER JOIN Roles_t " +
                               "ON Users_t.RoleID = Roles_t.RoleID " +
                               "WHERE Email=@Email " +
                               "AND Password=@Password " +
                               "AND IsActive = 1";

            SqlCommand command = new SqlCommand(ssqQuery, connect);

            command.Parameters.AddWithValue("@Email", txtEmail.Text);
            command.Parameters.AddWithValue("@Password", txtPassword.Text);

            connect.Open();

            SqlDataReader dataReader = command.ExecuteReader();

            if (dataReader.Read())
            {

```

```

        Session["UserID"] = dataReader["UserID"].ToString();
        Session["FullName"] = dataReader["FullName"].ToString();
        Session["Role"] = dataReader["RoleName"].ToString();

        Response.Redirect("Dashboard.aspx");
    }
    else
    {
        lblMessage.Text = "Invalid Login!";
    }

    connect.Close();
}
}
}

```

Dashboard.aspx

```

<%@ Page Language="C#"
AutoEventWireup="true" CodeBehind="Dashboard.aspx.cs" Inherits="PVFC.Dashboard" %>
<!DOCTYPE html>
<html><head runat="server">

    <title>Dashboard</title>

    <style>

        body {
            font-family: Arial;
            background-color: #f4f4f4;
            margin: 0;
            padding: 0;
        }

        .container {
            width: 80%;
            margin: 40px auto;
            background: white;
            padding: 30px;
            border-radius: 10px;
            box-shadow: 0px 0px 10px #ccc;
        }

        h2 {
            text-align: center;
            color: #333;
            margin-bottom: 20px;
        }

        h3 {
            color: #222;
            margin-top: 25px;
        }

        .welcome {
            font-size: 18px;
            font-weight: bold;
            color: #444;
        }
    </style>

```

```

    }

    .panel-box {
        background-color: #fafafa;
        border: 1px solid #ddd;
        padding: 20px;
        border-radius: 8px;
        margin-top: 20px;
    }

    .link-btn {
        display: inline-block;
        text-decoration: none;
        background-color: black;
        color: white;
        padding: 10px 15px;
        margin-top: 10px;
        border-radius: 5px;
    }

    .link-btn:hover {
        background-color: #444;
    }

    .logout-btn {
        margin-top: 30px;
        display: inline-block;
        text-decoration: none;
        background-color: #222;
        color: white;
        padding: 10px 15px;
        border-radius: 5px;
    }

    .logout-btn:hover {
        background-color: #555;
    }
</style>
</head>
<body>
<form id="form1" runat="server">
<div class="container">

    <h2>Dashboard</h2>

    <asp:Label ID="lblWelcome"
        runat="server"
        CssClass="welcome">
    </asp:Label>

    <br /><br />

    <!-- Admin-->

    <asp:Panel ID="pnlAdmin"
        runat="server"
        Visible="false"
        CssClass="panel-box">

        <h3>Admin Controls</h3>

```

```

        <a href="ManageUsers.aspx" class="link-btn">
            Manage Users
        </a>

        <br />

        <a href="ManageProducts.aspx" class="link-btn">
            Manage Products
        </a>

        <br />

        <a href="ManageOrders.aspx" class="link-btn">
            Manage Orders
        </a>

        <br />

        <a href="CustomerSegmentation.aspx" class="link-btn">
            Customer Segmentation
        </a>

        <br />
        <a href="DemandForecast.aspx" class="link-btn">
            Demand Forecast
        </a>
        <br />
    </asp:Panel>

    <!-- Saleperson -->

    <asp:Panel ID="pnlSales"
        runat="server"
        Visible="false"
        CssClass="panel-box">

        <h3>Sales Person Controls</h3>

        <a href="Inventory.aspx" class="link-btn">
            Manage Inventory
        </a>
        <br />
        <a href="DemandForecast.aspx" class="link-btn">
            Demand Forecast
        </a>
        <br />
    </asp:Panel>

    <!-- Customer -->

    <asp:Panel ID="pnlCustomer"
        runat="server"
        Visible="false"
        CssClass="panel-box">

        <h3>Customer Controls</h3>

        <a href="Products.aspx" class="link-btn">

```

```

        Browse Products
    </a>

    <br />

    <a href="Orders.aspx" class="link-btn">
        My Orders
    </a>

</asp:Panel>

<br />

<a href="Login.aspx" class="logout-btn">
    Logout
</a>
</div>
</form>
</body></html>

```

DashBoard.aspx.cs

```

using System;
namespace PVFC
{
    public partial class Dashboard : System.Web.UI.Page
    {
        protected void Page_Load(object sender, EventArgs e)
        {
            if (Session["Role"] == null)
            {
                Response.Redirect("Login.aspx");
            }

            lblWelcome.Text =
                "Welcome " + Session["FullName"].ToString();

            string Role = Session["Role"].ToString();

            if (Role == "Admin")
            {
                pnlAdmin.Visible = true;
            }
            else if (Role == "SalesPerson")
            {
                pnlSales.Visible = true;
            }
            else if (Role == "Customer")
            {
                pnlCustomer.Visible = true;
            }
        }
    }
}

```

Register.aspx

```
<%@ Page Language="C#"
AutoEventWireup="true" CodeBehind="Register.aspx.cs" Inherits="PVFC.Register" %>
<!DOCTYPE html>
<html><head runat="server">

    <title>Register</title>

    <style>

        body {
            font-family: Arial;
            background-color: #f4f4f4;
            margin: 0;
            padding: 0;
        }

        .container {
            width: 40%;
            margin: 50px auto;
            background: white;
            padding: 30px;
            border-radius: 10px;
            box-shadow: 0px 0px 10px #ccc;
        }

        h2 {
            text-align: center;
            color: #333;
            margin-bottom: 25px;
        }

        .textbox {
            width: 95%;
            padding: 10px;
            margin-top: 5px;
            margin-bottom: 15px;
            border-radius: 5px;
            border: 1px solid #ccc;
        }

        .btn {
            background-color: black;
            color: white;
            border: none;
            padding: 10px 18px;
            border-radius: 5px;
            cursor: pointer;
        }

        .btn:hover {
            background-color: #444;
        }

        .login-link {
            display: inline-block;
            margin-top: 20px;
            text-decoration: none;
            color: black;
        }
```

```

        font-weight: bold;
    }

    .message {
        color: green;
        font-weight: bold;
    }
}

</style>
</head>
<body>
<form id="form1" runat="server">
<div class="container">

    <h2>Customer Registration</h2>

    Name:
    <asp:TextBox ID="txtName"
        runat="server"
        CssClass="textbox"></asp:TextBox>

    Email:
    <asp:TextBox ID="txtEmail"
        runat="server"
        CssClass="textbox"></asp:TextBox>

    Password:
    <asp:TextBox ID="txtPassword"
        runat="server"
        TextMode="Password"
        CssClass="textbox"></asp:TextBox>

    Phone:
    <asp:TextBox ID="txtPhone"
        runat="server"
        CssClass="textbox"></asp:TextBox>

    Address:
    <asp:TextBox ID="txtAddress"
        runat="server"
        CssClass="textbox"></asp:TextBox>

    <asp:Button ID="btnRegister"
        runat="server"
        Text="Register"
        CssClass="btn"
        OnClick="btnRegister_Click" />

    <br /><br />

    <asp:Label ID="lblMessage"
        runat="server"
        CssClass="message"></asp:Label>

    <br />

    <a href="Login.aspx" class="login-link">
        Back To Login
    </a>
</div>
</form>

```



```
</body></html>
```

Register.aspx.cs

```
using System;using System.Configuration;using System.Data.SqlClient;
namespace PVFC
{
    public partial class Register : System.Web.UI.Page
    {
        protected void btnRegister_Click(object sender, EventArgs e)
        {
            string ConnectionString =
ConfigurationManager.ConnectionStrings["PVFCConnectionString"].ConnectionString;

            SqlConnection connect = new SqlConnection(ConnectionString);

            string insertQuery = "INSERT INTO Users_t " +
"(FullName, Email, Password, Phone, Address, RoleID) " +
"VALUES " +
"(@Name, @Email, @Password, @Phone, @Address, 3)";

            SqlCommand command = new SqlCommand(insertQuery, connect);

            command.Parameters.AddWithValue("@Name", txtName.Text);
            command.Parameters.AddWithValue("@Email", txtEmail.Text);
            command.Parameters.AddWithValue("@Password", txtPassword.Text);
            command.Parameters.AddWithValue("@Phone", txtPhone.Text);
            command.Parameters.AddWithValue("@Address", txtAddress.Text);

            connect.Open();
            command.ExecuteNonQuery();
            connect.Close();

            lblMessage.Text = "Registration Successful!";
        }
    }
}
```

ManageUsers.aspx

```
<%@ Page Language="C#"
AutoEventWireup="true"CodeBehind="ManageUsers.aspx.cs"Inherits="PVFC.ManageUsers" %>
<!DOCTYPE html>
<html><head runat="server">

    <title>Manage Users</title>

    <style>

        body {
            font-family: Arial;
            background-color: #f4f4f4;
            margin: 0;
            padding: 0;
        }

    </style>

</head><body>
```

```

.container {
  width: 95%;
  margin: 40px auto;
  background: white;
  padding: 25px;
  border-radius: 10px;
  box-shadow: 0px 0px 10px #ccc;
}

h2 {
  text-align: center;
  color: #333;
}

.grid {
  width: 100%;
  border-collapse: collapse;
  margin-top: 20px;
}

.grid th {
  background-color: black;
  color: white;
  padding: 12px;
}

.grid td {
  border: 1px solid #ccc;
  padding: 10px;
  text-align: center;
}

.grid tr:nth-child(even) {
  background-color: #f9f9f9;
}

.grid a {
  text-decoration: none;
  background: #222;
  color: white;
  padding: 5px 10px;
  border-radius: 5px;
}

.back-btn {
  display: inline-block;
  margin-top: 20px;
  background: black;
  color: white;
  text-decoration: none;
  padding: 10px 15px;
  border-radius: 5px;
}
</style>
</head>
<body>
<form id="form1" runat="server">
<div class="container">

```

```

<h2>Manage Users</h2>

<asp:GridView ID="gvUsers"
    runat="server"
    CssClass="grid"
    AutoGenerateColumns="False"
    OnRowCommand="gvUsers_RowCommand"
    DataKeyNames="UserID">

    <Columns>

        <asp:BoundField DataField="UserID" HeaderText="ID" />
        <asp:BoundField DataField="FullName" HeaderText="Name" />
        <asp:BoundField DataField="Email" HeaderText="Email" />
        <asp:BoundField DataField="Phone" HeaderText="Phone" />
        <asp:BoundField DataField="RoleName" HeaderText="Role" />
        <asp:BoundField DataField="IsActive" HeaderText="Status" />

        <asp:ButtonField Text="Deactivate" CommandName="Deactivate" />
        <asp:ButtonField Text="Activate" CommandName="Activate" />
    </Columns>

</asp:GridView>

<a href="Dashboard.aspx" class="back-btn">
    Back To Dashboard
</a>
</div>
</form>
</body></html>

```

ManageUsers.aspx.cs

```

using System;using System.Configuration;using System.Data;using
System.Data.SqlClient;using System.Web.UI.WebControls;
namespace PVFC
{
    public partial class ManageUsers : System.Web.UI.Page
    {
        string ConnectionString =
            ConfigurationManager.ConnectionStrings["PVFCConnectionString"].ConnectionString;

        protected void Page_Load(object sender, EventArgs e)
        {
            if (!IsPostBack)
            {
                LoadUsers();
            }
        }

        void LoadUsers()
        {
            SqlConnection connect = new SqlConnection(ConnectionString);

            string sqlquery =
                "SELECT U.UserID,U.FullName, U.Email,U.Phone,R.RoleName, U.IsActive " +
                "FROM Users_t as U " +

```

```

        "INNER JOIN Roles_t as R " +
        "ON U.RoleID = R.RoleID";

        SqlDataAdapter dataAdapter =
        new SqlDataAdapter(sqlQuery, connect);

        DataSet dataSet = new DataSet();

        dataAdapter.Fill(dataSet);

        gvUsers.DataSource = dataSet;

        gvUsers.DataBind();
    }

    protected void gvUsers_RowCommand(object sender, GridViewCommandEventArgs e)
    {
        int index = Convert.ToInt32(e.CommandArgument);
        int id = Convert.ToInt32(gvUsers.DataKeys[index].Value);

        SqlConnection connect = new SqlConnection(ConnectionString);

        if (e.CommandName == "Deactivate")
        {
            string query = "UPDATE Users_t SET IsActive=0 WHERE UserID=@id";
            SqlCommand command = new SqlCommand(query, connect);
            command.Parameters.AddWithValue("@id", id);

            connect.Open();
            command.ExecuteNonQuery();
            connect.Close();
        }

        if (e.CommandName == "Activate")
        {
            string sqlQuery = "UPDATE Users_t SET IsActive=1 WHERE UserID=@id";
            SqlCommand command2 = new SqlCommand(sqlQuery, connect);
            command2.Parameters.AddWithValue("@id", id);

            connect.Open();
            command2.ExecuteNonQuery();
            connect.Close();
        }

        LoadUsers();
    }
}

```

ManageProducts.aspx

```

<%@ Page Language="C#"
AutoEventWireup="true" CodeBehind="ManageProducts.aspx.cs" Inherits="PVFC.ManageProducts"
%>
<!DOCTYPE html>
<html><head runat="server">

```

```

<title>Manage Products</title>

<style>

  body {
    font-family: Arial;
    background-color: #f4f4f4;
    margin: 0;
    padding: 0;
  }

  .container {
    width: 85%;
    margin: 40px auto;
    background: white;
    padding: 25px;
    border-radius: 10px;
    box-shadow: 0px 0px 10px #ccc;
  }

  h2 {
    text-align: center;
    color: #333;
  }

  input[type=text] {
    padding: 10px;
    width: 220px;
    margin-right: 10px;
    border: 1px solid #ccc;
    border-radius: 5px;
  }

  input[type=submit] {
    background-color: black;
    color: white;
    border: none;
    padding: 10px 15px;
    border-radius: 5px;
    cursor: pointer;
  }

  input[type=submit]:hover {
    background-color: #444;
  }

  .grid {
    width: 100%;
    border-collapse: collapse;
    margin-top: 20px;
  }

  .grid th {
    background-color: black;
    color: white;
    padding: 12px;
  }

  .grid td {
    border: 1px solid #ccc;
    padding: 10px;
  }

```

```

        text-align: center;
    }

    .grid tr:nth-child(even) {
        background-color: #f9f9f9;
    }

    .grid a {
        text-decoration: none;
        background: #222;
        color: white;
        padding: 5px 10px;
        border-radius: 5px;
    }

    .back-btn {
        display: inline-block;
        margin-top: 20px;
        background: black;
        color: white;
        text-decoration: none;
        padding: 10px 15px;
        border-radius: 5px;
    }
}

</style>
</head>
<body>
<form id="form1" runat="server">
<div class="container">

    <h2>Manage Products</h2>

    <asp:TextBox ID="txtName"
        runat="server"
        placeholder="Product Name"></asp:TextBox>

    <asp:TextBox ID="txtPrice"
        runat="server"
        placeholder="Price"></asp:TextBox>

    <asp:TextBox ID="txtStock"
        runat="server"
        placeholder="Stock"></asp:TextBox>

    <asp:Button ID="btnAdd"
        runat="server"
        Text="Add Product"
        OnClick="btnAdd_Click" />

    <asp:GridView ID="gvProducts"
        runat="server"
        CssClass="grid"
        AutoGenerateColumns="False"
        DataKeyNames="ProductID"
        OnRowCommand="gvProducts_RowCommand">

        <Columns>

            <asp:BoundField DataField="ProductID" HeaderText="ID" />
            <asp:BoundField DataField="ProductName" HeaderText="Product Name" />

```

```

        <asp:BoundField DataField="Price" HeaderText="Price" />
        <asp:BoundField DataField="StockQuantity" HeaderText="Stock" />
        <asp:BoundField DataField="IsActive" HeaderText="Status" />

        <asp:ButtonField Text="Deactivate" CommandName="Deactivate" />
        <asp:ButtonField Text="Activate" CommandName="Activate" />
    </Columns>

</asp:GridView>

<a href="Dashboard.aspx" class="back-btn">
    Back To Dashboard
</a>
</div>
</form>
</body></html>

```

ManageProducts.aspx.cs

```

using System;using System.Configuration;using System.Data;using System.Data.SqlClient;
namespace PVFC
{
    public partial class ManageProducts : System.Web.UI.Page
    {
        string ConnectionString =
            ConfigurationManager.ConnectionStrings["PVFCConnectionString"].ConnectionString;

        protected void Page_Load(object sender, EventArgs e)
        {
            if (!IsPostBack)
            {
                LoadProducts();
            }
        }

        void LoadProducts()
        {
            SqlConnection connect = new SqlConnection(ConnectionString);

            string loadQuery = @"SELECT
                                ProductID,ProductName,Price,StockQuantity,
                                CASE
                                    WHEN IsActive = 1 THEN 'Active'
                                    ELSE 'Inactive'
                                END AS IsActive
                                FROM Products_t";

            SqlDataAdapter dataAdapter = new SqlDataAdapter(loadQuery, connect);

            DataSet dataSet = new DataSet();

            dataAdapter.Fill(dataSet);

            gvProducts.DataSource = dataSet;
            gvProducts.DataBind();
        }

        protected void btnAdd_Click(object sender, EventArgs e)

```

```

    {
        SqlConnection connect = new SqlConnection(ConnectionString);

        string sqlquery =
            "INSERT INTO Products_t " +
            "(CategoryID, ProductName, Price, StockQuantity) " +
            "VALUES " +
            "(1, @name, @price, @stock)";

        SqlCommand command = new SqlCommand(sqlquery, connect);

        command.Parameters.AddWithValue("@name", txtName.Text);
        command.Parameters.AddWithValue("@price", txtPrice.Text);
        command.Parameters.AddWithValue("@stock", txtStock.Text);

        connect.Open();
        command.ExecuteNonQuery();
        connect.Close();

        LoadProducts();
    }

    protected void gvProducts_RowCommand(object sender,
System.Web.UI.WebControls.GridViewCommandEventArgs ex)
    {
        int index = Convert.ToInt32(ex.CommandArgument);
        int ID = Convert.ToInt32(gvProducts.DataKeys[index].Value);

        SqlConnection connect = new SqlConnection(ConnectionString);

        if (ex.CommandName == "Deactivate")
        {
            string qqery = "UPDATE Products_t SET IsActive=0 WHERE ProductID=@id";

            SqlCommand command2 = new SqlCommand(qqery, connect);
            command2.Parameters.AddWithValue("@id", ID);

            connect.Open();
            command2.ExecuteNonQuery();
            connect.Close();
        }

        if (ex.CommandName == "Activate")
        {
            string Query = "UPDATE Products_t SET IsActive=1 WHERE ProductID=@id";

            SqlCommand command3 = new SqlCommand(Query, connect);
            command3.Parameters.AddWithValue("@id", ID);

            connect.Open();
            command3.ExecuteNonQuery();
            connect.Close();
        }

        LoadProducts();
    }
}

```


ManageOrders.aspx

```
<%@ Page Language="C#"
AutoEventWireup="true"CodeBehind="ManageOrders.aspx.cs"Inherits="PVFC.ManageOrders" %>
<!DOCTYPE html>
<html><head runat="server">

    <title>Manage Orders</title>

    <style>

        body {
            font-family: Arial;
            background-color: #f4f4f4;
            margin: 0;
            padding: 0;
        }

        .container {
            width: 85%;
            margin: 40px auto;
            background-color: white;
            padding: 25px;
            border-radius: 10px;
            box-shadow: 0px 0px 10px #ccc;
        }

        h2 {
            text-align: center;
            color: #333;
            margin-bottom: 25px;
        }

        .grid {
            width: 100%;
            border-collapse: collapse;
        }

        .grid th {
            background-color: black;
            color: white;
            padding: 12px;
        }

        .grid td {
            padding: 10px;
            border: 1px solid #ccc;
            text-align: center;
        }

        .grid tr:nth-child(even) {
            background-color: #f9f9f9;
        }

        .grid a {
            text-decoration: none;
            background-color: #222;
            color: white;
            padding: 6px 10px;
            border-radius: 5px;
```

```

    }

    .grid a:hover {
        background-color: #555;
    }

    .back-btn {
        display: inline-block;
        margin-top: 25px;
        text-decoration: none;
        background-color: black;
        color: white;
        padding: 10px 15px;
        border-radius: 5px;
    }

    .back-btn:hover {
        background-color: #444;
    }
</style>
</head>
<body>
<form id="form1" runat="server">
<div class="container">

    <h2>Manage Orders</h2>

    <asp:GridView ID="gvOrders"
runat="server"
CssClass="grid"
AutoGenerateColumns="False"
DataKeyNames="OrderID"
OnRowCommand="gvOrders_RowCommand">

    <Columns>

        <asp:BoundField DataField="OrderID" HeaderText="Order ID" />
        <asp:BoundField DataField="UserID" HeaderText="User ID" />
        <asp:BoundField DataField="TotalAmount" HeaderText="Amount" />
        <asp:BoundField DataField="Status" HeaderText="Status" />
        <asp:BoundField DataField="PaymentMethod" HeaderText="Payment" />

        <asp:ButtonField ButtonType="Button"
            Text="Mark Completed"
            CommandName="Complete" />

    </Columns></asp:GridView>

    <a href="Dashboard.aspx" class="back-btn">
        Back To Dashboard
    </a>
</div>
</form>
</body></html>

```

ManageOrders.aspx.cs

```
using System;using System.Configuration;using System.Data;using System.Data.SqlClient;
namespace PVFC
{
    public partial class ManageOrders : System.Web.UI.Page
    {
        string ConnectionString =
        ConfigurationManager.ConnectionStrings["PVFCConnectionString"].ConnectionString;

        protected void Page_Load(object sender, EventArgs ex)
        {
            if (!IsPostBack)
            {
                LoadOrders();
            }
        }

        void LoadOrders()
        {
            using (SqlConnection connect = new SqlConnection(ConnectionString))
            {
                string orderQuery = "SELECT * FROM Order_t";

                SqlDataAdapter dataAdapter = new SqlDataAdapter(orderQuery, connect);
                DataTable dataTable = new DataTable();
                dataAdapter.Fill(dataTable);

                gvOrders.DataSource = dataTable;
                gvOrders.DataBind();
            }
        }

        protected void gvOrders_RowCommand(object sender,
        System.Web.UI.WebControls.GridViewCommandEventArgs e)
        {
            if (e.CommandName == "Complete")
            {
                int index = Convert.ToInt32(e.CommandArgument);
                int ID = Convert.ToInt32(gvOrders.DataKeys[index].Value);

                using (SqlConnection connect = new SqlConnection(ConnectionString))
                {
                    string sqlQuery = "UPDATE Order_t SET Status='Completed' WHERE
        OrderID=@id";

                    SqlCommand command = new SqlCommand(sqlQuery, connect);
                    command.Parameters.AddWithValue("@id", ID);

                    connect.Open();
                    command.ExecuteNonQuery();
                }

                LoadOrders();
            }
        }
    }
}
```

Inventory.aspx

```
<%@ Page Language="C#"
AutoEventWireup="true" CodeBehind="Inventory.aspx.cs" Inherits="PVFC.Inventory" %>
<!DOCTYPE html>
<html><head runat="server">

    <title>Inventory Management</title>

    <style>

        body {
            font-family: Arial;
            background-color: #f4f4f4;
            margin: 0;
            padding: 0;
        }

        .container {
            width: 80%;
            margin: 40px auto;
            background: white;
            padding: 25px;
            border-radius: 10px;
            box-shadow: 0px 0px 10px #ccc;
        }

        h2 {
            text-align: center;
            color: #333;
            margin-bottom: 25px;
        }

        .grid {
            width: 100%;
            border-collapse: collapse;
        }

        .grid th {
            background-color: black;
            color: white;
            padding: 12px;
        }

        .grid td {
            padding: 10px;
            border: 1px solid #ccc;
            text-align: center;
        }

        .grid tr:nth-child(even) {
            background-color: #f9f9f9;
        }

        .grid input[type=text] {
            width: 80px;
            padding: 5px;
            border-radius: 4px;
            border: 1px solid #ccc;
        }

    </style>

</head>
<body>
```

```

.grid a {
    text-decoration: none;
    color: white;
    background-color: #222;
    padding: 6px 10px;
    border-radius: 5px;
}

.grid a:hover {
    background-color: #555;
}

.back-btn {
    display: inline-block;
    margin-top: 25px;
    text-decoration: none;
    background-color: black;
    color: white;
    padding: 10px 15px;
    border-radius: 5px;
}

.back-btn:hover {
    background-color: #444;
}

</style>
</head>
<body>
<form id="form1" runat="server">
<div class="container">

    <h2>Inventory Management</h2>

    <asp:GridView ID="gvInventory"
        runat="server"
        CssClass="grid"
        AutoGenerateColumns="False"
        AutoGenerateEditButton="True"
        OnRowEditing="gvInventory_RowEditing"
        OnRowCancelingEdit="gvInventory_RowCancelingEdit"
        OnRowUpdating="gvInventory_RowUpdating">

        <Columns>

            <asp:BoundField DataField="ProductID"
                HeaderText="ID"
                ReadOnly="True" />

            <asp:BoundField DataField="ProductName"
                HeaderText="Product Name"
                ReadOnly="True" />

            <asp:BoundField DataField="StockQuantity"
                HeaderText="Stock" />

        </Columns>

    </asp:GridView>

```

```

        <a href="Dashboard.aspx" class="back-btn">
            Back To Dashboard
        </a>
    </div>
</form>
</body></html>

```

Inventory.aspx.cs

```

using System;using System.Configuration;using System.Data;using System.Data.SqlClient;
namespace PVFC
{
    public partial class Inventory : System.Web.UI.Page
    {
        string ConnectionString =
            ConfigurationManager.ConnectionStrings["PVFCConnectionString"].ConnectionString;

        protected void Page_Load(object sender, EventArgs ex)
        {
            if (!IsPostBack)
            {
                LoadInventory();
            }
        }

        void LoadInventory()
        {
            SqlConnection connect = new SqlConnection(ConnectionString);

            string sqlQuery =
                "SELECT ProductID, ProductName, StockQuantity " +
                "FROM Products_t";

            SqlDataAdapter dataAdapter = new SqlDataAdapter(sqlQuery, connect);

            DataSet dataSet = new DataSet();

            dataAdapter.Fill(dataSet);

            gvInventory.DataSource = dataSet;

            gvInventory.DataBind();
        }

        protected void gvInventory_RowEditing(object sender,
            System.Web.UI.WebControls.GridViewEditEventArgs ex)
        {
            gvInventory.EditIndex = ex.NewEditIndex;

            LoadInventory();
        }

        protected void gvInventory_RowCancelingEdit(object sender,
            System.Web.UI.WebControls.GridViewCancelEventArgs ex)
        {
            gvInventory.EditIndex = -1;

            LoadInventory();
        }
    }
}

```

```

    }

    protected void gvInventory_RowUpdating(object sender,
System.Web.UI.WebControls.GridViewUpdateEventArgs ex)
    {
        int ID = Convert.ToInt32(
            gvInventory.Rows[ex.RowIndex].Cells[1].Text);

        string stock =
            ((System.Web.UI.WebControls.TextBox)
            gvInventory.Rows[ex.RowIndex].Cells[3].Controls[0]).Text;

        SqlConnection connect = new SqlConnection(ConnectionString);

        string sqlQuery =
            "UPDATE Products_t SET StockQuantity=@stock " +
            "WHERE ProductID=@id";

        SqlCommand command = new SqlCommand(sqlQuery, connect);

        command.Parameters.AddWithValue("@stock", stock);
        command.Parameters.AddWithValue("@id", ID);

        connect.Open();

        command.ExecuteNonQuery();

        connect.Close();

        gvInventory.EditIndex = -1;

        LoadInventory();
    }
}

```

Cart.aspx

```

<%@ Page Language="C#" AutoEventWireup="true" CodeBehind="Cart.aspx.cs"
Inherits="PVFC.Cart" %>
<!DOCTYPE html>
<html>
<head runat="server">
<title>My Cart</title>
<style>
body{font-family:Arial;background:#f4f4f4;}
.container{width:80%;margin:40px
auto;background:white;padding:25px;border-radius:10px;}
.grid{width:100%;border-collapse:collapse;}
.grid th{background:black;color:white;padding:10px;}
.grid td{padding:10px;border:1px solid #ccc;text-align:center;}
.btn{background:black;color:white;padding:10px;border:none;border-radius:5px;}
</style>
</head>
<body>
<form runat="server">
<div class="container">
<h2>My Cart</h2>

```

```

        <asp:Label ID="lblMessage" runat="server" ForeColor="Green" Font-
Bold="true"></asp:Label><br />
<asp:GridView ID="gvCart" runat="server" CssClass="grid" AutoGenerateColumns="False"
><Columns><asp:BoundField DataField="ProductName" HeaderText="Product" /><asp:BoundField
DataField="Price" HeaderText="Price" />
<asp:BoundField DataField="Quantity" HeaderText="Qty" /><asp:BoundField
DataField="Total" HeaderText="Total" />
</Columns></asp:GridView>
<br />
<asp:Label ID="lblTotal" runat="server" Font-Bold="true"></asp:Label>
<br /><br />
<h3>Recommended Products</h3>
<asp:GridView ID="gvRecommendation" runat="server" CssClass="grid"
AutoGenerateColumns="False">
<Columns>
<asp:BoundField DataField="ProductName" HeaderText="Product" />
<asp:BoundField DataField="Price" HeaderText="Price" />
<asp:BoundField DataField="CategoryName" HeaderText="Category" /></Columns>
</asp:GridView>
<br /><br />
Payment:<asp:DropDownList ID="ddlPayment" runat="server">
    <asp:ListItem>Cash On Delivery</asp:ListItem>
    <asp:ListItem>Card</asp:ListItem>
    <asp:ListItem>JazzCash</asp:ListItem></asp:DropDownList>
<br />
<br />
<asp:Button ID="btnOrder" runat="server" Text="Place Order" CssClass="btn"
OnClick="btnOrder_Click" />
    <br />
    <br />
    <asp:Button ID="btnshop" runat="server" Text="Continue Shopping" CssClass="btn"
PostBackUrl="Products.aspx" />
    <br />
    <br />
    <asp:Button ID="Button1" runat="server" Text="Back To Dashboard" CssClass="btn"
PostBackUrl="Dashboard.aspx" /></div></form></body></html>

```

Cart.aspx.cs

```

using System;using System.Configuration;using System.Data;using
System.Data.SqlClient;using System.Net;using System.IO;using Newtonsoft.Json;using
System.Collections.Generic;using System.Linq;
namespace PVFC
{
    public partial class Cart : System.Web.UI.Page
    {
        string ConnectionString =
ConfigurationManager.ConnectionStrings["PVFCConnectionString"].ConnectionString;
        double total = 0;

        protected void Page_Load(object sender, EventArgs e)
        {
            if (Session["UserID"] == null)
            {
                Response.Redirect("Login.aspx");
                return;
            }

            if (!IsPostBack)
            {

```



```

        if (Request.QueryString["order"] == "success")
        {
            lblMessage.Text = "Order's placed successfully!";
        }

        LoadCart();
        LoadRecommendations();
    }
}

void LoadCart()
{
    int userID = Convert.ToInt32(Session["UserID"]);

    using (SqlConnection connect = new SqlConnection(ConnectionString))
    {
        string Cartquery = "SELECT " +
            "Products_t.ProductName, " +
            "Products_t.Price, " +
            "Cart_t.Quantity, " +
            "(Products_t.Price * Cart_t.Quantity) AS Total " +
            "FROM Cart_t " +
            "INNER JOIN Products_t " +
            " ON Cart_t.ProductID = Products_t.ProductID " +
            "WHERE Cart_t.UserID=@uid";

        SqlDataAdapter dataAdapter = new SqlDataAdapter(Cartquery, connect);
        dataAdapter.SelectCommand.Parameters.AddWithValue("@uid", userID);

        DataTable dataTable = new DataTable();
        dataAdapter.Fill(dataTable);

        gvCart.DataSource = dataTable;
        gvCart.DataBind();

        total = 0;

        foreach (DataRow row in dataTable.Rows)
        {
            total += Convert.ToDouble(row["Total"]);
        }

        lblTotal.Text = "Total Amount is: Rs. " + total;

        if (dataTable.Rows.Count == 0)
        {
            gvCart.Visible = false;
            lblTotal.Text = "";

            if (lblMessage.Text == "")
                lblMessage.Text = "Your cart is empty. Continue shopping!";
        }
        else
        {
            gvCart.Visible = true;
        }
    }
}

void LoadRecommendations()
{

```

```

        int userID = Convert.ToInt32(Session["UserID"]);

        using (SqlConnection connect = new SqlConnection(ConnectionString))
        {
            string cartQuery = "SELECT TOP 1 ProductID " +
                                "FROM Cart_t " +
                                "WHERE UserID=@uid";

            SqlCommand command = new SqlCommand(cartQuery, connect);
            command.Parameters.AddWithValue("@uid", userID);

            connect.Open();
            object result = command.ExecuteScalar();
            connect.Close();

            if (result == null)
            {
                gvRecommendation.DataSource = null;
                gvRecommendation.DataBind();
                return;
            }

            int productID = Convert.ToInt32(result);

            List<int> recIDs = GetRecommendations(productID);

            if (recIDs == null || recIDs.Count == 0)
            {
                gvRecommendation.DataSource = null;
                gvRecommendation.DataBind();
                return;
            }

            string ids = string.Join(",", recIDs.Distinct());

            string query = "SELECT " +
                            "Products_t.ProductName, " +
                            "Products_t.Price, " +
                            "Categories_t.CategoryName " +
                            "FROM Products_t " +
                            "INNER JOIN Categories_t " +
                            "ON Products_t.CategoryID = Categories_t.CategoryID " +
                            "WHERE ProductID IN (" + ids + ")";

            SqlDataAdapter dataAdapter2 = new SqlDataAdapter(query, connect);

            DataTable dataTable2 = new DataTable();
            dataAdapter2.Fill(dataTable2);

            gvRecommendation.DataSource = dataTable2;
            gvRecommendation.DataBind();
        }
    }

    public List<int> GetRecommendations(int productID)
    {
        List<int> recs = new List<int>();

        try
        {

```

```

+ productID;

string url = "http://www.igrawebsite.somee.com/Recommendation.aspx?pid="

HttpWebRequest req = (HttpWebRequest)WebRequest.Create(url);
req.Method = "GET";
req.Timeout = 5000;

ServicePointManager.ServerCertificateValidationCallback =
(sender, cert, chain, sslPolicyErrors) => true;

using (HttpWebResponse res = (HttpWebResponse)req.GetResponse())
using (StreamReader reader = new StreamReader(res.GetResponseStream()))
{
    string json = reader.ReadToEnd();

    if (!string.IsNullOrEmpty(json))
    {
        recs = JsonConvert.DeserializeObject<List<int>>(json);
    }
}
catch
{
    recs = new List<int>();
}

return recs;
}

protected void btnOrder_Click(object sender, EventArgs e)
{
    int userID = Convert.ToInt32(Session["UserID"]);

    using (SqlConnection connect = new SqlConnection(ConnectionString))
    {
        connect.Open();

        try
        {
            total = 0;

            string cartQuery = "SELECT "+
                "Cart_t.ProductID, "+
                "Cart_t.Quantity, "+
                "Products_t.Price "+
                "FROM Cart_t "+
                "INNER JOIN Products_t "+
                "ON Cart_t.ProductID = Products_t.ProductID "+
                "WHERE Cart_t.UserID=@uid ";

            SqlDataAdapter dataAdapter = new SqlDataAdapter(cartQuery, connect);
            dataAdapter.SelectCommand.Parameters.AddWithValue("@uid", userID);

            DataTable dataTable = new DataTable();
            dataAdapter.Fill(dataTable);

            if (dataTable.Rows.Count == 0)
            {
                lblMessage.Text = "Cart is empty!";
                return;
            }
        }
    }
}

```

```

        foreach (DataRow row in dataTable.Rows)
        {
            total += Convert.ToDouble(row["Price"]) *
                    Convert.ToDouble(row["Quantity"]);
        }

        string status = ddlPayment.SelectedValue == "Cash On Delivery"
            ? "Pending"
            : "Completed";

        string orderQuery = "INSERT INTO Order_t " +
            "(UserID, TotalAmount, Status, PaymentMethod)" +
            "VALUES (@uid, @total, @status, @payment); " +
            "SELECT SCOPE_IDENTITY();";

        SqlCommand orderCmd = new SqlCommand(orderQuery, connect);
        orderCmd.Parameters.AddWithValue("@uid", userID);
        orderCmd.Parameters.AddWithValue("@total", total);
        orderCmd.Parameters.AddWithValue("@status", status);
        orderCmd.Parameters.AddWithValue("@payment",
ddlPayment.SelectedValue);

        int orderID = Convert.ToInt32(orderCmd.ExecuteScalar());

        foreach (DataRow row in dataTable.Rows)
        {
            string itemQuery = "INSERT INTO OrderItems_t " +
                "(OrderID, ProductID, Quantity, Price) " +
                "VALUES (@oid, @pid, @qty, @price)";

            SqlCommand itemCmd = new SqlCommand(itemQuery, connect);
            itemCmd.Parameters.AddWithValue("@oid", orderID);
            itemCmd.Parameters.AddWithValue("@pid", row["ProductID"]);
            itemCmd.Parameters.AddWithValue("@qty", row["Quantity"]);
            itemCmd.Parameters.AddWithValue("@price", row["Price"]);
            itemCmd.ExecuteNonQuery();
        }

        string deleteQuery = "DELETE FROM Cart_t " +
            " WHERE UserID=@uid ";
        SqlCommand deleteCmd = new SqlCommand(deleteQuery, connect);
        deleteCmd.Parameters.AddWithValue("@uid", userID);
        deleteCmd.ExecuteNonQuery();

        Response.Redirect("Cart.aspx?order=success");
    }
    catch (Exception ex)
    {
        lblMessage.Text = ex.Message;
    }
}
}
}
}
}

```

Products.aspx

```

<%@ Page Language="C#"
AutoEventWireup="true"CodeBehind="Products.aspx.cs"Inherits="PVFC.Products" %>
<!DOCTYPE html>
<html><head runat="server">

    <title>Products</title>

    <style>

        body {
            font-family: Arial;
            background-color: #f4f4f4;
            margin: 0;
            padding: 0;
        }

        .container {
            width: 85%;
            margin: 40px auto;
            background: white;
            padding: 25px;
            border-radius: 10px;
            box-shadow: 0px 0px 10px #ccc;
        }

        h2 {
            text-align: center;
            color: #333;
        }

        input[type=text] {
            padding: 10px;
            width: 220px;
            border-radius: 5px;
            border: 1px solid #ccc;
        }

        input[type=submit] {
            background: black;
            color: white;
            border: none;
            padding: 10px 15px;
            border-radius: 5px;
            cursor: pointer;
        }

        .grid {
            width: 100%;
            border-collapse: collapse;
            margin-top: 20px;
        }

        .grid th {
            background-color: black;
            color: white;
            padding: 12px;
        }

        .grid td {
            border: 1px solid #ccc;
            padding: 10px;
        }
    
```

```

        text-align: center;
    }

    .grid tr:nth-child(even) {
        background-color: #f9f9f9;
    }

    .grid a {
        text-decoration: none;
        background: #222;
        color: white;
        padding: 5px 10px;
        border-radius: 5px;
    }

    .cart-btn {
        display: inline-block;
        margin-top: 20px;
        background: black;
        color: white;
        text-decoration: none;
        padding: 10px 15px;
        border-radius: 5px;
    }

    .back-btn {
        display: inline-block;
        margin-top: 20px;
        background: black;
        color: white;
        text-decoration: none;
        padding: 10px 15px;
        border-radius: 5px;
    }
}

</style>
</head>
<body>
<form id="form1" runat="server">
<div class="container">

    <h2>Available Abayas</h2>

    Search Product:

    <asp:TextBox ID="txtSearch"
        runat="server"></asp:TextBox>

    <asp:Button ID="btnSearch"
        runat="server"
        Text="Search"
        OnClick="btnSearch_Click" />

    <asp:GridView ID="gvProducts"
        runat="server"
        CssClass="grid"
        AutoGenerateColumns="False"
        AutoGenerateSelectButton="True"
        OnSelectedIndexChanged="gvProducts_SelectedIndexChanged">

    <Columns>

```

```

        <asp:BoundField DataField="ProductID" HeaderText="ID" />
        <asp:BoundField DataField="ProductName" HeaderText="Product Name" />
        <asp:BoundField DataField="Price" HeaderText="Price" />
        <asp:BoundField DataField="StockQuantity" HeaderText="Stock" />

    </Columns>

</asp:GridView>

<a href="Cart.aspx" class="cart-btn">
    Go To Cart
</a>
<a href="Dashboard.aspx" class="back-btn">
    Back To Dashboard</a></div>
</form>
</body></html>

```

Products.aspx.cs

```

using System;using System.Configuration;using System.Data;using System.Data.SqlClient;
namespace PVFC
{
    public partial class Products : System.Web.UI.Page
    {
        string ConnectionString =
            ConfigurationManager.ConnectionStrings["PVFCConnectionString"].ConnectionString;

        protected void Page_Load(object sender, EventArgs e)
        {
            if (!IsPostBack)
            {
                LoadProducts();
            }
        }

        void LoadProducts(string search = "")
        {
            SqlConnection connect = new SqlConnection(ConnectionString);

            string sqlQuery =
                "SELECT ProductID, " +
                "    ProductName,Price,StockQuantity " +
                "FROM Products_t " +
                "WHERE ProductName LIKE @search";

            SqlDataAdapter dataAdapter = new SqlDataAdapter(sqlQuery, connect);

            dataAdapter.SelectCommand.Parameters.AddWithValue("@search",
                "%" + search + "%");

            DataSet dataSet = new DataSet();

            dataAdapter.Fill(dataSet);

            gvProducts.DataSource = dataSet;
        }
    }
}

```

```

        gvProducts.DataBind();
    }

    protected void btnSearch_Click(object sender, EventArgs e)
    {
        LoadProducts(txtSearch.Text);
    }

    protected void gvProducts_SelectedIndexChanged(object sender, EventArgs e)
    {
        int productID =
            Convert.ToInt32(
                gvProducts.SelectedRow.Cells[1].Text);

        int userID =
            Convert.ToInt32(Session["UserID"]);

        SqlConnection connect = new SqlConnection(ConnectionString);

        string sqlquery =
            "INSERT INTO Cart_t " +
            "(UserID, ProductID, Quantity) " +

            "VALUES " +
            "(@uid, @pid, 1)";

        SqlCommand command
            = new SqlCommand(sqlquery, connect);

        command.Parameters.AddWithValue("@uid", userID);
        command.Parameters.AddWithValue("@pid", productID);

        connect.Open();
        command.ExecuteNonQuery();
        connect.Close();

        Response.Write("<script>alert('Added To Cart')</script>");
    }
}
}

```

Orders.aspx

```

<%@ Page Language="C#"
AutoEventWireup="true" CodeBehind="Orders.aspx.cs" Inherits="PVFC.Orders" %>
<!DOCTYPE html>
<html><head runat="server">

    <title>My Orders</title>

    <style>
        body {
            font-family: Arial;
            background-color: #f4f4f4;
            margin: 0;
            padding: 0;

```



```

    }

    .container {
        width: 85%;
        margin: 40px auto;
        background: white;
        padding: 25px;
        border-radius: 10px;
        box-shadow: 0px 0px 10px #ccc;
    }

    h2 {
        text-align: center;
        color: #333;
    }

    .grid {
        width: 100%;
        border-collapse: collapse;
    }

    .grid th {
        background-color: black;
        color: white;
        padding: 12px;
    }

    .grid td {
        border: 1px solid #ccc;
        padding: 10px;
        text-align: center;
    }

    .grid tr:nth-child(even) {
        background-color: #f9f9f9;
    }

    .back-btn {
        display: inline-block;
        margin-top: 20px;
        background: black;
        color: white;
        text-decoration: none;
        padding: 10px 15px;
        border-radius: 5px;
    }
}

</style>
</head>
<body>
<form id="form1" runat="server">
<div class="container">

    <h2>My Orders</h2>

    <asp:GridView ID="gvOrders"
        runat="server"
        CssClass="grid"
        AutoGenerateColumns="False">

        <Columns>

```

```

        <asp:BoundField DataField="OrderID" HeaderText="Order ID" />
        <asp:BoundField DataField="OrderDate" HeaderText="Date" />
        <asp:BoundField DataField="ProductName" HeaderText="Product" />
        <asp:BoundField DataField="Quantity" HeaderText="Qty" />
        <asp:BoundField DataField="Total" HeaderText="Total" />
        <asp:BoundField DataField="Status" HeaderText="Status" />

    </Columns>

</asp:GridView>

<a href="Dashboard.aspx" class="back-btn">
    Back To Dashboard
</a>
</div>
</form>
</body></html>

```

Orders.aspx.cs

```

using System;using System.Configuration;using System.Data;using System.Data.SqlClient;
namespace PVFC
{
    public partial class Orders : System.Web.UI.Page
    {
        string ConnectionString =
            ConfigurationManager.ConnectionStrings["PVFCConnectionString"].ConnectionString;

        protected void Page_Load(object sender, EventArgs e)
        {
            if (!IsPostBack)
            {
                LoadOrders();
            }
        }

        void LoadOrders()
        {
            int userID =
                Convert.ToInt32(Session["UserID"]);

            SqlConnection connect = new SqlConnection(ConnectionString);

            string sqlquery = " SELECT  " +
                "o.OrderID,o.OrderDate, p.ProductName,i.Quantity, " +
                "(i.Price * i.Quantity) AS Total,o.Status " +
                "FROM  Order_t as o " +
                "INNER JOIN OrderItems_t i ON o.OrderID = i.OrderID " +
                "INNER JOIN Products_t p ON i.ProductID = p.ProductID " +
                "WHERE o.UserID = @uid " +
                "ORDER BY o.OrderID DESC ";

            SqlDataAdapter dataAdapter = new SqlDataAdapter(sqlquery, connect);

            dataAdapter.SelectCommand.Parameters.AddWithValue("@uid", userID);

            DataSet dataSet = new DataSet();

```

```

        dataAdapter.Fill(dataSet);

        gvOrders.DataSource = dataSet;

        gvOrders.DataBind();
    }
}

```

Recommendation.aspx

```

<%@ Page Language="C#"
AutoEventWireup="true" CodeBehind="Recommendation.aspx.cs" Inherits="PVFC.Recommendation"
%>

```

Recommendation.aspx.cs

```

using System; using System.Configuration; using System.Data.SqlClient; using
System.Collections.Generic; using System.Web.Script.Serialization;
namespace PVFC
{
    public partial class Recommendation : System.Web.UI.Page
    {
        string ConnectionString =
ConfigurationManager.ConnectionStrings["PVFCConnectionString"].ConnectionString;

        protected void Page_Load(object sender, EventArgs e)
        {
            Response.Clear();
            Response.ContentType = "application/json";

            List<int> recommendations = new List<int>();

            try
            {
                int ProductID = 0;

                if (!string.IsNullOrEmpty(Request.QueryString["pid"]))
                {
                    ProductID = Convert.ToInt32(Request.QueryString["pid"]);
                }

                using (SqlConnection Connect = new SqlConnection(ConnectionString))
                {
                    Connect.Open();

                    string sqlQuery = "SELECT TOP 5 O2.ProductID " +
"FROM OrderItems_t O1 " +
"INNER JOIN OrderItems_t O2 " +
"ON O1.OrderID = O2.OrderID " +
"WHERE O1.ProductID = @pid " +

```

```

        "AND O2.ProductID <> @pid " +
        "GROUP BY O2.ProductID " +
        "ORDER BY COUNT(*) DESC";

SqlCommand command = new SqlCommand(sqlQuery, Connect);
command.Parameters.AddWithValue("@pid", ProductID);

SqlDataReader dataReader = command.ExecuteReader();

while (dataReader.Read())
{
    recommendations.Add(Convert.ToInt32(dataReader["ProductID"]));
}

dataReader.Close();

if (recommendations.Count == 0)
{
    string fallback = "SELECT TOP 5 ProductID " +
        "FROM Products_t " +
        "WHERE CategoryID = " +
        "(SELECT CategoryID FROM Products_t WHERE ProductID=@pid) " +
        "AND ProductID<>@pid";

    SqlCommand command2 = new SqlCommand(fallback, Connect);
    command2.Parameters.AddWithValue("@pid", ProductID);

    SqlDataReader dataReader2 = command2.ExecuteReader();

    while (dataReader2.Read())
    {
        recommendations.Add(Convert.ToInt32(dataReader2["ProductID"]));
    }

    dataReader2.Close();
}

}
}
catch
{
    // safe fail
}

JavaScriptSerializer js = new JavaScriptSerializer();
Response.Write(js.Serialize(recommendations));
Response.End();
}
}
}

```

DemandForecast.aspx

```

<%@ Page Language="C#"
AutoEventWireup="true"CodeBehind="DemandForecast.aspx.cs"Inherits="PVFC.DemandForecast"
%>
<!DOCTYPE html>

```

```

<html><head runat="server">
<title>Demand Forecast</title>
<style>
body{
    font-family:Arial;
    background:#f4f4f4;
}
.container{
    width:80%;
    margin:auto;
    background:white;
    padding:20px;
    margin-top:30px;
    border-radius:8px;
}
h2{
    text-align:center;
}
.grid{
    width:100%;
}.btn{
    background:black;
    color:white;
    padding:10px;
    border:none;
    border-radius:5px;
}
</style>
</head>
<body>
<form runat="server">
<div class="container">
<h2>Demand Forecast Report</h2>
<asp:GridView ID="gvForecast"runat="server"CssClass="grid"></asp:GridView>
<br />
<asp:Button ID="btnBack"runat="server"Text="Back To
Dashboard"CssClass="btn"PostBackUrl="Dashboard.aspx" />
</div>
</form>
</body></html>

```

DemandForecast.aspx.cs

```

using System;using System.Configuration;using System.Data;using System.Data.SqlClient;
namespace PVFC
{
    public partial class DemandForecast : System.Web.UI.Page
    {
        string ConnectionString =
            ConfigurationManager.ConnectionStrings["PVFCCConnectionString"].ConnectionString;

        protected void Page_Load(object sender, EventArgs ex)
        {
            if (!IsPostBack)
            {
                LoadForecast();
            }
        }
    }
}

```

```

    }

    void LoadForecast()
    {
        SqlConnection connect =
            new SqlConnection(ConnectionString);

        string sqlquery = @"

        SELECT
        P.ProductName,
        SUM(OI.Quantity) AS TotalSold,

        CASE

        WHEN SUM(OI.Quantity) >= 12
        THEN 'High Demand'

        WHEN SUM(OI.Quantity) BETWEEN 8 AND 11
        THEN 'Medium Demand'

        WHEN SUM(OI.Quantity) BETWEEN 4 AND 7
        THEN 'Low Demand'

        ELSE 'Very Low Demand'

        END AS DemandLevel

        FROM OrderItems_t OI

        INNER JOIN Products_t P
        ON OI.ProductID = P.ProductID

        GROUP BY P.ProductName

        ORDER BY TotalSold DESC";

        SqlDataAdapter dataAdapter =
            new SqlDataAdapter(sqlquery, connect);

        DataTable dataTable =
            new DataTable();

        dataAdapter.Fill(dataTable);

        gvForecast.DataSource = dataTable;

        gvForecast.DataBind();
    }
}

```

CustomerSegmentationt.aspx

```

<%@ Page Language="C#"
AutoEventWireup="true" CodeBehind="CustomerSegmentation.aspx.cs" Inherits="PVFC.CustomerSe
gmentation" %>
<!DOCTYPE html>

```

```

<html><head runat="server">
<title>Customer Segmentation</title>
<style>
body{
    font-family:Arial;
    background:#f4f4f4;
    margin:0;
    padding:20px;
}
.container{
    width:90%;
    margin:auto;
    background:white;
    padding:20px;
    border-radius:10px;
    box-shadow:0px 0px 10px #ccc;
}
h2{
    text-align:center;
    color:#333;
}
h3{
    background:black;
    color:white;
    padding:10px;
    border-radius:5px;
}
.grid{
    width:100%;
    border-collapse:collapse;
    margin-bottom:10px;
}
.grid th{
    background:#222;
    color:white;
    padding:10px;
}
.grid td{
    border:1px solid #ccc;
    padding:8px;
}
.btn{
    padding:8px 15px;
    background:black;
    color:white;
    border:none;
    border-radius:5px;
    cursor:pointer;
}
.btn:hover{
    background:#444;
}
.msg{
    font-weight:bold;
    color:green;
}
.back-btn{
    background:#666;
}
.back-btn:hover{
    background:#333;
}

```

```

}
</style>
</head>
<body>
<form runat="server">
<div class="container">
<h2>Customer Segmentation & Marketing</h2>
<asp:Button ID="btnRefresh"runat="server"Text="Refresh
Data"CssClass="btn"OnClick="btnRefresh_Click" />
<br /><br />
<h3>Premium Customers</h3>
<asp:GridView ID="gvPremium"runat="server"CssClass="grid"></asp:GridView>
<asp:Button ID="btnPremium"runat="server"Text="Send
Offer"CssClass="btn"OnClick="btnPremium_Click" />
<asp:Label ID="lblPremium"runat="server"CssClass="msg"></asp:Label>
<br /><br />
<h3>Frequent Customers</h3>
<asp:GridView ID="gvFrequent"runat="server"CssClass="grid"></asp:GridView>
<asp:Button ID="btnFrequent"runat="server"Text="Send
Offer"CssClass="btn"OnClick="btnFrequent_Click" />
<asp:Label ID="lblFrequent"runat="server"CssClass="msg"></asp:Label>
<br /><br />
<h3>Regular Customers</h3>
<asp:GridView ID="gvRegular"runat="server"CssClass="grid"></asp:GridView>
<asp:Button ID="btnRegular"runat="server"Text="Send
Offer"CssClass="btn"OnClick="btnRegular_Click" />
<asp:Label ID="lblRegular"runat="server"CssClass="msg"></asp:Label>
<br /><br />
<h3>Occasional Customers</h3>
<asp:GridView ID="gvOccasional"runat="server"CssClass="grid"></asp:GridView>
<asp:Button ID="btnOccasional"runat="server"Text="Send
Offer"CssClass="btn"OnClick="btnOccasional_Click" />
<asp:Label ID="lblOccasional"runat="server"CssClass="msg"></asp:Label>
<br /><br />
<h3>Budget Customers</h3>
<asp:GridView ID="gvBudget"runat="server"CssClass="grid"></asp:GridView>
<asp:Button ID="btnBudget"runat="server"Text="Send
Offer"CssClass="btn"OnClick="btnBudget_Click" />
<asp:Label ID="lblBudget"runat="server"CssClass="msg"></asp:Label>
<br /><br />
<asp:Button ID="btnBack"runat="server"Text="Back To Dashboard"CssClass="btn back-
btn"OnClick="btnBack_Click" />
</div>
</form>
</body></html>

```

CustomerSegmentationt.aspx.cs

```

using System;using System.Data;using System.Data.SqlClient;using System.Configuration;
namespace PVFC
{
    public partial class CustomerSegmentation : System.Web.UI.Page
    {
        string ConnectionString =
            ConfigurationManager.ConnectionStrings["PVFCConnectionString"].ConnectionString;

        protected void Page_Load(object sender, EventArgs e)
        {
            if (!IsPostBack)

```



```

    {
        LoadAll();
    }
}

void LoadAll()
{
    LoadSegment("SELECT " +
        "U.UserID AS [ID], " +
        "U.FullName AS [Customer Name], " +
        "U.Address AS [City], " +
        "COUNT(O.OrderID) AS [Orders], " +
        "ISNULL(SUM(O.TotalAmount),0) AS [Total Spent] " +

        "FROM Users_t U " +

        "LEFT JOIN Order_t O " +
        "ON U.UserID = O.UserID " +

        "WHERE U.RoleID = 3 " +

        "GROUP BY U.UserID,U.FullName,U.Address " +

        "HAVING ISNULL(SUM(O.TotalAmount),0) >= 50000 " +

        "ORDER BY [Total Spent] DESC ", gvPremium);

    LoadSegment("SELECT " +
        "U.UserID AS [ID], " +
        "U.FullName AS [Customer Name], " +
        "U.Address AS [City], " +
        "COUNT(O.OrderID) AS [Orders], " +
        "ISNULL(SUM(O.TotalAmount),0) AS [Total Spent] " +

        "FROM Users_t U " +

        "LEFT JOIN Order_t O " +
        "ON U.UserID = O.UserID " +

        "WHERE U.RoleID = 3 " +

        "GROUP BY U.UserID,U.FullName,U.Address " +

        "HAVING COUNT(O.OrderID) >= 5 " +
        "AND ISNULL(SUM(O.TotalAmount),0) < 50000 " +

        "ORDER BY [Orders] DESC ", gvFrequent);

    LoadSegment("SELECT " +
        "U.UserID AS [ID], " +
        "U.FullName AS [Customer Name], " +
        "U.Address AS [City], " +
        "COUNT(O.OrderID) AS [Orders], " +
        "ISNULL(SUM(O.TotalAmount),0) AS [Total Spent] " +

        "FROM Users_t U " +

        "LEFT JOIN Order_t O " +
        "ON U.UserID = O.UserID " +

        "WHERE U.RoleID = 3 " +

```

```

"GROUP BY U.UserID,U.FullName,U.Address " +
"HAVING COUNT(O.OrderID) BETWEEN 3 AND 4 ", gvRegular);

LoadSegment("SELECT " +
"U.UserID AS [ID], " +
"U.FullName AS [Customer Name], " +
"U.Address AS [City], " +
"COUNT(O.OrderID) AS [Orders], " +
"ISNULL(SUM(O.TotalAmount),0) AS [Total Spent] " +
"FROM Users_t U " +
"LEFT JOIN Order_t O " +
"ON U.UserID = O.UserID " +
"WHERE U.RoleID = 3 " +
"GROUP BY U.UserID,U.FullName,U.Address " +
"HAVING COUNT(O.OrderID) BETWEEN 1 AND 2 " +
"AND ISNULL(SUM(O.TotalAmount),0) >= 10000 ", gvOccasional);

LoadSegment("SELECT " +
"U.UserID AS [ID], " +
"U.FullName AS [Customer Name], " +
"U.Address AS [City], " +
"COUNT(O.OrderID) AS [Orders], " +
"ISNULL(SUM(O.TotalAmount),0) AS [Total Spent] " +
"FROM Users_t U " +
"LEFT JOIN Order_t O " +
"ON U.UserID = O.UserID " +
"WHERE U.RoleID = 3 " +
"GROUP BY U.UserID,U.FullName,U.Address " +
"HAVING ISNULL(SUM(O.TotalAmount),0) < 10000 ", gvBudget);
}

void LoadSegment(string sqlquery,
System.Web.UI.WebControls.GridView gv)
{
    SqlConnection connect = new SqlConnection(ConnectionString);

    SqlDataAdapter dataAdapter =
    new SqlDataAdapter(sqlquery, connect);

    DataTable dataTable = new DataTable();

    dataAdapter.Fill(dataTable);

    gv.DataSource = dataTable;
    gv.DataBind();
}

void ShowMessage(
System.Web.UI.WebControls.GridView gv,

```

```

        System.Web.UI.WebControls.Label lbl,
        string message)
    {
        lbl.Text =
            message + " (" + gv.Rows.Count +
            " customers)";
    }

    protected void btnRefresh_Click(object sender, EventArgs e)
    {
        LoadAll();
    }

    protected void btnPremium_Click(object sender, EventArgs e)
    {
        ShowMessage(gvPremium,
            lblPremium,
            "Discount has been Sent To Premium Customers");
    }

    protected void btnFrequent_Click(object sender, EventArgs e)
    {
        ShowMessage(gvFrequent,
            lblFrequent,
            "Rewards has been Sent To Frequent Customers");
    }

    protected void btnRegular_Click(object sender, EventArgs e)
    {
        ShowMessage(gvRegular,
            lblRegular,
            "Special Offers has been Sent");
    }

    protected void btnOccasional_Click(object sender, EventArgs e)
    {
        ShowMessage(gvOccasional,
            lblOccasional,
            "Reminder Offers has been Sent");
    }

    protected void btnBudget_Click(object sender, EventArgs e)
    {
        ShowMessage(gvBudget,
            lblBudget,
            "Budget Deals has been Sent");
    }

    protected void btnBack_Click(object sender, EventArgs e)
    {
        Response.Redirect("Dashboard.aspx");
    }
}

```

Task 6 – Project Hosting on Somee

SOME.com Dashboard Shop Ask a question Search knowledge base... Log Out

Dashboard Support tickets Profile Billing Invoices Payment methods Subscriptions SSL Certificates Free certificate order Certificate signing request Virtual servers Websites Create website IqraWebsite.somee.cc File manager Domains / Bindings IIS applications IIS log viewer Event viewer

.../ Websites / IqraWebsite.somee.com

Summary File manager Domains / Bindings IIS applications IIS log viewer Event viewer Delete

www.IqraWebsite.somee.com

- IADProject
 - bin
 - Lab01
 - Lab02
 - Lab04
 - Lab05
 - Lab06
 - Lab07
 - Lab11
- Protected.IqraWebsite.somee.com

Name	Size	Date modified
IADProject	0	6/19/2026, 12:52:15 AM
Lab01	0	3/5/2026, 5:04:25 PM
Lab02	0	3/5/2026, 5:05:54 PM
Lab04	0	3/14/2026, 8:04:03 PM
Lab05	0	5/2/2026, 4:59:56 PM
Lab06	0	5/28/2026, 6:57:20 PM
Lab07	0	5/28/2026, 7:01:46 PM
Lab11	0	5/28/2026, 6:55:47 PM
index.html	1542	6/19/2026, 1:00:58 AM

Showing 1 to 9 of 9 entries

SOME.com Dashboard Shop Ask a question Search knowledge base... Log Out

Dashboard Support tickets Profile Billing Invoices Payment methods Subscriptions SSL Certificates Free certificate order Certificate signing request Virtual servers Websites Create website IqraWebsite.somee.cc File manager Domains / Bindings IIS applications IIS log viewer Event viewer

.../ Websites / IqraWebsite.somee.com

Summary File manager Domains / Bindings IIS applications IIS log viewer Event viewer Delete

www.IqraWebsite.somee.com

- IADProject
 - bin
 - Lab01
 - Lab02
 - Lab04
 - Lab05
 - Lab06
 - Lab07
 - Lab11
- Protected.IqraWebsite.somee.com

Name	Size	Date modified
bin	0	6/19/2026, 12:52:34 AM
Cart.aspx	2247	6/19/2026, 12:52:15 AM
CustomerSegmentation.aspx	3184	6/19/2026, 12:52:15 AM
Dashboard.aspx	3840	6/19/2026, 12:52:15 AM
DemandForecast.aspx	970	6/19/2026, 12:52:15 AM
Inventory.aspx	2952	6/19/2026, 12:52:15 AM
Login.aspx	3388	6/19/2026, 12:52:15 AM
ManageOrders.aspx	2753	6/19/2026, 12:52:15 AM
ManageProducts.aspx	3617	6/19/2026, 12:52:15 AM
ManageUsers.aspx	2697	6/19/2026, 12:52:15 AM
Orders.aspx	2245	6/19/2026, 12:52:15 AM
Products.aspx	3388	6/19/2026, 12:52:15 AM
Recommendation.aspx	120	6/19/2026, 12:52:15 AM
Register.aspx	2650	6/19/2026, 12:52:15 AM
Web.config	1639	6/19/2026, 12:52:15 AM

Showing 1 to 15 of 15 entries

Task 7 – Website Testing

New User Registration

Customer Registration

Name:

Email:

Password:

Phone:

Address:

Registration Successful!

[Back To Login](#)

[Web hosting by Somee.com](#)

Admin Login

Ivory Haya Login

Email

Password

Login

Demo Accounts

Admin
Email: admin@gmail.com
Password: admin123

Sales Person
Email: sales@gmail.com
Password: sales123

Customer
Email: ayesha@gmail.com
Password: 123

New User? [Register Here](#)

Dashboard

Welcome Admin User

Admin Controls

Manage Users

Manage Products

Manage Orders

Customer Segmentation

Demand Forecast

Logout

Manage Users

ID	Name	Email	Phone	Role	Status		
1	Admin User	admin@gmail.com	03001234567	Admin	True	Deactivate	Activate
2	Sales User	sales@gmail.com	03111234567	SalesPerson	True	Deactivate	Activate
3	Ayesha Khan	ayesha@gmail.com	03211234567	Customer	True	Deactivate	Activate
4	Fatima Noor	fatima@gmail.com	03331234567	Customer	True	Deactivate	Activate
5	Sara Ali	sara@gmail.com	03451234567	Customer	True	Deactivate	Activate
6	Hina Malik	hina@gmail.com	03010000001	Customer	True	Deactivate	Activate
7	Zara Ahmed	zara@gmail.com	03010000002	Customer	False	Deactivate	Activate
8	Noor Fatima	noor@gmail.com	03010000003	Customer	True	Deactivate	Activate
9	Maham Ali	maham@gmail.com	03010000004	Customer	True	Deactivate	Activate
10	Areeba Khan	areeba@gmail.com	03010000005	Customer	True	Deactivate	Activate
11	Iqra Noor	iqra@gmail.com	03010000006	Customer	True	Deactivate	Activate
12	Sana Sheikh	sana@gmail.com	03010000007	Customer	False	Deactivate	Activate
13	Eman Tariq	eman@gmail.com	03010000008	Customer	True	Deactivate	Activate
14	Rabia Aslam	rabia@gmail.com	03010000009	Customer	True	Deactivate	Activate
15	Komal Shah	komal@gmail.com	03010000010	Customer	True	Deactivate	Activate

Back To Dashboard

Manage Products

Silk Casual Abaya

10000

25

Add Product

ID	Product Name	Price	Stock	Status		
1	Black Casual Abaya	4500.00	25	Inactive	Deactivate	Activate
2	Grey Front Open Abaya	5500.00	15	Active	Deactivate	Activate
3	Formal Pearl Abaya	7000.00	10	Active	Deactivate	Activate
4	Luxury Gold Abaya	12000.00	5	Active	Deactivate	Activate
5	White Wedding Abaya	18000.00	3	Active	Deactivate	Activate
6	Blue Casual Abaya	5000.00	12	Active	Deactivate	Activate
7	Stone Formal Abaya	8500.00	8	Active	Deactivate	Activate
8	Royal Black Luxury Abaya	15000.00	5	Active	Deactivate	Activate
9	Golden Wedding Abaya	22000.00	4	Active	Deactivate	Activate
10	Silk Casual Abaya	10000.00	25	Active	Deactivate	Activate

Back To Dashboard

Manage Orders

Order ID	User ID	Amount	Status	Payment	
1	3	11500.00	Completed	Card	Mark Completed
2	3	18000.00	Completed	JazzCash	Mark Completed
3	3	4500.00	Completed	Cash On Delivery	Mark Completed
4	4	19000.00	Completed	Card	Mark Completed
5	4	12000.00	Completed	JazzCash	Mark Completed
6	5	30000.00	Completed	Card	Mark Completed
7	5	18000.00	Completed	Cash On Delivery	Mark Completed
8	5	22000.00	Completed	Card	Mark Completed
9	6	10000.00	Completed	Card	Mark Completed
10	7	12500.00	Completed	JazzCash	Mark Completed
11	7	25000.00	Completed	Card	Mark Completed
12	7	7000.00	Completed	Cash On Delivery	Mark Completed
13	8	18000.00	Completed	Card	Mark Completed
14	8	4500.00	Completed	JazzCash	Mark Completed
15	9	22000.00	Completed	Card	Mark Completed

Customer Segmentation & Marketing

Refresh Data

Premium Customers

ID	Customer Name	City	Orders	Total Spent
5	Sara Ali	Faisalabad	3	70000.00
3	Ayesha Khan	Rawalpindi	5	58500.00

Send Offer Discount has been Sent To Premium Customers (2 customers)

Frequent Customers

Send Offer

Regular Customers

ID	Customer Name	City	Orders	Total Spent
5	Sara Ali	Faisalabad	3	70000.00
7	Zara Ahmed	Karachi	3	44500.00

Demand Forecast Report

ProductName	TotalSold	DemandLevel
White Wedding Abaya	8	Medium Demand
Luxury Gold Abaya	7	Low Demand
Black Casual Abaya	7	Low Demand
Formal Pearl Abaya	6	Low Demand
Golden Wedding Abaya	4	Low Demand
Grey Front Open Abaya	3	Very Low Demand
Stone Formal Abaya	3	Very Low Demand
Blue Casual Abaya	2	Very Low Demand
Royal Black Luxury Abaya	1	Very Low Demand

Back To Dashboard

[Web hosting by Somee.com](#)

Salesperson Login

Ivory Haya Login

Email

Password

Login

Demo Accounts

Admin
Email: admin@gmail.com
Password: admin123

Sales Person
Email: sales@gmail.com
Password: sales123

Customer
Email: ayesha@gmail.com
Password: 123

New User? [Register Here](#)

Dashboard

Welcome Sales User

Sales Person Controls

Manage Inventory

Demand Forecast

Logout

[Web hosting by Somee.com](#)

Inventory Management

	ID	Product Name	Stock
Edit	1	Black Casual Abaya	25
Edit	2	Grey Front Open Abaya	15
Edit	3	Formal Pearl Abaya	10
Edit	4	Luxury Gold Abaya	5
Edit	5	White Wedding Abaya	3
Edit	6	Blue Casual Abaya	12
Update Cancel	7	Stone Formal Abaya	3d
Edit	8	Royal Black Luxury Abaya	5
Edit	9	Golden Wedding Abaya	4
Edit	10	Silk Casual Abaya	25

Back To Dashboard

[Web hosting by Somee.com](#)

Demand Forecast Report

ProductName	TotalSold	DemandLevel
White Wedding Abaya	8	Medium Demand
Luxury Gold Abaya	7	Low Demand
Black Casual Abaya	7	Low Demand
Formal Pearl Abaya	6	Low Demand
Golden Wedding Abaya	4	Low Demand
Grey Front Open Abaya	3	Very Low Demand
Stone Formal Abaya	3	Very Low Demand
Blue Casual Abaya	2	Very Low Demand
Royal Black Luxury Abaya	1	Very Low Demand

Back To Dashboard

[Web hosting by Somee.com](#)

Customer Login

Ivory Haya Login

Email

Password

Login

Demo Accounts

Admin
Email: admin@gmail.com
Password: admin123

Sales Person
Email: sales@gmail.com
Password: sales123

Customer
Email: ayesha@gmail.com
Password: 123

New User? [Register Here](#)

Dashboard

Welcome Ayesha Khan

Customer Controls

[Browse Products](#)

[My Orders](#)

[Logout](#)

[Web hosting by Somee.com](#)

Available Abayas

Search Product:

[Search](#)

	ID	Product Name	Price	Stock
Select	5	White Wedding Abaya	18000.00	3

[Go To Cart](#)

[Back To Dashboard](#)

[Web hosting by Somee.com](#)

My Cart

Product	Price	Qty	Total
White Wedding Abaya	18000.00	1	18000.00

Total Amount is: Rs. 18000

Recommended Products

Payment: [Cash On Delivery](#) ▼

[Place Order](#)

[Continue Shopping](#)

[Back To Dashboard](#)

My Cart

Order's placed successfully!

Recommended Products

Payment: Cash On Delivery

[Place Order](#)

[Continue Shopping](#)

[Back To Dashboard](#)

[Web hosting by Somee.com](#)

My Orders

Order ID	Date	Product	Qty	Total	Status
31	6/18/2026 3:13:36 PM	White Wedding Abaya	1	18000.00	Completed
30	6/18/2026 8:14:11 AM	Black Casual Abaya	1	4500.00	Completed
29	6/18/2026 7:58:10 AM	Black Casual Abaya	1	4500.00	Completed
29	6/18/2026 7:58:10 AM	Formal Pearl Abaya	1	7000.00	Completed
29	6/18/2026 7:58:10 AM	Stone Formal Abaya	1	8500.00	Completed
3	6/16/2026 5:29:29 PM	Black Casual Abaya	1	4500.00	Completed
2	6/16/2026 5:29:29 PM	White Wedding Abaya	1	18000.00	Completed
1	6/16/2026 5:29:29 PM	Black Casual Abaya	1	4500.00	Completed
1	6/16/2026 5:29:29 PM	Formal Pearl Abaya	1	7000.00	Completed

[Back To Dashboard](#)

[Web hosting by Somee.com](#)