
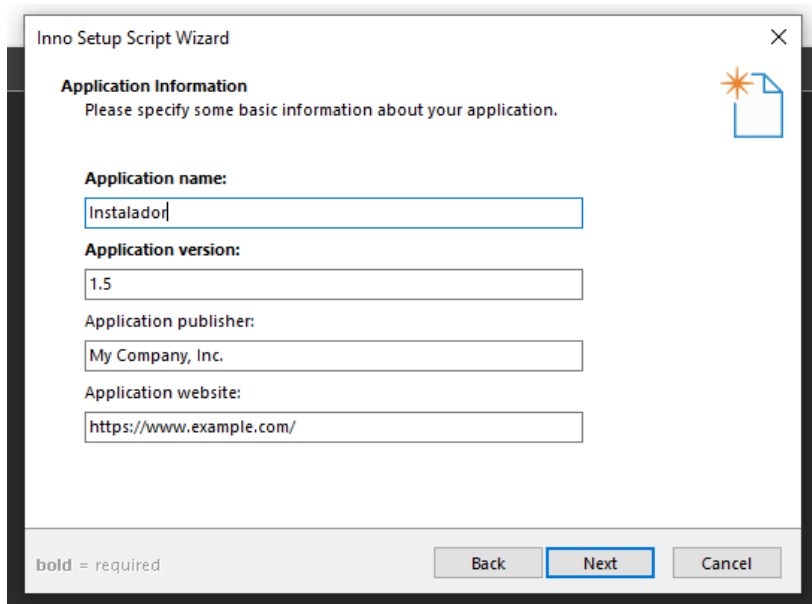



## Proceso seguido para crear el instalador

El programa utilizado para crear el instalador es INNO SETUP:

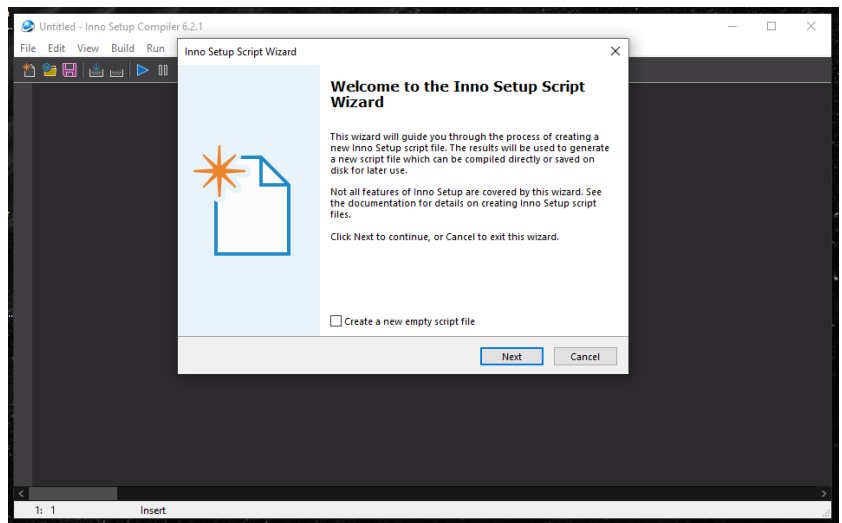

Comienzo dándole un nombre al instalador

Y nombre a la carpeta:

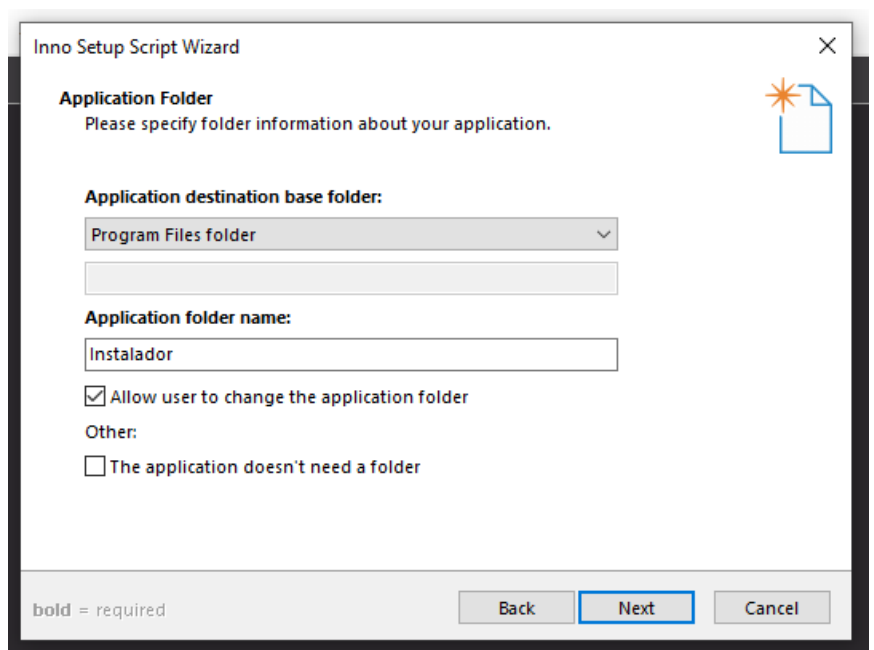

Inno Setup Script Wizard

**Application Files**  
Please specify the files that are part of your application.

**Application main executable file:**  
C:\Users\Administrador\Desktop\Programas\net6.0-windows\Pr Browse...

☒ Allow user to start the application after Setup has finished  
☐ The application doesn't have a main executable file

**Other application files:**  
C:\Users\Administrador\Desktop\Programas\AutoFirma\_v1\_6\_0\_J Add file(s) ...  
C:\Users\Administrador\Desktop\Programas\rufus-4.3p.exe Add folder ...  
C:\Users\Administrador\Desktop\Programas\SpaceSniffer.exe Edit ...  
Remove

bold = required Back Next Cancel

Ahora se añade los programas y las carpetas necesarias que se van a instalar

Inno Setup Script Wizard

**Application File Association**  
Please specify which file association should be created for your application.

☒ Associate a file type to the main executable

**Application file type name:**  
Instalador File

**Application file type extension:**  
.myp

bold = required Back Next Cancel

Inno Setup Script Wizard



**Application Shortcuts**  
Please specify which shortcuts should be created for your application.

☒ Create a shortcut to the main executable in the Start Menu Programs folder  
Application Start Menu folder name:  
Instalador


☒ Allow user to change the Start Menu folder name  
☐ Allow user to disable Start Menu folder creation  
☐ Create an Internet shortcut in the Start Menu folder  
☐ Create an Uninstall shortcut in the Start Menu folder


**Other shortcuts to the main executable:**  
☒ Allow user to create a desktop shortcut

bold = required Back Next Cancel

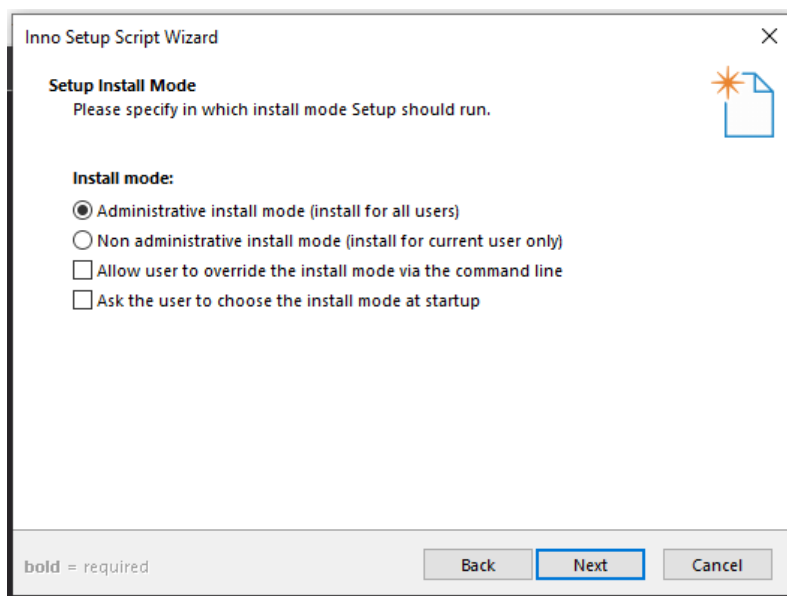
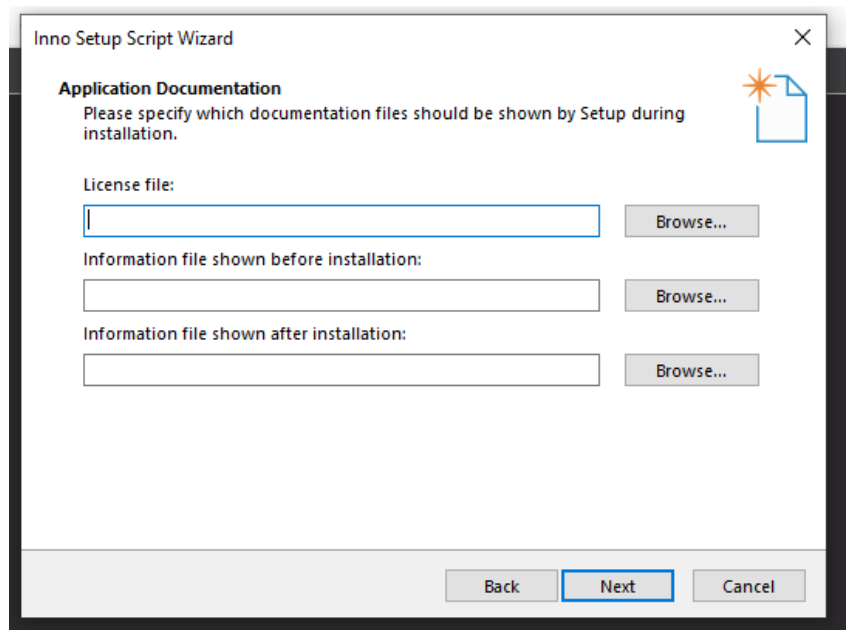


En esta ventana desmarcamos el idioma inglés que viene seleccionado por defecto y marcamos el español.

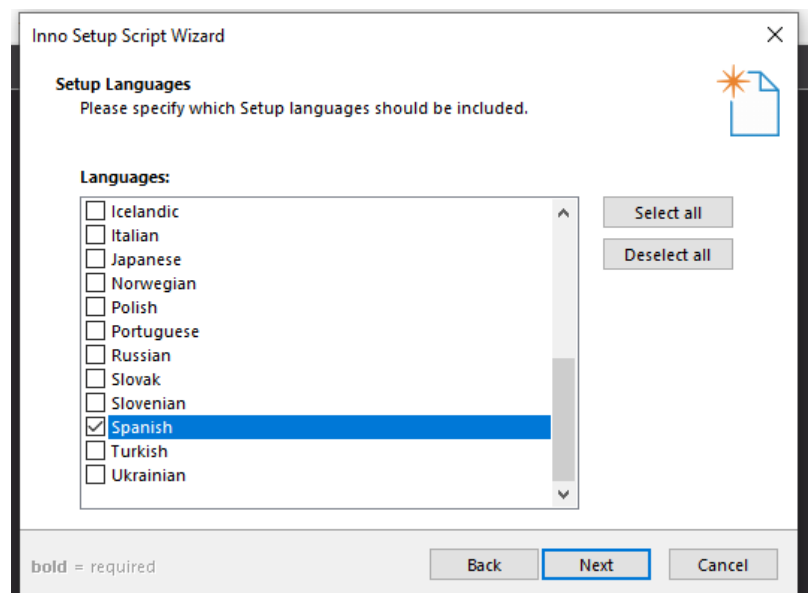


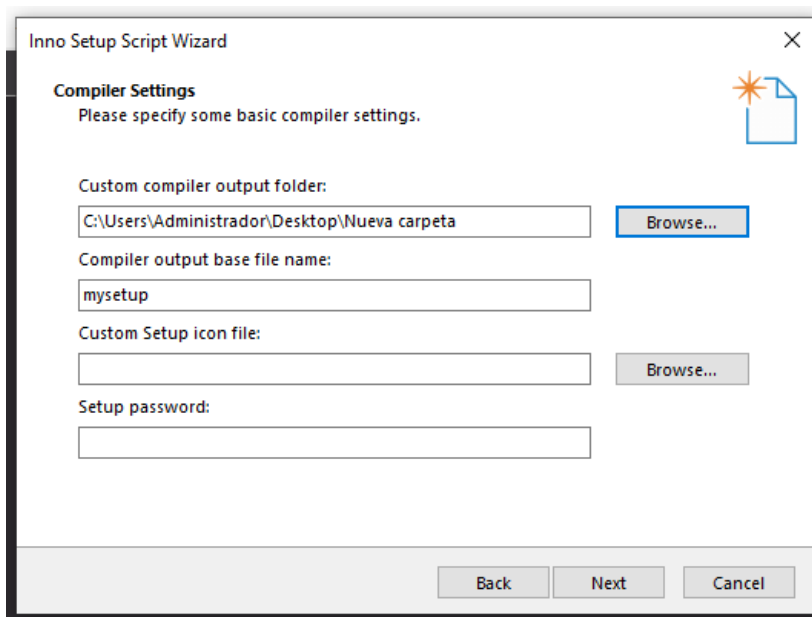

Se selecciona la carpeta donde se va a crear

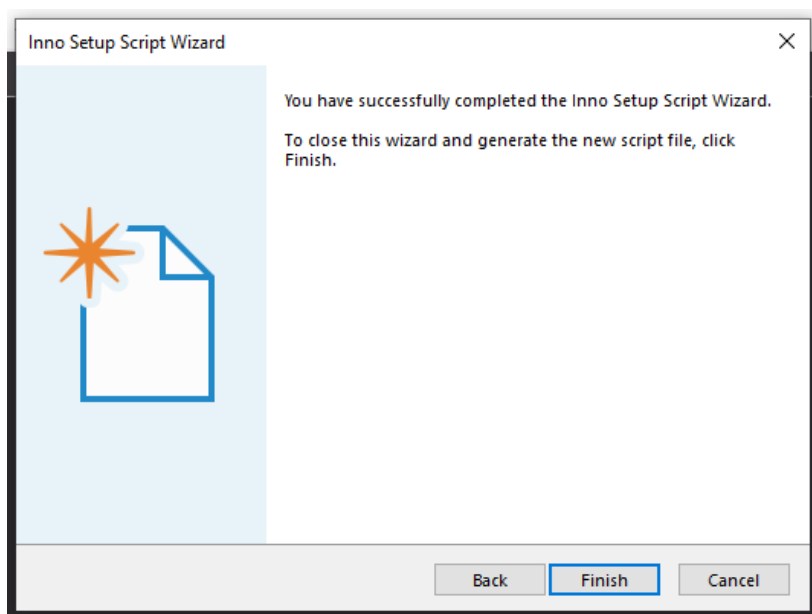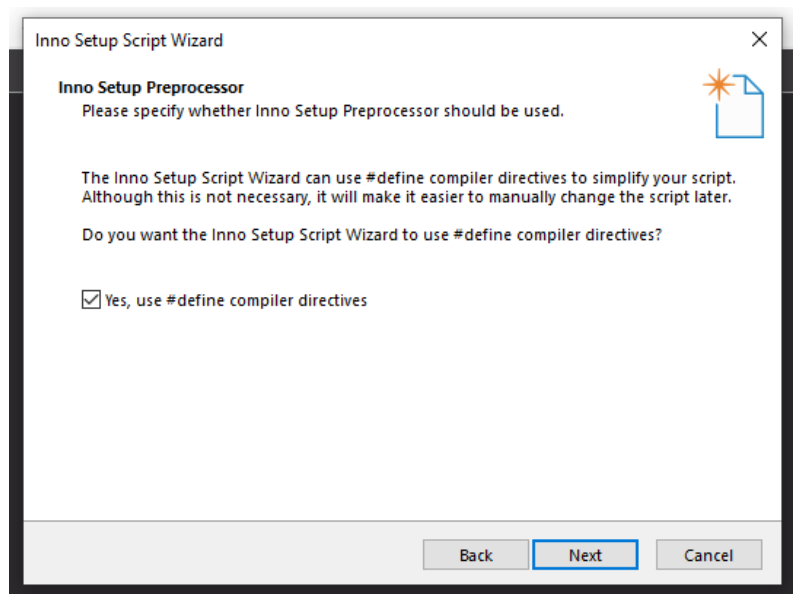

Se completa su creación

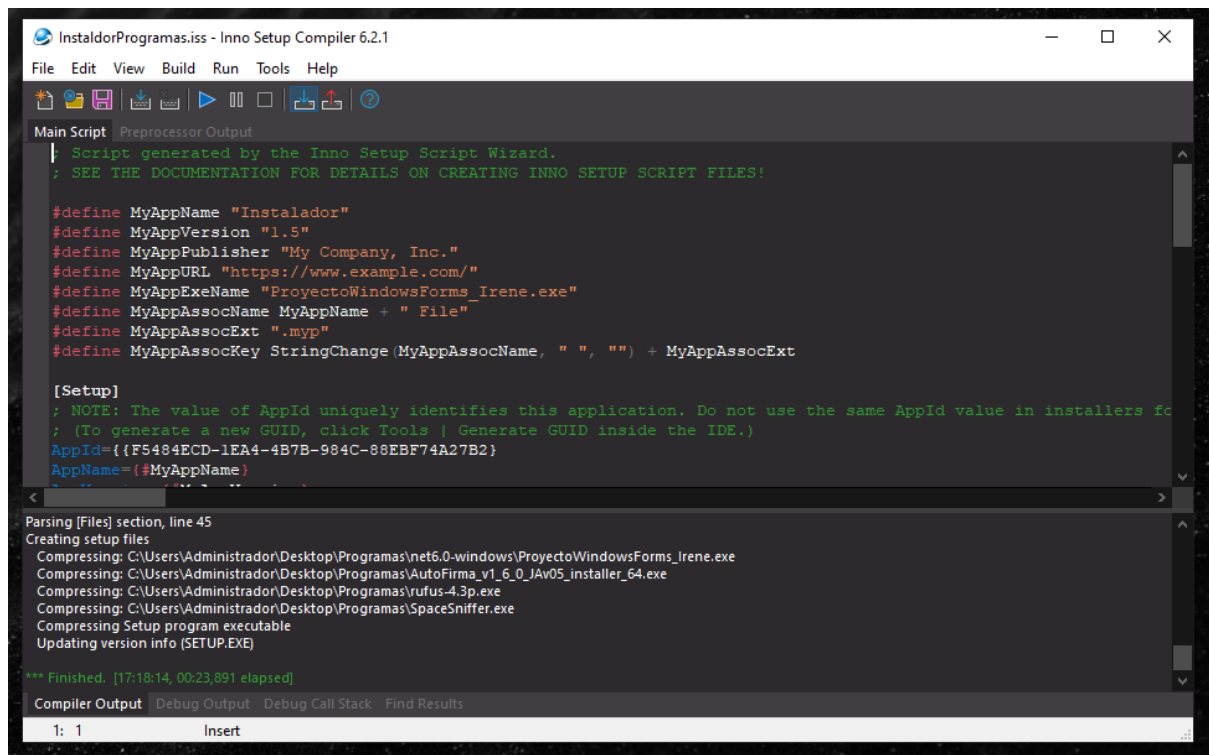

The screenshot shows the Inno Setup Compiler 6.2.1 interface. The 'Main Script' tab is active, displaying the following code:

```
Script generated by the Inno Setup Script Wizard.
; SEE THE DOCUMENTATION FOR DETAILS ON CREATING INNO SETUP SCRIPT FILES!

#define MyAppName "Instalador"
#define MyAppVersion "1.5"
#define MyAppPublisher "My Company, Inc."
#define MyAppURL "https://www.example.com/"
#define MyAppExeName "ProyectoWindowsForms_Irene.exe"
#define MyAppAssocName MyAppName + " File"
#define MyAppAssocExt ".myp"
#define MyAppAssocKey StringChange(MyAppAssocName, " ", "") + MyAppAssocExt

[Setup]
; NOTE: The value of Appid uniquely identifies this application. Do not use the same Appid value in installers for
; (To generate a new GUID, click Tools | Generate GUID inside the IDE.)
AppId={{F5484ECD-1EA4-4B7B-984C-88EBF74A27B2}
AppName={#MyAppName}
```


The 'Compiler Output' tab is also visible, showing the following messages:

```
Parsing [Files] section, line 45
Creating setup files
Compressing: C:\Users\Administrador\Desktop\Programas\net6.0-windows\ProyectoWindowsForms_Irene.exe
Compressing: C:\Users\Administrador\Desktop\Programas\AutoFirma_v1.6_0_Jav05_installer_64.exe
Compressing: C:\Users\Administrador\Desktop\Programas\rufus-4.3p.exe
Compressing: C:\Users\Administrador\Desktop\Programas\SpaceSniffer.exe
Compressing Setup program executable
Updating version info (SETUP.EXE)

*** Finished. [17:18:14, 00:23,891 elapsed]
```

The status bar at the bottom indicates '1: 1 Insert'.

Se crea el documento mostrado arriba y el ejecutable mostrado abajo

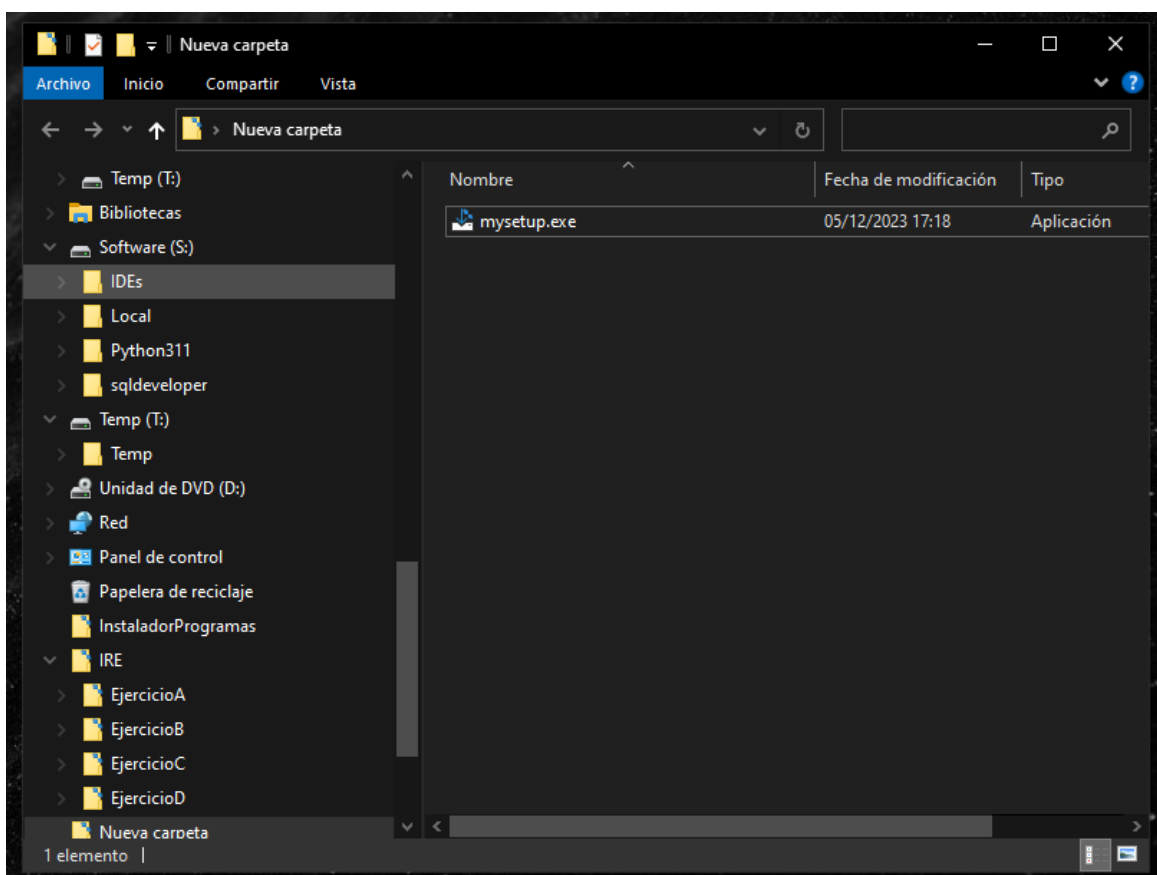

Una vez creado modifico el Scrip para que aparezcan los iconos de cada aplicacion y para que se me cree un acceso directo de cada aplicación:

```
; Script generated by the Inno Setup Script Wizard.
; SEE THE DOCUMENTATION FOR DETAILS ON CREATING INNO SETUP SCRIPT FILES!

#define MyAppName "Instalador"
#define MyAppVersion "1.5"
#define MyAppPublisher "My Company, Inc."
#define MyAppURL "https://www.example.com/"
#define MyAppExeName "ProyectoWindowsForms_Irene.exe"
#define MyAppAssocName MyAppName + " File"
#define MyAppAssocExt ".myp"
#define MyAppAssocKey StringChange(MyAppAssocName, " ", "") + MyAppAssocExt

[Setup]
; NOTE: The value of AppId uniquely identifies this application. Do not use the same AppId value in installers for other applications.
; (To generate a new GUID, click Tools | Generate GUID inside the IDE.)
AppId={{313A1FE2-5338-423E-90AF-E6582FE40A15}}
AppName={#MyAppName}
AppVersion={#MyAppVersion}
;AppVerName={#MyAppName} {#MyAppVersion}
AppPublisher={#MyAppPublisher}
AppPublisherURL={#MyAppURL}
AppSupportURL={#MyAppURL}
AppUpdatesURL={#MyAppURL}
DefaultDirName={autopf}\{#MyAppName}
ChangesAssociations=yes
DisableProgramGroupPage=yes
; Uncomment the following line to run in non administrative install mode (install for current user only.)
;PrivilegesRequired=lowest
OutputDir=C:\Users\irene\OneDrive\Desktop\Ejecutable
OutputBaseFilename=InstaladorIrene
SetupIconFile=C:\Users\irene\OneDrive\Desktop\icoInstalador.ico
Compression=lzma
SolidCompression=yes
WizardStyle=modern

[Languages]
Name: "spanish"; MessagesFile: "compiler:Languages\Spanish.isl"




[Tasks]
Name: "desktopicon"; Description: "{cm:CreateDesktopIcon}"; GroupDescription: "{cm:AdditionalIcons}"; Flags: unchecked


[Files]
Source: "C:\Users\irene\OneDrive\Desktop\net6.0-windows\{#MyAppExeName}"; DestDir: "{app}"; Flags: ignoreversion
Source: "C:\Users\irene\OneDrive\Desktop\net6.0-windows\*"; DestDir: "{app}"; Flags: ignoreversion recursesubdirs createallsubdirs
Source: "C:\Users\irene\OneDrive\Desktop\procexp64.exe"; DestDir: "{app}"; Flags: ignoreversion
Source: "C:\Users\irene\OneDrive\Desktop\rufus-4.3p.exe"; DestDir: "{app}"; Flags: ignoreversion
Source: "C:\Users\irene\OneDrive\Desktop\SpaceSniffer.exe"; DestDir: "{app}"; Flags: ignoreversion
; NOTE: Don't use "Flags: ignoreversion" on any shared system files

[Registry]
Root: HKCA; Subkey: "Software\Classes\{#MyAppAssocExt}\OpenWithProgids"; ValueType: string; ValueName: "{#MyAppAssocKey}"; ValueData: ""; Flags: uninsdeletevalue
Root: HKCA; Subkey: "Software\Classes\{#MyAppAssocKey}"; ValueType: string; ValueName: ""; ValueData: "{#MyAppAssocName}"; Flags: uninsdeletekey
Root: HKCA; Subkey: "Software\Classes\{#MyAppAssocKey}\DefaultIcon"; ValueType: string; ValueName: ""; ValueData: "{app}\{#MyAppExeName},0"
Root: HKCA; Subkey: "Software\Classes\{#MyAppAssocKey}\shell\open\command"; ValueType: string; ValueName: ""; ValueData: """"{app}\{#MyAppExeName}"" ""%1""""
Root: HKCA; Subkey: "Software\Classes\Applications\{#MyAppExeName}\SupportedTypes"; ValueType: string; ValueName: ".myp"; ValueData: ""

[Icons]
Name: "{autoprograms}\{#MyAppName}"; Filename: "{app}\{#MyAppExeName}"; Tasks: desktopicon
Name: "{autodesktop}\{#MyAppName} - Proyecto Windows Forms"; Filename: "{app}\{#MyAppExeName}"; Tasks: desktopicon; IconFilename: "C:\Users\irene\OneDrive\Desktop\icoUnas.ico"
Name: "{autodesktop}\{#MyAppName} - Process Explorer"; Filename: "{app}\procexp64.exe"; Tasks: desktopicon; IconFilename: "C:\Users\irene\OneDrive\Desktop\icoProce.ico"
Name: "{autodesktop}\{#MyAppName} - Rufus"; Filename: "{app}\rufus-4.3p.exe"; Tasks: desktopicon; IconFilename: "C:\Users\irene\OneDrive\Desktop\icoRufus.ico"
Name: "{autodesktop}\{#MyAppName} - Space Sniffer"; Filename: "{app}\SpaceSniffer.exe"; Tasks: desktopicon; IconFilename: "C:\Users\irene\OneDrive\Desktop\icoSpace.ico"

[Run]
Filename: "{app}\{#MyAppExeName}"; Description: "{cm:LaunchProgram,{StringChange(MyAppName, '&', '&&')}}"; Flags: nowait postinstall skipifsilent
```

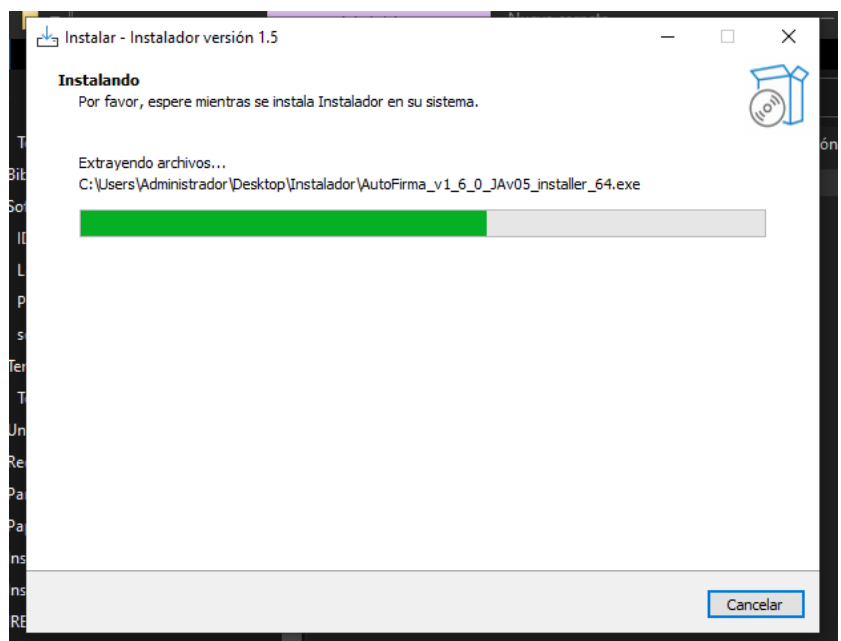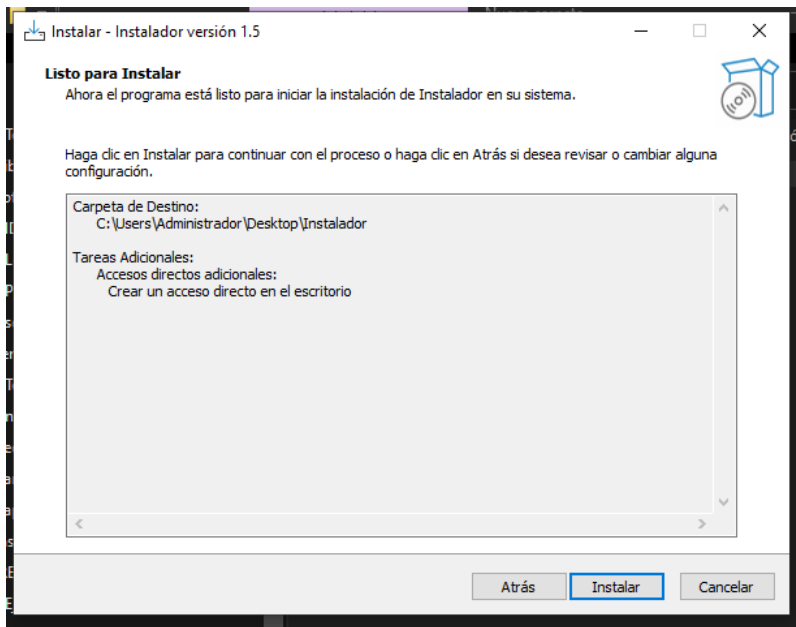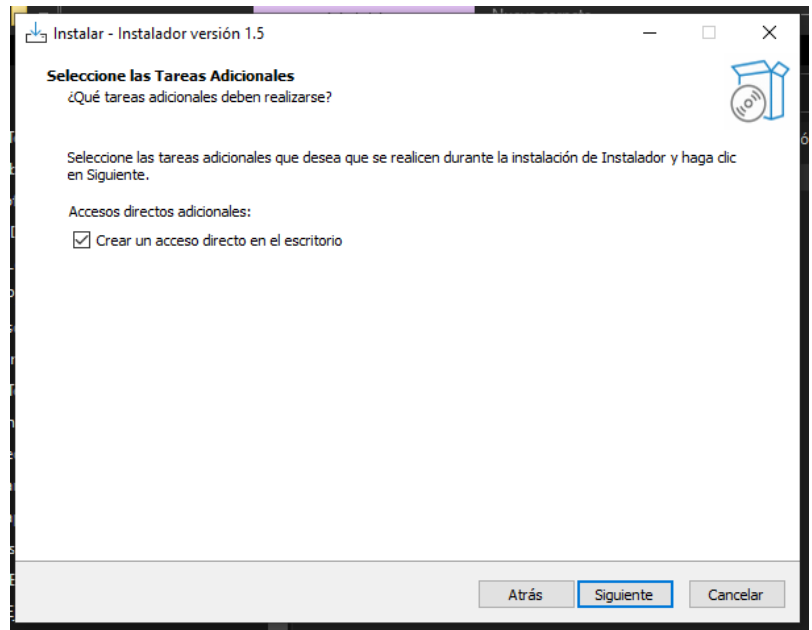

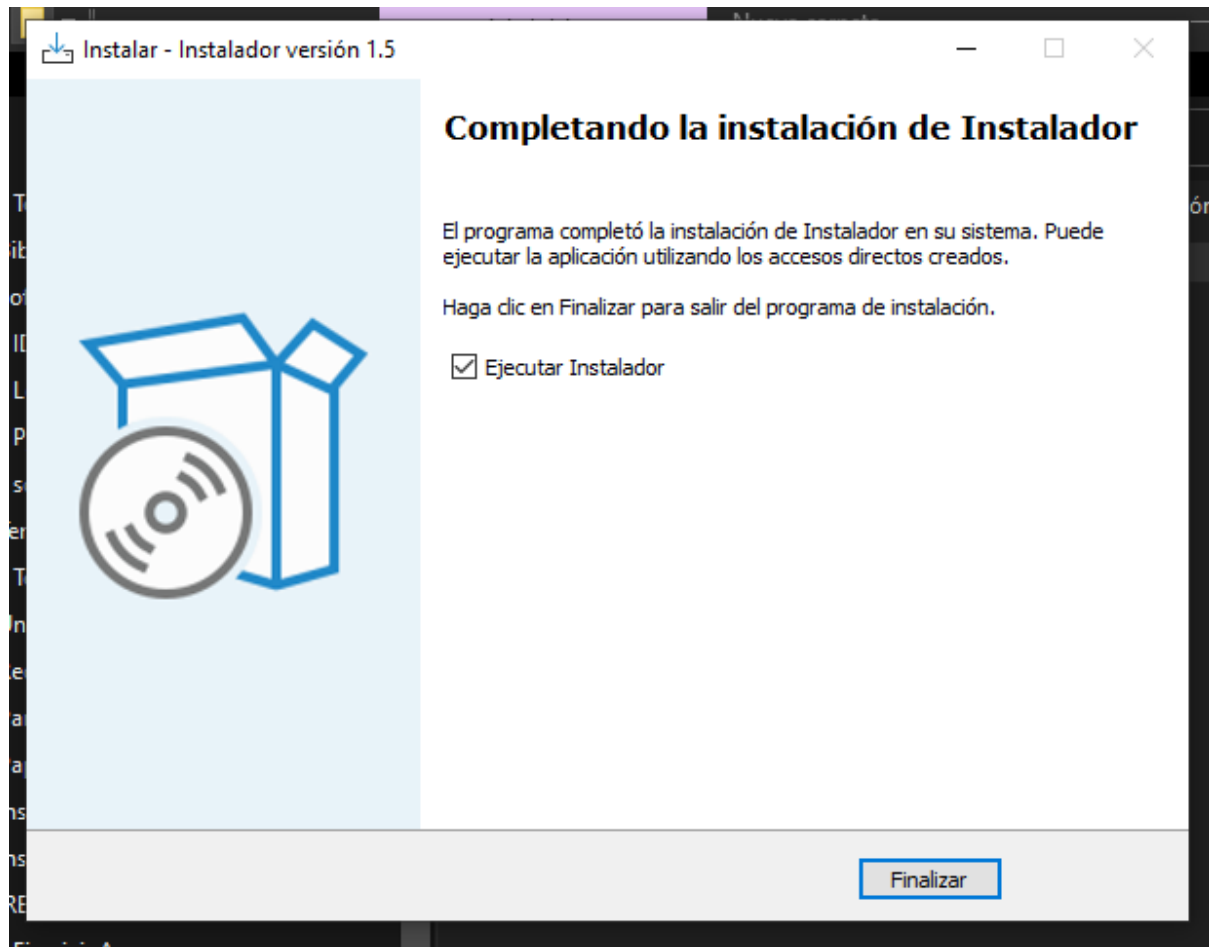

Instalación terminada!