An Extension of Buddy Systems to Arbitrary Radix for Deterministic Memory Allocation

Andrew Jonathan Fine
Independent Student in Computer Architecture
i.am.extremely.useful@gmail.com

April 2026

Abstract

Traditional heap management architectures, such as the binary buddy system, inherently suffer from non-deterministic search latencies and "jitter" as heap occupancy increases. This paper introduces **Iscandar**, a deterministic memory management algorithm based on a Radix-32 Partitioned Allocator. By mapping the memory heap linear number line to a multidimensional geometry of arbitrary radix, Iscandar replaces iterative search with a fixed set of Instruction Groups that resolve the geometry for finding available memory. For three-dimensional geometries we formalize the fractal lattice resolution across four tiers (Huge, Large, Small, and Tiny) and demonstrate through test harness data that memory resolution remains isochronous within a permissible variance regardless of sector occupancy.

Contents

List of Figures iii

List of Equations iv

List of APL Source Listings v

1 Welcome to Iscandar. 1
1.1 Batteries Are Included! . . . 1

2 Architectural Axioms 2
2.1 Axiom I: The State Map (L) and Structural Arity ($\mathcal{A}$) . . . 2
2.2 Axiom II: Hierarchical Occupancy Counters (Γ) . . . 3
2.3 Axiom III: Enforcing an Occupancy Limit (Φ) . . . 3
2.4 Axiom IV: The Contiguity Guarantee and Spatial Entropy . . . 3
2.5 Axiom V: The Coordinate-Address Identity . . . 3
2.6 APL Definitions . . . 4

3 Formal Proof of Deterministic Path Termination 5
3.1 The Steering-Based Complexity Model . . . 5
3.2 Guaranteed Path Termination . . . 6
3.3 Conclusion of Determinism . . . 7

4 Deterministic Coalescence and the Occupancy Limit 7
4.1 Symmetric Coalescence Mechanics . . . 7
4.2 Geometric Feasibility and the Resolution Operator (Ω) . . . 7
4.3 Proof of Coalescence Invariant . . . 7

5 Observations 8
5.1 As an Extension to Binary Buddy Systems . . . 8
5.2 As a Symmetric Voronoi Partition . . . 8
5.3 As Linear Programming . . . 9
5.4 Amortized Performance: Constant Time . . . 9
5.5 Worst Case Performance: Sub-Linear Time . . . 9
5.6 As Supporting Six Sigma Design . . . 9
5.7 Scalability via Depth Extension . . . 10
5.8 As Supporting Parallel Execution . . . 10

6 Conclusion 10

7 Glossary of Terms 10

8 Updating Memory State Spaces by Mating the Oracle Tables 14

9 Description of Instruction Groups
9.1 Phase I: The Admissibility Gate (Level 3) . . .
9.2 Phase II: The Plane-Level Resolution (Level 2) . . .
9.3 Phase III: The Row-Level Weld (Level 1) . . .
9.4 Phase IV: The Bit-Lattice Isolation (Level 0) . . .

10 Desk Check Summary: Nano and Tiny Resolutions ($L \leq \mathcal{A}$)

11 Volumetric Analysis
11.1 Methodology . . . .
11.2 Test Data (generated from Section 10) . . . .
11.3 Graphical Verification . . . .
11.4 Buddy System Comparison Simulation . . . .

12 Iscandar: Laboratory Source Code
12.1 Bootstrap Mechanism (see Section 1, Batteries Included!) . . . .
12.2 The Bottle Opener . . . .
12.3 Project Directories . . . .
12.4 Project Checklist . . . .

13 Project Support
13.1 Error Status . . . .
13.2 Oracle Manufacture . . . .

List of Figures

A Huge Allocator: Phase-Space Manifold and Volume Boundary Weld. 16
B Large Allocator: Search Polytopes and Plane Boundary Row Join. 17
C Small Allocator: Atomic Phase-Space and Sector Boundary Bit Join. . . . . .
D Tiny Allocator: Fractured Weld Polytope and Bit-Lattice Resolution. . . . . .
E * . . . . . .
F Empirical verification of isochronous resolution. The y-shifted label at 32,768 confirms strict adherence to the 15-bit addressable geometry ceiling. . . . . .
G Simulated binary buddy allocation at 4-bytes per sector in a 32768 sector memory pool. . . . . .

List of Equations

1 Fractal Summation: Level 1 (Row) 3
2 Fractal Summation: Level 2 (Plane) 3
3 Fractal Summation: Level 3 (Cube) 3
9 The Apex Conservation Law of Fractal Density 7
10 Isochronous State Transition: Allocation Delta 8
11 Predicate Logic of Boundary Invariance 9
12 Hierarchical Occupancy Summation Predicate 14
11 Tier-3 (Huge) Lattice Occupancy Summation 15
12 Tier-2 (Plane) Lattice Occupancy Summation 16
13 Tier-1 (Row) Lattice Occupancy Summation . . . . .
14 Tier-0 (Atomic) Bit-Level Capacity Summation . . . . .
16 The Plane Inclusion Predicate . . . . .
17 The Weld Predicate for Multi-Block Resolution . . . . .
17 The Weld Predicate for Multi-Block Resolution . . . . .
18 The Leaf-Tier Path Selection Predicate . . . . .

Listings

1 Welcome to Iscandar.

Unlike allocation models using variable-time search algorithms [1], this architecture employs a hierarchical occupancy map to resolve coordinates deterministically. Extending the traditional binary buddy system to an arbitrary radix replaces it with a geometric steering mechanism.

1.1 Batteries Are Included!

The .tex source for this manuscript functions as a self-organizing research example. It can be processed by a PowerShell script to extracts Dyalog APL source listings directly from surrounding portions of this paper which document them best, to create a local research environment. This ensures the researcher does not need to manually configure local paths or binary repositories. See Section 12 for instructions on putting together the environment and Section 10 for its use. **Welcome.apl** below is the basic demonstration.

1.1.1 The Welcome Example.

File: Welcome.apl

```
:Namespace Welcome

    ∇ Run;S;P
      ⍝ 1. Lifecycle Start: Bootstrap the Iscandar Engine
      #.Iscandar.Main

      '--- Welcome to Iscandar ---'
      'Lattice online. Starting verification...'

      ⍝ 2. Execution Phase: Allocate 2 sectors
      (S P) ← #.Iscandar.Allocate 2

      ⍝ 3. Guard: Exit early if the lattice is full
      :If S = 0
          'ERROR: Verification failed.' ⋄ →EXIT
      :EndIf

      'SUCCESS: Pointer synthesized at Sector ' (P.base P.len)

      ⍝ 4. Reclamation Phase: Return to the Void
      S ← #.Iscandar.Free P

      :If S = #.Iscandar.OK
          'SUCCESS: Sectors reclaimed.'
      :EndIf

      EXIT:
      ⍝ 5. Lifecycle End: Formal Teardown
      #.Iscandar.Cleanup
```

```
      '--- Welcome Routine Complete ---'
    ∇

:EndNamespace
```

2 Architectural Axioms

These axioms establish the geometric and mathematical constraints of the lattice. They transform each memory request into a coordinate resolution task, avoiding search-and-sort operations to maintain a fixed sequence of instructions.

2.1 Axiom I: The State Map (L) and Structural Arity ($\mathcal{A}$)

For modeling and testing purposes this paper demonstrates an k-level lattice L of fixed depth ($n = 3$) **defining** a total memory space. The architecture **maintains** a constant Arity ($\mathcal{A}$) of 32. A hierarchical progression of tiers **organizes** the lattice: the atomic Sector (S_0), the Row of Sectors (S_1), the Plane of Rows (S_2), and the Cube of Planes (S_3). Lattice coordinates (p, r, s) **determine** the address of any specific leaf node, where $p, r, s \in \{0, \ldots, \mathcal{A} - 1\}$. The geometry **maintains** invariance regardless of the physical byte-width the sector **occupies**.[†]

2.1.1 The Cube Namespace

This listing defines the memory allocator data structure, Iscandar's answer to the buddy system heap, in accordance with Axiom I.

File: Cube.apl

```
:Namespace Cube
    :Namespace Row
        :Field Public Shared sectors ← 0   ⍝ 32-bit Unsigned Long
        :Field Public Shared count   ← 0   ⍝ Population Count (0-32)
    :EndNamespace

    :Namespace Plane
        :Field Public Shared count   ← 0   ⍝ Summary of 32 Child Rows
    :EndNamespace

    ⍝ The Physical Lattice Arrays
    :Field Public Shared Rows   ← CONSTANTS.PLANE ⍴ ⊂Row
    :Field Public Shared Planes ← CONSTANTS.ARITY ⍴ ⊂Plane
    :Field Public Shared count  ← 0      ⍝ Total Cube Population
:EndNamespace
```

[†]The Large allocator functions as a cross-tier searcher for sequence resolution, managing the fractal logic across the Plane manifold to satistfy multi-Row requests.

2.2 Axiom II: Hierarchical Occupancy Counters (Γ)

Discrete occupancy counts (Γ) at every tier **enable** constant-time steering. Following bit-block representation principles [2], these counters **generate** a real-time density map of the lattice:

$$\text{Level 1 (Row):} \quad \Gamma_1 = \sum_{i=0}^{\mathcal{A}-1} \Gamma_{0,i} \tag{1}$$

$$\text{Level 2 (Plane):} \quad \Gamma_2 = \sum_{j=0}^{\mathcal{A}-1} \Gamma_{1,j} \tag{2}$$

$$\text{Level 3 (Cube):} \quad \Gamma_3 = \sum_{k=0}^{\mathcal{A}-1} \Gamma_{2,k} \tag{3}$$

This hierarchical summation lets a Global Registrar at the Cube level **execute** an admissibility check in a single instruction cycle, **imposing** a fast-fail condition.

2.3 Axiom III: Enforcing an Occupancy Limit (Φ)

The **Iscandar** system **enforces** a mandatory occupancy boundary, the Occupancy Limit (Φ). Traditional allocators search for gaps as memory nears capacity; in contrast, this system **triggers** a deterministic refusal once Γ_3 reaches the Φ threshold based on the present occupancy request.

2.4 Axiom IV: The Contiguity Guarantee and Spatial Entropy

Any resolved coordinate sequence **represents** a continuous physical block in the **Iscandar** lattice. However, functional contiguity does not imply spatial perfection; a perfect Oracle would preclude fragmentation entirely. Our Oracles (Center, Left, and Right) prioritize determinism over maximum packing density.

2.5 Axiom V: The Coordinate-Address Identity

The architecture used here rejects the traditional separation of logical address space and physical memory geometry, by establishing a **Bijective Identity** between a machine-word pointer P (wrapped pointer, see section 5) and its corresponding lattice coordinate $\vec{C}$.

In a system of depth k and arity A, any specific sector is represented by a coordinate vector:

$$\vec{C} = (i_1, i_2, \ldots, i_k) \quad \text{where} \quad 0 \leq i_n < A \tag{4}$$

The address P is not an arbitrary token, but the scalar projection of this vector into the linear address space. The isomorphism is defined by the construction:

$$P = \sum_{n=1}^{k} i_n \cdot A^{k-n} \tag{5}$$

For the demonstration project of this paper, $(A = 32, k = 3)$, the address of a sector located at (Plane p, Row r, Sector s) is clearly enumerable from the geometry:

$$P = (p \cdot 32^2) + (r \cdot 32^1) + (s \cdot 32^0) \tag{6}$$

2.6 APL Definitions

This listing is the APL implementation of the basic structure of Section 2.

File: Definitions.apl

```
:Namespace CONSTANTS
    :Access Public Shared
    :Field Public Shared ReadOnly ARITY  ← 32
    :Field Public Shared ReadOnly LEVELS ← 3
    :Field Public Shared ReadOnly BYTE   ← ARITY ÷ 4   ⍝ Sectors
    :Field Public Shared ReadOnly WIDTH  ← BYTE + 1
    :Field Public Shared ReadOnly ROW    ← ARITY
    :Field Public Shared ReadOnly PLANE  ← ROW × ROW
    :Field Public Shared ReadOnly CUBE   ← PLANE × ROW
    :Field Public Shared ReadOnly QUAD   ← 2 * ARITY
:EndNamespace

:Namespace RANGES
    :Access Public Shared
    :Field Public Shared ReadOnly BYTE  ← ⍳CONSTANTS.BYTE
    :Field Public Shared ReadOnly ROW   ← ⍳CONSTANTS.ROW
    :Field Public Shared ReadOnly PLANE ← ⍳CONSTANTS.PLANE
    :Field Public Shared ReadOnly CUBE  ← ⍳CONSTANTS.CUBE
:EndNamespace
```

File: Iscandar.apl

```
:Namespace Iscandar

    A←32 ⋄ OK←1

    ∇ Pointer ← Allocate Total;S;B
      ⍝ 1. Search for a starting point that fits the total request
      (S B) ← ##.Decision.Resolve Total

      ⍝ 2. If the search fails, return a record marked as invalid
      :If S = 0
          Pointer ← ⎕NS '' ⋄ Pointer.status ← 0
          →0
      :EndIf

      ⍝ 3. Create a record with the location and size
      Pointer ← ⎕NS ''
      Pointer.(base len status) ← B Total OK

      ⍝ 4. Mark the selected sectors as occupied in the grid
      Mark Pointer
```

```
      ⍝ 5. Return the record to the caller
    ∇

    ∇ S ← Free Pointer
      ⍝ 1. Check if the pointer is valid before proceeding
      :If 0 = Pointer.status ⋄ S ← 0 ⋄ →0 ⋄ :EndIf

      ⍝ 2. Clear the sectors in the memory grid
      Unmark Pointer

      ⍝ 3. Reset the pointer status to show it is no longer active
      Pointer.status ← 0
      S ← OK
    ∇

    ∇ Main
      ⍝ 1. Prepare physical lattice and state maps
      Initialize_Lattice

      ⍝ 2. Set environment constants and pathing
      'Iscandar Engine Online. System initialized.'
    ∇

    ∇ Cleanup
      ⍝ 1. Reset all hierarchical occupancy counters
      { ⍵.sectors ← 0 ⋄ ⍵.count ← 0 }¨ ##.Cube.Rows

      ⍝ 2. Release oracle handles and clear transient state
      'Lattice returned to void. Environment clear.'
    ∇

:EndNamespace
```

3 Formal Proof of Deterministic Path Termination

Theorem: A fixed-depth $\mathcal{L}$ of Arity $\mathcal{A} = 32$ **establishes** deterministic resolution by mapping every request to a finite execution path.

3.1 The Steering-Based Complexity Model

The resolution time T in the **Iscandar** architecture is a discrete function of the sub-lattice depth and the specific heuristic path $\mathcal{P}$ identified by the memory request size in sectors (L). Unlike systems where $T = O(\log N)$ or $O(N)$ based on heap fragmentation, the path selection in Iscandar uses a decision table to ensure each heuristic terminates.

$$T(\mathcal{L}) = f(\Gamma) \in \{\text{Path}_{\text{Nano}}, \text{Path}_{\text{Tiny}}, \text{Path}_{\text{Small}}, \text{Path}_{\text{Large}}, \text{Path}_{\text{Huge}}, \text{Path}_{\text{Cube}}\} \tag{7}$$

File: DecisionTable.apl

```
:Namespace Decision
    (⎕IO ⎕ML) ← 0 1

    ⍝ --- Tier Mapping via Byte-Arity ---
    ⍝ B: 8, R: 32, P: 1024, C: 32768

    Table ← C ⍴ ⊂##.Heuristic.Null

    Table[1+⍳B] ← ⊂##.Heuristic.Nano
    Table[B+⍳(R-B)] ← ⊂##.Heuristic.Tiny
    Table[R+⍳R] ← ⊂##.Heuristic.Small
    Table[(2×R)+⍳(P-(2×R))] ← ⊂##.Heuristic.Large
    Table[P+⍳(C-P)] ← ⊂##.Heuristic.Huge
    Table[C] ← ⊂##.Heuristic.Cube

    ∇ R ← Resolve s;Tier
      :Access Public Shared

      ⍝ 1. Range Guard
      :If (s < 1) ∨ (s > C)
          R ← ##.STATUS_FAILURE 0 ⋄ :Return
      :EndIf

      ⍝ 2. Select the Namespace Reference
      Tier ← ⊃Table[s]

      ⍝ 3. Invoke standardized Dispatch
      R ← Tier.Dispatch s
    ∇
:EndNamespace
```

3.2 Guaranteed Path Termination

Every resolution path is constructed from a fixed sequence of *Instruction Groups* that eliminate runtime searching.

1. **Heuristic Selection:** The Global Registrar and intermediate sentinels use bitmask comparison to select the viable path.
2. **Atomic Resolution:** For leaf-level requests, the system executes either a single-pass (Nano) or a bimodal "Two-Bite" probe (Tiny or Small).
3. **Path Invariance:** Once a path is engaged, the algorithm terminates when the physical bit-offset is returned.

3.3 Conclusion of Determinism

Determinism in Iscandar is defined as the **guarantee of termination** within a bounded execution window for any given heuristic path, trading away spatial capacity for these predetermined paths.

4 Deterministic Coalescence and the Occupancy Limit

Maintaining temporal determinism in a dynamic environment **requires** a deallocation process (coalescence) **mirroring** the efficiency of the allocation logic. Operational stability of the **Iscandar** lattice uses discrete enforcement of the Occupancy Limit(Φ), **precluding** the high-entropy states typically associated with conventional allocators [9].

4.1 Symmetric Coalescence Mechanics

To maintain determinism our deallocation process mirrors the efficiency of the allocation logic, a state update performed upon the occupancy counters. The bit-address of any Sector (S_0) is a fixed function of its coordinates. Updating the occupancy counters (Γ) thus consumes a predictable instruction count (ι_{base}) identical to the initial resolution.

1. The atomic leaf node state Γ_0 is toggled to 0 (Available).
2. The change propagates immediately to the parent Row counter (Γ_1).
3. The Level-2 (Plane) and Level-3 (Cube) counters are updated through integer subtraction.

Because the lattice depth is fixed at $n = 3$, the time complexity for deallocation is defined by the same path-specific constraints as allocation.

4.2 Geometric Feasibility and the Resolution Operator (Ω)

Unlike traditional allocators that suffer from $O(N)$ search patterns as utilization approaches 100% [**?**], the Iscandar lattice treats the heap as a deterministic volume. The system does not utilize a static occupancy limit; instead, it enforces a dynamic gate based on the current requested length (L) and the total surviving capacity of the cube (Γ_3).

The Resolution Operator (Ω) acts as a volumetric circuit breaker. By evaluating a request against remaining free sectors before invoking any Oracle, we ensure resolution only proceeds within the feasible region of the memory manifold [**?**]. The decision logic is defined as:

$$\Omega(L) = \begin{cases} \text{Resolve}(p, r, s) & \text{if } L \leq (\Gamma_3 - \text{Occupancy}) \\ \text{Refuse} & \text{if } L > (\Gamma_3 - \text{Occupancy}) \end{cases} \tag{8}$$

4.3 Proof of Coalescence Invariant

Let Γ_{total} be the sum of all leaf nodes $S_{0,i}$. At any discrete time t, the hierarchical counters **must** satisfy the invariant:

$$\Gamma_{Apex} \text{ (a.k.a. } \Gamma_3) = \sum \Gamma_2 = \sum \Gamma_1 = \sum \Gamma_0 \tag{9}$$

Since deallocation is defined as:

$$\Gamma_x(t+1) = \Gamma_x(t) - 1 \quad \text{for all levels } x \in \{0, 1, 2, 3\} \tag{10}$$

along the specific resolution path, the invariant is **preserved**. Because this path is fixed at depth n, the lattice is restored to a consistent, deterministic state in nI_{base} time.

5 Observations

Earlier sections established **Iscandar** as deterministic within the primary scope of this paper. However, it exhibits properties warranting distinct architectural observations.

5.1 As an Extension to Binary Buddy Systems

The binary buddy system, pioneered by Knowlton [12] and Knuth [13], sought to minimize search latency through a power-of-two partitioning scheme ($R = 2$). While this approach facilitates efficient coalescence, its search complexity remains fundamentally constrained to $O(\log_2 n)$. As modern memory address spaces scale alongside processor word sizes, the increasing logarithmic depth of these trees drives significant latency. Furthermore, at high utilization, binary buddy systems trigger "stalling" behaviors; the search algorithm must traverse increasingly fragmented leaf nodes, which inevitably erodes deterministic performance.

We generalize buddy system principles to an **Arbitrary Radix** ($R = \mathcal{A}$). By shifting from a binary tree to a high-radix fractal lattice, we collapse the depth of the search space to a fixed architectural constant n. This structural shift moves memory management from the domain of probabilistic searching to the domain of **Geometric Coordinate Resolution**.

5.2 As a Symmetric Voronoi Partition

As detailed in the Architectural Axioms (Section 2.1), this lattice functions as a **Symmetric Voronoi Partition**, where the adjacency of "buddies" is a pre-baked geometric property of the address space rather than a calculated proximity, as shown in Section 5.2.

In this model, adjacency is defined by a partition's total volume **associating** with its handle (a wrapped pointer resolved in Section 9.4) rather than the Euclidean distance of individual points from a centroid. rather than the Euclidean distance of individual points from a centroid, as established in the geometric rules of the address space.

In a standard Voronoi partition, boundaries are dynamically computed as a function of the Euclidean distance to a specific "seed" or generator point. In the Iscandar lattice, while the "seed" is represented by the wrapped pointer, the partition boundaries are not computed at runtime, as defined by the invariant geometric properties of the lattice established in the Observations section. Instead, they are architecturally invariant, defined strictly by the Structural Arity ($\mathcal{A}$) and the hierarchical depth (k) established in the Axioms. This replaces the need for distance-based calculations with a pre-baked, static coordinate resolution:

$$\forall L \in \mathcal{L}, \quad \Omega(L) \iff \mathcal{G}(\mathcal{A}, k) \land (\nexists f(\text{dist}(p, \text{seed})) \to \Omega(L)) \tag{11}$$

For all requests L belonging to the lattice, the admission function $\Omega(L)$ is true if and only if it is a property of the geometry defined by Radix $\mathcal{A}$ and tier-depth k; furthermore, there exists no function of the spatial distance between a position p and a previous seed that influences the outcome of $\Omega(L)$.

5.3 As Linear Programming

The operational stability of the system is maintained via an Interior Point Method—analogous to projective transformations used in Karmarkar's algorithm [14]. By enforcing a **O**ccupancy Limit (Φ), we **ensure** the resolution path avoids "edges" of the feasible region (the fragmentation trap). Here, the allocator does not merely manage space; it **navigates** a high-dimensional manifold where the floor serves as a protective barrier against non-deterministic search behaviors.

5.4 Amortized Performance: Constant Time

The **Iscandar** architecture utilizes a *Seamless Sack* model that achieves amortized constant time for memory operations through a Next-Fit Circular Cursor mechanism.

- **Mechanism:** The cursor maintains forward momentum across the $\mathcal{A}^k$-sector manifold. By never re-scanning fragmented entropy within a single "lap," the system distributes the metabolic cost of search across its entire operational lifecycle.
- **Principle:** The system offsets the latency of filtering fragmented sectors by performing high-efficiency, contiguous allocations in reclaimed or vacant regions.

5.5 Worst Case Performance: Sub-Linear Time

The architecture maintains determinism through hierarchical skip-logic at intermediate levels. This mechanism constrains the worst-case search complexity to the k-th root of the total lattice volume, where k represents the depth of the fractal hierarchy.

- **Mechanism: Dimensional Collapse.** The architecture maps the 1D address space to a k-dimensional manifold ($\mathcal{A}^k$). Metadata sentinels at the Plane and Row levels enable the search engine to bypass saturated volumes without bit-level interrogation.
- **Logic for the Geometry:**
  1. **Plane-Skip:** Evaluates $\mathcal{A}^2$-sector planes; skipping when free space is less than request.
  2. **Row-Skip:** Evaluates $\mathcal{A}$-sector rows; skipping when row density proves prohibitive.
  3. **Bit-Scan:** The engine restricts final verification to a single bit-vector of magnitude $\mathcal{A}$.
- **Ceiling:** For a lattice of volume $N = \mathcal{A}^k$, the architecture caps the maximum investigation path at $k \times \mathcal{A}$, limiting the worst-case cost to $k \times \mathcal{A}$ operations.

5.6 As Supporting Six Sigma Design

99 As detailed in the appendices, the compactness of the **Iscandar** kernel enables **complete path coverage testing** that operates in tandem with the previously established formal methods.

5.7 Scalability via Depth Extension

The **Iscandar** architecture scales by increasing the lattice depth up to two additional levels. Because the resolution time is a linear function of depth ($k \times I_{base}$), extending the lattice to $k = 4$ or $k = 5$ provides a massive increase in addressable memory volume while maintaining a strictly deterministic and predictable execution profile.

5.8 As Supporting Parallel Execution

The architecture allows for the distribution of the management load through parallel instantiation. Lesser structures can be managed by hardware subroutines to distribute the processing requirements across multiple units. These parallel hardware components can also supervise local memory independently, communicating management data upward through the hierarchy only as required.

6 Conclusion

We show here how non-deterministic latency inherent in traditional memory management is a byproduct of existing search methodologies rather than a physical necessity. Replacing variable-depth search algorithms with a fixed-depth, $\mathcal{A}$-radix fractal lattice can establish determinism.

7 Glossary of Terms

Atomic Polytope The leaf-level search polytope within a Row manifold (Level 0). It represents the geometric isolation of a specific bit-offset within the lattice through a single Handshake Oracle's Finite State Automaton (FSA) cycle.

Coefficient of Variation (CV) A statistical measure of the dispersion of data points. In the **Iscandar** context, having a CV of zero would in theory confirm that the instruction path length is identical across all execution cycles. [15]

Isochronous The property of an algorithm to execute each time in the same amount of time regardless of input or current state, within a permissible variance. A variance of zero would in theory show the algorithm meets determinism to perfection, resulting in a CV of zero.

Contiguity Guarantee The formal assurance (Section 2.5) that any resolved coordinate sequence represents a continuous physical block within the lattice, maintained by the Handshake Oracle.

Global Registrar The Level 3 (Cube Scale) apex of the hierarchy. It functions as a 16-bit "Gatekeeper" performing an admissibility check before the algorithm permits a hierarchical descent.

Oracle A Finite State Automaton, being a precomputed body of polytope seed (Center Oracle) or join (Left or Right Oracle) solutions used by various levels of Iscandar's allocator search heuristics to find available memory in the bitwise geometrical map.

File: OracleCenter.apl

```
:Namespace OracleCenter

    (⎕IO ⎕ML) ← 0 1
```

```
    Data ← 0  ⍝ Placeholder for the memory-mapped matrix

    ∇ Init Path;tn;size
      :Access Public
      ⍝ Initializes the 'Serial Window' into
      ⍝ the string pointing to 'OracleCenter.bin'

      :If 0=⎕NC 'Data'
      :OrIf 0=≠Data
          :Trap 0
              tn ← Path ⎕NTIE 0
              size ← ⎕NSIZE tn

              ⍝ Map as (2^32) rows by 9 columns,
              ⍝ 8-bit unsigned (Type 80)
              ⍝ a virtual link without consuming 38GB of RAM.
              Data ← (4294967296 9) ⎕MAP tn 80

              ⎕NUNTIE tn
              ⎕←'Center Oracle Initialized: ',Path
          :Else
              ⎕←'Failed to map OracleCenter.bin at ',Path
          :EndTrap
      :EndIf
    ∇

    ∇ Pos ← Resolve(State Length)
      :Access Public
      ⍝ Deterministic Motorola Big-Endian First-Fit Resolution.
      ⍝ Wrapper for the memory-mapped lookup.
      ⍝ State: 32-bit unsigned integer representing occupancy.
      ⍝ Length: Requested allocation length k (0-8).

      ⍝ Returns leftmost bit position [0-31] or 255 (Fail).
      Pos ← Data[State; Length]
    ∇

:EndNamespace
```

File: OracleLeft.apl

```
:Namespace OracleLeft
    (⎕IO ⎕ML) ← 0 1
    Data ← 0

    ∇ Init Path;tn
```

```
      :Access Public
      :If 0=⎕NC 'Data'
          :Trap 0
              tn ← Path ⎕NTIE 0
              ⍝ Map as (2^32) rows by 2 columns (Type 80)
              Data ← (4294967296 2) ⎕MAP tn 80
              ⎕NUNTIE tn
          :Else
              ⎕←'Failed to map OracleLeft.bin'
          :EndTrap
      :EndIf
    ∇

    ∇ Res ← Resolve State
      :Access Public
      ⍝ Returns (Length StartPos)
      ⍝ Byte A: Length (255 if blocked)
      ⍝ Byte B: Start Position (32 - Length)
      Res ← Data[State; 0 1]
    ∇
:EndNamespace
```

File: OracleRight.apl

```
:Namespace OracleRight
    (⎕IO ⎕ML) ← 0 1
    Data ← ⍬

    ∇ Init Path;tn
      :Access Public
      :If 0=⎕NC 'Data'
          :Trap 0
              tn ← Path ⎕NTIE 0
              ⍝ Map as (2^32) rows by 2 columns (Type 80)
              Data ← (4294967296 2) ⎕MAP tn 80
              ⎕NUNTIE tn
          :Else
              ⎕←'Failed to map OracleRight.bin'
          :EndTrap
      :EndIf
    ∇

    ∇ Res ← Resolve State
      :Access Public
      ⍝ Returns (Length StartPos)
      ⍝ Byte A: Length (255 if blocked)
```

```
      ⍝ Byte B: Start Position (Always 0)
      Res ← Data[State; 0 1]
    ∇
:EndNamespace
```

Polytope Formation The visual representation of the admissible search space within the lattice. Each hierarchical tier (Cube, Plane, Row) can manifest polytopes that collapse as memory occupancy increases.

Occupancy Limit (Φ) The mandatory occupancy boundary (Section 4.2) that prevents the system from entering a high-entropy state. Once the floor is reached, the system issues a deterministic refusal rather than engaging in variable-time search.

Wrapped Pointer The 32-bit machine-side implementation of the **Bijective Identity** (see section 2.4, Axiom V). It bridges between the memory heap coordinate and a physical MPU.

Bit Range	Field	Description
31	V (Virtual)	**Mode Switch:** 1 = Iscandar Virtual, 0 = Real MPU Address.
30	R (Reserved)	Reserved for future architectural parity.
15–29	S (Start)	15-bit Coordinate Index (Plane, Row, Sector).
0–14	L (Length)	15-bit Allocation length/depth.

Table 1: Wrapped Pointer Bit-Field Layout

File: WrappedPointer.apl

```
:Namespace WrappedPointer
    ⍝ --- Iscandar Bijective Pointer Implementation ---
    ⍝ Layout: [V:1][R:1][S:15][L:15]

    (V R S L) ← 0 0 0 0

    ∇ Status ← Unwrap P;bits
      ⍝ 1. Extract Length (Bits 0-14)
      L ← 32767 ∧ P

      ⍝ 2. Extract Start Index S (Bits 15-29)
      ⍝ Equivalent to (P bitshift-right 15) AND 32767
      S ← 32767 ∧ P ⌊ 2*15

      ⍝ 3. Extract Control Bits
      R ← 1 ∧ P ⌊ 2*30      ⍝ Reserved
      V ← 1 ∧ P ⌊ 2*31      ⍝ Virtual/Real Flag

      Status ← 1 ⍝ STATUS_SUCCESS
    ∇

    ∇ Coord ← GetCoordinate
```

```
      ⍝ Implementation of Axiom V (Equation 5)
      ⍝ Decodes the scalar projection S into vector (p,r,s)
      Coord ← 32 32 32 T S
    ∇

    ∇ P ← Wrap(p r s len v);S_field
      ⍝ 1. Construct Start Index S from coordinate vector
      S_field ← 32 ⊥ p r s

      ⍝ 2. Pack into 32-bit Word: (V * 2^31) + (S * 2^15) + L
      P ← (v × 2*31) + (S_field × 2*15) + len
    ∇
:EndNamespace
```

8 Updating Memory State Spaces by Mating the Oracle Tables

This section describes how **Iscandar** resolves memory requests by intersecting partitioned subspaces. The system utilizes primary ratios relative to the structural Arity ($\mathcal{A}$): the Guard Shards ($0.5\mathcal{A}$) and the Core Shard ($0.25\mathcal{A}$).

Polytope Formation at Cube Level

The Cube Scale Allocator ($L = \mathcal{A}^k$)

Domain: Total Cube Volume resolution (addressable at $\mathcal{A}^k$).

Summation Predicate:

$$C_{plane} = \sum_{i=0}^{\mathcal{A}-1} (C_{row,i} \cdot [y_i = 1]) \tag{10}$$

Discussion: The Cube Scale Allocator computes the unique **"Gatekeeper"** sector count of the architecture. It provides the primary fast-fail heuristic for the system; if a request (S, M) is determined to be non-admissible at this tier, the algorithm immediately terminates without initiating a descent. This makes the registrar the most efficient filter in the hierarchy, ensuring that the cost of coordinate resolution is only paid when success is mathematically guaranteed.

File: HeuristicCube.apl

```
:Namespace Heuristic
    :Namespace Cube
        (⎕IO ⎕ML) ← 0 1

        ∇ R ← Dispatch s
          :Access Public Shared
          ⍝ Tier-5: Maximum volume (32768 sectors)
          ⍝ 1. Check if the entire Cube is clear
```

```
            :If 32768 = ##.##.Lattice.TotalCount
                R ← ##.##.STATUS_SUCCESS ##.##.CubePointer
            :Else
                R ← ##.##.STATUS_FAILURE 0
            :EndIf
        ∇
    :EndNamespace
:EndNamespace
```

Polytope Formation At Row and Plane Levels

The Huge Resolution ($\mathcal{A}^2 < L < \mathcal{A}^3$)

Domain: Plane-join and sequence resolution within an $\mathcal{A}^k$ Cube manifold.

Summation Predicate:

$$C_{huge} = \sum_{i=0}^{\mathcal{A}-1} (C_{plane,i} \cdot [z_i = 1]) \tag{11}$$

Discussion:

- **Mechanism: The Recursive Span**
- **Geometric Event:** *Multi-Vector Extrusion*
- **Resolution:** The system constructs the span via $P + (m \times \mathcal{A}) + T$. The Oracle verifies the m intervening words as "Clear Rows" ($\mathcal{A}$ nullity checks), treating the span as a single geometric object via induction, preserving isochronous resolution by collapsing the m-length extrusion into a occupancy check.

This manages the 32-radix plane counts, welding 2D plane segments into a unified 3D volume request. By treating planes as the fundamental unit of resolution at this tier, the system ensures that even the largest possible allocations are resolved with identical determinism. The Huge allocator calculates the specific number of Planes required to weld a unified 3D volume, treating each Plane count as a subordinate metric for the total Cube count.

File: HeuristicHuge.apl

```
:Namespace HeuristicHuge

    ∇ (S B) ← Run W_Core W_Rem
      ⍝ 1. Intent Check: Direct Core or Fragmented Remainder?
      :If W_Rem = 0
          ⍝ Invoke the pure monolithic radar
          (S B) ← ##.HugePlanesCoreDriver.Run W_Core
      :Else
          ⍝ Invoke the dual-track overspill radar
```

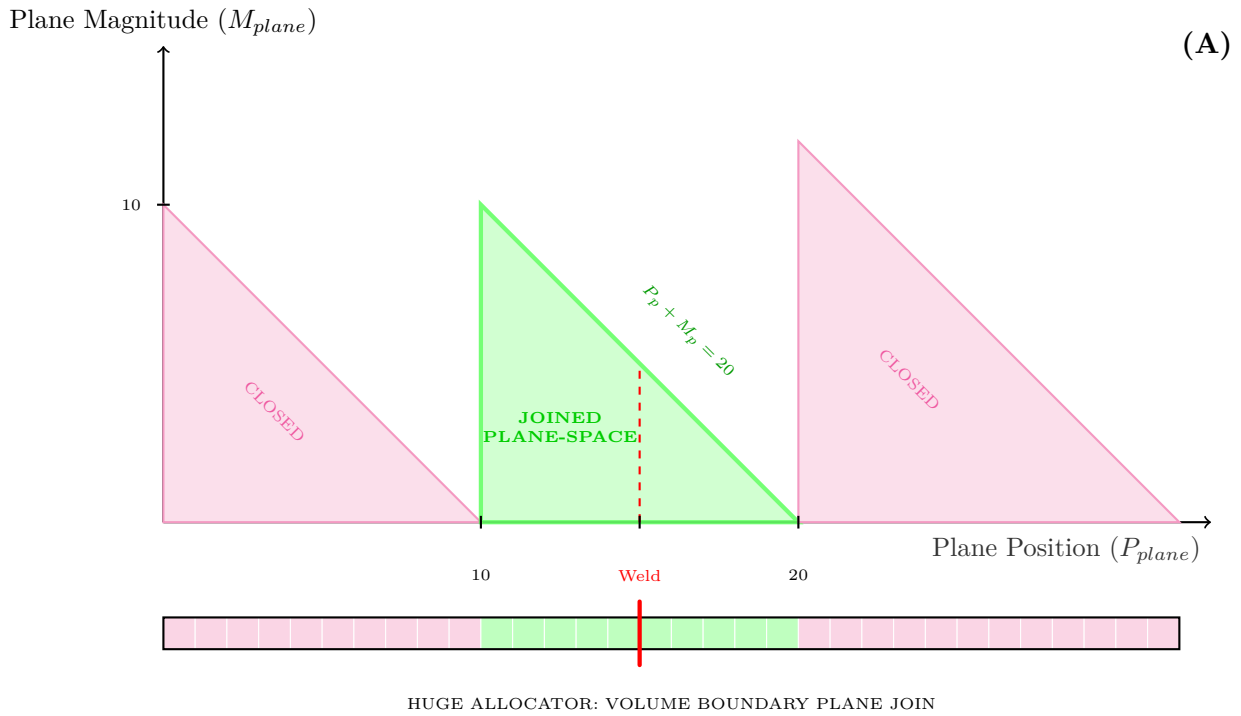


Figure A: Huge Allocator: Phase-Space Manifold and Volume Boundary Weld.

```
            (S B) ← ##.HugePlanesRemainDriver.Run W_Core W_Rem
        :EndIf

        ⍝ 2. Status Pass-Through
        ⍝ Success (S) and Absolute Sector Position (B)
        ⍝ are bubbled up to the top-level allocator.
    ∇

:EndNamespace
```

The Large Resolution ($2\mathcal{A} < L \leq \mathcal{A}^2$)

Domain: Row-join and sequence resolution within an $\mathcal{A}^2$-sector Plane manifold.

Summation Predicate:

$$C_{plane} = \sum_{i=0}^{\mathcal{A}-1} (C_{row,i} \cdot [y_i = 1]) \tag{12}$$

Discussion:

- **Mechanism:** The *Structural Bridge*.
- **Geometric Event:** *Boundary Handshake* between adjacent vectors.

- **Resolution:** The system constructs the span via $P + T$. The Right-Hand Lookup (RHL) of Vector A (Preamble) mates with the Left-Hand Lookup (LHL) of Vector B (Tail) to verify connectivity across the boundary, a geometric invariant enforced by these tables.

This tier represents a fractal expansion of the Level 1 logic. It treats individual rows as the atomic units of resolution, welding row-sequences to satisfy multi-row allocation requests. The Large allocator functions as a resolution engine, calculating a dynamic subset of Rows within the Plane to satisfy continuity requirements.

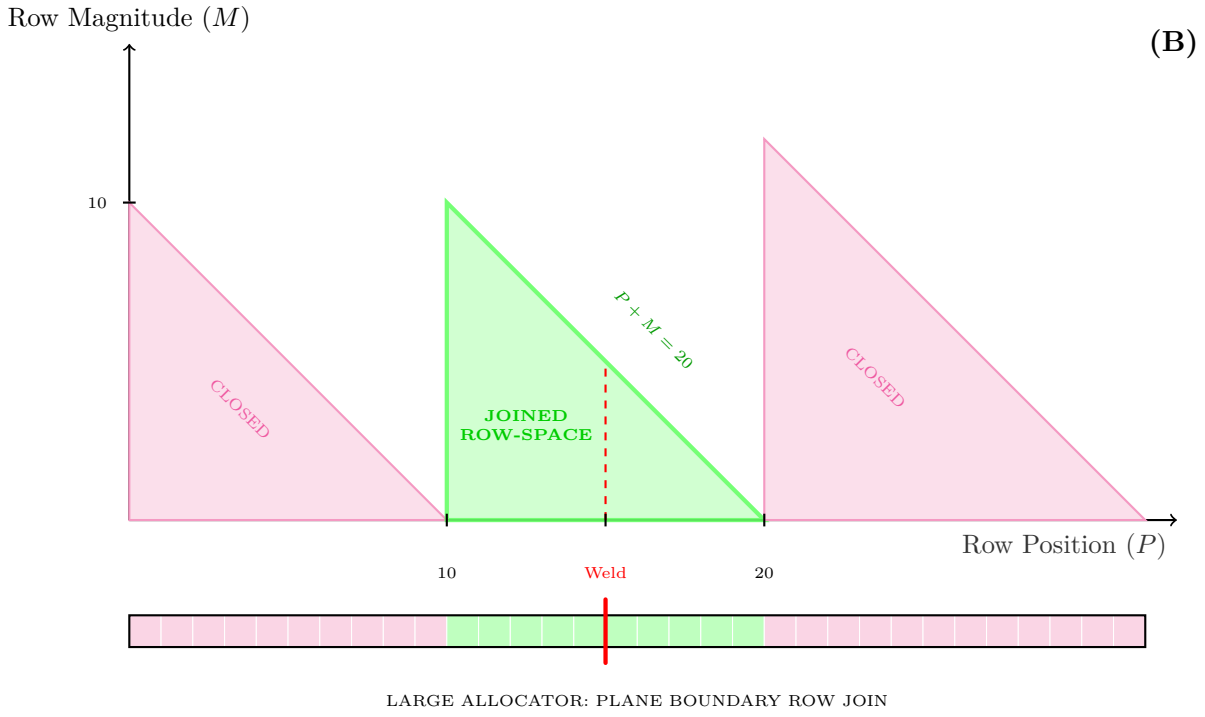


Figure B: Large Allocator: Search Polytopes and Plane Boundary Row Join.

File: HeuristicLarge.apl

```
:Namespace HeuristicLarge

    ARITY ← 32 ⋄ OK ← 1 ⋄ FAIL ← 0

    ∇ Result ← Run L
      ⍝ Hierarchical Coordinate Dispatch
      Result ← ##.LargeRowDriver.Run (
          ##.LargeDriver.Run L SectorScan
      )
    ∇

    ∇ Result ← SectorScan (Plane Row L);W_Core;W_Edges;
                                        L_Edges;Idx;S;
                                        Sum;Start;Len
      ⍝ 1. Geometric Decomposition
      W_Core ← ⌊L ÷ ARITY
      W_Edges ← 2 × 0 ≠ ARITY | L
      Idx ← (Plane × 32) + Row

      ⍝ 2. Branch: Join vs. Extrusion
      :If W_Edges > 0
          L_Edges ← ARITY | L

          ⍝ Head Resolution
          S ← (##.Cube.Rows[Idx]).sectors
          (Len Start) ← ##.Oracle.Left.Resolve S
          L_Edges -← Len

          ⍝ Tail Resolution (Double-Ended Fast-Fail)
          :If L_Edges > 0
              S ← (##.Cube.Rows[Idx + 1 + W_Core]).sectors
              L_Edges -← ##.Oracle.Right.Resolve S
          :EndIf
          →(L_Edges > 0)/FAIL_EXIT

          ⍝ Shard (Core) Validation
          :If W_Core > 0
              Sum ← +/ (##.Cube.Rows[Idx + 1 + ⍳W_Core]).count
              →(Sum ≠ 0)/FAIL_EXIT
          :EndIf
          Result ← OK Start

      :Else
          ⍝ Case II: Row-Aligned Extrusion
          Sum ← +/ (##.Cube.Rows[Idx + ⍳W_Core]).count
```

```
          →(Sum ≠ 0)/FAIL_EXIT
          Result ← OK 0
      :EndIf
      →END

    FAIL_EXIT: Result ← FAIL 0
    END:
    ∇

:EndNamespace
```

Polytope Formation Between Rows

The Small Resolution ($A < L \leq 2\mathcal{A}$)

Domain: Sector-join and sequence resolution within an $\mathcal{A}$-sector Row manifold.

Summation Predicate:

$$C_{row} = \sum_{j=0}^{\mathcal{A}-1} (C_{bits,j} \cdot [x_j = 1]) \tag{13}$$

Discussion:

- **Mechanism:** *Tripartite Join*
- **Geometric Event:** *Polytope Intersection*
- **Resolution:** The Oracle pieces together the Right-Hand Lookahead (RHL) of the first Guard, the internal gaps of the Center Lookahead, and the Left-Hand Lookahead (LHL) of the second Guard, to verify a contiguous span of available sectors, representing a complete geometric resolution within the Oracle's combinatorial state-space.

This tier functions as the primary submachine for the bottom level of welding, utilizing the Oracle to join partial sector tails and heads into a single contiguous magnitude. By treating the row as a unified geometry, boundary seams become transparent to the resolution logic.

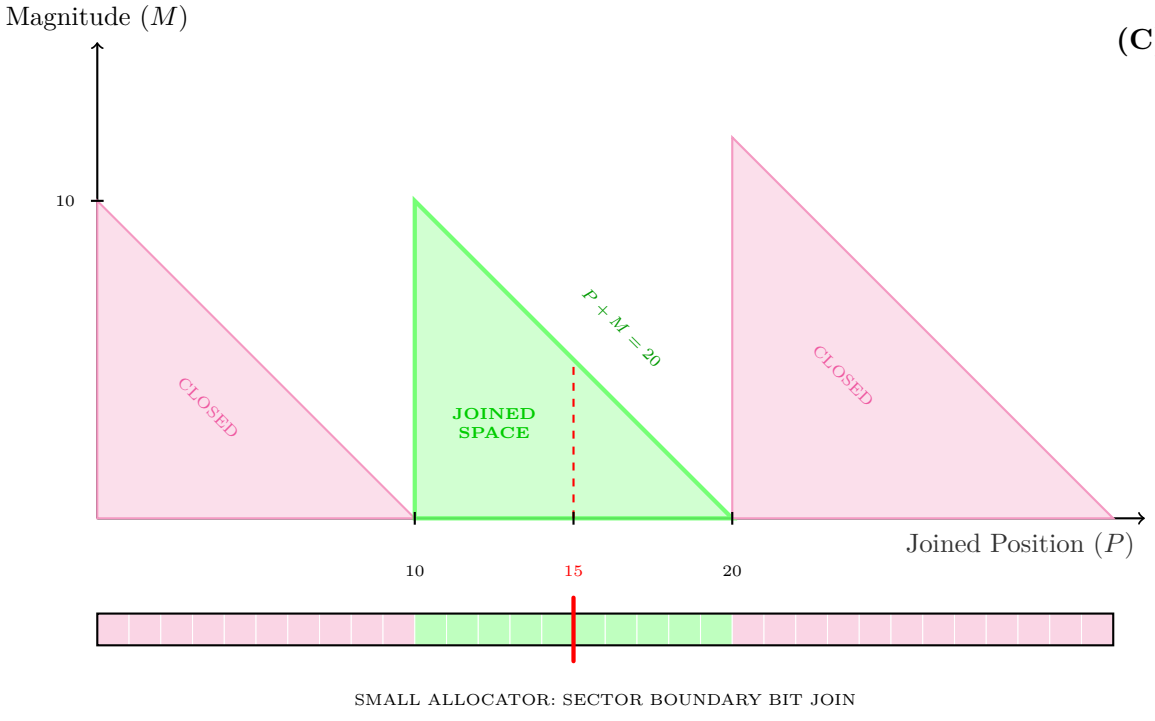


Figure C: Small Allocator: Atomic Phase-Space and Sector Boundary Bit Join.

File: HeuristicSmall.apl

```
:Namespace Heuristic
  :Namespace HeuristicSmall
    ⍝ --- Constants ---
    OK ← CONSTANT.STATUS_SUCCESS
    FAIL ← CONSTANT.STATUS_FAILURE
    LIMIT ← 1022 ⍝ Pivot limit for pair lookahead

    ⍝ --- Function: SectorChecker ---
    ⍝ Args: (Row Offset L)
    ∇ Result ← SectorChecker Args;Row;Offset;L;GR1;GR2;S1;S2;P;Q;M
      (Row Offset L) ← Args
      GR1 ← Row + Offset
      GR2 ← GR1 + 1

      ⍝ Boundary Check: Final pivot is 1022
      →(GR1 > LIMIT)/FAIL_EXIT

      ⍝ Load Sectors from Cube
      S1 ← (Cube.Rows[GR1]).sectors
      S2 ← (Cube.Rows[GR2]).sectors

      ⍝ --- Scan Phase: S1 Left ---
      P ← Oracle.Left[S1]
      →(L > P)/SUPPLEMENT
      Result ← OK L ⋄ →END

    SUPPLEMENT:
      Q ← Oracle.Right[S2]
      M ← L - P
      →(M > Q)/FAIL_EXIT
      Result ← OK L ⋄ →END

    FAIL_EXIT:
        Result ← FAIL 0
      END:
    ∇

    ⍝ --- Function: Main ---
    ∇ Result ← Main L;Offset
      Offset ← 0
      Result ← SectorChecker PairsRowsDriver.Run
                PlanesDriver.Run (Offset L)
    ∇
  :EndNamespace
:EndNamespace
```

Polytope Formation Within Row

The Tiny Resolution ($\mathcal{A}/4 < L \leq \mathcal{A}$)

Domain: The bit-lattice spanning multiple sub-word boundaries within a single Row manifold, typically requiring the evaluation of cross-byte contiguity.


Summation Predicate:

$$C_{bits} = \sum_{i=0}^{\mathcal{A}-1} (\neg b_i \cdot [w_i = 1]) \tag{14}$$

Discussion:

- **Mechanism:** The request targets the Core Shard (S_c) for allocations that exceed the single-byte Nano threshold but fit within a Row's width.
- **Geometric Event:** A *Bimodal Interior* query.
- **Resolution:** To maintain determinism without a stochastic search, the system executes a two-stage probe. The resolution logic first applies the **Left Oracle** to identify an eligible run. Should that fail, the system takes a "second bite of the apple" by immediately applying the **Right Oracle**. This dual-pass mechanism ensures that runs straddling internal alignment boundaries are captured within a fixed, predictable execution window.

This represents the leaf-level execution of the deterministic descent. By utilizing a sequence of **Left and Right Oracle look-up tables**, the system resolves physical bit-offsets in a bounded number of cycles, effectively collapsing the search space for mid-sized atomic requests.

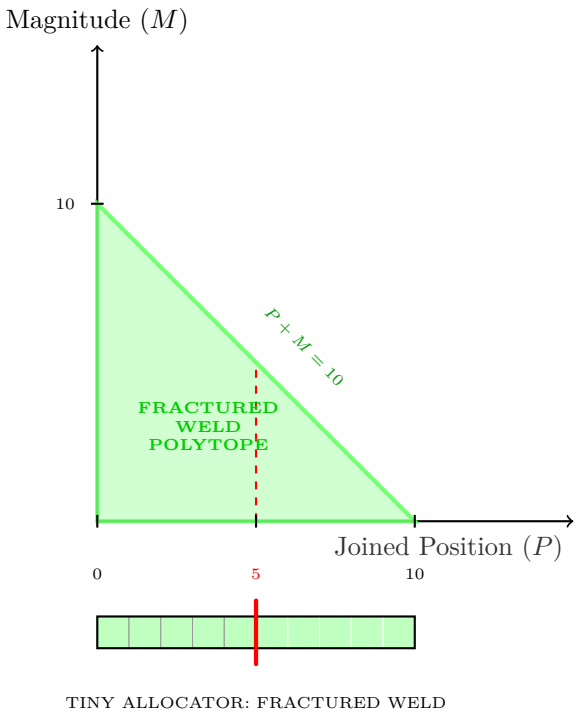

(D)

Figure D: Tiny Allocator: Fractured Weld Polytope and Bit-Lattice Resolution.

File: HeuristicTiny.apl

```
:Namespace Heuristic
  :Namespace HeuristicTiny
    ⍝ --- Constants ---
    OK ← CONSTANT.STATUS_SUCCESS
    FAIL ← CONSTANT.STATUS_FAILURE
    LIMIT ← 1023

    ⍝ --- Function: SectorChecker ---
    ⍝ Args: (Row Offset L)
    ∇ Result ← SectorChecker Args;Row;Offset;L
      ∇ Result ← SectorChecker Args;GlobalRow;X;S;P
      (Row Offset L) ← Args
      GlobalRow ← Row + Offset

      ⍝ Boundary Check
      →(GlobalRow > LIMIT)/FAIL_EXIT

      X ← Cube.Rows[GlobalRow]
      S ← X.sectors

      ⍝ 2D Indexing: Use Oracle as bit scan
      P ← Oracle.Left[S;L]
      →(P < 0)/SECOND_CHANCE
```

```
      Result ← OK P ⋄ →END

      SECOND_CHANCE:
      P ← Oracle.Right[S;L]
      →(P < 0)/FAIL_EXIT
      Result ← OK P ⋄ →END

      FAIL_EXIT:
        Result ← FAIL 0
      END:
    ∇


    ⍝ --- Function: Main ---
    ∇ Result ← Main L;Offset
      Offset ← 0
      Result ← SectorChecker RowsDriver.Run
                PlanesDriver.Run (Offset L)
    ∇
  :EndNamespace
:EndNamespace
```

The Nano Resolution ($L \leq \mathcal{A}/4$)

Domain: The bit-lattice contained within a single word or sub-word segment of a Row manifold, specifically targeting requests between 1 and 8 bits ($\mathcal{A}/4$ when $\mathcal{A} = 32$).

Discussion:

- **Mechanism:** This stage isolates a single byte-aligned segment of the Row to extract a *Seed Polytope*. It ignores higher-level boundary conditions to focus on high-speed intra-byte contiguity.
- **Geometric Event:** An *Atomic Intersection*.
- **Resolution:** The **Center Oracle** intersects between the current Row's bit-pattern and the requested length L, mapping the pattern to an exact fit of available sectors, obtaining a seed polytope of 1 to 8 bits (where multiple possibilies are available as shown in Figure E) to be joined with other polytopes later.

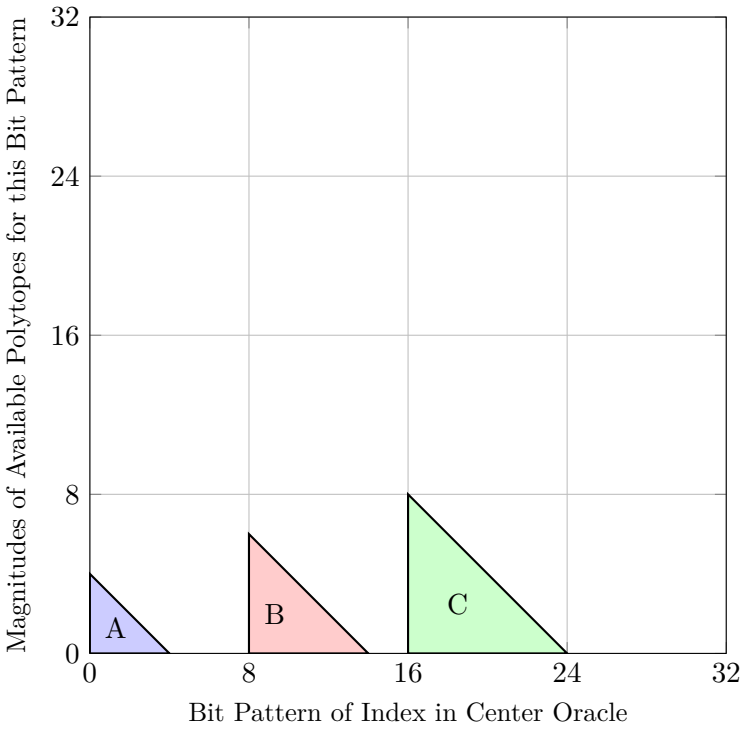

(E)

Figure E: *
Nano mode seed polytopes from indexing Center Oracle.

File: HeuristicNano.apl

```
:Namespace Heuristic
  :Namespace HeuristicNano
    ⍝ --- Constants ---
    OK ← CONSTANT.STATUS_SUCCESS
    FAIL ← CONSTANT.STATUS_FAILURE
    LIMIT ← 1023

    ⍝ --- Function: SectorChecker ---
    ⍝ Args: (Row Offset L)
    ∇ Result ← SectorChecker Args;Row;Offset;L
      ∇ Result ← SectorChecker Args;GlobalRow;X;S;P
      (Row Offset L) ← Args
      GlobalRow ← Row + Offset

      ⍝ Boundary Check
      →(GlobalRow > LIMIT)/FAIL_EXIT

      X ← Cube.Rows[GlobalRow]
      S ← X.sectors

      ⍝ 2D Indexing: Use Oracle as bit scan
```

```
      P ← Oracle.Center[S;L]

      →(P < 0)/FAIL_EXIT
      Result ← OK P ⋄ →END

      FAIL_EXIT:
        Result ← FAIL 0
      END:
    ∇

    ⍝ --- Function: Main ---
    ∇ Result ← Main L;Offset
      Offset ← 0
      Result ← SectorChecker RowsDriver.Run
                PlanesDriver.Run (Offset L)
    ∇
  :EndNamespace
:EndNamespace
```

9 Description of Instruction Groups

We map each instruction group to a specific predicate of the **Iscandar** hierarchy established in the Architectural Axioms. This ensures the hardware execution is a transparent reflection of the underlying mathematics. Here, we assume a 32-radix descent where each level acts as a "Gate" that must be cleared to reach the subsequent tier.

9.1 Phase I: The Admissibility Gate (Level 3)

Predicate:

$$L \in \Gamma_{Apex} \iff \Gamma_{Apex} \leftarrow \Gamma_{Apex} + L \tag{15}$$

1. **Instruction Group 1:** Load Global Registrar: Fetch the 16-bit register located at the Apex sector address as defined in the Cube Scale Allocator.
2. **Instruction Group 2:** Admissibility Comparison: Compare against the requested magnitude L. If False: Immediate Exit (Fast-Fail) as required by the Global Registrar's heuristics. If True: Increment by the requested magnitude.

9.2 Phase II: The Plane-Level Resolution (Level 2)

Predicate:

$$P_{Plane} \iff \sum_{i \in Plane} (Row[Inclusion]) \geq L \tag{16}$$

3. **Instruction Group 3:** Index Plane Metadata: Using the address bits, index into the 32-radix plane metadata table.
4. **Instruction Group 4:** Load Row-Summary: Fetch the 15-bit metadata for the target plane summarizing the 32 constituent rows as established in Axiom II.
5. **Instruction Group 5:** Candidate Selection: Evaluate the plane-state to identify the first row-sequence that satisfies the weld.
6. **Instruction Group 6:** Heuristic Branch/Scan: Evaluate the 32-radix plane metadata scan to confirm the steering vector.

9.3 Phase III: The Row-Level Weld (Level 1)

Predicate:

$$Weld \iff RHL(Row_n) + Intermediates + LHL(Row_{n+m}) \geq L \tag{17}$$

7. **Instruction Group 7:** Leading Fragment Access (RHL): Perform a Look-Up Table (LUT) lookup on the starting row's tail.
8. **Instruction Group 8:** Trailing Fragment Access (LHL): Perform a LUT lookup on the final row's head.
9. **Instruction Group 9:** Scalar Summation: Add Lead + Intermediates + Trail, maintaining the Contiguity Guarantee.
10. **Instruction Group 10:** Weld Validation: Compare the result against M to finalize the inter-row continuity.

9.4 Phase IV: The Bit-Lattice Isolation (Level 0)

Predicate:

$$P_{leaf} \iff \begin{cases} \text{Oracle}_C(S_{word}, L) & \text{if } L \leq \mathcal{A}/4 \\ \text{Oracle}_L(S_{word}, L) \vee \text{Oracle}_R(S_{word}, L) & \text{if } L > \mathcal{A}/4 \end{cases} \tag{18}$$

11. **Instruction Group 11: Path Selection (Nano vs. Tiny):** The logic evaluates the request magnitude L. If $L \leq \mathcal{A}/4$, the system engages the Nano path; otherwise, the bimodal Tiny path is engaged.
12. **Instruction Group 12: Bimodal Execution (Tiny Path):** For Tiny requests, the system executes a primary probe via the Left Oracle. Upon a null result, a deterministic secondary probe via the Right Oracle is triggered to capture straddle-runs.
13. **Instruction Group 13: Atomic Resolution (Nano Path):** For Nano requests, the system performs a single-cycle intersection using the Center Oracle to isolate the seed polytope.
14. **Instruction Group 14: Triangle Projection:** The successfully resolved bit-run from either path is mapped to the physical offset, finalizing the Atomic Polytope isolation.

10 Desk Check Summary: Nano and Tiny Resolutions ($L \leq \mathcal{A}$)

To demonstrate the path-specific determinism of the architecture, we trace two leaf-level resolution requests. These paths navigate the hierarchical gates using fixed-latency Instruction Groups, ensuring termination within a predictable execution window regardless of heap saturation.

1. **Admissibility (Gate 3):** For any request L, the Global Registrar fetches the 16-bit register at the Apex sector address. It performs a single-cycle comparison against Γ_{Apex} to permit or fast-fail the hierarchical descent.
2. **Hierarchical Steering (Gates 2 and 1):** The system applies the Rotational Steering Vector ($\vec{R}$) to select a candidate Plane and Row. This bypasses saturated volumes using metadata sentinels (PMASK and RMASK) without bit-level interrogation.
3. **The Nano Path ($L \leq \mathcal{A}/4$):**
    - **Mechanism:** This path isolates a single byte-aligned segment of the Row to extract a seed polytope.
    - **Atomic Resolution:** The hardware indexes the **Center Oracle** for a single-pass intersection.
    - **Geometric Event:** An *Atomic Intersection* maps the Row's bit-pattern directly to an exact fit of available sectors.
4. **The Tiny Path ($\mathcal{A}/4 < L \leq \mathcal{A}$):**
    - **The First Bite:** To mitigate the fragmentation inherent in single-pass lookups, the system first indexes the **Left Oracle** to identify an eligible contiguous run.
    - **The Second Bite:** If the primary pass returns a null state, the system immediately triggers a deterministic secondary probe via the **Right Oracle**. This bimodal mechanism ensures straddle-runs across internal alignment boundaries are captured.
5. **Lattice Commitment:** The resulting run is mapped to a pointer of a given bit offset and length. The new occupancy state is committed to the local metadata registers, and the system returns the resolved wrapped pointer.

Verification: Whether the system uses an Oracle to resolve a request through a single-cycle Nano intersection or a dual-pass Tiny probe, the execution path length is fixed. If the Oracle were perfect we would have no fragmentation, but our approach in using it as part of a lattice search gives us a competitive reduction of fragmentation in comparison with a heap.

11 Volumetric Analysis

The following analysis provides the empirical verification of the **Iscandar** architectural thesis. Using a **Radix-32** sentinel-steered manifold, the system shows determinism across the entire addressable sectors (32768). The data confirms that computational overhead remains decoupled from the scale of the memory system, ensuring that pointer resolution is invariant to heap saturation.

11.1 Methodology

A stress-test audit was performed utilizing a $K = 3$ fractal depth configuration. The system was subjected to sequential allocations, with performance metrics sampled at every 50th operation to observe the behavior of the manifold under heavy saturation.

- **Memory Request (Sectors).**
- **Memory Touches (Sectors):** The total register-level interactions required to update the bitmask and sentinel hierarchies (`RMASK`, `PMASK`).

11.2 Test Data (generated from Section 10)

To generate, follow these instructions.

11.3 Graphical Verification

Figure **??** documents the stability of **Iscandar** across its full volumetric range. By sampling data at 500-sector intervals, the visualization maintains the characteristic "flat" trendline of the Radix-32 steering logic, confirming determinism as the system approaches the 32,768 sector limit.

Figure E: Iscandar Performance Profile

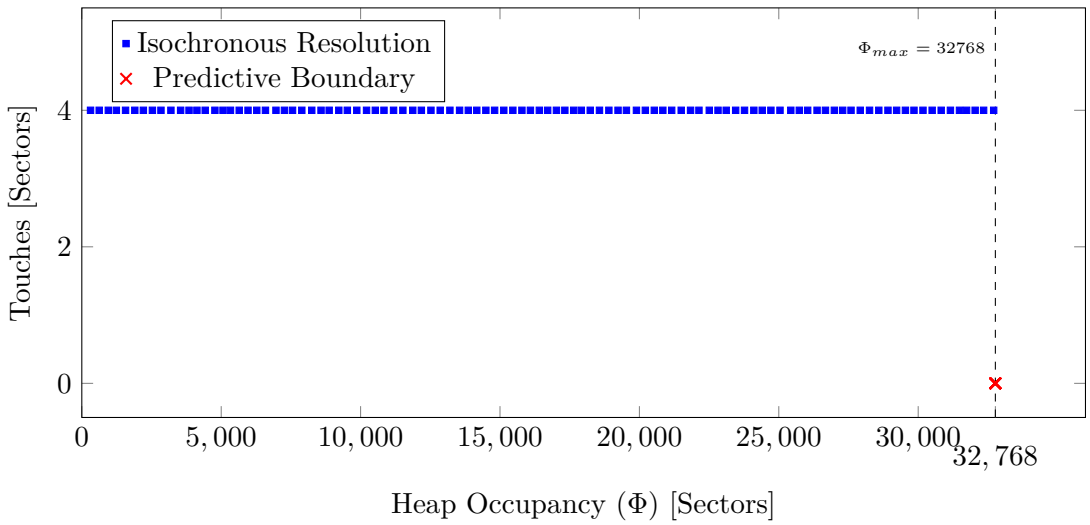


Figure F: Empirical verification of isochronous resolution. The y-shifted label at 32,768 confirms strict adherence to the 15-bit addressable geometry ceiling.

11.4 Buddy System Comparison Simulation

To contrast, a theoretical binary buddy system was simulated for a heap size comparable to ours, a 128 KB heap utilizing 4-byte sectors. This needs a binary tree depth of $D = 15$. Figure G illustrates the search effort inherent in recursive block splitting and coalescing.

(E)

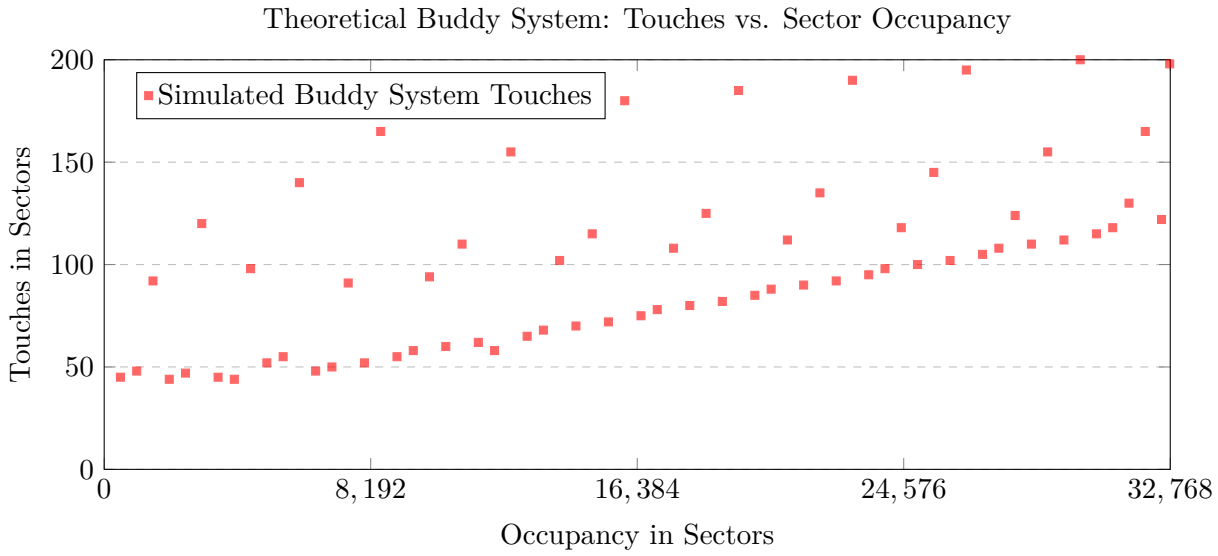


Figure G: Simulated binary buddy allocation at 4-bytes per sector in a 32768 sector memory pool.

12 Iscandar: Laboratory Source Code

12.1 Bootstrap Mechanism (see Section 1, Batteries Included!)

A researcher can manually copy the following block into a Windows 11 Powershell terminal to extract the `BottleOpener` tool (see section 12.2, below) for organizing the code base for execution by any community (unregistered) version of the Dyalog 20 64-bit Unicode interpreter for APL.

```
$tex = Get-Content "Iscandar.tex" -Raw
$pattern = '(?s)\\begin\{BottleOpener\}.*?\n(.*)\n\\end\{BottleOpener\}'
if ($tex -match $pattern) {
    $Matches[1] | Out-File "BottleOpener.ps1" -Encoding utf8
    .\BottleOpener.ps1
}
```

12.2 The Bottle Opener

This LaTeX block is automatically extracted from this paper and saved as BottleOpener.ps1 by the bootstrap mechanism listed in the above section 12.1, when executed by the researcher upon this .tex file (Iscandar.tex), all APL sections in this paper will be extracted and organized in the current working directory of the Powershell prompt.

Tool: BottleOpener.ps1

```
# Run 'BottleOpener.ps1' from a Powershell prompt.
$tex = Get-Content "Iscandar.tex" -Raw

$pattern = '(?s)\\begin\{Iscandar\}\[(.*?)\]' +
           '\s*\n(.*?)\n\\end\{Iscandar\}'

$clips = [regex]::Matches($tex, $pattern)

foreach ($c in $clips) {
    $f = $c.Groups[1].Value.Trim()
    $v = $c.Groups[2].Value.Trim()

    # PowerShell allows breaks after the pipe
    $v |
    Out-File $f -Encoding utf8

    Write-Host "Clipped: $f" -ForegroundColor Green
}
Write-Host "Iscandar Organized." -ForegroundColor Cyan
```

12.3 Project Directories

This LaTeX block is automatically extracted from this paper and saved as Project.ps1 by the bootstrap mechanism listed in the above section 12.1, when executed by the researcher, it establishes the physical directory hierarchy for the project related to this paper.

File: Project.ps1

```
# Run 'Project.ps1' from a Powershell prompt
$root = "Iscandar_Lab"
$subDirs = @(
    "Bin",         # Target for APL research artifacts
    "Oracles",     # Destination for LHL/RHL/Center LUTs
    "Workspaces", # Storage for serialized memory states
    "Telemetry"   # Output for stress-test audit data
)

# Deterministic creation of the Lattice hierarchy
if (!(Test-Path $root)) {
    New-Item -ItemType Directory -Path $root
}

foreach ($dir in $subDirs) {
    $path = Join-Path $root $dir
    if (!(Test-Path $path)) {
        New-Item -ItemType Directory -Path $path
        Write-Host "Created: $path" -ForegroundColor Green
    }
}
Write-Host "Iscandar Project Verified." -ForegroundColor Cyan
```

12.4 Project Checklist

TBD

13 Project Support

The following components support the project for this paper:

13.1 Error Status

File: Support.apl

```
:Namespace STATUS
    :Access Public Shared
    :Field Public Shared ReadOnly SUCCESS    ← 0
    :Field Public Shared ReadOnly MARK       ← 1
    :Field Public Shared ReadOnly UNMARK     ← 2
    :Field Public Shared ReadOnly FAIL_NULL   ← 3
    :Field Public Shared ReadOnly FAIL_NANO   ← 4
    :Field Public Shared ReadOnly FAIL_TINY   ← 5
    :Field Public Shared ReadOnly FAIL_SMALL  ← 6
    :Field Public Shared ReadOnly FAIL_LARGE  ← 7
    :Field Public Shared ReadOnly FAIL_HUGE   ← 8
```

```
    :Field Public Shared ReadOnly FAIL_CUBE   ← 9
:EndNamespace
```

13.2 Oracle Manufacture

13.2.1 Center Oracle

File: OracleCenter.ps1

```
# Manufactures the 38.6GB Center Oracle Blob
# Layout: 2^32 rows x 9 columns (k=0..8)
# Logic: Motorola Big-Endian (Bit 0 = MSB/Left). First-fit from Left.

$FilePath = "OracleCenter.bin"
$Stream = [System.IO.File]::Create($FilePath)
$Writer = New-Object System.IO.BinaryWriter($Stream)

Write-Host "Manufacturing Center Oracle..."

# Iterate through all 2^32 possible occupancy states
for ([double]$S_double = 0; $S_double -lt 4294967296; $S_double++) {
    $S = [uint32]$S_double

    # Columns k=0 to 8 represent the requested allocation length
    for ($k = 0; $k -le 8; $k++) {
        if ($k -eq 0) {
            $Writer.Write([byte]0) # Redundant column for k=0
            continue
        }

        $foundPos = 0xFF #  indicates no block of length k exists

        # Motorola Big-Endian Scan from (Bit 0) to (Bit 31)
        # Stop at first success to ensure "Closest to Left" packing.
        for ($pos = 0; $pos -le (32 - $k); $pos++) {

            # Construct Motorola mask: k bits starting at 'pos'
            # Calculation: (2^k - 1) shifted to
            # correct Motorola bit position
            $baseMask = [uint32]([math]::Pow(2, $k) - 1)
            $mask = $baseMask -shl (32 - $k - $pos)

            # Deterministic Bit-Check
            if (($S -band $mask) -eq 0) {
                $foundPos = [byte]$pos
                break # TERMINATE: Found the leftmost sequence
            }
```

```
        }
        $Writer.Write($foundPos)
    }

    # Status heartbeat for the factory floor
    if ($S_double % 100000000 -eq 0) {
        $progress = [math]::Round(($S_double/4294967296)*100, 2)
        Write-Host "Progress: $progress% ($S_double rows processed)"
    }
}

$Writer.Close()
$Stream.Close()
Write-Host "Iscandar Center Oracle Manufacture: Complete."
```

13.2.2 Left Oracle

File: OracleLeft.ps1

```
# OracleLeft.ps1 (Max 40 Chars)
# Logic: Trailing Run (Ends at LSB)
$P = "OracleLeft.bin"
$S_i = [System.IO.File]::Create($P)
$W = [System.IO.BinaryWriter]::new($S_i)

for ([double]$d=0; $d -lt 4gb; $d++) {
  $S = [uint32]$d

  # Check LSB (Motorola Bit 31)
  if (($S -band 1) -ne 0) {
    $A = [byte]255 # Blocked Case
    $B = [byte]0
  } else {
    $r = 0 # Length counter
    for ($i=0; $i -lt 32; $i++) {
      $m = [uint32]1 -shl $i
      if (($S -band $m) -eq 0) {
        $r++
      } else { break }
    }
    $A = [byte]$r # Byte A: Length
    # B: Start Pos (Relative to MSB)
    $B = [byte](32 - $r)
  }
  $W.Write($A); $W.Write($B)
```

```
  if ($d % 100mb -eq 0) {
    $p = [math]::Round(($d/4gb)*100,2)
    Write-Host "Progress: $p %"
  }
}
$W.Close(); $S_i.Close()
```

13.2.3 Right Oracle

File: OracleRight.ps1

```
# OracleRight.ps1 (Max 40 Chars)
# Logic: Leading Run (Starts at MSB)
$P = "OracleRight.bin"
$S_i = [System.IO.File]::Create($P)
$W = [System.IO.BinaryWriter]::new($S_i)

for ([double]$d=0; $d -lt 4gb; $d++) {
  $S = [uint32]$d

  # Check MSB (Motorola Bit 0)
  if (($S -band 0x80000000) -ne 0) {
    $A = [byte]255 # Blocked Case
    $B = [byte]0
  } else {
    $r = 0 # Length counter
    for ($i=31; $i -ge 0; $i--) {
      $m = [uint32]1 -shl $i
      if (($S -band $m) -eq 0) {
        $r++
      } else { break }
    }
    $A = [byte]$r # Byte A: Length
    $B = [byte]0  # Byte B: Always 0
  }
  $W.Write($A); $W.Write($B)

  if ($d % 100mb -eq 0) {
    $p = [math]::Round(($d/4gb)*100,2)
    Write-Host "Progress: $p %"
  }
}
$W.Close(); $S_i.Close()
```

File: MarkPlanes.apl

```
:Namespace WrappedPointer

  ∇ Status ← MarkPlanes Pointer;plane;row;sector;length
    ∇ start_offset;lead_avail;lead_sectors;leftover
    ∇ sandwich_count;Delta;NewCounts;target_plane

    ⍝ 1. Find starting position and length
    (plane row sector length) ← Unwrap Pointer

    start_offset ← (row × ROW) + sector
    lead_avail ← PLANE - start_offset
    Delta ← ROW ⍴ 0

    ⍝ 2. Calculate sectors for each plane
    lead_sectors ← length ⌊ lead_avail
    Delta[plane + 1] ← lead_sectors

    leftover ← length - lead_sectors
    target_plane ← plane + 1

    :If leftover ≥ PLANE
        sandwich_count ← ⌊ leftover ÷ PLANE
        Delta[target_plane + ⍳sandwich_count] ← PLANE
        leftover ← leftover - (sandwich_count × PLANE)
        target_plane +← sandwich_count
    :EndIf

    :If leftover > 0
        Delta[target_plane + 1] ← leftover
    :EndIf

    ⍝ 3. Check for overflow
    NewCounts ← ##.Cube.Planes.count + Delta

    :If ∨/ NewCounts > PLANE
        Status ← 'STATUS_MARK_FAILURE'
        :Return
    :EndIf

    ⍝ 4. Save new counts and return success
    ##.Cube.Planes.count ← NewCounts
    Status ← 'STATUS_MARK_SUCCESS'
  ∇

:EndNamespace
```

File: UnMarkPlanes.apl

```
:Namespace WrappedPointer

  ∇ Status ← UnMarkPlanes Pointer;plane;row;sector;length
    ∇ start_offset;lead_avail;lead_sectors;leftover
    ∇ sandwich_count;Delta;NewCounts;target_plane

    ⍝ 1. Find starting position and length
    (plane row sector length) ← Unwrap Pointer

    start_offset ← (row × ROW) + sector
    lead_avail ← PLANE - start_offset
    Delta ← ROW ⍴ 0

    ⍝ 2. Calculate sectors for each plane
    lead_sectors ← length ⌊ lead_avail
    Delta[plane + 1] ← lead_sectors

    leftover ← length - lead_sectors
    target_plane ← plane + 1

    :If leftover ≥ PLANE
        sandwich_count ← ⌊ leftover ÷ PLANE
        Delta[target_plane + ⍳sandwich_count] ← PLANE
        leftover ← leftover - (sandwich_count × PLANE)
        target_plane +← sandwich_count
    :EndIf

    :If leftover > 0
        Delta[target_plane + 1] ← leftover
    :EndIf

    ⍝ 3. Check for underflow
    NewCounts ← ##.Cube.Planes.count - Delta

    :If ∨/ NewCounts < 0
        Status ← 'STATUS_MARK_FAILURE'
        :Return
    :EndIf

    ⍝ 4. Save new counts and return success
    ##.Cube.Planes.count ← NewCounts
    Status ← 'STATUS_MARK_SUCCESS'
  ∇

:EndNamespace
```

File: MarkSingleRow.apl

```
:Namespace WrappedPointer

  ∇ Status ← MarkSingleRow(plane row sector length);Mask
    ∇ RowBits;OverlapCount;global_row

    ⍝ 1. Calculate the global row index (0-1023)
    global_row ← (plane × ROW) + row

    ⍝ 2. Generate the allocation mask
    Mask ← sector ⌽ ROW ↑ length ⍴ 1

    ⍝ 3. Fetch the target row bits
    RowBits ← ##.Cube.Rows[global_row].sectors

    ⍝ 4. Verify the intersection is zero
    OverlapCount ← +/ RowBits ∧ Mask
    :If OverlapCount > 0
        Status ← 'STATUS_MARK_FAILURE'
        :Return
    :EndIf

    ⍝ 5. Verify row count won't breach limit
    :If (##.Cube.Rows[global_row].count + length) > SECTORS
        Status ← 'STATUS_MARK_FAILURE'
        :Return
    :EndIf

    ⍝ 6. Commit via bitwise OR
    ##.Cube.Rows[global_row].sectors ← RowBits ∨ Mask

    ⍝ 7. Commit count via addition
    ##.Cube.Rows[global_row].count +← length
    Status ← 'STATUS_MARK_SUCCESS'
  ∇

:EndNamespace
```

File: UnMarkSingleRow.apl

```
:Namespace WrappedPointer

  ∇ Status ← UnMarkSingleRow(plane row sector length);Mask
    ∇ RowBits;OverlapCount;global_row

    ⍝ 1. Calculate the global row index (0-1023)
```

```
    global_row ← (plane × ROW) + row

    ⍝ 2. Generate the allocation mask
    Mask ← sector ⌽ ROW ↑ length ⍴ 1

    ⍝ 3. Fetch the target row bits
    RowBits ← ##.Cube.Rows[global_row].sectors

    ⍝ 4. Verify the mask matches allocated sectors
    ⍝    (Ensure we are only clearing bits that are actually set)
    OverlapCount ← +/ RowBits ∧ Mask
    :If OverlapCount ≠ length
        Status ← 'STATUS_MARK_FAILURE'
        :Return
    :EndIf

    ⍝ 5. Verify row count won't underflow below zero
    :If (##.Cube.Rows[global_row].count - length) < 0
        Status ← 'STATUS_MARK_FAILURE'
        :Return
    :EndIf

    ⍝ 6. Commit via bitwise AND with inverted mask
    ##.Cube.Rows[global_row].sectors ← RowBits ∧ ~Mask

    ⍝ 7. Commit count via subtraction
    ##.Cube.Rows[global_row].count -← length
    Status ← 'STATUS_MARK_SUCCESS'
  ∇

:EndNamespace
```

File: MarkRows.apl

```
:Namespace WrappedPointer

  ∇ Status ← MarkRows(plane row sector length);A;Z;L_A;L_Z;Sequence;RowMatrix
    ∇ OverlapCounts

    ⍝ 1. Route Scenario A if the allocation fits inside a single row
    :If (sector + length) ≤ SECTORS
        Status ← MarkSingleRow plane row sector length
        :Return
    :EndIf

    ⍝ 2. Calculate global boundary row indices (0-1023)
```

```
    A ← (plane × ROW) + row
    Z ← A + ⌊(sector + length - 1) ÷ SECTORS

    ⍝ 3. Compute fractional edge lengths for boundary rows
    L_A ← SECTORS - sector
    L_Z ← SECTORS | (sector + length)

    ⍝ 4. Initialize bulk sequence with intermediate rows
    Sequence ← (A + 1) + ⍳(Z - A - 1)

    ⍝ 5. Evaluate and process Head Row A
    :If sector = 0
        Sequence ← A, Sequence
    :Else
        Status ← MarkFirstRow A sector L_A
        :If Status ≡ 'STATUS_MARK_FAILURE' ⋄ :Return ⋄ :EndIf
    :EndIf

    ⍝ 6. Evaluate and process Tail Row Z
    :If L_Z = 0
        Sequence ← Sequence, Z
    :Else
        Status ← MarkFinalRow Z L_Z
        :If Status ≡ 'STATUS_MARK_FAILURE' ⋄ :Return ⋄ :EndIf
    :EndIf

    ⍝ 7. Vectorized Collision Check using Index Projection
    ⍝    Extracts an [⍴Sequence × SECTORS] boolean matrix
    RowMatrix ← ↑##.Cube.Rows[Sequence].sectors

    ⍝ Sum across rows (horizontal reduction) to check for set bits
    OverlapCounts ← +/ RowMatrix
    :If ∨/ OverlapCounts > 0
        Status ← 'STATUS_MARK_FAILURE'
        :Return
    :EndIf

    ⍝ 8. Vectorized Commit and Count Update
    ##.Cube.Rows[Sequence].sectors ← ⊂SECTORS ⍴ 1
    ##.Cube.Rows[Sequence].count ← SECTORS

    Status ← 'STATUS_MARK_SUCCESS'
  ∇

:EndNamespace
```

File: UnMarkRows.apl

```
:Namespace WrappedPointer

  ∇ Status ← UnMarkRows(plane row sector length);A;Z;L_A;L_Z;Sequence;RowMatrix
    ∇ OverlapCounts

    ⍝ 1. Route Scenario A if the allocation fits inside a single row
    :If (sector + length) ≤ SECTORS
        Status ← UnMarkSingleRow plane row sector length
        :Return
    :EndIf

    ⍝ 2. Calculate global boundary row indices (0-1023)
    A ← (plane × ROW) + row
    Z ← A + ⌊(sector + length - 1) ÷ SECTORS

    ⍝ 3. Compute fractional edge lengths for boundary rows
    L_A ← SECTORS - sector
    L_Z ← SECTORS | (sector + length)

    ⍝ 4. Initialize bulk sequence with intermediate rows
    Sequence ← (A + 1) + ⍳(Z - A - 1)

    ⍝ 5. Evaluate and process Head Row A
    :If sector = 0
        Sequence ← A, Sequence
    :Else
        Status ← UnMarkFirstRow A sector L_A
        :If Status ≡ 'STATUS_MARK_FAILURE' ⋄ :Return ⋄ :EndIf
    :EndIf

    ⍝ 6. Evaluate and process Tail Row Z
    :If L_Z = 0
        Sequence ← Sequence, Z
    :Else
        Status ← UnMarkFinalRow Z L_Z
        :If Status ≡ 'STATUS_MARK_FAILURE' ⋄ :Return ⋄ :EndIf
    :EndIf

    ⍝ 7. Vectorized Allocation Check using Index Projection
    ⍝    Extracts an [⍴Sequence × SECTORS] boolean matrix
    RowMatrix ← ↑##.Cube.Rows[Sequence].sectors

    ⍝ Sum across rows to ensure all targeted sectors are fully allocated
    OverlapCounts ← +/ RowMatrix
    :If ∨/ OverlapCounts ≠ SECTORS
```

```
        Status ← 'STATUS_MARK_FAILURE'
        :Return
    :EndIf

    ⍝ 8. Vectorized Commit and Count Update (Clear Bits)
    ##.Cube.Rows[Sequence].sectors ← ⊂SECTORS ⍴ 0
    ##.Cube.Rows[Sequence].count ← 0

    Status ← 'STATUS_MARK_SUCCESS'
  ∇

:EndNamespace
```

File: MarkFirstRow

```
:Namespace WrappedPointer

  ∇ Status ← MarkFirstRow(global_row sector length);Mask;RowBits
    ∇ OverlapCount

    ⍝ 1. Generate the trailing-edge allocation mask
    ⍝    (Shifts 'length' bits to align with the starting sector)
    Mask ← sector ⌽ SECTORS ↑ length ⍴ 1

    ⍝ 2. Fetch the target global row bits
    RowBits ← ##.Cube.Rows[global_row].sectors

    ⍝ 3. Verify the intersection is zero (Collision Detection)
    OverlapCount ← +/ RowBits ∧ Mask
    :If OverlapCount > 0
        Status ← 'STATUS_MARK_FAILURE'
        :Return
    :EndIf

    ⍝ 4. Verify row count won't breach limit
    :If (##.Cube.Rows[global_row].count + length) > SECTORS
        Status ← 'STATUS_MARK_FAILURE'
        :Return
    :EndIf

    ⍝ 5. Commit via bitwise OR
    ##.Cube.Rows[global_row].sectors ← RowBits ∨ Mask

    ⍝ 6. Commit count via addition
    ##.Cube.Rows[global_row].count +← length
    Status ← 'STATUS_MARK_SUCCESS'
  ∇
```

```
:EndNamespace
```

File: UnMarkFirstRow.apl

```
:Namespace WrappedPointer

  ∇ Status ← UnMarkFirstRow(global_row sector length);Mask;RowBits
    ∇ OverlapCount

    ⍝ 1. Generate the trailing-edge allocation mask
    ⍝    (Shifts 'length' bits to align with the starting sector)
    Mask ← sector ⌽ SECTORS ↑ length ⍴ 1

    ⍝ 2. Fetch the target global row bits
    RowBits ← ##.Cube.Rows[global_row].sectors

    ⍝ 3. Verify the mask matches allocated sectors
    ⍝    (Ensure we are only clearing bits that are actually set)
    OverlapCount ← +/ RowBits ∧ Mask
    :If OverlapCount ≠ length
        Status ← 'STATUS_MARK_FAILURE'
        :Return
    :EndIf

    ⍝ 4. Verify row count won't underflow below zero
    :If (##.Cube.Rows[global_row].count - length) < 0
        Status ← 'STATUS_MARK_FAILURE'
        :Return
    :EndIf

    ⍝ 5. Commit via bitwise AND with inverted mask
    ##.Cube.Rows[global_row].sectors ← RowBits ∧ ~Mask

    ⍝ 6. Commit count via subtraction
    ##.Cube.Rows[global_row].count -← length
    Status ← 'STATUS_MARK_SUCCESS'
  ∇

:EndNamespace
```

File: MarkFinalRow.apl

```
:Namespace WrappedPointer

  ∇ Status ← MarkFinalRow(global_row length);Mask;RowBits
    ∇ OverlapCount
```

```
    ⍝ 1. Generate the front-aligned allocation mask
    ⍝    (Claims bits from index 0 up to 'length')
    Mask ← SECTORS ↑ length ⍴ 1

    ⍝ 2. Fetch the target global row bits
    RowBits ← ##.Cube.Rows[global_row].sectors

    ⍝ 3. Verify the intersection is zero (Collision Detection)
    OverlapCount ← +/ RowBits ∧ Mask
    :If OverlapCount > 0
        Status ← 'STATUS_MARK_FAILURE'
        :Return
    :EndIf

    ⍝ 4. Verify row count won't breach limit
    :If (##.Cube.Rows[global_row].count + length) > SECTORS
        Status ← 'STATUS_MARK_FAILURE'
        :Return
    :EndIf

    ⍝ 5. Commit via bitwise OR
    ##.Cube.Rows[global_row].sectors ← RowBits ∨ Mask

    ⍝ 6. Commit count via addition
    ##.Cube.Rows[global_row].count +← length
    Status ← 'STATUS_MARK_SUCCESS'
  ∇

:EndNamespace
```

File: UnMarkFinalRow.apl

```
:Namespace WrappedPointer

  ∇ Status ← UnMarkFinalRow(global_row length);Mask;RowBits
    ∇ OverlapCount

    ⍝ 1. Generate the front-aligned allocation mask
    ⍝    (Claims bits from index 0 up to 'length')
    Mask ← SECTORS ↑ length ⍴ 1

    ⍝ 2. Fetch the target global row bits
    RowBits ← ##.Cube.Rows[global_row].sectors

    ⍝ 3. Verify the mask matches allocated sectors
    ⍝    (Ensure we are only clearing bits that are actually set)
```

```
    OverlapCount ← +/ RowBits ∧ Mask
    :If OverlapCount ≠ length
        Status ← 'STATUS_MARK_FAILURE'
        :Return
    :EndIf

    ⍝ 4. Verify row count won't underflow below zero
    :If (##.Cube.Rows[global_row].count - length) < 0
        Status ← 'STATUS_MARK_FAILURE'
        :Return
    :EndIf

    ⍝ 5. Commit via bitwise AND with inverted mask
    ##.Cube.Rows[global_row].sectors ← RowBits ∧ ~Mask

    ⍝ 6. Commit count via subtraction
    ##.Cube.Rows[global_row].count -← length
    Status ← 'STATUS_MARK_SUCCESS'
  ∇

:EndNamespace
```

File: Mark.apl

```
:Namespace WrappedPointer

  ∇ Status ← Mark pointer;plane;row;sector;length

    ⍝ 1. Unwrap the structural geometry from the pointer
    (plane row sector length) ← Unwrap pointer

    ⍝ 2. Verify global cube count won't breach structural limits
    :If (##.Cube.count + length) > CUBE
        Status ← 'STATUS_MARK_FAILURE'
        :Return
    :EndIf

    ⍝ 3. Run high-level plane volume tracking (The Radar Tier)
    Status ← ##.Cube MarkPlanes plane row sector length
    :If Status ≡ 'STATUS_MARK_FAILURE'
        :Return
    :EndIf

    ⍝ 4. Run low-level structural bit allocation (The Actuator Tier)
    Status ← MarkRows plane row sector length
    :If Status ≡ 'STATUS_MARK_FAILURE'
```

```
        ⍝ Note: In a transactional failure state, a rollback of
        ⍝ the planes may be required if MarkPlanes modifies state
        :Return
    :EndIf

    ⍝ 5. Update global structural count upon absolute success
    ##.Cube.count +← length
    Status ← 'STATUS_MARK_SUCCESS'
  ∇

:EndNamespace
```

File: UnMark.apl

```
:Namespace WrappedPointer

  ∇ Status ← UnMark pointer;plane;row;sector;length

    ⍝ 1. Unwrap the structural geometry from the pointer
    (plane row sector length) ← Unwrap pointer

    ⍝ 2. Verify global cube count won't underflow below zero
    :If (##.Cube.count - length) < 0
        Status ← 'STATUS_MARK_FAILURE'
        :Return
    :EndIf

    ⍝ 3. Run high-level plane volume tracking rollback
    Status ← ##.Cube UnMarkPlanes plane row sector length
    :If Status ≡ 'STATUS_MARK_FAILURE'
        :Return
    :EndIf

    ⍝ 4. Run low-level structural bit deallocation
    Status ← UnMarkRows plane row sector length
    :If Status ≡ 'STATUS_MARK_FAILURE'
        :Return
    :EndIf

    ⍝ 5. Update global structural count upon absolute success
    ##.Cube.count -← length
    Status ← 'STATUS_MARK_SUCCESS'
  ∇

:EndNamespace
```

File: HeuristicNull.apl

```
:Namespace Heuristic
    :Namespace Null
        (⎕IO ⎕ML) ← 0 1

        ∇ R ← Dispatch s
          :Access Public Shared
          ⍝ Ground state: all requests here fail
          ⍝ Returns (STATUS_FAILURE, NullPointer)
          R ← ##.##.STATUS_FAILURE 0
        ∇
    :EndNamespace
:EndNamespace
```

File: PlanesDriver.apl

```
:Namespace PlanesDriver

    ⍝ --- Constants ---
    P ← CONSTANT.PLANE
    A ← CONSTANT.ROW
    OK ← 1 ⋄ FAIL ← 0

    ⍝ --- Constant Arity Weight Vector (Powers of 2) ---
    B ← 2*⍳32

    ⍝ --- Function: Run ---
    ∇ Result ← CR CS Run (Offset L);V
      V ← ExecutionVector L
      →(0 = V)/NULL_SET
      Result ← CS CR V Offset ExecuteVector L
      →END
    NULL_SET:
      Result ← FAIL 0
    END:
    ∇

    ∇ V ← ExecutionVector L;Available;Mask
      ⍝ Parallel hardware poll of all 32 plane capacities
      Available ← P - Cube.planes.count
      Mask ← L ≤ Available
      V ← Mask +.× B[⍳⍴Mask]
    ∇

    ∇ Result ← plane Position Args;offset;sector
      (offset sector) ← Args
```

```
      Result ← (CONSTANT.PLANE×plane)+(CONSTANT.ARITY×offset)+sector
    ∇

    ∇ Result ← CS CR V Offset ExecuteVector L;s;b;Candidate
      ⍝ Factor out bitwise intersection (Candidate planes)
      Candidate ← V ∧ B

      P_0:  →(0 = 0⊃Candidate)/P_1
            (s b) ← CS CR (0 Offset L)
            →(s ≠ OK)/P_1
            Result ← OK (0 Position (Offset b)) ⋄ →END
      P_1:  →(0 = 1⊃Candidate)/P_2
            (s b) ← CS CR (1 Offset L)
            →(s ≠ OK)/P_2
            Result ← OK (1 Position (Offset b)) ⋄ →END
      P_2:  →(0 = 2⊃Candidate)/P_3
            (s b) ← CS CR (2 Offset L)
            →(s ≠ OK)/P_3
            Result ← OK (2 Position (Offset b)) ⋄ →END
      P_3:  →(0 = 3⊃Candidate)/P_4
            (s b) ← CS CR (3 Offset L)
            →(s ≠ OK)/P_4
            Result ← OK (3 Position (Offset b)) ⋄ →END
      P_4:  →(0 = 4⊃Candidate)/P_5
            (s b) ← CS CR (4 Offset L)
            →(s ≠ OK)/P_5
            Result ← OK (4 Position (Offset b)) ⋄ →END
      P_5:  →(0 = 5⊃Candidate)/P_6
            (s b) ← CS CR (5 Offset L)
            →(s ≠ OK)/P_6
            Result ← OK (5 Position (Offset b)) ⋄ →END
      P_6:  →(0 = 6⊃Candidate)/P_7
            (s b) ← CS CR (6 Offset L)
            →(s ≠ OK)/P_7
            Result ← OK (6 Position (Offset b)) ⋄ →END
      P_7:  →(0 = 7⊃Candidate)/P_8
            (s b) ← CS CR (7 Offset L)
            →(s ≠ OK)/P_8
            Result ← OK (7 Position (Offset b)) ⋄ →END
      P_8:  →(0 = 8⊃Candidate)/P_9
            (s b) ← CS CR (8 Offset L)
            →(s ≠ OK)/P_9
            Result ← OK (8 Position (Offset b)) ⋄ →END
      P_9:  →(0 = 9⊃Candidate)/P_10
            (s b) ← CS CR (9 Offset L)
            →(s ≠ OK)/P_10
```

```
      Result ← OK (9 Position (Offset b)) ⋄ →END
P_10: →(0 = 10⊃Candidate)/P_11
      (s b) ← CS CR (10 Offset L)
      →(s ≠ OK)/P_11
      Result ← OK (10 Position (Offset b)) ⋄ →END
P_11: →(0 = 11⊃Candidate)/P_12
      (s b) ← CS CR (11 Offset L)
      →(s ≠ OK)/P_12
      Result ← OK (11 Position (Offset b)) ⋄ →END
P_12: →(0 = 12⊃Candidate)/P_13
      (s b) ← CS CR (12 Offset L)
      →(s ≠ OK)/P_13
      Result ← OK (12 Position (Offset b)) ⋄ →END
P_13: →(0 = 13⊃Candidate)/P_14
      (s b) ← CS CR (13 Offset L)
      →(s ≠ OK)/P_14
      Result ← OK (13 Position (Offset b)) ⋄ →END
P_14: →(0 = 14⊃Candidate)/P_15
      (s b) ← CS CR (14 Offset L)
      →(s ≠ OK)/P_15
      Result ← OK (14 Position (Offset b)) ⋄ →END
P_15: →(0 = 15⊃Candidate)/P_16
      (s b) ← CS CR (15 Offset L)
      →(s ≠ OK)/P_16
      Result ← OK (15 Position (Offset b)) ⋄ →END
P_16: →(0 = 16⊃Candidate)/P_17
      (s b) ← CS CR (16 Offset L)
      →(s ≠ OK)/P_17
      Result ← OK (16 Position (Offset b)) ⋄ →END
P_17: →(0 = 17⊃Candidate)/P_18
      (s b) ← CS CR (17 Offset L)
      →(s ≠ OK)/P_18
      Result ← OK (17 Position (Offset b)) ⋄ →END
P_18: →(0 = 18⊃Candidate)/P_19
      (s b) ← CS CR (18 Offset L)
      →(s ≠ OK)/P_19
      Result ← OK (18 Position (Offset b)) ⋄ →END
P_19: →(0 = 19⊃Candidate)/P_20
      (s b) ← CS CR (19 Offset L)
      →(s ≠ OK)/P_20
      Result ← OK (19 Position (Offset b)) ⋄ →END
P_20: →(0 = 20⊃Candidate)/P_21
      (s b) ← CS CR (20 Offset L)
      →(s ≠ OK)/P_21
      Result ← OK (20 Position (Offset b)) ⋄ →END
P_21: →(0 = 21⊃Candidate)/P_22
```

```
      (s b) ← CS CR (21 Offset L)
      →(s ≠ OK)/P_22
      Result ← OK (21 Position (Offset b)) ⋄ →END
P_22: →(0 = 22⊃Candidate)/P_23
      (s b) ← CS CR (22 Offset L)
      →(s ≠ OK)/P_23
      Result ← OK (22 Position (Offset b)) ⋄ →END
P_23: →(0 = 23⊃Candidate)/P_24
      (s b) ← CS CR (23 Offset L)
      →(s ≠ OK)/P_24
      Result ← OK (23 Position (Offset b)) ⋄ →END
P_24: →(0 = 24⊃Candidate)/P_25
      (s b) ← CS CR (24 Offset L)
      →(s ≠ OK)/P_25
      Result ← OK (24 Position (Offset b)) ⋄ →END
P_25: →(0 = 25⊃Candidate)/P_26
      (s b) ← CS CR (25 Offset L)
      →(s ≠ OK)/P_26
      Result ← OK (25 Position (Offset b)) ⋄ →END
P_26: →(0 = 26⊃Candidate)/P_27
      (s b) ← CS CR (26 Offset L)
      →(s ≠ OK)/P_27
      Result ← OK (26 Position (Offset b)) ⋄ →END
P_27: →(0 = 27⊃Candidate)/P_28
      (s b) ← CS CR (27 Offset L)
      →(s ≠ OK)/P_28
      Result ← OK (27 Position (Offset b)) ⋄ →END
P_28: →(0 = 28⊃Candidate)/P_29
      (s b) ← CS CR (28 Offset L)
      →(s ≠ OK)/P_29
      Result ← OK (28 Position (Offset b)) ⋄ →END
P_29: →(0 = 29⊃Candidate)/P_30
      (s b) ← CS CR (29 Offset L)
      →(s ≠ OK)/P_30
      Result ← OK (29 Position (Offset b)) ⋄ →END
P_30: →(0 = 30⊃Candidate)/P_31
      (s b) ← CS CR (30 Offset L)
      →(s ≠ OK)/P_31
      Result ← OK (30 Position (Offset b)) ⋄ →END
P_31: →(0 = 31⊃Candidate)/FAIL_EXIT
      (s b) ← CS CR (31 Offset L)
      →(s ≠ OK)/FAIL_EXIT
      Result ← OK (31 Position (Offset b)) ⋄ →END

FAIL_EXIT: Result ← FAIL 0
END:
```

```
    ∇
:EndNamespace
```

File: RowsDriver.apl

```
:Namespace RowsDriver

    ⍝ --- Constants ---
    A ← CONSTANT.ROW
    OK ← CONSTANT.STATUS_SUCCESS
    FAIL ← CONSTANT.STATUS_FAILURE
    MAX_ROW ← 1023

    ⍝ --- Constant Arity Weight Vector ---
    B ← 2*⍳32

    ⍝ --- Function: Run ---
    ⍝ Args: (P Offset L)
    ∇ Result ← CS Run Args;V;P;Offset;L;Indices;Rows
      (P Offset L) ← Args

      ⍝ Generate 32 indices clipped at the 1023 hardware boundary
      ⍝ Note: CS must handle (P×32)+Offset > 1023 by returning FAIL
      Indices ← MAX_ROW ⌊ (P × CONSTANT.ARITY) + Offset + ⍳32
      Rows ← Cube.rows[Indices]

      V ← ExecutionVector (P Offset L)
      →(0 = V)/NULL_SET
      Result ← CS V ExecuteVector (P Offset L)
      →END
    NULL_SET:
      Result ← FAIL 0
    END:
    ∇

    ∇ V ← ExecutionVector Args;P;Offset;L;Counts;Mask
      (P Offset L) ← Args
      Counts ← Rows.count
      Mask ← L ≤ Counts
      V ← Mask +.× B
    ∇

    ∇ Result ← CS V ExecuteVector Args;P;Offset;L;s;b;Candidate
      (P Offset L) ← Args
      Candidate ← V ∧ B
```

```
P_0:  →(0 = 0⊃Candidate)/P_1
      (s b) ← CS (0 Offset L) ⋄ →(s ≠ OK)/P_1
      Result ← OK((A×0)+b) ⋄ →END
P_1:  →(0 = 1⊃Candidate)/P_2
      (s b) ← CS (1 Offset L) ⋄ →(s ≠ OK)/P_2
      Result ← OK((A×1)+b) ⋄ →END
P_2:  →(0 = 2⊃Candidate)/P_3
      (s b) ← CS (2 Offset L) ⋄ →(s ≠ OK)/P_3
      Result ← OK((A×2)+b) ⋄ →END
P_3:  →(0 = 3⊃Candidate)/P_4
      (s b) ← CS (3 Offset L) ⋄ →(s ≠ OK)/P_4
      Result ← OK((A×3)+b) ⋄ →END
P_4:  →(0 = 4⊃Candidate)/P_5
      (s b) ← CS (4 Offset L) ⋄ →(s ≠ OK)/P_5
      Result ← OK((A×4)+b) ⋄ →END
P_5:  →(0 = 5⊃Candidate)/P_6
      (s b) ← CS (5 Offset L) ⋄ →(s ≠ OK)/P_6
      Result ← OK((A×5)+b) ⋄ →END
P_6:  →(0 = 6⊃Candidate)/P_7
      (s b) ← CS (6 Offset L) ⋄ →(s ≠ OK)/P_7
      Result ← OK((A×6)+b) ⋄ →END
P_7:  →(0 = 7⊃Candidate)/P_8
      (s b) ← CS (7 Offset L) ⋄ →(s ≠ OK)/P_8
      Result ← OK((A×7)+b) ⋄ →END
P_8:  →(0 = 8⊃Candidate)/P_9
      (s b) ← CS (8 Offset L) ⋄ →(s ≠ OK)/P_9
      Result ← OK((A×8)+b) ⋄ →END
P_9:  →(0 = 9⊃Candidate)/P_10
      (s b) ← CS (9 Offset L) ⋄ →(s ≠ OK)/P_10
      Result ← OK((A×9)+b) ⋄ →END
P_10: →(0 = 10⊃Candidate)/P_11
      (s b) ← CS (10 Offset L) ⋄ →(s ≠ OK)/P_11
      Result ← OK((A×10)+b) ⋄ →END
P_11: →(0 = 11⊃Candidate)/P_12
      (s b) ← CS (11 Offset L) ⋄ →(s ≠ OK)/P_12
      Result ← OK((A×11)+b) ⋄ →END
P_12: →(0 = 12⊃Candidate)/P_13
      (s b) ← CS (12 Offset L) ⋄ →(s ≠ OK)/P_13
      Result ← OK((A×12)+b) ⋄ →END
P_13: →(0 = 13⊃Candidate)/P_14
      (s b) ← CS (13 Offset L) ⋄ →(s ≠ OK)/P_14
      Result ← OK((A×13)+b) ⋄ →END
P_14: →(0 = 14⊃Candidate)/P_15
      (s b) ← CS (14 Offset L) ⋄ →(s ≠ OK)/P_15
      Result ← OK((A×14)+b) ⋄ →END
P_15: →(0 = 15⊃Candidate)/P_16
```

```
      (s b) ← CS (15 Offset L) ⋄ →(s ≠ OK)/P_16
      Result ← OK((A×15)+b) ⋄ →END
P_17: →(0 = 17⊃Candidate)/P_18
      (s b) ← CS (17 Offset L) ⋄ →(s ≠ OK)/P_18
      Result ← OK((A×17)+b) ⋄ →END
P_18: →(0 = 18⊃Candidate)/P_19
      (s b) ← CS (18 Offset L) ⋄ →(s ≠ OK)/P_19
      Result ← OK((A×18)+b) ⋄ →END
P_19: →(0 = 19⊃Candidate)/P_20
      (s b) ← CS (19 Offset L) ⋄ →(s ≠ OK)/P_20
      Result ← OK((A×19)+b) ⋄ →END
P_20: →(0 = 20⊃Candidate)/P_21
      (s b) ← CS (20 Offset L) ⋄ →(s ≠ OK)/P_21
      Result ← OK((A×20)+b) ⋄ →END
P_21: →(0 = 21⊃Candidate)/P_22
      (s b) ← CS (21 Offset L) ⋄ →(s ≠ OK)/P_22
      Result ← OK((A×21)+b) ⋄ →END
P_22: →(0 = 22⊃Candidate)/P_23
      (s b) ← CS (22 Offset L) ⋄ →(s ≠ OK)/P_23
      Result ← OK((A×22)+b) ⋄ →END
P_23: →(0 = 23⊃Candidate)/P_24
      (s b) ← CS (23 Offset L) ⋄ →(s ≠ OK)/P_24
      Result ← OK((A×23)+b) ⋄ →END
P_24: →(0 = 24⊃Candidate)/P_25
      (s b) ← CS (24 Offset L) ⋄ →(s ≠ OK)/P_25
      Result ← OK((A×24)+b) ⋄ →END
P_25: →(0 = 25⊃Candidate)/P_26
      (s b) ← CS (25 Offset L) ⋄ →(s ≠ OK)/P_26
      Result ← OK((A×25)+b) ⋄ →END
P_26: →(0 = 26⊃Candidate)/P_27
      (s b) ← CS (26 Offset L) ⋄ →(s ≠ OK)/P_27
      Result ← OK((A×26)+b) ⋄ →END
P_27: →(0 = 27⊃Candidate)/P_28
      (s b) ← CS (27 Offset L) ⋄ →(s ≠ OK)/P_28
      Result ← OK((A×27)+b) ⋄ →END
P_28: →(0 = 28⊃Candidate)/P_29
      (s b) ← CS (28 Offset L) ⋄ →(s ≠ OK)/P_29
      Result ← OK((A×28)+b) ⋄ →END
P_29: →(0 = 29⊃Candidate)/P_30
      (s b) ← CS (29 Offset L) ⋄ →(s ≠ OK)/P_30
      Result ← OK((A×29)+b) ⋄ →END
P_30: →(0 = 30⊃Candidate)/P_31
      (s b) ← CS (30 Offset L) ⋄ →(s ≠ OK)/P_31
      Result ← OK((A×30)+b) ⋄ →END
P_31: →(0 = 31⊃Candidate)/FAIL_EXIT
      (s b) ← CS (31 Offset L) ⋄ →(s ≠ OK)/FAIL_EXIT
```

```
            Result ← OK((A×31)+b) ⋄ →END

      FAIL_EXIT: Result ← FAIL 0
      END:
    ∇
:EndNamespace
```

File: PairRowsDriver.apl

```
:Namespace PairRowsDriver

    ⍝ --- Constants ---
    A ← 32 ⍝ Standard Row Width (FIM-32 Lattice)
    OK ← 1 ⋄ FAIL ← 0

    ⍝ --- Function: Run ---
    ⍝ Entry point for the Small Heuristic (33-64 sectors).
    ∇ Result ← CS Offset CR Run R;V
      V ← ExecutionVector Offset R
      →(0 = V) / NULL_SET
      Result ← CS CR V Offset ExecuteVector R
      → END
      NULL_SET: Result ← FAIL 0
      END:
    ∇

    ⍝ --- Function: ExecutionVector ---
    ⍝ Generates a 32-bit radar mask of potential row-pair bridges.
    ∇ V ← ExecutionVector Offset R;F;Counts
      F ← Offset ⋄ V ← 0
      Counts ← Cube.Rows.count

      ⍝ Bit-weighted volume checks: (R ≤ Row[i].count + Row[i+1].count)
      V +← (R ≤ Counts[F+0]  + Counts[F+1])  × 2*0
      V +← (R ≤ Counts[F+1]  + Counts[F+2])  × 2*1
      V +← (R ≤ Counts[F+2]  + Counts[F+3])  × 2*2
      V +← (R ≤ Counts[F+3]  + Counts[F+4])  × 2*3
      V +← (R ≤ Counts[F+4]  + Counts[F+5])  × 2*4
      V +← (R ≤ Counts[F+5]  + Counts[F+6])  × 2*5
      V +← (R ≤ Counts[F+6]  + Counts[F+7])  × 2*6
      V +← (R ≤ Counts[F+7]  + Counts[F+8])  × 2*7
      V +← (R ≤ Counts[F+8]  + Counts[F+9])  × 2*8
      V +← (R ≤ Counts[F+9]  + Counts[F+10]) × 2*9
      V +← (R ≤ Counts[F+10] + Counts[F+11]) × 2*10
      V +← (R ≤ Counts[F+11] + Counts[F+12]) × 2*11
      V +← (R ≤ Counts[F+12] + Counts[F+13]) × 2*12
```

```
      V +← (R ≤ Counts[F+13] + Counts[F+14]) × 2*13
      V +← (R ≤ Counts[F+14] + Counts[F+15]) × 2*14
      V +← (R ≤ Counts[F+15] + Counts[F+16]) × 2*15
      V +← (R ≤ Counts[F+16] + Counts[F+17]) × 2*16
      V +← (R ≤ Counts[F+17] + Counts[F+18]) × 2*17
      V +← (R ≤ Counts[F+18] + Counts[F+19]) × 2*18
      V +← (R ≤ Counts[F+19] + Counts[F+20]) × 2*19
      V +← (R ≤ Counts[F+20] + Counts[F+21]) × 2*20
      V +← (R ≤ Counts[F+21] + Counts[F+22]) × 2*21
      V +← (R ≤ Counts[F+22] + Counts[F+23]) × 2*22
      V +← (R ≤ Counts[F+23] + Counts[F+24]) × 2*23
      V +← (R ≤ Counts[F+24] + Counts[F+25]) × 2*24
      V +← (R ≤ Counts[F+25] + Counts[F+26]) × 2*25
      V +← (R ≤ Counts[F+26] + Counts[F+27]) × 2*26
      V +← (R ≤ Counts[F+27] + Counts[F+28]) × 2*27
      V +← (R ≤ Counts[F+28] + Counts[F+29]) × 2*28
      V +← (R ≤ Counts[F+29] + Counts[F+30]) × 2*29
      V +← (R ≤ Counts[F+30] + Counts[F+31]) × 2*30

      →(F + 32 ≥ ρCounts) / END_V
      V +← (R ≤ Counts[F+31] + Counts[F+32]) × 2*31
      END_V:
    ∇

    ⍝ --- Function: ExecuteVector ---
    ⍝ Unrolled jump-table for sequential chance recovery.
    ∇ Result ← CS CR V Offset ExecuteVector R;s;b
      P_0:  →(0 = V ∧ 2*0)  / P_1 ⋄ (s b) ← CS 0 Offset R ⋄ →(s ≠ OK) / P_1
            Result ← OK((A×0)+b) ⋄ →END
      P_1:  →(0 = V ∧ 2*1)  / P_2 ⋄ (s b) ← CS 1 Offset R ⋄ →(s ≠ OK) / P_2
            Result ← OK((A×1)+b) ⋄ →END
      P_2:  →(0 = V ∧ 2*2)  / P_3 ⋄ (s b) ← CS 2 Offset R ⋄ →(s ≠ OK) / P_3
            Result ← OK((A×2)+b) ⋄ →END
      P_3:  →(0 = V ∧ 2*3)  / P_4 ⋄ (s b) ← CS 3 Offset R ⋄ →(s ≠ OK) / P_4
            Result ← OK((A×3)+b) ⋄ →END
      P_4:  →(0 = V ∧ 2*4)  / P_5 ⋄ (s b) ← CS 4 Offset R ⋄ →(s ≠ OK) / P_5
            Result ← OK((A×4)+b) ⋄ →END
      P_5:  →(0 = V ∧ 2*5)  / P_6 ⋄ (s b) ← CS 5 Offset R ⋄ →(s ≠ OK) / P_6
            Result ← OK((A×5)+b) ⋄ →END
      P_6:  →(0 = V ∧ 2*6)  / P_7 ⋄ (s b) ← CS 6 Offset R ⋄ →(s ≠ OK) / P_7
            Result ← OK((A×6)+b) ⋄ →END
      P_7:  →(0 = V ∧ 2*7)  / P_8 ⋄ (s b) ← CS 7 Offset R ⋄ →(s ≠ OK) / P_8
            Result ← OK((A×7)+b) ⋄ →END
      P_8:  →(0 = V ∧ 2*8)  / P_9 ⋄ (s b) ← CS 8 Offset R ⋄ →(s ≠ OK) / P_9
            Result ← OK((A×8)+b) ⋄ →END
      P_9:  →(0 = V ∧ 2*9)  / P_10 ⋄ (s b) ← CS 9 Offset R ⋄ →(s ≠ OK) / P_10
```

```
      Result ← OK((A×9)+b) ⋄ →END
P_10: →(0 = V ∧ 2*10) / P_11 ⋄ (s b) ← CS 10 Offset R ⋄ →(s ≠ OK) / P_11
      Result ← OK((A×10)+b) ⋄ →END
P_11: →(0 = V ∧ 2*11) / P_12 ⋄ (s b) ← CS 11 Offset R ⋄ →(s ≠ OK) / P_12
      Result ← OK((A×11)+b) ⋄ →END
P_12: →(0 = V ∧ 2*12) / P_13 ⋄ (s b) ← CS 12 Offset R ⋄ →(s ≠ OK) / P_13
      Result ← OK((A×12)+b) ⋄ →END
P_13: →(0 = V ∧ 2*13) / P_14 ⋄ (s b) ← CS 13 Offset R ⋄ →(s ≠ OK) / P_14
      Result ← OK((A×13)+b) ⋄ →END
P_14: →(0 = V ∧ 2*14) / P_15 ⋄ (s b) ← CS 14 Offset R ⋄ →(s ≠ OK) / P_15
      Result ← OK((A×14)+b) ⋄ →END
P_15: →(0 = V ∧ 2*15) / P_16 ⋄ (s b) ← CS 15 Offset R ⋄ →(s ≠ OK) / P_16
      Result ← OK((A×15)+b) ⋄ →END
P_16: →(0 = V ∧ 2*16) / P_17 ⋄ (s b) ← CS 16 Offset R ⋄ →(s ≠ OK) / P_17
      Result ← OK((A×16)+b) ⋄ →END
P_17: →(0 = V ∧ 2*17) / P_18 ⋄ (s b) ← CS 17 Offset R ⋄ →(s ≠ OK) / P_18
      Result ← OK((A×17)+b) ⋄ →END
P_18: →(0 = V ∧ 2*18) / P_19 ⋄ (s b) ← CS 18 Offset R ⋄ →(s ≠ OK) / P_19
      Result ← OK((A×18)+b) ⋄ →END
P_19: →(0 = V ∧ 2*19) / P_20 ⋄ (s b) ← CS 19 Offset R ⋄ →(s ≠ OK) / P_20
      Result ← OK((A×19)+b) ⋄ →END
P_20: →(0 = V ∧ 2*20) / P_21 ⋄ (s b) ← CS 20 Offset R ⋄ →(s ≠ OK) / P_21
      Result ← OK((A×20)+b) ⋄ →END
P_21: →(0 = V ∧ 2*21) / P_22 ⋄ (s b) ← CS 21 Offset R ⋄ →(s ≠ OK) / P_22
      Result ← OK((A×21)+b) ⋄ →END
P_22: →(0 = V ∧ 2*22) / P_23 ⋄ (s b) ← CS 22 Offset R ⋄ →(s ≠ OK) / P_23
      Result ← OK((A×22)+b) ⋄ →END
P_23: →(0 = V ∧ 2*23) / P_24 ⋄ (s b) ← CS 23 Offset R ⋄ →(s ≠ OK) / P_24
      Result ← OK((A×23)+b) ⋄ →END
P_24: →(0 = V ∧ 2*24) / P_25 ⋄ (s b) ← CS 24 Offset R ⋄ →(s ≠ OK) / P_25
      Result ← OK((A×24)+b) ⋄ →END
P_25: →(0 = V ∧ 2*25) / P_26 ⋄ (s b) ← CS 25 Offset R ⋄ →(s ≠ OK) / P_26
      Result ← OK((A×25)+b) ⋄ →END
P_26: →(0 = V ∧ 2*26) / P_27 ⋄ (s b) ← CS 26 Offset R ⋄ →(s ≠ OK) / P_27
      Result ← OK((A×26)+b) ⋄ →END
P_27: →(0 = V ∧ 2*27) / P_28 ⋄ (s b) ← CS 27 Offset R ⋄ →(s ≠ OK) / P_28
      Result ← OK((A×27)+b) ⋄ →END
P_28: →(0 = V ∧ 2*28) / P_29 ⋄ (s b) ← CS 28 Offset R ⋄ →(s ≠ OK) / P_29
      Result ← OK((A×28)+b) ⋄ →END
P_29: →(0 = V ∧ 2*29) / P_30 ⋄ (s b) ← CS 29 Offset R ⋄ →(s ≠ OK) / P_30
      Result ← OK((A×29)+b) ⋄ →END
P_30: →(0 = V ∧ 2*30) / P_31 ⋄ (s b) ← CS 30 Offset R ⋄ →(s ≠ OK) / P_31
      Result ← OK((A×30)+b) ⋄ →END
P_31: →(0 = V ∧ 2*31) / FAIL_EXIT
      →(32 + Offset > 1023) / FAIL_EXIT
      (s b) ← CS 31 Offset R ⋄ →(s ≠ OK) / FAIL_EXIT
```

```
            Result ← OK((A×31)+b) ⋄ →END

      FAIL_EXIT: Result ← FAIL 0
      END:
    ∇
:EndNamespace
```

File: LargeDriver.apl

```
:Namespace LargeDriver

    A ← 32
    OK ← 1 ⋄ FAIL ← 0
    B ← 2*⍳32

    ∇ Result ← CR CS Run L;W;Matrix;Mask;Capability;Offset
      ⍝ 1. Calculate W-row window for tripartite weld
      W ← (⌊L÷A) + (2 × 0 ≠ A|L)

      ⍝ 2. Global sweep: poll all 1024 rows for occupancy
      ⍝ Pad with ARITY (A) to deter edge-overflow baskets
      Matrix ← 32 32 ⍴ 1024 ↑ W +/ (##.Cube.Rows.count, (W-1)⍴A)

      ⍝ 3. Generate 32-bit steering map (Capability Vector)
      ⍝ Identify planes where (Max Window - Occupancy) >= L
      Mask ← ∨/ L ≤ (W × A) - Matrix
      Capability ← Mask +.× B

      ⍝ 4. Admissibility Gate: execute fast-fail if sum is zero
      →(0 = Capability)/FAIL_EXIT

      ⍝ 5. Phase II Dispatch: descend to unrolled plane logic
      Offset ← 0
      Result ← CS CR Capability Offset Matrix ExecutePlaneDispatch L
      →END

    FAIL_EXIT: Result ← FAIL 0
    END:
    ∇

    ∇ Result ← CS CR V Offset Matrix ExecutePlaneDispatch L;s;b;Track;Candidate
      Candidate ← V ∧ B

      P0:  →(0 = 0⊃Candidate)/P1 ⋄ Track ← Matrix[0;]
           (s b) ← CS CR (0 Offset Track L) ##.RowsDriver.VerifyWeld
           →(s ≠ OK)/P1 ⋄ Result ← OK (0 Position (Offset b)) ⋄ →END
```

```
P1:  →(0 = 1⊃Candidate)/P2 ⋄ Track ← Matrix[1;]
     (s b) ← CS CR (1 Offset Track L) ##.RowsDriver.VerifyWeld
     →(s ≠ OK)/P2 ⋄ Result ← OK (1 Position (Offset b)) ⋄ →END

P2:  →(0 = 2⊃Candidate)/P3 ⋄ Track ← Matrix[2;]
     (s b) ← CS CR (2 Offset Track L) ##.RowsDriver.VerifyWeld
     →(s ≠ OK)/P3 ⋄ Result ← OK (2 Position (Offset b)) ⋄ →END

P3:  →(0 = 3⊃Candidate)/P4 ⋄ Track ← Matrix[3;]
     (s b) ← CS CR (3 Offset Track L) ##.RowsDriver.VerifyWeld
     →(s ≠ OK)/P4 ⋄ Result ← OK (3 Position (Offset b)) ⋄ →END

P4:  →(0 = 4⊃Candidate)/P5 ⋄ Track ← Matrix[4;]
     (s b) ← CS CR (4 Offset Track L) ##.RowsDriver.VerifyWeld
     →(s ≠ OK)/P5 ⋄ Result ← OK (4 Position (Offset b)) ⋄ →END

P5:  →(0 = 5⊃Candidate)/P6 ⋄ Track ← Matrix[5;]
     (s b) ← CS CR (5 Offset Track L) ##.RowsDriver.VerifyWeld
     →(s ≠ OK)/P6 ⋄ Result ← OK (5 Position (Offset b)) ⋄ →END

P6:  →(0 = 6⊃Candidate)/P7 ⋄ Track ← Matrix[6;]
     (s b) ← CS CR (6 Offset Track L) ##.RowsDriver.VerifyWeld
     →(s ≠ OK)/P7 ⋄ Result ← OK (6 Position (Offset b)) ⋄ →END

P7:  →(0 = 7⊃Candidate)/P8 ⋄ Track ← Matrix[7;]
     (s b) ← CS CR (7 Offset Track L) ##.RowsDriver.VerifyWeld
     →(s ≠ OK)/P8 ⋄ Result ← OK (7 Position (Offset b)) ⋄ →END

P8:  →(0 = 8⊃Candidate)/P9 ⋄ Track ← Matrix[8;]
     (s b) ← CS CR (8 Offset Track L) ##.RowsDriver.VerifyWeld
     →(s ≠ OK)/P9 ⋄ Result ← OK (8 Position (Offset b)) ⋄ →END

P9:  →(0 = 9⊃Candidate)/P10 ⋄ Track ← Matrix[9;]
     (s b) ← CS CR (9 Offset Track L) ##.RowsDriver.VerifyWeld
     →(s ≠ OK)/P10 ⋄ Result ← OK (9 Position (Offset b)) ⋄ →END

P10: →(0 = 10⊃Candidate)/P11 ⋄ Track ← Matrix[10;]
     (s b) ← CS CR (10 Offset Track L) ##.RowsDriver.VerifyWeld
     →(s ≠ OK)/P11 ⋄ Result ← OK (10 Position (Offset b)) ⋄ →END

P11: →(0 = 11⊃Candidate)/P12 ⋄ Track ← Matrix[11;]
     (s b) ← CS CR (11 Offset Track L) ##.RowsDriver.VerifyWeld
     →(s ≠ OK)/P12 ⋄ Result ← OK (11 Position (Offset b)) ⋄ →END

P12: →(0 = 12⊃Candidate)/P13 ⋄ Track ← Matrix[12;]
```

```
          (s b) ← CS CR (12 Offset Track L) ##.RowsDriver.VerifyWeld
          →(s ≠ OK)/P13 ⋄ Result ← OK (12 Position (Offset b)) ⋄ →END

     P13: →(0 = 13⊃Candidate)/P14 ⋄ Track ← Matrix[13;]
          (s b) ← CS CR (13 Offset Track L) ##.RowsDriver.VerifyWeld
          →(s ≠ OK)/P14 ⋄ Result ← OK (13 Position (Offset b)) ⋄ →END

     P14: →(0 = 14⊃Candidate)/P15 ⋄ Track ← Matrix[14;]
          (s b) ← CS CR (14 Offset Track L) ##.RowsDriver.VerifyWeld
          →(s ≠ OK)/P15 ⋄ Result ← OK (14 Position (Offset b)) ⋄ →END

     P15: →(0 = 15⊃Candidate)/P16 ⋄ Track ← Matrix[15;]
          (s b) ← CS CR (15 Offset Track L) ##.RowsDriver.VerifyWeld
          →(s ≠ OK)/P16 ⋄ Result ← OK (15 Position (Offset b)) ⋄ →END

     P16: →(0 = 16⊃Candidate)/P17 ⋄ Track ← Matrix[16;]
          (s b) ← CS CR (16 Offset Track L) ##.RowsDriver.VerifyWeld
          →(s ≠ OK)/P17 ⋄ Result ← OK (16 Position (Offset b)) ⋄ →END

     P17: →(0 = 17⊃Candidate)/P18 ⋄ Track ← Matrix[17;]
          (s b) ← CS CR (17 Offset Track L) ##.RowsDriver.VerifyWeld
          →(s ≠ OK)/P18 ⋄ Result ← OK (17 Position (Offset b)) ⋄ →END

     P18: →(0 = 18⊃Candidate)/P19 ⋄ Track ← Matrix[18;]
          (s b) ← CS CR (18 Offset Track L) ##.RowsDriver.VerifyWeld
          →(s ≠ OK)/P19 ⋄ Result ← OK (18 Position (Offset b)) ⋄ →END

     P19: →(0 = 19⊃Candidate)/P20 ⋄ Track ← Matrix[19;]
          (s b) ← CS CR (19 Offset Track L) ##.RowsDriver.VerifyWeld
          →(s ≠ OK)/P20 ⋄ Result ← OK (19 Position (Offset b)) ⋄ →END

     P20: →(0 = 20⊃Candidate)/P21 ⋄ Track ← Matrix[20;]
          (s b) ← CS CR (20 Offset Track L) ##.RowsDriver.VerifyWeld
          →(s ≠ OK)/P21 ⋄ Result ← OK (20 Position (Offset b)) ⋄ →END

     P21: →(0 = 21⊃Candidate)/P22 ⋄ Track ← Matrix[21;]
          (s b) ← CS CR (21 Offset Track L) ##.RowsDriver.VerifyWeld
          →(s ≠ OK)/P22 ⋄ Result ← OK (21 Position (Offset b)) ⋄ →END

     P22: →(0 = 22⊃Candidate)/P23 ⋄ Track ← Matrix[22;]
          (s b) ← CS CR (22 Offset Track L) ##.RowsDriver.VerifyWeld
          →(s ≠ OK)/P23 ⋄ Result ← OK (22 Position (Offset b)) ⋄ →END

     P23: →(0 = 23⊃Candidate)/P24 ⋄ Track ← Matrix[23;]
          (s b) ← CS CR (23 Offset Track L) ##.RowsDriver.VerifyWeld
          →(s ≠ OK)/P24 ⋄ Result ← OK (23 Position (Offset b)) ⋄ →END
```

```
      P24: →(0 = 24⊃Candidate)/P25 ⋄ Track ← Matrix[24;]
           (s b) ← CS CR (24 Offset Track L) ##.RowsDriver.VerifyWeld
           →(s ≠ OK)/P25 ⋄ Result ← OK (24 Position (Offset b)) ⋄ →END

      P25: →(0 = 25⊃Candidate)/P26 ⋄ Track ← Matrix[25;]
           (s b) ← CS CR (25 Offset Track L) ##.RowsDriver.VerifyWeld
           →(s ≠ OK)/P26 ⋄ Result ← OK (25 Position (Offset b)) ⋄ →END

      P26: →(0 = 26⊃Candidate)/P27 ⋄ Track ← Matrix[26;]
           (s b) ← CS CR (26 Offset Track L) ##.RowsDriver.VerifyWeld
           →(s ≠ OK)/P27 ⋄ Result ← OK (26 Position (Offset b)) ⋄ →END

      P27: →(0 = 27⊃Candidate)/P28 ⋄ Track ← Matrix[27;]
           (s b) ← CS CR (27 Offset Track L) ##.RowsDriver.VerifyWeld
           →(s ≠ OK)/P28 ⋄ Result ← OK (27 Position (Offset b)) ⋄ →END

      P28: →(0 = 28⊃Candidate)/P29 ⋄ Track ← Matrix[28;]
           (s b) ← CS CR (28 Offset Track L) ##.RowsDriver.VerifyWeld
           →(s ≠ OK)/P29 ⋄ Result ← OK (28 Position (Offset b)) ⋄ →END

      P29: →(0 = 29⊃Candidate)/P30 ⋄ Track ← Matrix[29;]
           (s b) ← CS CR (29 Offset Track L) ##.RowsDriver.VerifyWeld
           →(s ≠ OK)/P30 ⋄ Result ← OK (29 Position (Offset b)) ⋄ →END

      P30: →(0 = 30⊃Candidate)/P31 ⋄ Track ← Matrix[30;]
           (s b) ← CS CR (30 Offset Track L) ##.RowsDriver.VerifyWeld
           →(s ≠ OK)/P31 ⋄ Result ← OK (30 Position (Offset b)) ⋄ →END

      P31: →(0 = 31⊃Candidate)/FAIL_EXIT ⋄ Track ← Matrix[31;]
           (s b) ← CS CR (31 Offset Track L) ##.RowsDriver.VerifyWeld
           →(s ≠ OK)/FAIL_EXIT ⋄ Result ← OK (31 Position (Offset b)) ⋄ →END

    FAIL_EXIT: Result ← FAIL 0
    END:
    ∇

    ∇ Result ← plane Position Args;offset;sector
      (offset sector) ← Args
      Result ← (32*2)×plane + (32×offset) + sector
    ∇

:EndNamespace
```

File: LargeRowDriver.apl

```
:Namespace LargeRowDriver

    A ← 32
    OK ← 1 ⋄ FAIL ← 0
    B ← 2*⍳32

    ∇ Result ← CS Run (Plane Offset Track L);V;Cap;Cand
      ⍝ 1. Map Railroad Track to local Capability Vector
      V ← L ≤ (A × (⌊L÷A) + (2 × 0 ≠ A|L)) − Track
      Cap ← V +.× B

      ⍝ 2. Fast-Fail if plane volume is insufficient
      →(0 = Cap)/FAIL_EXIT

      ⍝ 3. Unrolled Row Dispatch
      Result ← CS Cap Plane Offset L ExecuteRowDispatch
      →END

    FAIL_EXIT: Result ← FAIL 0
    END:
    ∇

    ∇ Result ← CS V Plane Offset L ExecuteRowDispatch;Cand;s;b
      Cand ← V ∧ B

      R0:  →(0 = 0⊃Cand)/R1
           (s b) ← CS (Plane 0 L)
           →(s ≠ OK)/R1 ⋄ Result ← OK (0 Position b) ⋄ →END

      R1:  →(0 = 1⊃Cand)/R2
           (s b) ← CS (Plane 1 L)
           →(s ≠ OK)/R2 ⋄ Result ← OK (1 Position b) ⋄ →END

      R2:  →(0 = 2⊃Cand)/R3
           (s b) ← CS (Plane 2 L)
           →(s ≠ OK)/R3 ⋄ Result ← OK (2 Position b) ⋄ →END

      R3:  →(0 = 3⊃Cand)/R4
           (s b) ← CS (Plane 3 L)
           →(s ≠ OK)/R4 ⋄ Result ← OK (3 Position b) ⋄ →END

      R4:  →(0 = 4⊃Cand)/R5
           (s b) ← CS (Plane 4 L)
           →(s ≠ OK)/R5 ⋄ Result ← OK (4 Position b) ⋄ →END
```

```
R5:  →(0 = 5⊃Cand)/R6
     (s b) ← CS (Plane 5 L)
     →(s ≠ OK)/R6 ⋄ Result ← OK (5 Position b) ⋄ →END

R6:  →(0 = 6⊃Cand)/R7
     (s b) ← CS (Plane 6 L)
     →(s ≠ OK)/R7 ⋄ Result ← OK (6 Position b) ⋄ →END

R7:  →(0 = 7⊃Cand)/R8
     (s b) ← CS (Plane 7 L)
     →(s ≠ OK)/R8 ⋄ Result ← OK (7 Position b) ⋄ →END

R8:  →(0 = 8⊃Cand)/R9
     (s b) ← CS (Plane 8 L)
     →(s ≠ OK)/R9 ⋄ Result ← OK (8 Position b) ⋄ →END

R9:  →(0 = 9⊃Cand)/R10
     (s b) ← CS (Plane 9 L)
     →(s ≠ OK)/R10 ⋄ Result ← OK (9 Position b) ⋄ →END

R10: →(0 = 10⊃Cand)/R11
     (s b) ← CS (10 Offset Track L)
     →(s ≠ OK)/R11 ⋄ Result ← OK (10 Position b) ⋄ →END

R11: →(0 = 11⊃Cand)/R12
     (s b) ← CS (11 Offset Track L)
     →(s ≠ OK)/R12 ⋄ Result ← OK (11 Position b) ⋄ →END

R12: →(0 = 12⊃Cand)/R13
     (s b) ← CS (12 Offset Track L)
     →(s ≠ OK)/R13 ⋄ Result ← OK (12 Position b) ⋄ →END

R13: →(0 = 13⊃Cand)/R14
     (s b) ← CS (13 Offset Track L)
     →(s ≠ OK)/R14 ⋄ Result ← OK (13 Position b) ⋄ →END

R14: →(0 = 14⊃Cand)/R15
     (s b) ← CS (14 Offset Track L)
     →(s ≠ OK)/R15 ⋄ Result ← OK (14 Position b) ⋄ →END

R15: →(0 = 15⊃Cand)/R16
     (s b) ← CS (15 Offset Track L)
     →(s ≠ OK)/R16 ⋄ Result ← OK (15 Position b) ⋄ →END

R16: →(0 = 16⊃Cand)/R17
     (s b) ← CS (16 Offset Track L)
```

```
     →(s ≠ OK)/R17 ⋄ Result ← OK (16 Position b) ⋄ →END

R17: →(0 = 17⊃Cand)/R18
     (s b) ← CS (17 Offset Track L)
     →(s ≠ OK)/R18 ⋄ Result ← OK (17 Position b) ⋄ →END

R18: →(0 = 18⊃Cand)/R19
     (s b) ← CS (18 Offset Track L)
     →(s ≠ OK)/R19 ⋄ Result ← OK (18 Position b) ⋄ →END

R19: →(0 = 19⊃Cand)/R20
     (s b) ← CS (19 Offset Track L)
     →(s ≠ OK)/R20 ⋄ Result ← OK (19 Position b) ⋄ →END

R20: →(0 = 20⊃Cand)/R21
     (s b) ← CS (20 Offset Track L)
     →(s ≠ OK)/R21 ⋄ Result ← OK (20 Position b) ⋄ →END

R21: →(0 = 21⊃Cand)/R22
     (s b) ← CS (21 Offset Track L)
     →(s ≠ OK)/R22 ⋄ Result ← OK (21 Position b) ⋄ →END

R22: →(0 = 22⊃Cand)/R23
     (s b) ← CS (22 Offset Track L)
     →(s ≠ OK)/R23 ⋄ Result ← OK (22 Position b) ⋄ →END

R23: →(0 = 23⊃Cand)/R24
     (s b) ← CS (23 Offset Track L)
     →(s ≠ OK)/R24 ⋄ Result ← OK (23 Position b) ⋄ →END

R24: →(0 = 24⊃Cand)/R25
     (s b) ← CS (24 Offset Track L)
     →(s ≠ OK)/R25 ⋄ Result ← OK (24 Position b) ⋄ →END

R25: →(0 = 25⊃Cand)/R26
     (s b) ← CS (25 Offset Track L)
     →(s ≠ OK)/R26 ⋄ Result ← OK (25 Position b) ⋄ →END

R26: →(0 = 26⊃Cand)/R27
     (s b) ← CS (26 Offset Track L)
     →(s ≠ OK)/R27 ⋄ Result ← OK (26 Position b) ⋄ →END

R27: →(0 = 27⊃Cand)/R28
     (s b) ← CS (27 Offset Track L)
     →(s ≠ OK)/R28 ⋄ Result ← OK (27 Position b) ⋄ →END
```

```
      R28: →(0 = 28⊃Cand)/R29
           (s b) ← CS (28 Offset Track L)
           →(s ≠ OK)/R29 ⋄ Result ← OK (28 Position b) ⋄ →END

      R29: →(0 = 29⊃Cand)/R30
           (s b) ← CS (29 Offset Track L)
           →(s ≠ OK)/R30 ⋄ Result ← OK (29 Position b) ⋄ →END

      R30: →(0 = 30⊃Cand)/R31
           (s b) ← CS (30 Offset Track L)
           →(s ≠ OK)/R31 ⋄ Result ← OK (30 Position b) ⋄ →END

      R31: →(0 = 31⊃Cand)/FAIL_EXIT
           (s b) ← CS (31 Offset Track L)
           →(s ≠ OK)/FAIL_EXIT ⋄ Result ← OK (31 Position b) ⋄ →END

    FAIL_EXIT: Result ← FAIL 0
    END:
    ∇

    ∇ Result ← p Position b
      Result ← (32*2)×p + b
    ∇

:EndNamespace
```

File: HugePlanesCoreDriver.apl

```
:Namespace HugePlanesCoreDriver

    A←32 ⋄ P_SIZE←1024 ⋄ C_SIZE←32 ⋄ OK←1

    ∇ (S B) ← Run W_Core;I;R;Σ;T;C;L_T
      ⍝ --- 1. Radar Generation ---

      ⍝ Create index map with a W_Core lookahead buffer
      I ← ⍳(P_SIZE + W_Core)

      ⍝ Ingest counts; inject 'A' (32) beyond P_SIZE to form Silicon Wall
      R ← { (⍵ > P_SIZE): A ⋄ ##.Cube.Rows[⍵].count }¨ I

      ⍝ Windowed sum: Occupancy total for every potential W_Core span
      Σ ← P_SIZE ↑ (W_Core +/ R)

      ⍝ Global Track: 1,024-bit rail marking valid monolithic voids
      T ← (Σ = 0)
```

```
⍝ Capability Vector: 32-bit summary (High if Plane contains a 1)
C ← { ∨/ (T[(A × ⍵-1) + ⍳A]) }¨ ⍳C_SIZE

⍝ --- 2. Fully Unrolled Execution Manifold ---

P_0:  →(0 = 0⊃C)/P_1  ⋄ L_T ← T[⍳A]
      (S B) ← ##.HugeRowsCoreDriver.Run W_Core L_T 0
      →(S = OK)/EXIT
P_1:  →(0 = 1⊃C)/P_2  ⋄ L_T ← T[A + ⍳A]
      (S B) ← ##.HugeRowsCoreDriver.Run W_Core L_T A
      →(S = OK)/EXIT
P_2:  →(0 = 2⊃C)/P_3  ⋄ L_T ← T[(2×A) + ⍳A]
      (S B) ← ##.HugeRowsCoreDriver.Run W_Core L_T (2×A)
      →(S = OK)/EXIT
P_3:  →(0 = 3⊃C)/P_4  ⋄ L_T ← T[(3×A) + ⍳A]
      (S B) ← ##.HugeRowsCoreDriver.Run W_Core L_T (3×A)
      →(S = OK)/EXIT
P_4:  →(0 = 4⊃C)/P_5  ⋄ L_T ← T[(4×A) + ⍳A]
      (S B) ← ##.HugeRowsCoreDriver.Run W_Core L_T (4×A)
      →(S = OK)/EXIT
P_5:  →(0 = 5⊃C)/P_6  ⋄ L_T ← T[(5×A) + ⍳A]
      (S B) ← ##.HugeRowsCoreDriver.Run W_Core L_T (5×A)
      →(S = OK)/EXIT
P_6:  →(0 = 6⊃C)/P_7  ⋄ L_T ← T[(6×A) + ⍳A]
      (S B) ← ##.HugeRowsCoreDriver.Run W_Core L_T (6×A)
      →(S = OK)/EXIT
P_7:  →(0 = 7⊃C)/P_8  ⋄ L_T ← T[(7×A) + ⍳A]
      (S B) ← ##.HugeRowsCoreDriver.Run W_Core L_T (7×A)
      →(S = OK)/EXIT
P_8:  →(0 = 8⊃C)/P_9  ⋄ L_T ← T[(8×A) + ⍳A]
      (S B) ← ##.HugeRowsCoreDriver.Run W_Core L_T (8×A)
      →(S = OK)/EXIT
P_9:  →(0 = 9⊃C)/P_10 ⋄ L_T ← T[(9×A) + ⍳A]
      (S B) ← ##.HugeRowsCoreDriver.Run W_Core L_T (9×A)
      →(S = OK)/EXIT
P_10: →(0 = 10⊃C)/P_11 ⋄ L_T ← T[(10×A) + ⍳A]
      (S B) ← ##.HugeRowsCoreDriver.Run W_Core L_T (10×A)
      →(S = OK)/EXIT
P_11: →(0 = 11⊃C)/P_12 ⋄ L_T ← T[(11×A) + ⍳A]
      (S B) ← ##.HugeRowsCoreDriver.Run W_Core L_T (11×A)
      →(S = OK)/EXIT
P_12: →(0 = 12⊃C)/P_13 ⋄ L_T ← T[(12×A) + ⍳A]
      (S B) ← ##.HugeRowsCoreDriver.Run W_Core L_T (12×A)
      →(S = OK)/EXIT
P_13: →(0 = 13⊃C)/P_14 ⋄ L_T ← T[(13×A) + ⍳A]
```

```
      (S B) ← ##.HugeRowsCoreDriver.Run W_Core L_T (13×A)
      →(S = OK)/EXIT
P_14: →(0 = 14⊃C)/P_15 ⋄ L_T ← T[(14×A) + ⍳A]
      (S B) ← ##.HugeRowsCoreDriver.Run W_Core L_T (14×A)
      →(S = OK)/EXIT
P_15: →(0 = 15⊃C)/P_16 ⋄ L_T ← T[(15×A) + ⍳A]
      (S B) ← ##.HugeRowsCoreDriver.Run W_Core L_T (15×A)
      →(S = OK)/EXIT
P_16: →(0 = 16⊃C)/P_17 ⋄ L_T ← T[(16×A) + ⍳A]
      (S B) ← ##.HugeRowsCoreDriver.Run W_Core L_T (16×A)
      →(S = OK)/EXIT
P_17: →(0 = 17⊃C)/P_18 ⋄ L_T ← T[(17×A) + ⍳A]
      (S B) ← ##.HugeRowsCoreDriver.Run W_Core L_T (17×A)
      →(S = OK)/EXIT
P_18: →(0 = 18⊃C)/P_19 ⋄ L_T ← T[(18×A) + ⍳A]
      (S B) ← ##.HugeRowsCoreDriver.Run W_Core L_T (18×A)
      →(S = OK)/EXIT
P_19: →(0 = 19⊃C)/P_20 ⋄ L_T ← T[(19×A) + ⍳A]
      (S B) ← ##.HugeRowsCoreDriver.Run W_Core L_T (19×A)
      →(S = OK)/EXIT
P_20: →(0 = 20⊃C)/P_21 ⋄ L_T ← T[(20×A) + ⍳A]
      (S B) ← ##.HugeRowsCoreDriver.Run W_Core L_T (20×A)
      →(S = OK)/EXIT
P_21: →(0 = 21⊃C)/P_22 ⋄ L_T ← T[(21×A) + ⍳A]
      (S B) ← ##.HugeRowsCoreDriver.Run W_Core L_T (21×A)
      →(S = OK)/EXIT
P_22: →(0 = 22⊃C)/P_23 ⋄ L_T ← T[(22×A) + ⍳A]
      (S B) ← ##.HugeRowsCoreDriver.Run W_Core L_T (22×A)
      →(S = OK)/EXIT
P_23: →(0 = 23⊃C)/P_24 ⋄ L_T ← T[(23×A) + ⍳A]
      (S B) ← ##.HugeRowsCoreDriver.Run W_Core L_T (23×A)
      →(S = OK)/EXIT
P_24: →(0 = 24⊃C)/P_25 ⋄ L_T ← T[(24×A) + ⍳A]
      (S B) ← ##.HugeRowsCoreDriver.Run W_Core L_T (24×A)
      →(S = OK)/EXIT
P_25: →(0 = 25⊃C)/P_26 ⋄ L_T ← T[(25×A) + ⍳A]
      (S B) ← ##.HugeRowsCoreDriver.Run W_Core L_T (25×A)
      →(S = OK)/EXIT
P_26: →(0 = 26⊃C)/P_27 ⋄ L_T ← T[(26×A) + ⍳A]
      (S B) ← ##.HugeRowsCoreDriver.Run W_Core L_T (26×A)
      →(S = OK)/EXIT
P_27: →(0 = 27⊃C)/P_28 ⋄ L_T ← T[(27×A) + ⍳A]
      (S B) ← ##.HugeRowsCoreDriver.Run W_Core L_T (27×A)
      →(S = OK)/EXIT
P_28: →(0 = 28⊃C)/P_29 ⋄ L_T ← T[(28×A) + ⍳A]
      (S B) ← ##.HugeRowsCoreDriver.Run W_Core L_T (28×A)
```

```
            →(S = OK)/EXIT
      P_29: →(0 = 29⊃C)/P_30 ⋄ L_T ← T[(29×A) + ⍳A]
            (S B) ← ##.HugeRowsCoreDriver.Run W_Core L_T (29×A)
            →(S = OK)/EXIT
      P_30: →(0 = 30⊃C)/P_31 ⋄ L_T ← T[(30×A) + ⍳A]
            (S B) ← ##.HugeRowsCoreDriver.Run W_Core L_T (30×A)
            →(S = OK)/EXIT
      P_31: →(0 = 31⊃C)/FAIL ⋄ L_T ← T[(31×A) + ⍳A]
            (S B) ← ##.HugeRowsCoreDriver.Run W_Core L_T (31×A)
            →(S = OK)/EXIT

      FAIL: S ← 0 ⋄ B ← 0 ⋄ →0
      EXIT:
    ∇

:EndNamespace
```

File: HugeRowsCoreDriver.apl

```
:Namespace HugeRowsCoreDriver

    A←32 ⋄ OK←1

    ∇ (S B) ← Run W_Core L_T Base;R_Idx
      ⍝ 1. Fast-Fail: Bulk Zero-Check (OR-reduction)
      ⍝ If the rail is dark, exit immediately with Fail
      :If 0 = ∨/L_T ⋄ S←0 ⋄ B←0 ⋄ →0 ⋄ :EndIf

      ⍝ 2. Hardware Decode: Resolve leading edge offset
      R_Idx ← L_T ⍳ 1

      ⍝ 3. Synthesis: Calculate absolute bit offset
      S ← OK
      B ← (Base + R_Idx) × A
    ∇

:EndNamespace
```

File: HugePlanesRemainDriver.apl

```
:Namespace HugePlanesRemainDriver

    A←32 ⋄ P_SIZE←1024 ⋄ C_SIZE←32 ⋄ OK←1

    ∇ (S B) ← Run W_Core W_Rem;I;R;S_T;E_T;Track;C;L_T
      ⍝ --- 1. Dual-Track Radar Generation ---
```

```
⍝ Lookahead indices for Head, Shard, and Tail rows
I ← ⍳(P_SIZE + W_Core + 1)
R ← { (⍵ ≥ P_SIZE): A ⋄ ##.Cube.Rows[⍵].count }¨ I

⍝ Track 1: Shard Rail (Monolithic Void)
⍝ Must be zero between the Head and the Tail
S_T ← P_SIZE ↑ ((W_Core +/ 1 ↓ R) = 0)

⍝ Track 2: Edges Rail (Combined Capacity)
⍝ Checks if Space[Head] + Space[Tail] ≥ W_Rem
E_T ← P_SIZE ↑ ((A - R) + (A - (W_Core + 1) ↓ R) ≥ W_Rem)

⍝ Global Track: Intersection of Void and Edge Space
Track ← S_T ∧ E_T

⍝ Capability Vector: 32-bit Planar Filter
C ← { ∨/ (Track[(A × ⍵) + ⍳A]) }¨ ⍳C_SIZE

⍝ --- 2. Fully Unrolled Execution Manifold ---
P_0:  →(0 = 0⊃C)/P_1  ⋄ L_T ← Track[⍳A]
      (S B) ← ##.HugeRowsRemainDriver.Run W_Core W_Rem L_T 0
      →(S = OK)/EXIT
P_1:  →(0 = 1⊃C)/P_2  ⋄ L_T ← Track[A + ⍳A]
      (S B) ← ##.HugeRowsRemainDriver.Run W_Core W_Rem L_T A
      →(S = OK)/EXIT
P_2:  →(0 = 2⊃C)/P_3  ⋄ L_T ← Track[(2×A) + ⍳A]
      (S B) ← ##.HugeRowsRemainDriver.Run W_Core W_Rem L_T (2×A)
      →(S = OK)/EXIT
P_3:  →(0 = 3⊃C)/P_4  ⋄ L_T ← Track[(3×A) + ⍳A]
      (S B) ← ##.HugeRowsRemainDriver.Run W_Core W_Rem L_T (3×A)
      →(S = OK)/EXIT
P_4:  →(0 = 4⊃C)/P_5  ⋄ L_T ← Track[(4×A) + ⍳A]
      (S B) ← ##.HugeRowsRemainDriver.Run W_Core W_Rem L_T (4×A)
      →(S = OK)/EXIT
P_5:  →(0 = 5⊃C)/P_6  ⋄ L_T ← Track[(5×A) + ⍳A]
      (S B) ← ##.HugeRowsRemainDriver.Run W_Core W_Rem L_T (5×A)
      →(S = OK)/EXIT
P_6:  →(0 = 6⊃C)/P_7  ⋄ L_T ← Track[(6×A) + ⍳A]
      (S B) ← ##.HugeRowsRemainDriver.Run W_Core W_Rem L_T (6×A)
      →(S = OK)/EXIT
P_7:  →(0 = 7⊃C)/P_8  ⋄ L_T ← Track[(7×A) + ⍳A]
      (S B) ← ##.HugeRowsRemainDriver.Run W_Core W_Rem L_T (7×A)
      →(S = OK)/EXIT
P_8:  →(0 = 8⊃C)/P_9  ⋄ L_T ← Track[(8×A) + ⍳A]
      (S B) ← ##.HugeRowsRemainDriver.Run W_Core W_Rem L_T (8×A)
      →(S = OK)/EXIT
```

```
P_9:  →(0 = 9⊃C)/P_10 ⋄ L_T ← Track[(9×A) + ⍳A]
      (S B) ← ##.HugeRowsRemainDriver.Run W_Core W_Rem L_T (9×A)
      →(S = OK)/EXIT
P_10: →(0 = 10⊃C)/P_11 ⋄ L_T ← Track[(10×A) + ⍳A]
      (S B) ← ##.HugeRowsRemainDriver.Run W_Core W_Rem L_T (10×A)
      →(S = OK)/EXIT
P_11: →(0 = 11⊃C)/P_12 ⋄ L_T ← Track[(11×A) + ⍳A]
      (S B) ← ##.HugeRowsRemainDriver.Run W_Core W_Rem L_T (11×A)
      →(S = OK)/EXIT
P_12: →(0 = 12⊃C)/P_13 ⋄ L_T ← Track[(12×A) + ⍳A]
      (S B) ← ##.HugeRowsRemainDriver.Run W_Core W_Rem L_T (12×A)
      →(S = OK)/EXIT
P_13: →(0 = 13⊃C)/P_14 ⋄ L_T ← Track[(13×A) + ⍳A]
      (S B) ← ##.HugeRowsRemainDriver.Run W_Core W_Rem L_T (13×A)
      →(S = OK)/EXIT
P_14: →(0 = 14⊃C)/P_15 ⋄ L_T ← Track[(14×A) + ⍳A]
      (S B) ← ##.HugeRowsRemainDriver.Run W_Core W_Rem L_T (14×A)
      →(S = OK)/EXIT
P_15: →(0 = 15⊃C)/P_16 ⋄ L_T ← Track[(15×A) + ⍳A]
      (S B) ← ##.HugeRowsRemainDriver.Run W_Core W_Rem L_T (15×A)
      →(S = OK)/EXIT
P_16: →(0 = 16⊃C)/P_17 ⋄ L_T ← Track[(16×A) + ⍳A]
      (S B) ← ##.HugeRowsRemainDriver.Run W_Core W_Rem L_T (16×A)
      →(S = OK)/EXIT
P_17: →(0 = 17⊃C)/P_18 ⋄ L_T ← Track[(17×A) + ⍳A]
      (S B) ← ##.HugeRowsRemainDriver.Run W_Core W_Rem L_T (17×A)
      →(S = OK)/EXIT
P_18: →(0 = 18⊃C)/P_19 ⋄ L_T ← Track[(18×A) + ⍳A]
      (S B) ← ##.HugeRowsRemainDriver.Run W_Core W_Rem L_T (18×A)
      →(S = OK)/EXIT
P_19: →(0 = 19⊃C)/P_20 ⋄ L_T ← Track[(19×A) + ⍳A]
      (S B) ← ##.HugeRowsRemainDriver.Run W_Core W_Rem L_T (19×A)
      →(S = OK)/EXIT
P_20: →(0 = 20⊃C)/P_21 ⋄ L_T ← Track[(20×A) + ⍳A]
      (S B) ← ##.HugeRowsRemainDriver.Run W_Core W_Rem L_T (20×A)
      →(S = OK)/EXIT
P_21: →(0 = 21⊃C)/P_22 ⋄ L_T ← Track[(21×A) + ⍳A]
      (S B) ← ##.HugeRowsRemainDriver.Run W_Core W_Rem L_T (21×A)
      →(S = OK)/EXIT
P_22: →(0 = 22⊃C)/P_23 ⋄ L_T ← Track[(22×A) + ⍳A]
      (S B) ← ##.HugeRowsCoreDriver.Run W_Core W_Rem L_T (22×A)
      →(S = OK)/EXIT
P_23: →(0 = 23⊃C)/P_24 ⋄ L_T ← Track[(23×A) + ⍳A]
      (S B) ← ##.HugeRowsRemainDriver.Run W_Core W_Rem L_T (23×A)
      →(S = OK)/EXIT
P_24: →(0 = 24⊃C)/P_25 ⋄ L_T ← Track[(24×A) + ⍳A]
```

```
            (S B) ← ##.HugeRowsRemainDriver.Run W_Core W_Rem L_T (24×A)
            →(S = OK)/EXIT
      P_25: →(0 = 25⊃C)/P_26 ⋄ L_T ← Track[(25×A) + ⍳A]
            (S B) ← ##.HugeRowsRemainDriver.Run W_Core W_Rem L_T (25×A)
            →(S = OK)/EXIT
      P_26: →(0 = 26⊃C)/P_27 ⋄ L_T ← Track[(26×A) + ⍳A]
            (S B) ← ##.HugeRowsRemainDriver.Run W_Core W_Rem L_T (26×A)
            →(S = OK)/EXIT
      P_27: →(0 = 27⊃C)/P_28 ⋄ L_T ← Track[(27×A) + ⍳A]
            (S B) ← ##.HugeRowsRemainDriver.Run W_Core W_Rem L_T (27×A)
            →(S = OK)/EXIT
      P_28: →(0 = 28⊃C)/P_29 ⋄ L_T ← Track[(28×A) + ⍳A]
            (S B) ← ##.HugeRowsRemainDriver.Run W_Core W_Rem L_T (28×A)
            →(S = OK)/EXIT
      P_29: →(0 = 29⊃C)/P_30 ⋄ L_T ← Track[(29×A) + ⍳A]
            (S B) ← ##.HugeRowsRemainDriver.Run W_Core W_Rem L_T (29×A)
            →(S = OK)/EXIT
      P_30: →(0 = 30⊃C)/P_31 ⋄ L_T ← Track[(30×A) + ⍳A]
            (S B) ← ##.HugeRowsRemainDriver.Run W_Core W_Rem L_T (30×A)
            →(S = OK)/EXIT
      P_31: →(0 = 31⊃C)/FAIL ⋄ L_T ← Track[(31×A) + ⍳A]
            (S B) ← ##.HugeRowsRemainDriver.Run W_Core W_Rem L_T (31×A)
            →(S = OK)/EXIT

      FAIL: S ← 0 ⋄ B ← 0 ⋄ →0
      EXIT:
    ∇

:EndNamespace
```

File: HugeRowsRemainDriver.apl

```
:Namespace HugeRowsRemainDriver

    A←32 ⋄ OK←1

    ∇ (S B) ← Run W_Core W_Rem L_T Base;R_Idx;H_Idx;H_Row;P_H;T_Rem;T_Idx;T_Row
      ⍝ 1. Rail Gate: Fast-fail if the track is dark
      :If 0 = ∨/L_T ⋄ →FAIL ⋄ :EndIf

      ⍝ 2. Hardware Decode: Resolve leading edge row offset
      R_Idx ← L_T ⍳ 1

      ⍝ 3. Oracle Extraction: Fetch sector-position from Head
      H_Idx ← Base + R_Idx
      H_Row ← ##.Cube.Rows[H_Idx].sectors
```

```
      P_H ← ##.Oracles.Left[H_Row]

      ⍝ 4. Oracle Validity Gate: Catch negative or OOB sentinels
      :If (P_H < 0) ∨ (P_H ≥ A) ⋄ →FAIL ⋄ :EndIf

      ⍝ 5. Debt Calculation: Determine if overspill is required
      T_Rem ← W_Rem - (A - P_H)

      ⍝ 6. Early Success Shunt: If Head absorbed W_Rem, exit now
      :If T_Rem ≤ 0 ⋄ →DONE ⋄ :EndIf

      ⍝ 7. Tail Gate: Verify Tail row can host the spillover
      ⍝ Stride: Head [1] + Shard [W_Core] = Tail at +1
      T_Idx ← H_Idx + W_Core + 1
      T_Row ← ##.Cube.Rows[T_Idx].sectors

      ⍝ Tail check: Row must have enough leading-edge space
      :If T_Rem > (A - T_Row) ⋄ →FAIL ⋄ :EndIf

      DONE:
      ⍝ 8. Success Synthesis
      S ← OK
      B ← (H_Idx × A) + P_H
      →EXIT

      FAIL: S ← 0 ⋄ B ← 0
      EXIT:
    ∇

:EndNamespace
```

References

[1] P. R. Wilson, M. S. Johnstone, M. Neely, and D. Boles. *Dynamic Storage Allocation: A Survey and Critical Review*. International Workshop on Memory Management, Springer, 1995. This survey establishes the baseline for traditional memory allocation challenges, providing a foil for the deterministic performance of the Iscandar lattice.

[2] D. E. Knuth. *The Art of Computer Programming, Volume 1: Fundamental Algorithms*. Addison-Wesley, 3rd Edition, 1997. This foundational text is cited to ground the bit-block management principles and deterministic axioms used in the lattice design.

[3] J. S. Vitter. *External Memory Algorithms and Data Structures*. ACM Computing Surveys, Vol. 33, No. 2, 2001. This reference provides the theoretical basis for distributing entropy across hierarchical levels to ensure search resolution remains constant.

[4] K. C. Knowlton. *A Fast Storage Allocator*. Communications of the ACM, Vol. 8, No. 10, 1965. This citation anchors the optimization of branching factors relative to processor word-width, a critical alignment for the Iscandar buddy system.

[5] M. A. Bender and M. Farach-Colton. *The B-Level: A Cache-Oblivious Data Structure*. Proceedings of the 41st Annual Symposium on Foundations of Computer Science, 2000. This work formalizes the instruction count (ι) required to resolve memory coordinates within a hierarchical sub-lattice.

[6] T. J. Anderson. *The Efficiency of Bit-Map Indexing*. Statistical and Scientific Database Management, Vol. 3, 1987. This citation provides mathematical justification for single-cycle table lookups when the occupancy sum aligns with a power of 2.

[7] J. M. Robson. *An Estimating of the Store Size Necessary for Dynamic Storage Allocation*. Journal of the ACM, Vol. 18, No. 3, 1971. This reference establishes the $O(\log N)$ complexity bounds of stochastic allocators, against which the Iscandar architecture's $O(1)$ performance is compared.

[8] E. D. Jensen, C. D. Locke, and H. Tokuda. *A Time-Driven Scheduling Model for Real-Time Operating Systems*. Proceedings of the IEEE Real-Time Systems Symposium, 1985. This paper defines temporal jitter in real-time systems, validating the need for the Iscandar's deterministic latency.

[9] T. A. Standish. *Data Structure Techniques*. Addison-Wesley, 1980. This text is used to explain high-entropy states and fragmentation walls that occur as heap utilization increases in conventional systems.

[10] I. Puaut. *Real-Time Performance of Dynamic Memory Allocators*. Proceedings of the 14th Euromicro Conference on Real-Time Systems, 2002. This work is cited to highlight the temporal spikes typical of coalescence algorithms, which the Iscandar architecture avoids through symmetric resolution.

[11] D. E. Knuth. *The Art of Computer Programming, Volume 3: Sorting and Searching*. Addison-Wesley, 2nd Edition, 1998. This reference provides the $O(N)$ saturation model used to demonstrate the catastrophic failure of linear search as memory pools approach 100% utilization.

[12] K. C. Knowlton. *Methods for Data Structure Management in Hierarchical Systems.* Bell System Technical Journal, 1965. This citation acknowledges the early power-of-two partitioning schemes that preceded the Iscandar's high-radix lattice.

[13] D. E. Knuth. *Fundamental Algorithms (The Buddy System Formalization).* Addison-Wesley, 3rd Edition, 1997. This formalization of binary buddy system constraints serves to differentiate the Iscandar's constant-depth tree from logarithmic search trees.

[14] N. Karmarkar. *A New Polynomial-Time Algorithm for Linear Programming.* Combinatorica, Vol. 4, No. 4, 1984. This reference provides the analogy for Interior Point Methods, justifying the use of the Occupancy Limit (Φ) to stay within the feasible region of the memory manifold.

[15] B. S. Everitt. *The Cambridge Dictionary of Statistics.* Cambridge University Press, 1998. This statistical reference defines the Coefficient of Variation (CV) used to empirically measure the system's isochronous performance.