



PROTOCOL

THE PRIVACY LAYER FOR SOLANA

Zero-knowledge proofs · Multi-party computation · Confidential
balances · Stealth addresses · Quantum-resistant cryptography

14

SOLANA PROGRAMS

6

STARK AIRS

9

ARCIS MPC

17

SDKS (NPM)

DESIGN & ARCHITECTURE DOCUMENT

v1.0.1 · May 2026

Volta Team · Developed by Slashy Fx

THE PROBLEM

Your blockchain activity is completely exposed. Traditional blockchains offer pseudonymity, not privacy. Every transaction creates a permanent trail that can be traced back to you.

100%

Transactions are public

Every transfer you make is permanently recorded on the blockchain and visible to anyone with an explorer.

73%

Users deanonymized

Blockchain analytics firms can link your wallet to your real identity through transaction patterns and exchange KYC data.

24/7

Surveillance

Governments and corporations continuously monitor and analyze financial activity on public blockchains.

\$4.3B

Stolen via wallet tracking

Bad actors use public transaction data to identify and target high-value wallets for theft and social engineering.

THE SOLUTION

Protocol 01 is a comprehensive privacy layer for Solana that makes every transaction untraceable, every balance invisible, and every identity anonymous — using cutting-edge cryptography.

∞

Recurring

Private subscriptions

100%

Private

Zero knowledge

0

Traces

Unlinkable TXs

~3s

Speed

Shield + unshield

How it Works

01

CONNECT

Create or import
wallet



02

SHIELD

Deposit to ZK pool



03

TRANSACTION

Send via ZK proofs



04

RECEIVE

Withdraw — zero
trace

PRIVACY STACK

Seven cryptographic layers working together to achieve total financial privacy on Solana.

1. Zero-Knowledge Proofs (Groth16 + STARK)

Groth16 (BN254) — 6 Circom circuits for shielded transfers, confidential balances, denominated pools, and subscriber ownership. Proven with snarkjs, verified on-chain via Solana's native `alt_bn128` syscalls. ~200K compute units per verification.

STARK (Goldilocks) — 6 custom AIRs for quantum-resistant proof of ownership. Hash-based (no elliptic curves), immune to Shor's algorithm. Compact ~9KB proofs. Verified on-chain with custom FRI verifier. ~889K compute units.

2. Stealth Addresses (ECDH + ML-KEM-768)

Adapted from Ethereum's EIP-5564 for Solana. Each payment creates a unique one-time address using Elliptic Curve Diffie-Hellman key exchange. **v2 adds post-quantum protection** via ML-KEM-768 (FIPS 203) hybrid encapsulation — safe against both classical and quantum adversaries.

```
Stealth Meta-Address v1: st:01<base58(spending_pub(32) + viewing_pub(32))>
Stealth Meta-Address v2: st:02<base58(spending_pub(32) + viewing_pub(32) + kem_pub(1184))>
Hybrid Secret: HKDF-SHA256(X25519_shared || ML-KEM_shared, "p01-hybrid-stealth-v2")
```

3. Denominated Privacy Pools

Fixed-denomination pools (0.1/1/10/100 SOL, 1/10/100/1000 USDC) break the link between deposits and withdrawals. All notes in a pool share the same value, making them indistinguishable. Epoch-based maturity prevents timing analysis. P2P note sharing via BLE and NFC.

4. Confidential Balances (zkSPL)

Account-model privacy using Poseidon hash commitments (quantum-resistant). Balances hidden behind ZK proofs. Deposit, withdraw, and transfer without revealing amounts on-chain. Unlike Pedersen commitments (ECC-based, broken by Shor), Poseidon is hash-based and quantum-safe.

5. Trustless On-Chain Relay

Decentralized relay network as a Solana program. Relayers stake SOL, accept encrypted jobs, and execute transactions on behalf of users. Slashing for misbehavior. No backend server, no trust assumptions. Breaks the on-chain link between sender and recipient.

6. Multi-Party Computation (Arcium)

Decentralized MPC via Arcium's Cerberus protocol. 9 encrypted circuits for: confidential relay, anonymous registry lookup, hidden nullifier, balance audit, threshold stealth scan, and private voting. Security holds as long as 1 honest node exists in the cluster.

7. Quantum-Safe Vault

Three defense layers against quantum attacks on Ed25519: **WOTS+** (one-time hash signatures, key rotates per TX), **Hash-Timelock** (SHA-256 preimage lock for cold storage), **Commit-Reveal** (2-phase TX auth prevents quantum front-running).

SYSTEM ARCHITECTURE

Monorepo with 14 Solana programs, 14 SDKs on npm, 3 client apps, 6 STARK AIRs (quantum-safe, active), 9 Arcis MPC circuits, and 6 legacy Circom circuits kept for reference only (Groth16 path retired in v0.9.9).

CLIENT LAYER

Mobile App Expo 54 / RN 0.81 Android + iOS	Extension Chrome MV3 Vite + React 19	Web App Next.js 16 React 19 + Tailwind v4
---	---	--

SDK LAYER

specter-sdk Stealth + wallet	zk-sdk Shielded pool	zkspl-sdk Confidential balance	arcium-sdk MPC compute
p01-js Merchant SDK	privacy-toolkit Merkle + commit	auth-sdk Login with P01	rpc-config RPC fallback

PROVING LAYER

STARK Prover Winterfell (WASM) 6 custom AIRs · primary	Arcis MPC Cerberus backend 9 circuits · 6 use cases	Groth16 (retired) snarkjs + 6 Circom Removed from spend paths
---	--	--

ON-CHAIN LAYER (SOLANA)

zk_shielded Shielded pool + denom + subs	p01_zkspl Confidential balances	specter Stealth + streams	p01_trustless Trustless pool
p01_relayer Decentralized relay	p01_quantum_vault WOTS+ / HTL / CR	p01_registry Meta-address dir	p01_stark_verifier 6-circuit STARK
p01_arcium 9 MPC circuits	p01_fee_splitter Protocol fees	p01_stream Payment streams	p01_subscription Recurring payments
whitelist Access control	p01_bundler Atomic multi-shield	p01_liquidity Instant unshield · v0.9.9	p01_mugen P2P fiat escrow

Tech Stack

Anchor	0.32.1	React	19.1
Solana CLI	2.2.14 (Agave)	Expo	54 / RN 0.81
Rust	1.94.0	Next.js	16
TypeScript	5.9.0 (strict)	Winterfell	0.10 (STARK)
snarkjs	0.7.5	noble/post-quantum	0.2.1 (ML-KEM)
circom2	2.2.2	poseidon-lite	0.3.0

ON-CHAIN PROGRAMS

14 Anchor programs deployed on Solana devnet. 140+ instructions covering shielded transfers, confidential balances, stealth payments, streams, subscriptions, quantum-safe vaults, MPC, instant-unshield liquidity, P2P fiat escrow, and more. All spend paths verify via the custom on-chain FRI verifier (v0.9.9 — Groth16 retired).

PROGRAM	PROGRAM ID	INSTRUCTIONS	SIZE
zk_shielded	GbVM5yve ... j27c	Shield, unshield, transfer, denominated pool, subscription vault, STARK variants	1.1 MB
p01_zkspl	Eppog ... Ppah	Confidential deposit, withdraw, transfer, balance proof, viewer management	480 KB
specter	2tuztg ... fbSp	Stealth send v1/v2, claim, wallet init, streams (create, withdraw, cancel)	320 KB
p01_trustless	FnTmMx ... i43Q	Trustless shield/unshield (proof = permission), zkSPL trustless	544 KB
p01_relayer	2okhzL ... 5BM	Register relayer, submit/complete/expire job, stake, slash, key rotation	380 KB
p01_quantum_vault	HazoS6 ... Th7o	WOTS+ vault, hash-timelock vault, commit-then-reveal	290 KB
p01_registry	QaQwpv ... hQB	Register v1/v2, update keys, update name, deregister	210 KB
p01_stark_verifier	DGY37k ... QvGs	Init/upload/verify/close proof buffer, 6 circuits, resize	479 KB
p01_arciium	FH1JiQ ... TLPT	9 MPC computation definitions (Arcium encrypted-ixs)	1.0 MB
p01_fee_splitter	UdxXEv ... 5BM	Split SOL/token with hardcoded 0.5% protocol fee	369 KB
p01_stream	C92xDD ... 31f4c	Create stream, withdraw intervals, cancel/refund	250 KB
p01_subscription	3eDvPJ ... BTHW	Create subscription, process payment, pause/resume, privacy settings	310 KB
whitelist	WhLst1 ... 9xKm	Merkle-based access control, allowlist management	180 KB
p01_bundler	BndLr1 ... 4vQp	Atomic multi-shield CPI batching, trustless deposit aggregation	280 KB
p01_liquidity	6PfFkvj ...	Instant unshield — init_pool, deposit, withdraw, prefund, settle, update_params (v0.9.9)	310 KB
p01_mugen	—	P2P fiat-to-crypto escrow (wSOL vault, Treasury Buffer, MPC-protected routes)	450 KB

ZK CIRCUITS & STARK AIRs

6 STARK AIRs over Goldilocks (quantum-resistant, active on every spend path) plus 9 Arcis MPC circuits for confidential compute. The 7 legacy Groth16 circuits are retired as of v0.9.9 — kept for reference only.

Legacy ZK Circuits (Groth16 — retired)

CIRCUIT	CONSTRAINTS	PUBLIC INPUTS	PURPOSE
transfer	12,222	merkle_root, nullifiers, output_commitments, public_amount	2-in-2-out UTXO transfer
denominated_pool	4,273	nullifier, merkle_root, min_epoch, denomination	Fixed-amount pool unshield
denominated_transfer	5,628	nullifier, merkle_root, new_commitment	Pool note ownership transfer
confidential_balance	1,382	old_commitment, new_commitment, delta_hash	Balance update with hidden amount
balance_proof	644	commitment, threshold	Prove balance $\geq$ threshold
subscriber_ownership	~500	commitment	Prove subscriber identity for ZK subscriptions
note_split	~10,000	nullifier, merkle_root, output_commitments[], denomination	Cross-pool note splitting (up to 20 outputs)

STARK AIRs (Quantum-Resistant)

CIRCUIT ID	AIR	WIDTH	LENGTH	LDE BLOWUP	PROOF SIZE
0	subscriber_ownership	3 cols	32 rows	8x	~9 KB
1	pool_commitment	3 cols	32 rows	8x	~9 KB
2	balance_proof	4 cols	256 rows	8x	~12 KB
3	merkle_path	3 cols	32 rows	8x	~9 KB
4	confidential_balance	4 cols	256 rows	8x	~12 KB
5	transfer	6 cols	512 rows	8x	~15 KB

Proof Pipeline

STARK (active — quantum-safe)

```
p01-stark build AIR trace (Winterfell v0.1 0)
compact NTT → LDE → Merkle (Blake3)
Fiat-Shamir Blake3(trace_root || commitment)
FRI 16 queries → 9-15 KB proof
```

Groth16 (retired — reference only)

```
circom circuit.circom --r1cs --wasm --sym
snarkjs groth16 setup circuit.r1cs pot20_final.ptau
snarkjs zkey contribute → beacon finalize
snarkjs groth16 prove → 256 bytes proof
// Removed from every spend dispatch in v0.9.9.
```

SECURITY MODEL

Defense-in-depth: every layer of the stack is hardened against classical and quantum adversaries.

LAYER	MECHANISM	QUANTUM SAFE
Seed phrase	AES-256-GCM, PBKDF2 (100K iterations)	Yes (symmetric)
Note storage	NaCl secretbox (XSalsa20-Poly1305)	Yes (symmetric)
PIN storage	SHA-256 with per-device salt, constant-time compare	Yes (hash-based)
Session keys	Hardware-backed SecureStore (not AsyncStorage)	Platform-dependent
Key management	Spending key NEVER leaves device. No remote prover fallback.	N/A
ZK soundness	Groth16: invalid proofs cannot pass verification	No (BN254)
ZK completeness	Valid spends always produce valid proofs	N/A
STARK proofs	Hash-based (Poseidon over Goldilocks), 128-bit security	Yes
Stealth v2	X25519 + ML-KEM-768 (FIPS 203) hybrid ECDH	Yes (lattice-based)
Quantum vault	WOTS+ (SHA-256 hash chains), hash-timelock, commit-reveal	Yes (hash-based)
Commitments	Poseidon (algebraic hash, not ECC-based)	Yes
Double-spend	Nullifier PDAs on-chain (unique per note)	N/A
MPC threshold	Arcium Cerberus: 1-of-N honest node guarantees correctness	Protocol-level
Relay privacy	Encrypted job submission + threshold decryption	Yes (symmetric)
Clipboard	Auto-clear after 60s on all sensitive copies	N/A
Biometric	Device fallback when hardware unavailable, no bypass	N/A
PIN brute-force	Progressive lockout: 5→30s, 8→60s, 10→300s	N/A
Backup	android:allowBackup="false" (prevents adb backup)	N/A

THREAT MODEL & CRYPTOGRAPHY

Adversary Analysis

Blockchain Observer

Cannot link senders to recipients.
Cannot determine amounts.
Cannot analyze spending patterns.
Stealth addresses create unlinkable one-time endpoints.

Quantum Adversary

STARK proofs are hash-based (immune to Shor). ML-KEM-768 stealth is lattice-based. WOTS+ vault signatures rotate per TX. Poseidon commitments are algebraic hash (not ECC).

Compromised Node

MPC Cerberus protocol ensures correctness as long as 1 honest node exists in the cluster. Relay jobs are encrypted end-to-end. Threshold decryption prevents single-node compromise.

Cryptographic Primitives

SYMMETRIC

XSalsa20-Poly1305 Note vault encryption

AES-256-GCM Seed encryption (ext)

Rescue-CTR Arcium MPC inputs

ASYMMETRIC

Ed25519 Solana signatures

X25519 Stealth ECDH

ML-KEM-768 Post-quantum hybrid (FIPS 203)

HASHING

Poseidon (BN254) Commitments, nullifiers

Poseidon (Goldilocks) STARK AIR constraints

SHA-256 WOTS+, PIN, view tags

Blake3 STARK Merkle trees

SIGNATURES & KEY DERIVATION

WOTS+ (SHA-256) Quantum-safe OTS

HKDF-SHA256 Key derivation

Trust Model

Client Side (Zero Trust)

- Spending key **NEVER** leaves device
- Proofs generated locally (snarkjs / WebView)
- No remote prover fallback (hard-fail)
- Stealth scanning via on-chain RPC (no relay)

On-Chain (Trustless)

- Nullifier PDAs prevent double-spend
- Groth16/STARK verification on-chain
- proof = permission (no admin keys)
- MPC: 1-of-N honesty for correctness

FEATURE SET

Denominated Privacy Pools

Fixed-denomination anonymous pools. STARK-proven unshield (quantum-resistant). Epoch-based maturity protection.

- SOL: 0.1 / 1 / 10 / 100 | USDC: 1 / 10 / 100 / 1,000
- P2P note sharing via BLE + NFC, encrypted backups

Stealth Transfers

Unique one-time addresses via ECDH. View tags for O(1) scanning. v2 adds ML-KEM-768 (quantum-resistant).

- Unlinkable stealth addresses + 1-byte view tag filter
- On-chain registry (EIP-5564) + hybrid X25519 + ML-KEM

Confidential Balances (zkSPL)

Balances hidden behind Poseidon commitments. Deposit, withdraw, transfer without revealing amounts.

- 4 operations + balance proof (solvency without exposure)
- Viewer key management for authorized audits

AI Agent

On-device AI for managing private finances. Voice input via Groq Whisper. No data leaves the device.

- Multi-provider: Groq / Gemini / Llama (local)
- Live SOL price + Fear & Greed + conversation history

Payment Streams

Interval-based recurring payments. Amount noise ($\pm 20\%$), timing noise, stealth per payment.

- Personal streams + services (Netflix, Spotify, etc.)
- Privacy score + ZK subscriber vaults

Quantum-Safe Vault

Three defense layers against quantum attacks on Ed25519. SHA-256 preimage is the security boundary.

- WOTS+ (32 hash chains, key rotates per TX)
- Hash-Timelock + Commit-Reveal (2-phase TX auth)

Arcium MPC – 9 Encrypted Circuits

Confidential Relay

Threshold TX decryption across MPC cluster

Anonymous Lookup

Private stealth meta-address query

Hidden Nullifier

SHA3 commitment via MPC

Balance Audit

Solvency proof without exposure

Stealth Scan

Viewing key sharded across nodes

Private Vote

Encrypted ballots + threshold tally

PRIVACY INFRASTRUCTURE

Six systems that eliminate metadata leakage, automate shielding, route across denominations, and batch deposits atomically — and, as of v1.0.1, wrap every spend in transaction-level opacity: relayer-submitted, on-chain-event-scrubbed, uniform-size STARK proofs, with recipient-hiding MPC relay.

V1.0.1 · TX-OPACITY RELEASE

V3 STARK transfers end-to-end (Goldilocks Poseidon parity across mobile, extension & on-chain verifier) · **denominated_pool_v4 migration** (escapes un-decodable legacy events) · **Tx-Opacity A/B/C:** p01_relayer wired into every V3 flow, on-chain events scrubbed (depositor / recipient / amount), proofs padded to a uniform 145 KB · **Phase D Arcium confidentialRelay** (recipient hidden even from the relayer via threshold MPC) · **Multi-relayer rotation** with liveness filtering.

Auto-Shield

One-time receive addresses with autonomous shielding. Your main wallet **never** appears on-chain.

1. User opens Receive → fresh stealth addresses
2. Sender sends SOL to one-time address
3. Autonomous runner detects funds (≥ 0.05 SOL)
4. Funds auto-shielded into denominated pool
5. One-time address discarded — zero link

- Threshold: 0.05 SOL minimum trigger
- Max pending age: 7 days before cleanup
- Spending key never leaves device

Privacy Relay

Railway-hosted RPC proxy that strips IP, metadata, and timing patterns before forwarding to Solana.

- Strips User-Agent, Origin, Referer headers
- Random jitter: 30–120ms per request (timing decorrelation)
- Header whitelist: only Content-Type + Solana headers
- Optional Tor routing for maximum anonymity

4 privacy tiers: direct → rotation → proxy → tor

```
Client → Privacy Middleware → Railway Relay  
→ Helius RPC  
      (strip headers)      (strip IP/jitter)  
      (Solana)
```

Privacy Router — Note Splitting

Cross-pool denomination routing via the `note_split` ZK circuit (~10K constraints). Break large notes into smaller denominations without revealing the link.

- Up to 20 output notes per split operation
- Dynamic epoch delay for maturity enforcement
- Atomic nullifier + Merkle insertion (no partial state)
- 0.3% protocol fee via `p01_fee_splitter`

Autonomous runner: polls every 60s, auto-refreshes maturity every 5min, resumes pending routes across sessions

On-Chain Bundler

Atomic multi-shield CPI batching via `p01_bundler`. Multiple users deposit in a single Solana transaction — impossible to correlate via timing.


- Trustless, permissionless, serverless
- CPI calls into `zk_shielded` for each deposit
- Coinbase CDP SDK integration for fiat on-ramp
- Breaks timing correlation across all participants

Deployed as standalone program — no admin keys, no upgrade authority

MOBILE APPLICATION

Native privacy wallet for Android & iOS. Expo 54 / React Native 0.81. On-device ZK proving, biometric security, Privy authentication.

Tab Navigation

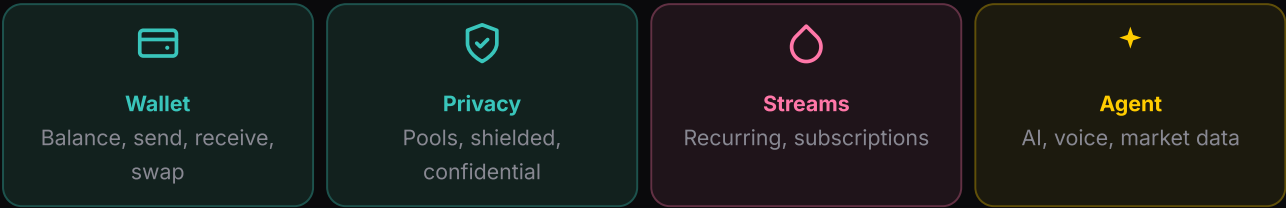

Key Screens

Wallet Dashboard

- Balance card with visibility toggle + quick actions
- Privacy summary pill, token list, recent activity

Privacy Dashboard

- Privacy Pool hero (STARK proofs) + quick actions
- Arcium MPC status + legacy shielded migration

Denominated Pool Screens

- Notes list, shield/unshield, STARK proof generation
- P2P transfer (BLE/NFC), import/export encrypted

Streams Dashboard

- Monthly outflow + privacy score + noise badges
- Service subs + auto-payment processing

On-Device Proving

Groth16 Prover (WebView)

snarkjs running in a hidden WebView. Queue-based (1 proof at a time). 120s timeout for large circuits. Base64-bundled circuit files (19MB transfer circuit). No remote fallback — hard fail.

STARK Prover (WASM)

Winterfell compiled to 82KB WASM module. Hidden WebView execution. All 6 circuits supported. Message-passing for Merkle path strings. Mounted in app root via StarkProverProvider.

Security Features

- Privy authentication (email, SMS, social, wallet)
- PIN with SHA-256 + per-device salt
- Biometric auth (Face ID / fingerprint)
- Progressive lockout (5→30s, 8→60s, 10→300s)
- SecureStore for all secrets (hardware-backed)
- Clipboard auto-clear (60 seconds)
- App switcher blur (prevents screenshots)
- android:allowBackup="false"
- Lock screen enforced even if "none" selected

DESIGN & ARTISTIC DIRECTION

Cyberpunk aesthetic inspired by Hatsune Miku, NEEDY STREAMER OVERLOAD, and ULTRAKILL. Dark-only, high-contrast, industrial monospace with neon cyan and pink accents.

Color System

Backgrounds

void	#0a0a0c	Primary BG
dark	#0f0f12	Secondary
surface	#151518	Cards
surface-2	#1a1a1e	Elevated

Borders

border	#2a2a30
border-hover	#3a3a42

Accents

cyan	#39c5bb	Primary accent
cyan-bright	#00ffe5	Neon highlight
pink	#ff77a8	Secondary accent
pink-hot	#ff2d7a	Glitch layers
yellow	#ffcc00	Agent / warnings
red	#ff3366	Error / destructive

Text

text	#ffffff
muted	#888892
dim	#555560

Typography

Orbitron

Display / Headlines
Weight 400–900

Inter

Body Text
Weight 300–900

JetBrains Mono

Code / Technical
Weight 400–700

Visual Effects

Glitch Effects (ULTRAKILL-inspired)

- Chromatic aberration: cyan + pink offset layers
- Screen tearing: horizontal clip-path slices
- Flicker: frame-based opacity jitter
- Shake/skew: $\pm 5^\circ$ transform during bursts
- Noise bars: horizontal colored bands
- SVG turbulence overlay at 0.02 opacity

Glow & Glass Effects

- Multi-layer box-shadow (20/40/60px blur)
- Text-shadow for neon glow on headings
- LiquidGlassTabBar: BlurView + gradient + specular
- Scanline animation: 8s vertical sweep
- Shimmer: gradient sweep at 135°
- 8-layer depth background system (web)

DESIGN PRINCIPLES

10 core principles that guide every design decision across all Protocol 01 interfaces.

01. Dark-Only

No light theme. Ever. Optimized for OLED displays. Deep void backgrounds with high-contrast neon accents.

02. Cyberpunk Aesthetic

Neon on void, industrial edges. Inspired by Hatsune Miku, NEEDY STREAMER OVERLOAD, ULTRAKILL.

03. No Black Text

All text is white, gray, or colored. Black text is forbidden to maintain contrast hierarchy.

04. Modular Colors

Each tab has its own accent color. Wallet = cyan, Privacy = pink, Streams = bright-cyan, Agent = yellow.

05. Haptic Everything

Tactile feedback on all interactions. Light for navigation, medium for actions, heavy for confirmations.

06. Spring Physics

Bouncy, organic animations using react-native-reanimated spring configs. No linear easing.

07. Glass Morphism

Blur + transparency layers. LiquidGlassTabBar with BlurView, gradient overlay, and specularity.

08. System Metaphor

Terminal-style status indicators: `PROTOCOL::01 / STATUS::ACTIVE`. Monospace for all technical data.

09. Asymmetric Glitch

Chaotic branding animations. Chromatic aberration, screen tearing, flicker, shake/skew during bursts.

10. Security First

App switcher blur, clipboard auto-clear, no data leaks. Privacy is a design constraint, not an afterthought.

WEB APP & BROWSER EXTENSION

Web Application (Next.js 16)

Marketing site, SDK demo, and documentation portal. Built with React 19, Tailwind v4, and Framer Motion for cinematic interactions.

Landing Page

- Hero: Animated "01" with ULTRAKILL glitch effect
- System status display: PROTOCOL::01 / STATUS::ACTIVE
- 8-layer depth background (grid, mesh, particles, scanlines, vignette, shimmer, noise)
- Semi-transparent Miku mascot (15% opacity, grayscale)
- Feature sections with alternating code previews
- Problem/solution statistics with visual contrast
- Download section: APK + Extension + Source

Pages

- `/` — Landing page with hero, features, how it works
- `/docs` — Technical documentation (all 12 programs, SDKs, circuits)
- `/sdk-demo` — Interactive SDK playground
- `/download` — APK + extension download

Web Design Highlights

- Grid pattern overlay (40px, cyan @ 5% opacity)
- Terminal-style code previews (3-dot header)
- Gradient text: cyan → pink → bright-cyan
- Custom scrollbar (0.5rem, cyan thumb on hover)
- Badge system: cyan, pink, yellow, bright-cyan

Browser Extension (Chrome MV3)

Full Solana wallet as a Chrome/Brave extension. Private by default with integrated stealth addresses and shielded transfers.

Features

- Wallet creation & import (BIP39 mnemonic)
- SOL & SPL token management with live prices
- Privacy Zone: stealth addresses + shielded transfers
- Confidential balances (zkSPL)
- Payment streams dashboard
- dApp connection (Wallet Standard)
- AES-256-GCM seed encryption
- Rate limiting on sensitive endpoints

Architecture

- Manifest V3 (Chrome + Brave compatible)
- Vite build system + React 19
- Background service worker for wallet state
- Popup UI for quick actions
- Content script for dApp injection
- RPC fallback via `@protocol-01/rpc-config`
- Seed-based key derivation (BIP44)

SDK ECOSYSTEM

8 TypeScript packages for developers to integrate Protocol 01 privacy into their applications.

PACKAGE	PURPOSE	KEY EXPORTS
@protocol-01/specter-sdk	Core privacy SDK	Stealth, wallet, transfer, relay, quantum, registry, indexer, prover
@protocol-01/zk-sdk	ZK primitives	ShieldedClient, Note, MerkleTree, ZkProver, viewing keys
@protocol-01/zkspl-sdk	Confidential tokens	Confidential deposit, withdraw, transfer, balance proof
@protocol-01/arcium-sdk	MPC compute	ArciumClient, 6 use-case modules, Rescue cipher
@protocol-01/p01-js	Merchant SDK	Protocol01 client, subscriptions, payments, React components
@protocol-01/privacy-toolkit	Merkle + commit	Incremental tree, Poseidon, amount hash, proof format
@protocol-01/auth-sdk	Auth integration	P01AuthClient, P01AuthServer, session management
@protocol-01/rpc-config	RPC infrastructure	RpcConnectionManager, fallback chain, URL sanitization

Integration Example

```
import { StealthWallet } from '@protocol-01/specter-sdk';
import { ShieldedClient } from '@protocol-01/zk-sdk';

// Create stealth address for recipient
const stealth = await StealthWallet.generateStealthAddress(recipientMeta);

// Shield tokens into the privacy pool
const client = new ShieldedClient(connection, wallet);
const note = await client.shield({ amount: 1_000_000n, mint: SOL_MINT });

// Transfer privately (2-in-2-out UTXO)
await client.transfer({ inputs: [note], outputs: [recipientNote, changeNote] });
```

TESTING & QUALITY ASSURANCE

Comprehensive test suite with 370+ stress tests, 25+ program tests, 30+ SDK unit tests, and automated E2E flows covering every instruction and cryptographic primitive.

Test Suite Overview

CATEGORY	FILES	TESTS	COVERAGE
Program Tests (ts-mocha)	25	~200	All 12 programs, real devnet transactions
SDK Unit Tests (vitest)	30+	~150	specter-sdk, zk-sdk, privacy-toolkit, auth-sdk
E2E Tests	8	~80	Cross-program flows, STARK lifecycle, shield/unshield
Stress: Programs	1	106	All 12 programs, every instruction, concurrent ops
Stress: Crypto	1	124	Poseidon, stealth, WOTS+, Merkle, NaCl, HKDF, ML-KEM
Stress: Mobile	1	140	Vault encryption, PIN, noise, STARK builders, BLE/NFC
Rust Tests (STARK)	6	69	All 6 AIR implementations, compact proofs

Performance Benchmarks

OPERATION	PERFORMANCE	OPERATION	PERFORMANCE
Poseidon 2-input hash (1000x)	< 5s	Merkle insert+proof (100x)	< 10s
Stealth address gen (100x)	< 3s	Note encrypt/decrypt (1000x)	< 5s
WOTS+ keygen (50x)	< 5s	Vault encrypt/decrypt (1000x)	< 5s
WOTS+ sign+verify (50x)	< 10s	PIN hash (1000x)	< 2s

ROADMAP

Protocol 01 is code-complete on every client-facing feature. Remaining work is production readiness: external audit, canonical leaf-event refactor, and mainnet deployment.

Shipped


- 14 Solana programs on devnet (incl. **p01_liquidity**, **p01_mugen**)
- Full STARK migration — 6 AIRs, custom on-chain FRI verifier, Groth16 retired
- Arcium MPC integration — 9 circuits, 6 use cases, 833 KB SBF
- Mobile app (Android APK), Chrome extension, Next.js 16 web
- 14 SDKs on npm (specter, zk, zkspl, arcium, p01-js, privacy-toolkit, auth, rpc-config, ...)
- Quantum vault (WOTS+, HTL, CR) + hybrid stealth (ECDH + ML-KEM-768)
- Privacy Relay, Auto-Shield, Privacy Router, On-chain bundler
- On-chain Service Registry + 4 attested services
- **v0.9.9 Frost**: instant unshield, per-wallet note isolation (HKDF), deterministic stealth signer + crash-sweep, `denominated_pool_v2` migration, universal event decoder
- **v1.0 Tx-Opacity**: V3 STARK transfers E2E, `denominated_pool_v4` migration, relayer-wired + event-scrubbed + uniform 145 KB proofs (Phases A/B/C), Phase D Arcium recipient-hiding relay, multi-relayer rotation
- Mugen Exchange (P2P fiat) live on Vercel
- Colosseum Frontier 2026 submission, Superteam Ireland tag

Remaining for Mainnet

- **External Security Audit**
OtterSec / Neodyme / Trail of Bits — gating mainnet
- **Universal LeafInserted Event**
Single canonical emission from `insert_with_root()` so future instructions never require a new client-side decoder layout
- **Mainnet Launch**
Phase-gated rollout: denominated pools → subscriptions → privacy router
- **iOS Build & TestFlight**
Only Android verified so far; CocoaPods + code signing to do
- **Dedicated RPC (Helius/QuickNode)**
Paid tier + certificate pinning via TrustKit on mobile
- **DeFi Composability**
Jupiter, Raydium, lending rails with shielded positions



> THE SYSTEM CANNOT SEE YOU.



One app. Total invisibility.
Denominated pools. Confidential balances.
Anonymous subscriptions. Stealth transfers.
Quantum-resistant privacy on Solana.

PROGRAMS

14

STARK AIRs

6

MPC CIRCUITS

9

PROPRIETARY SOFTWARE — ALL RIGHTS RESERVED

© 2026 Volta Team | Developed by Slashy Fx

[PROTOCOL-01.DEV](#)

[@PROTOCOL01_](#)

[ISSLASHY/PROTOCOL-01](#)