


Nama : Nafisah Ulayya
NIM : 242410101049
Kelas : A
Matkul : Pemrograman Web


Aktivitas Mandiri 3

1. Buat layout master: resources/views/layouts/app.blade.php dengan navbar, main content area (@yield('content')), dan footer

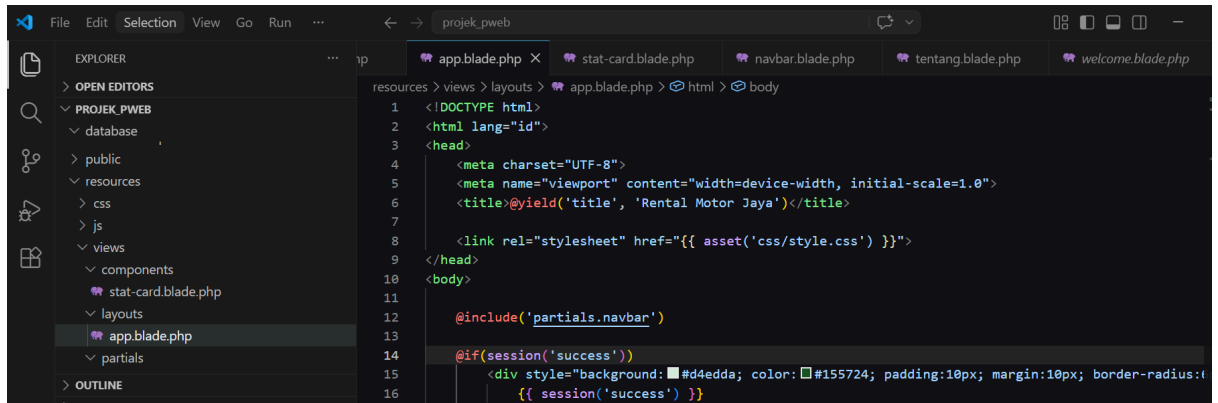

```
resources > views > layouts > app.blade.php > html > body
1 <!DOCTYPE html>
2 <html lang="id">
3 <head>
4     <meta charset="UTF-8">
5     <meta name="viewport" content="width=device-width, initial-scale=1.0">
6     <title>@yield('title', 'Rental Motor Jaya')</title>
7
8     <link rel="stylesheet" href="{{ asset('css/style.css') }}">
9 </head>
10 <body>
11
12     @include('partials.navbar')
13
14     @if(session('success'))
15         <div style="background: #d4edda; color: #155724; padding: 10px; margin: 10px; border-radius: 4px;">
16             {{ session('success') }}
```

2. . Buat partial: resources/views/partials/navbar.blade.php dan sisipkan dengan @include di layout

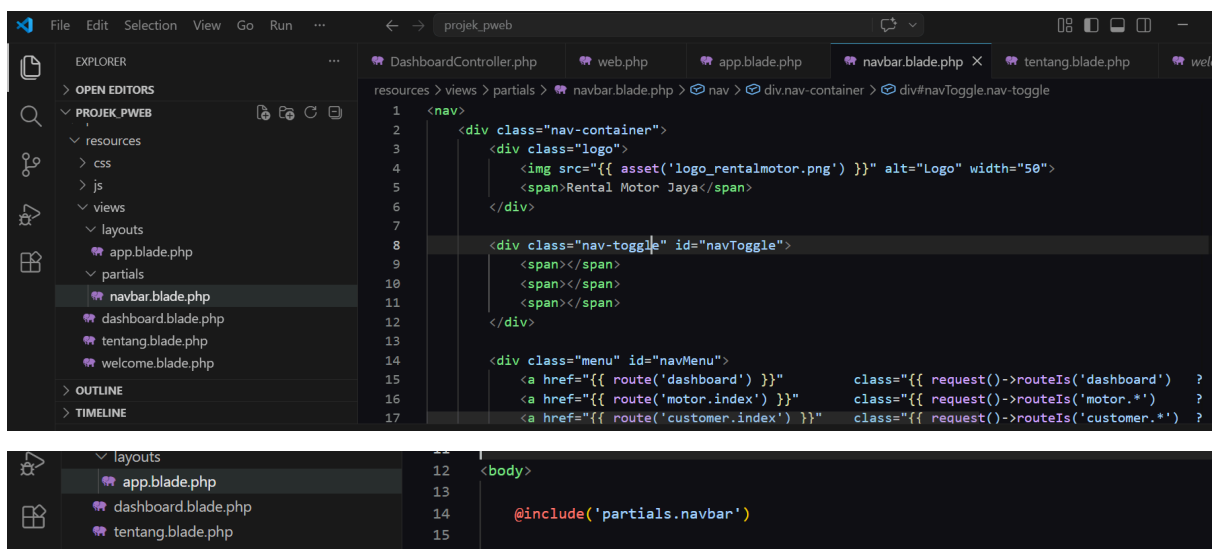

```
resources > views > partials > navbar.blade.php > nav > div.nav-container > div#navToggle.nav-toggle
1 <nav>
2     <div class="nav-container">
3         <div class="logo">
4             
5             <span>Rental Motor Jaya</span>
6         </div>
7
8         <div class="nav-toggle" id="navToggle">
9             <span></span>
10            <span></span>
11            <span></span>
12        </div>
13
14        <div class="menu" id="navMenu">
15            <a href="{{ route('dashboard') }}" class="{{ request()->routeIs('dashboard') ?
16            <a href="{{ route('motor.index') }}" class="{{ request()->routeIs('motor.*') ?
17            <a href="{{ route('customer.index') }}" class="{{ request()->routeIs('customer.*') ?
18
19        </div>
20    </div>
21</nav>
22
23<body>
24
25    @include('partials.navbar')
26
27    @if(session('success'))
```

3. Buat halaman dashboard: resources/views/dashboard.blade.php yang @extends('layouts.app')

```

1 @extends('layouts.app')
2
3 @section('title', 'Dashboard - Rental Motor Jaya')
4
5 @section('content')
6
7     <header class="hero">
8
9         <div class="hero-text">
10             <h1>#BebaskanAja</h1>
11             <p>Pusat Sewa Motor Terpercaya</p>
12         </div>
13
14         <div class="hero-img">
15             
16         </div>
17     </header>

```

4. Tampilkan flash session message di layout: @if(session('success')) ... @endif

```

1 <html lang="id">
2 <head>
3
4     <title>@yield('title', 'Rental Motor Jaya')</title>
5
6     <link rel="stylesheet" href="{{ asset('css/style.css') }}">
7 </head>
8 <body>
9
10     @include('partials.navbar')
11
12     @if(session('success'))
13         <div style="background: #d4edda; color: #155724; padding: 10px; margin: 10px; border-radius: 5px;">
14             {{ session('success') }}
15         </div>
16     @endif
17
18

```

5. Buat komponen: resources/views/components/stat-card.blade.php (kartu statistik dengan props: judul, nilai, ikon, warna)

```

1 @props(['judul', 'nilai', 'ikon', 'warna'])
2
3 <div style="background: {{ $warna }}; color:white; padding:15px; border-radius:10px;">
4     <h4>{{ $judul }}</h4>
5     <h2>{{ $nilai }}</h2>
6     <small>{{ $ikon }}</small>
7 </div>
8

```



6. Gunakan @forelse di dashboard untuk loop array data dummy (jumlah mahasiswa, mata kuliah, dll)

```

20 <main>
21
22     @section
23
24         <div class="motor-grid">
25             @foreach($statCards as $item)
26                 <div class="stat-card">
27                     @include('components.stat-card', ['judul' => $item['judul'], 'nilai' => $item['nilai'], 'ikon' => $item['ikon'], 'warna' => $item['warna']])
28                 </div>
29             @endforeach
30         </div>
31
32     @endsection
33
34     @forelse($statCards as $item)
35         <x-stat-card :judul="$item['judul']" :nilai="$item['nilai']" :ikon="$item['ikon']" :warna="$item['warna']">
36         </x-stat-card>
37     @empty
38         <p>Tidak ada data statistik.</p>
39     @endforelse
40
41 </main>
42



```

7. Buat halaman 'Data Motor' dan 'Transaksi' yang @extends layout yang sama

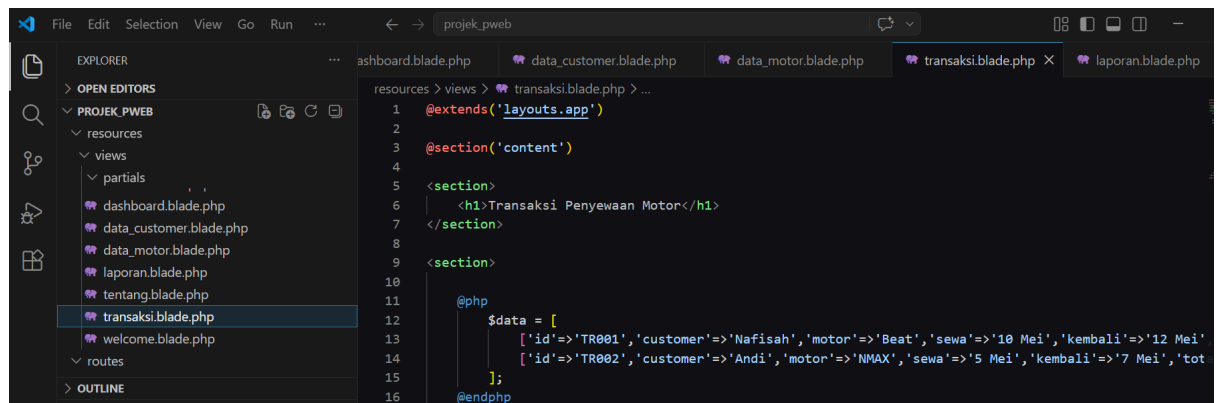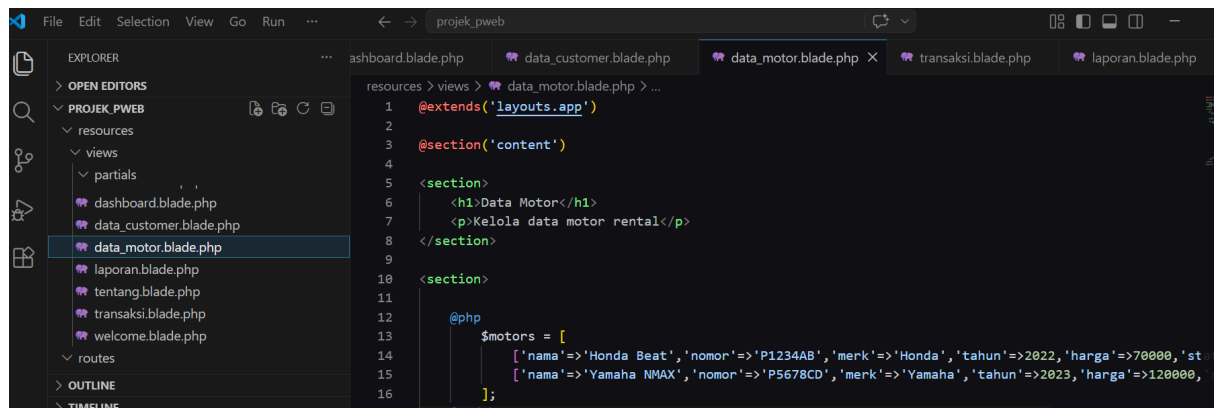

8. Gunakan @push('scripts') dan @stack('scripts') untuk menambahkan JavaScript spesifik per halaman

@push('scripts') untuk halaman transaksi

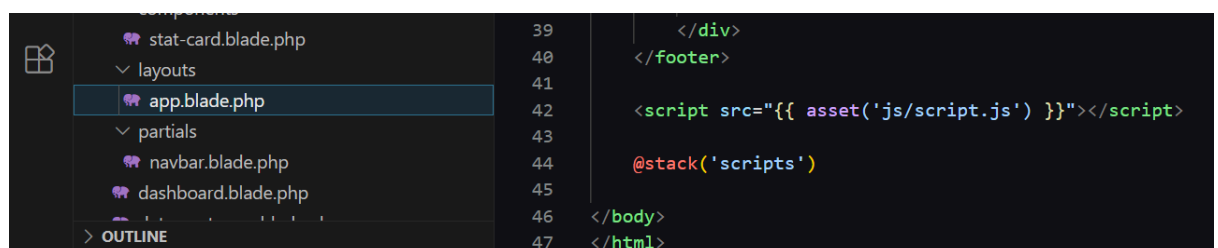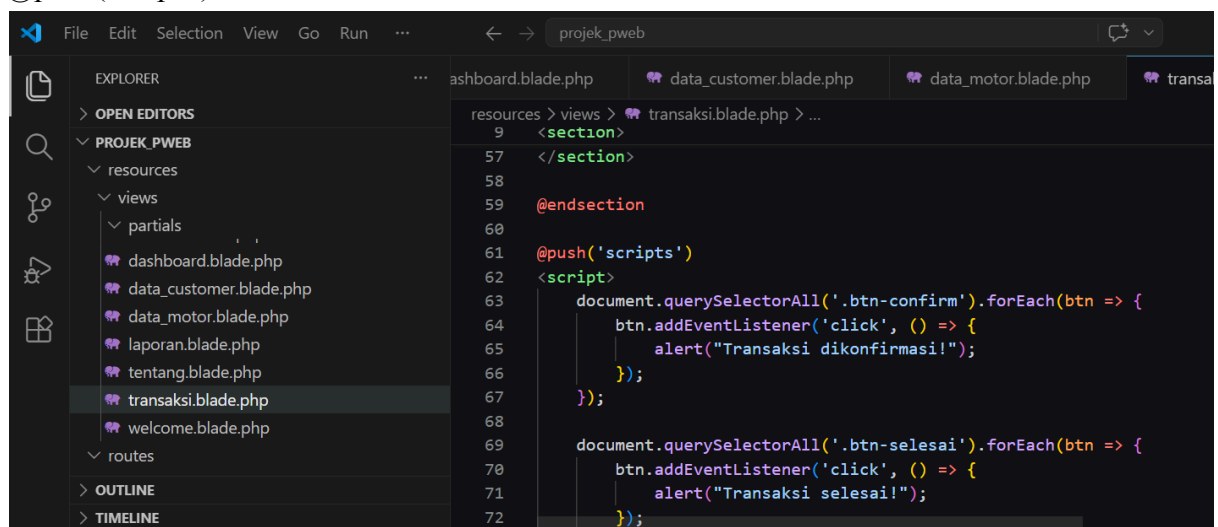

Aktivitas Mandiri 4

1. Buat Model dan Migration sekaligus: `php artisan make:model Mahasiswa -m`

```
PS C:\Users\HP\projek_pweb> php artisan make:model Motor -m

INFO Model [C:\Users\HP\projek_pweb\app\Models\Motor.php] created successfully.

INFO Migration [C:\Users\HP\projek_pweb\database\migrations\2026_05_05_151610_create_motors_table.php] created successfully.

PS C:\Users\HP\projek_pweb>
```

2. Edit file migration: tambahkan kolom dengan terdapat merk (enum), harga (decimal), aktif (boolean), foto (nullable)

```
app.blade.php 2026_05_05_151610_create_motors_table.php X stat-card.blade.php navbar
database > migrations > 2026_05_05_151610_create_motors_table.php
8  {
9      /**
10     */
11     public function up(): void
12     {
13         Schema::create('motors', function (Blueprint $table) {
14             $table->id();
15
16             $table->string('nama');
17             $table->string('nomor')->unique();
18             $table->enum('merk', ['Honda', 'Yamaha', 'Suzuki', 'Kawasaki']);
19             $table->year('tahun');
20             $table->decimal('harga', 10, 2);
21             $table->enum('status', ['Tersedia', 'Disewa'])->default('Tersedia');
22             $table->boolean('aktif')->default(true);
23             $table->string('foto')->nullable();
24             $table->timestamps();
25         });
26     }
27 }
```

3. Jalankan migration: `php artisan migrate` — cek di phpMyAdmin bahwa tabel sudah terbuat

```
PS C:\Users\HP\projek_pweb> php artisan migrate --
INFO Running migrations.
2026_05_05_151610_create_motors_table ..... 569.67ms DONE
```

Server: localhost:3306 » Database: projek_pweb » Table: motors

MySQL returned an empty result set (i.e. zero rows). (Query took 0.0029 seconds.)

```
SELECT * FROM `motors`
```


☐ Profiling [[Edit inline](#)] [[Edit](#)] [[Explain SQL](#)] [[Create PHP code](#)] [[Refresh](#)]

id	nama	nomor	merk	tahun	harga	status	aktif	foto	created_at	updated_at
----	------	-------	------	-------	-------	--------	-------	------	------------	------------


Query results operations

[Create view](#)

4. Edit Model Mahasiswa: isi \$fillable, tambahkan \$casts, dan buat local scope scopeAktif()

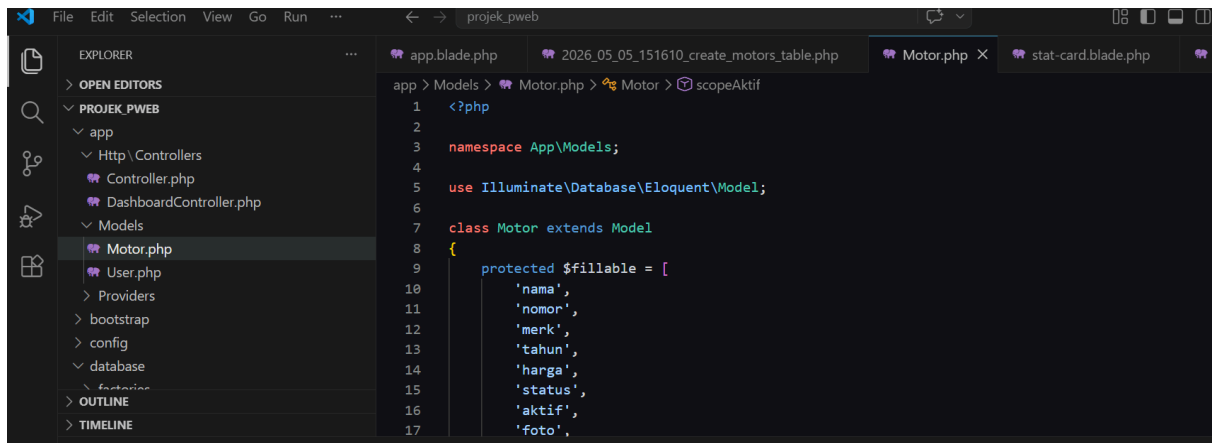


```
1 <?php
2
3 namespace App\Models;
4
5 use Illuminate\Database\Eloquent\Model;
6
7 class Motor extends Model
8 {
9     protected $fillable = [
10         'nama',
11         'nomor',
12         'merk',
13         'tahun',
14         'harga',
15         'status',
16         'aktif',
17         'foto',
```

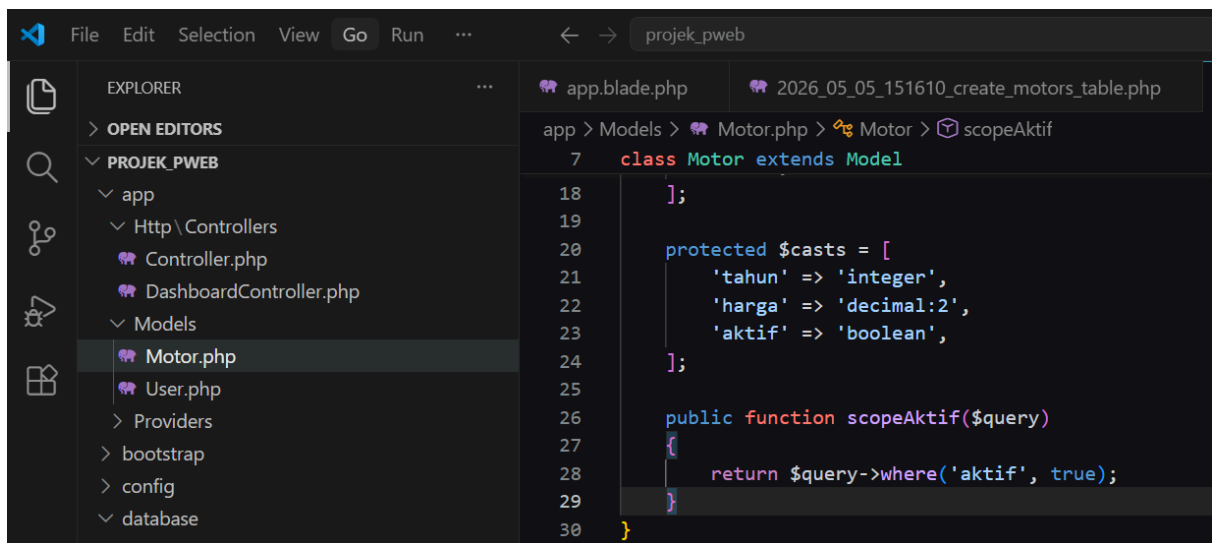

```
7 class Motor extends Model
18 ];
19
20 protected $casts = [
21     'tahun' => 'integer',
22     'harga' => 'decimal:2',
23     'aktif' => 'boolean',
24 ];
25
26 public function scopeAktif($query)
27 {
28     return $query->where('aktif', true);
29 }
30 }
```

5. Buat seeder: php artisan make:seeder MahasiswaSeeder — isi dengan 5-10 data dummy



```
PS C:\Users\HP\projek_pweb> php artisan make:seeder MotorSeeder

INFO Seeder [C:\Users\HP\projek_pweb\database\seeders\MotorSeeder.php] created successfully.
```

```
8 class MotorSeeder extends Seeder
9 {
10     public function run(): void
11     {
12         Motor::insert([
13             [
14                 'nama' => 'Honda Beat',
15                 'nomor' => 'P1234AB',
16                 'merk' => 'Honda',
17                 'tahun' => 2022,
18                 'harga' => 70000,
19                 'status' => 'Tersedia',
20                 'aktif' => true,
21                 'foto' => null,
22                 'created_at' => now(),
23                 'updated_at' => now(),
24             ],
25             [
26                 'nama' => 'Yamaha NMAX',
27                 'nomor' => 'P5678CD',
28                 'merk' => 'Yamaha',
29                 'tahun' => 2023,
30                 'harga' => 120000,
31                 'status' => 'Disewa',
32                 'aktif' => true,
33                 'foto' => null,
34                 'created_at' => now(),
35                 'updated_at' => now(),
36             ],
37         ],
38         [
39             'nama' => 'Honda Vario 160',
```

```
37         Motor::insert([
38             [
39                 'nama' => 'Honda Vario 160',
40                 'nomor' => 'P9101EF',
41                 'merk' => 'Honda',
42                 'tahun' => 2023,
43                 'harga' => 100000,
44                 'status' => 'Tersedia',
45                 'aktif' => true,
46                 'foto' => null,
47                 'created_at' => now(),
48                 'updated_at' => now(),
49             ],
50             [
51                 'nama' => 'Scoopy',
52                 'nomor' => 'P1122GH',
53                 'merk' => 'Honda',
54                 'tahun' => 2021,
55                 'harga' => 80000,
56                 'status' => 'Disewa',
57                 'aktif' => true,
58                 'foto' => null,
59                 'created_at' => now(),
60                 'updated_at' => now(),
61             ],
62             [
63                 'nama' => 'Kawasaki Ninja',
64                 'nomor' => 'P3344IJ',
65                 'merk' => 'Kawasaki',
66                 'tahun' => 2020,
```

6. Daftarkan seeder di DatabaseSeeder.php dan jalankan: php artisan db:seed

The screenshot shows the Visual Studio Code editor with the file explorer on the left displaying the project structure. The file `DatabaseSeeder.php` is selected. The main editor shows the code for `DatabaseSeeder.php`, which extends the `Seeder` class and includes the `WithoutModelEvents` trait. The `run()` method calls `MotorSeeder::class`. The terminal at the bottom shows the command `php artisan db:seed` being executed, resulting in the database being seeded.

```
File Edit Selection View Go Run ... < > projek_pweb

EXPLORER
  > OPEN EDITORS
  > PROJেক_PWEB
    > database
      > migrations
        0001_01_01_000000_create_users_table.php
        0001_01_01_000001_create_cache_table.php
        0001_01_01_000002_create_jobs_table.php
        2026_05_05_151610_create_motors_table....
      > seeders
        DatabaseSeeder.php
        MotorSeeder.php
        .gitignore
        database.sqlite
    > public
    > resources
      > css
      > js
      > views
        > components
          stat-card.blade.php
        > layouts

2026_05_05_151610_create_motors_table.php
Motor.php
Mo

database > seeders > DatabaseSeeder.php > DatabaseSeeder > run
1 <?php
2
3 namespace Database\Seeders;
4
5 use App\Models\User;
6 use Illuminate\Database\Console\Seeds\WithoutModelEvents;
7 use Illuminate\Database\Seeder;
8
9 class DatabaseSeeder extends Seeder
10 {
11     use WithoutModelEvents;
12
13     /**
14      * Seed the application's database.
15      */
16     public function run(): void
17     {
18         $this->call([
19             MotorSeeder::class,
20         ]);
21     }
22 }
23

PS C:\Users\HP\projek_pweb> php artisan db:seed

INFO Seeding database.

Database\Seeders\MotorSeeder ..... RUNNING
Database\Seeders\MotorSeeder ..... 190 ms DONE
```

7. Buka php artisan tinker dan coba query: Mahasiswa::all(),
Mahasiswa::where('jurusan','SI')->get(), Mahasiswa::avg('ipk')

```
PS C:\Users\HP\projek_pweb> php artisan tinker
Psy Shell v0.12.22 (PHP 8.3.30 - cli) by Justin Hileman
```

Motor::all()

```
> Motor::all();

= Illuminate\Database\Eloquent\Collection {#8076
  all: [
    App\Models\Motor {#8071
      id: 1,
      nama: "Honda Beat",
      nomor: "P1234AB",
      merk: "Honda",
      tahun: "2022",
      harga: "70000.00",
      status: "Tersedia",
      aktif: 1,
      foto: null,
      created_at: "2026-05-05 15:50:16",
      updated_at: "2026-05-05 15:50:16",
    },
    App\Models\Motor {#8070
      id: 2,
      nama: "Yamaha NMAX",
      nomor: "P5678CD",
      merk: "Yamaha",
      tahun: "2023",
      harga: "120000.00",
      status: "Disewa",
      aktif: 1,
      foto: null,
      created_at: "2026-05-05 15:50:16",
      updated_at: "2026-05-05 15:50:16",
    },
  ],
}
```

Motor::where('merk', 'Honda')->get()

```
> Motor::where('merk', 'Honda')->get();

= Illuminate\Database\Eloquent\Collection {#7386
  all: [
    App\Models\Motor {#7348
      id: 1,
      nama: "Honda Beat",
      nomor: "P1234AB",
      merk: "Honda",
      tahun: "2022",
      harga: "70000.00",
      status: "Tersedia",
      aktif: 1,
      foto: null,
      created_at: "2026-05-05 15:50:16",
      updated_at: "2026-05-05 15:50:16",
    },
    App\Models\Motor {#8104
      id: 3,
      nama: "Honda Vario 160",
      nomor: "P9101EF",
      merk: "Honda",
      tahun: "2023",
      harga: "100000.00",
      status: "Tersedia",
      aktif: 1,
      foto: null,
```

Motor::avg('harga')

```
> Motor::avg('harga');

= "104000.000000"
```


8. Coba buat relasi: buat tabel customer dan transaksi, lalu definisikan relasi belongsToMany di Model

```
PS C:\Users\HP\projek_pweb> php artisan make:model Customer -m


INFO Model [C:\Users\HP\projek_pweb\app\Models\Customer.php] created successfully.
INFO Migration [C:\Users\HP\projek_pweb\database\Migrations\2026_05_05_160439_create_customers_table.php] created successfully.

PS C:\Users\HP\projek_pweb> php artisan make:migration create_transaksi_table

INFO Migration [C:\Users\HP\projek_pweb\database\Migrations\2026_05_05_160821_create_transaksi_table.php] created successfully.
```
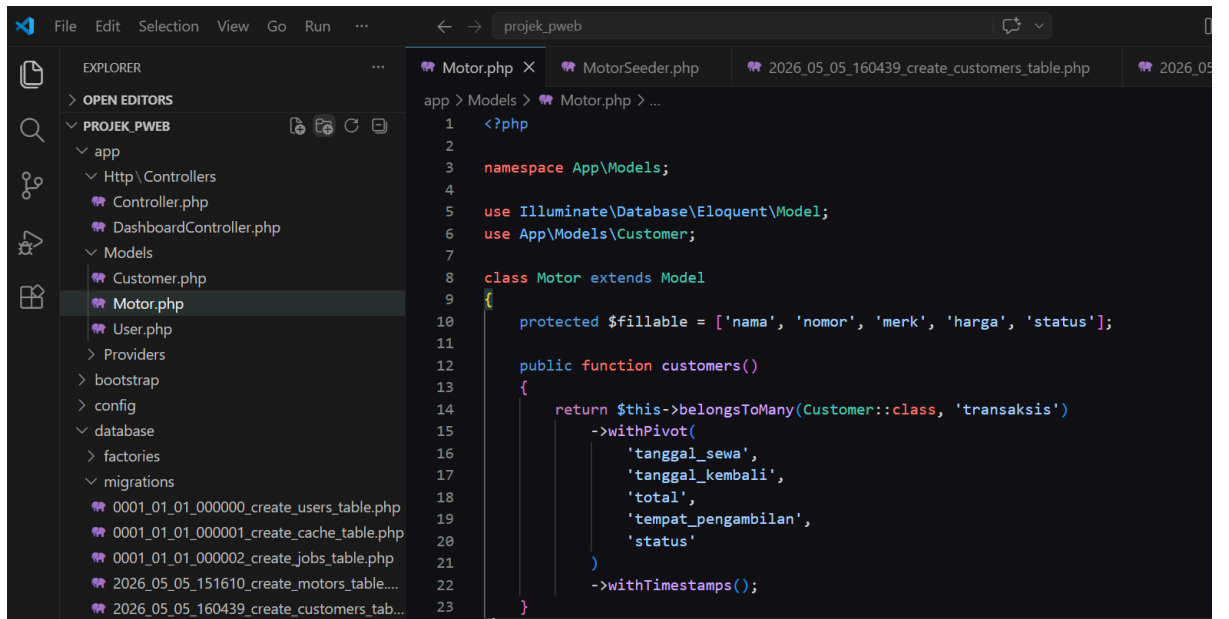
```
1 <?php
2
3 namespace App\Models;
4
5 use Illuminate\Database\Eloquent\Model;
6 use App\Models\Customer;
7
8 class Motor extends Model
9 {
10     protected $fillable = ['nama', 'nomor', 'merk', 'harga', 'status'];
11
12     public function customers()
13     {
14         return $this->belongsToMany(Customer::class, 'transaksis')
15             ->withPivot(
16                 'tanggal_sewa',
17                 'tanggal_kembali',
18                 'total',
19                 'tempat_pengambilan',
20                 'status'
21             )
22             ->withTimestamps();
23     }
24 }
```

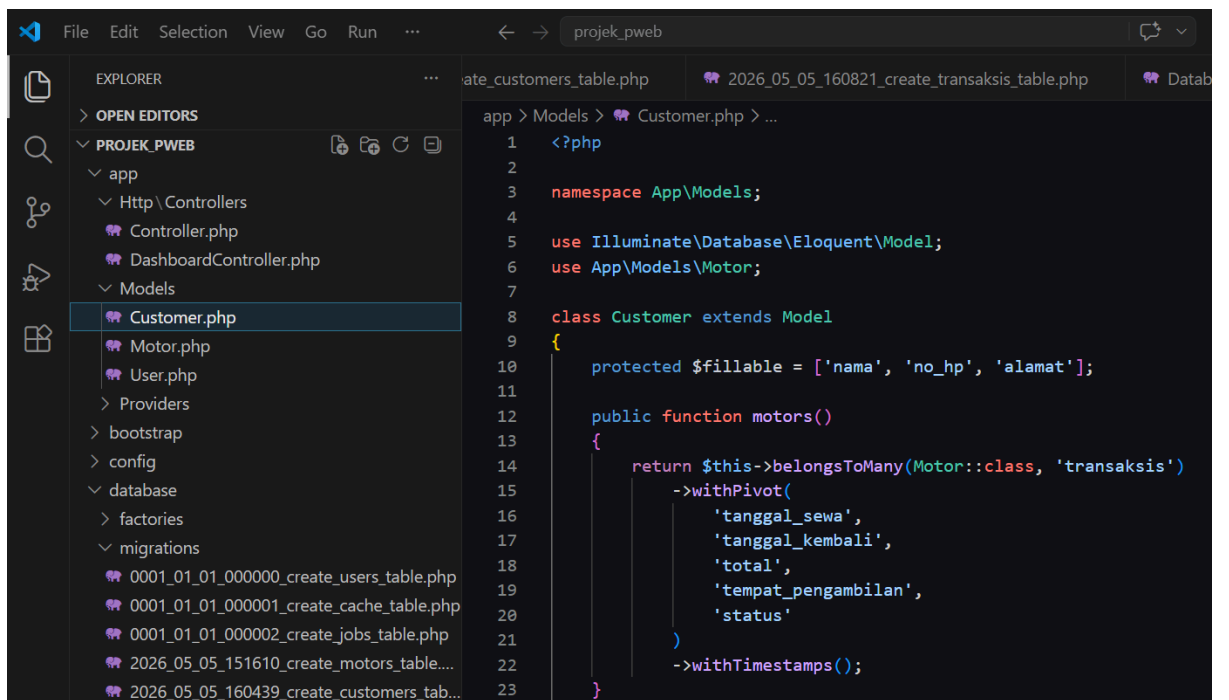

```
1 <?php
2
3 namespace App\Models;
4
5 use Illuminate\Database\Eloquent\Model;
6 use App\Models\Motor;
7
8 class Customer extends Model
9 {
10     protected $fillable = ['nama', 'no_hp', 'alamat'];
11
12     public function motors()
13     {
14         return $this->belongsToMany(Motor::class, 'transaksis')
15             ->withPivot(
16                 'tanggal_sewa',
17                 'tanggal_kembali',
18                 'total',
19                 'tempat_pengambilan',
20                 'status'
21             )
22             ->withTimestamps();
23     }
24 }
```