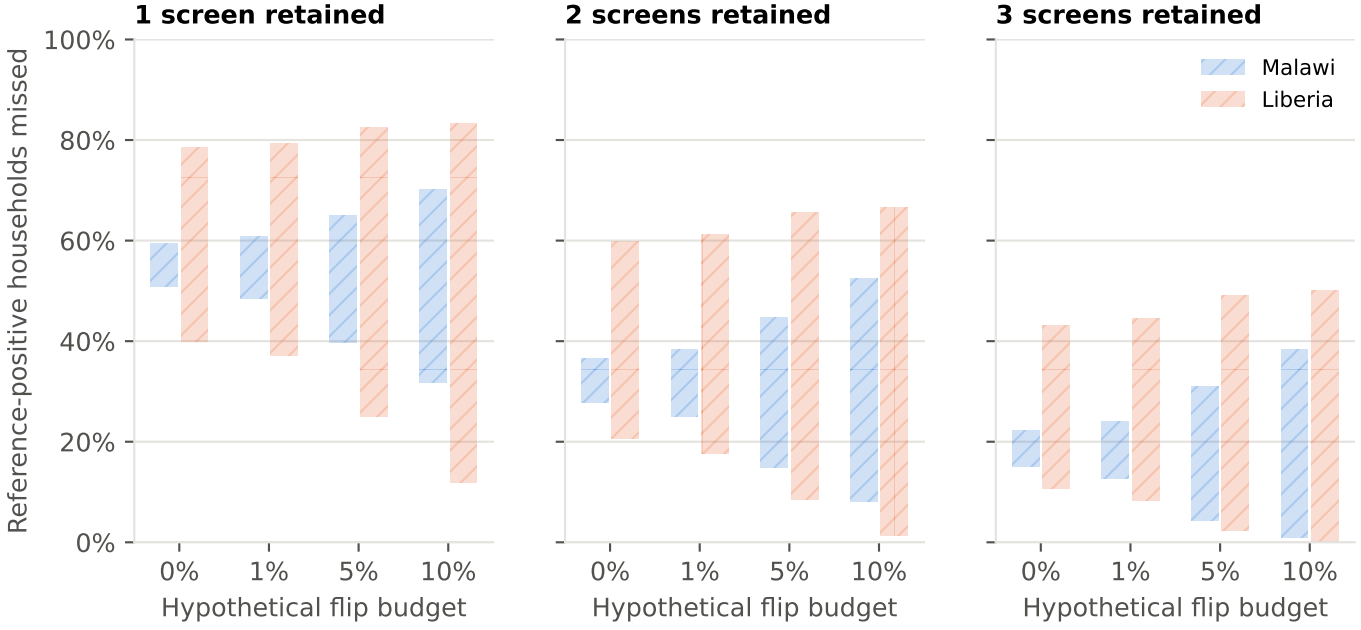

Identification ranges (not confidence intervals) when missing windows are unrestricted AND up to the stated share of observed binary screens in each country may be misclassified (one shared budget per country). Budgets are hypothetical sensitivity settings, not measured error rates. 0% equals Fig. 4. Exact Dinkelbach + dynamic-programming optimisation; optimality certified ($F(\lambda^*) = 0$).