Code :-

Webapp/searcj.jsp:

```
<%@ page import="java.util.*" %>
<html>
<head>
   <title>Search User by DOB</title>
</head>
<body>
<h2>Search User by DOB</h2>
<form action="SearchResult" method="post">
   Enter DOB:
   <input type="date" name="dob" required>
   <input type="submit" value="Search">
</form>
<hr>
<%
   String[] names = (String[]) request.getAttribute("nameA");
   String[] emails = (String[]) request.getAttribute("emailA");
   String[] dobs = (String[]) request.getAttribute("doblist");
   if (names != null && names.length > 0) {
%>
<h3>Results:</h3>
<%
   for (int i = 0; i < names.length; i++) {
%>
<p>
   Name: <%= names[i] %><br>
   Email: <%= emails[i] %><br>
   DOB: <%= dobs[i] %><br>
</p>
<%
   }
} else if (names != null) {
%>
<p>No data found ❌</p>
<%
   }
%>
</body>
</html>
```

Src/main/java/semester6/SearchResult:

```
package semester6;
import java.io.IOException;
import java.sql.*;
import java.util.ArrayList;
import javax.servlet.*;
import javax.servlet.annotation.WebServlet;
import javax.servlet.http.*;
@WebServlet("/SearchResult")
public class SearchResult extends HttpServlet {
   protected void doPost(HttpServletRequest req, HttpServletResponse resp)
         throws ServletException, IOException {
      ArrayList<String> nameList = new ArrayList<>();
      ArrayList<String> emailList = new ArrayList<>();
      ArrayList<String> dobList = new ArrayList<>();
      try {
         // Load driver
         Class.forName("com.mysql.cj.jdbc.Driver");
         // Connect DB
         Connection con = DriverManager.getConnection(
               "jdbc:mysql://localhost:3306/studentdb",
               "root",
               ""
         );
         String dob = req.getParameter("dob");
         // Query
         String query = "SELECT name, email, dob FROM users WHERE dob=?";
         PreparedStatement ps = con.prepareStatement(query);
         ps.setString(1, dob);
         ResultSet rs = ps.executeQuery();
         while (rs.next()) {
            nameList.add(rs.getString("name"));
            emailList.add(rs.getString("email"));
            dobList.add(rs.getString("dob"));
         }
         // Convert to array
         req.setAttribute("nameA", nameList.toArray(new String[0]));
         req.setAttribute("emailA", emailList.toArray(new String[0]));
         req.setAttribute("doblist", dobList.toArray(new String[0]));
         con.close();
      } catch (Exception e) {
         e.printStackTrace();
      }
```

```
        // Forward to JSP
        RequestDispatcher rd = req.getRequestDispatcher("search.jsp");
        rd.forward(req, resp);
    }
}
```

webapp/WEB-INF/web.xml:

```
<?xml version="1.0" encoding="UTF-8" ?>
<web-app>
    <welcome-file-list>
        <welcome-file>search.jsp</welcome-file>
    </welcome-file-list>
</web-app>
```

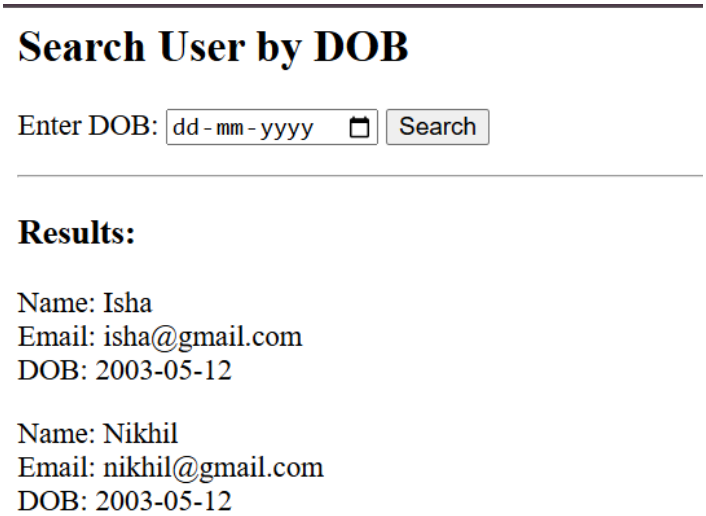

Conclusion:-

This experiment demonstrates how to search user data using Servlet, JSP, and JDBC. The user enters a date, the servlet processes the request, retrieves matching records from the database, and displays them on the JSP page. It shows the use of MVC architecture, PreparedStatement, and dynamic data handling in web applications.