



Store and Retrieve Files

Step 1 : In the AWS Console , select S3 .

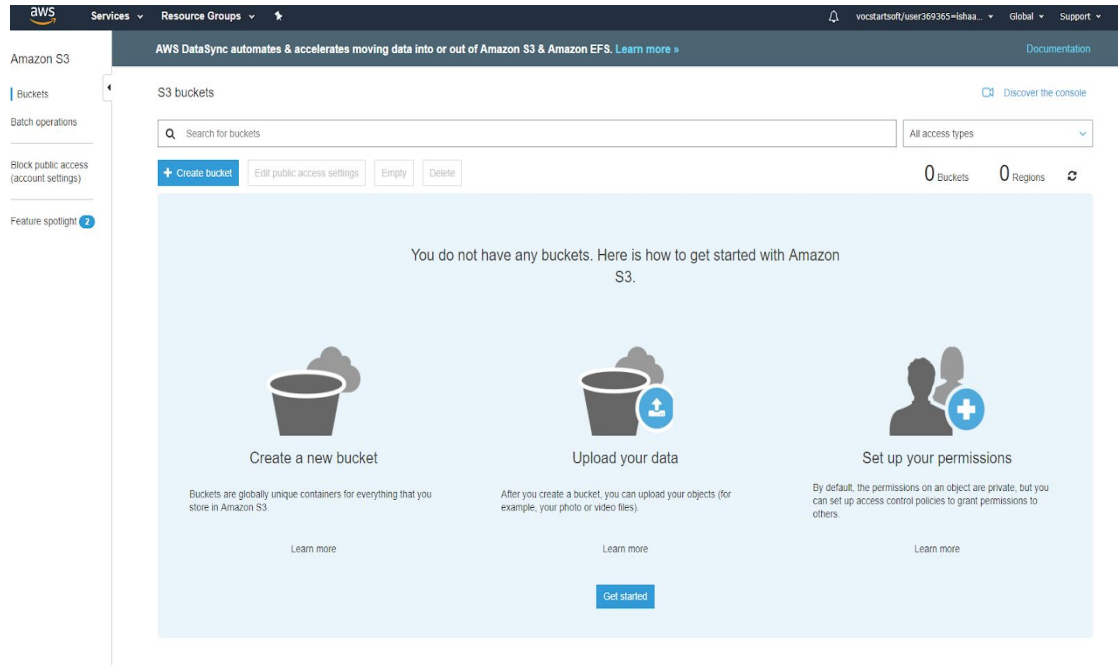

In Amazon S3 you will see Bucket option , Click on it create a new Bucket .

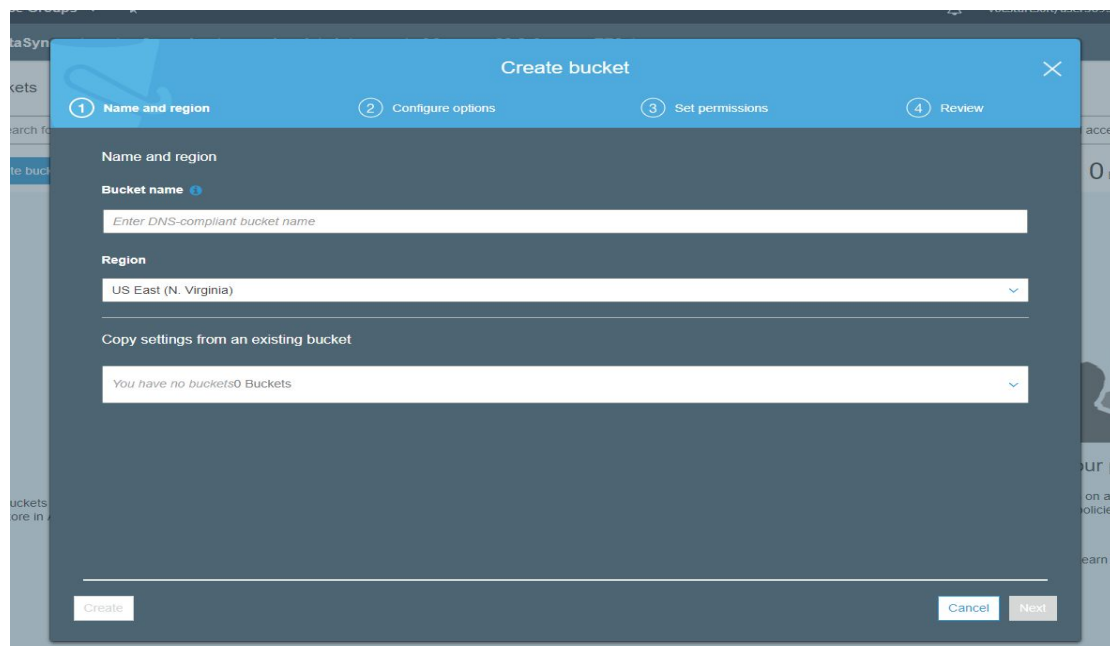

Then click on the created Bucket.

The screenshot shows the 'Create bucket' dialog box with the 'Name and region' step selected. The 'Bucket name' field contains 'newbucket1'. The 'Region' dropdown is set to 'US East (N. Virginia)'. The 'Copy settings from an existing bucket' dropdown shows 'You have no buckets0 Buckets'. The 'Create' button is visible at the bottom left, and 'Cancel' and 'Next' buttons are at the bottom right.

Create bucket

1 Name and region 2 Configure options 3 Set permissions 4 Review

Name and region

Bucket name ⓘ

newbucket1

Region

US East (N. Virginia)

Copy settings from an existing bucket

You have no buckets0 Buckets

Create Cancel Next

The screenshot shows the 'Create bucket' dialog box with the 'Configure options' step selected. The 'Properties' section includes 'Versioning' (Keep all versions of an object in the same bucket), 'Server access logging' (Log requests for access to your bucket), 'Tags' (You can use tags to track project costs), 'Object-level logging' (Record object-level API activity using AWS CloudTrail for an additional cost), and 'Default encryption' (Automatically encrypt objects when they are stored in S3). The 'Advanced settings' section is collapsed. The 'Management' section is also collapsed. The 'Previous' and 'Next' buttons are visible at the bottom right.

Create bucket

1 Name and region 2 Configure options 3 Set permissions 4 Review

Properties

Versioning

☐ Keep all versions of an object in the same bucket. [Learn more](#)

Server access logging

☐ Log requests for access to your bucket. [Learn more](#)

Tags

You can use tags to track project costs. [Learn more](#)

Key Value

+ Add another

Object-level logging

☐ Record object-level API activity using AWS CloudTrail for an additional cost. [See CloudTrail pricing](#) or [learn more](#)

Default encryption

☐ Automatically encrypt objects when they are stored in S3. [Learn more](#)

Advanced settings

Management

Previous Next

Create bucket

✓ Name and region

✓ Configure options

✓ Set permissions

4 Review

Name and region

Bucket name

newbuck11

Region

US East (N. Virginia)

Options

Versioning

Disabled

Server access logging

Disabled

Tagging

0 Tags

Object-level logging

Disabled

Default encryption

None

CloudWatch request metrics

Disabled

Object lock

Disabled

Permissions

Block all public access

On

Block public access to buckets and objects granted through *new* access control lists (ACLs)

On

Block public access to buckets and objects granted through *any* access control lists (ACLs)

On

Previous

Create bucket

AWS DataSync automates & accelerates moving data into or out of Amazon S3 & Amazon EFS. [Learn more »](#)

[Documentation](#)

S3 buckets

[Discover the console](#)

Q Search for buckets	All access types
<div> <div>+ Create bucket</div> <div>Edit public access settings</div> <div>Empty</div> <div>Delete</div> </div> <div> <div>1 Buckets</div> <div>1 Regions</div> <div>3</div> </div>	
<div> <div>Bucket name</div> <div>Access</div> <div>Region</div> <div>Date created</div> </div>	
<div> <div>newbuck11</div> <div>Bucket and objects not public</div> <div>US East (N. Virginia)</div> <div>Sep 3, 2019 1:08:27 PM GMT+0530</div> </div>	

This is mainly used to store and retrieve any amount of data, at any time, from anywhere on the web. It gives any developer access to the same highly scalable, reliable, fast, inexpensive data storage infrastructure that Amazon uses to run its own global network of web sites

Step 2: Upload files you want on this bucket

Amazon S3 > newbucket11

Overview Properties Permissions Management

Upload Create folder Download Actions

US East (N. Virginia)

This bucket is empty. Upload new objects to get started.

Upload an object
Buckets are globally unique containers for everything that you store in Amazon S3.
[Learn more](#)

Set object properties
After you create a bucket, you can upload your objects (for example, your photo or video files).
[Learn more](#)
[Get started](#)

Set object permissions
By default, the permissions on an object are private, but you can set up access control policies to grant permissions to others.
[Learn more](#)

Search: Type a prefix and press Enter to search. Press ESC to clear.

Upload Create folder Download Actions

US East (N. Virginia)

Viewing 1 to 1

Name	Last modified	Size	Storage class
1.PNG	Sep 3, 2019 1:11:08 PM GMT+0530	87.0 KB	Standard

Viewing 1 to 1

Now once uploaded the desired file .

Encryption or making the file public can be done in the file properties.

After your work for the same is done , you can keep the bucket and files stored in it or Delete them .