

# Making microservices Fault Tolerant and Resilient



Ritesh Panigrahi

Follow

4 min read · Aug 28, 2021



63



1



In this article, we will understand

1. Why do we need to make our microservices fault-tolerant and resilient?
2. What do fault tolerance and resilience mean?
3. Various reasons for failures for the microservices
4. Design Patterns to achieve Resiliency

## Why do we need to make our microservices fault-tolerant and resilient?

In a monolithic application, a single error will break the whole architecture, so to avoid this microservice architecture is adopted because it contains multiple independently deployable units which won't affect the entire system.

So does that mean the microservice architecture will never fail? No, suppose there are 3 microservices A, B, and C:- A calls B and B calls C, what will happen when service C is down?

The whole architecture will be at a halt as B will not work because it can't call C, which will affect A. Even though only one service is down, the whole architecture got disturbed due to dependencies.

So, from this what we can understand is just creating microservices is not enough we even need to think about What to do if any of the services fail?

What will the fallback plan be?

We can do several things to ensure that the entire chain of microservices does not fail with the failure of a single component.

## **What do fault tolerance and resilience mean?**

Generally, both these terms are used interchangeably but there is a slight difference in both.


**Fault tolerance** means given a microservice application how much tolerant it is or what is the impact when there is a fault, will the whole application goes down or part of functionality goes down or there are some arrangements to handle failures.

*Tolerance the system has for a fault — Fault Tolerance*

**Resilience** means how many faults the system can tolerate.

## **Various reasons for failures for the microservices**

Consider this below architecture, here service A calls service B and service C. Service B calls an external service.

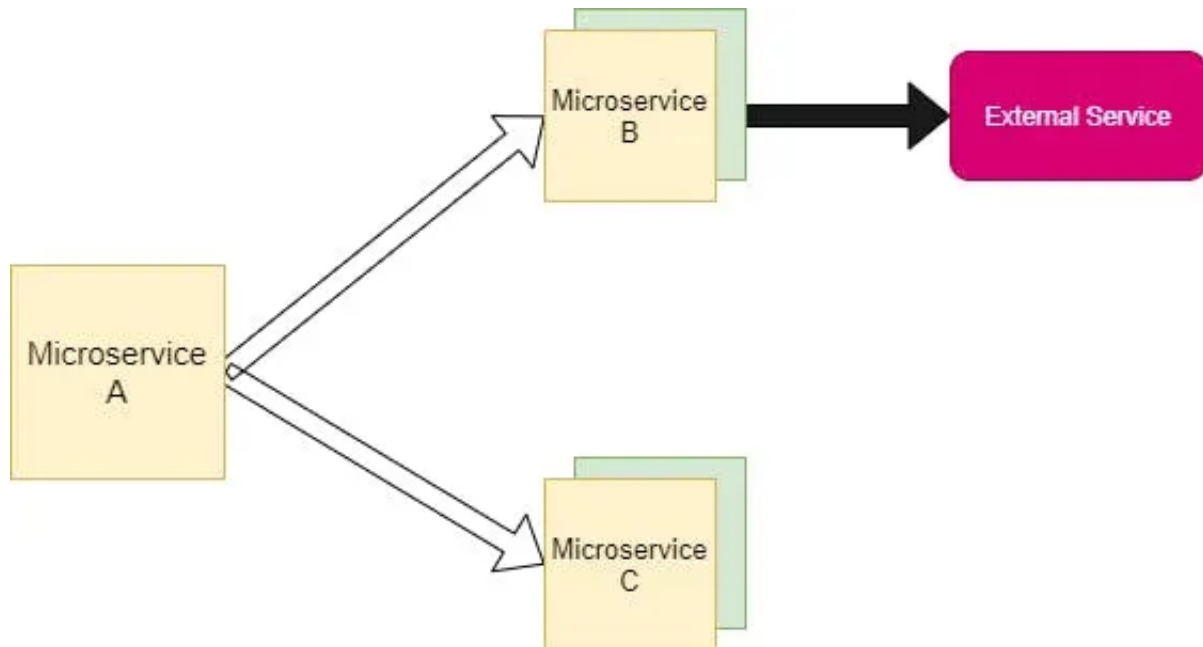

Now we will understand different cases

*Case 1:- If any of service B or C is down*

*Solution:-* We can run duplicate instances of the same services so that even if any one of the instances goes down then we can use another instance available.

If you are using spring cloud then thanks to service discovery- Eureka and client-side load balancing-Ribbon which helps us handle this easily.

*Case 2:- If any microservice is slow*

Suppose the external service to which service B calls is slow, this will result in service B is slow.

This might seem not a big issue but due to this call to service C becomes slow even though services B and C are independent.

How?

It is because of threads, if there are multiple requests to service B which is slow the thread pool is filled with those threads which are for service B so now if there comes a request for service C because the pool is filled

the request has to wait which makes service C slow.

*Solution:* Add timeouts to the request, so the request will no longer be in the pool if there is no response within the given timeout.

But still, this will partly solve the issue because let's assume we added timeouts for 5 secs and the request is coming per sec this will also lead to a thread pool issue.

There can be multiple other reasons like Database is not accessible, Server is down, etc which can cause faults.

## **Design Patterns to achieve Resiliency**


### **Circuit Breaker Pattern**

As in the above example, we have seen that service B is slow due to which service C also becomes slow.

So to avoid this, we can first detect where the problem is and then stop calling that component for some amount of time. Basically, we have to deactivate that component which gives a problem for some time.

This pattern is called Circuit Breaker pattern as we are breaking the call to the service which gives a problem for a certain amount of time and then again resuming.

## Circuit Breaker Design Pattern

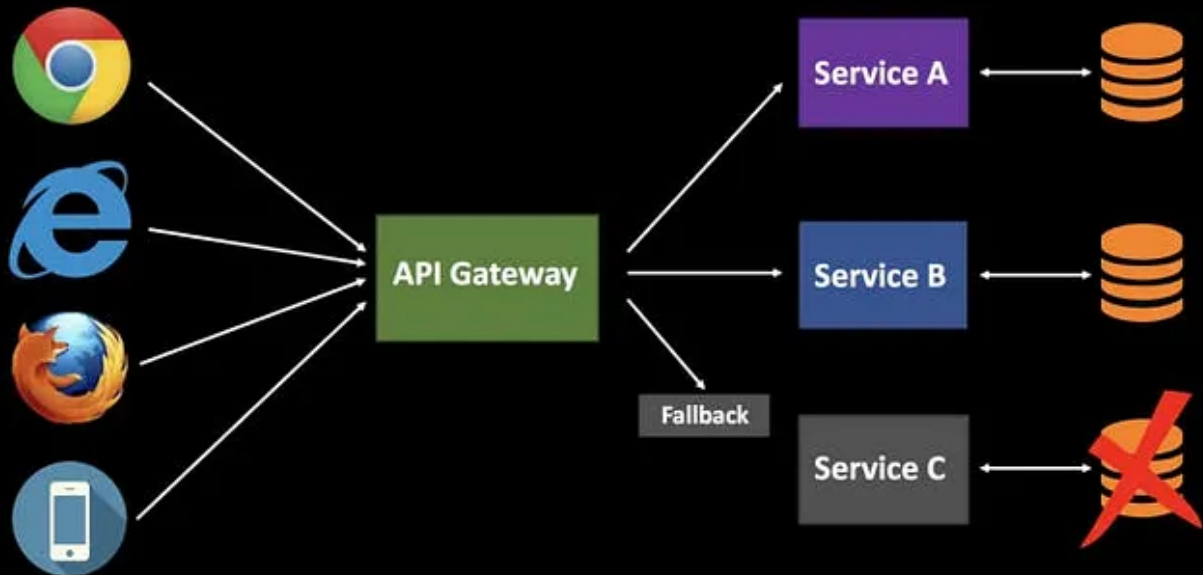

We can use some popular third-party libraries to implement circuit breaking in your application, such as Polly and Hystrix.

### Retry Design Pattern

In this pattern, we can retry the connection which has failed earlier. This is useful for temporary issues. A lot of times a simple retry might fix the issue.

### Timeout Design Pattern

certain time, throw an exception and stop the request.

### Bulkhead Pattern

The Bulkhead pattern is a type of application design that is tolerant of failure. In a bulkhead architecture, elements of an application are isolated into pools so that if one fails, the others will continue to function. It's named after the sectioned partitions (bulkheads) of a ship's hull. If a

ship's hull is compromised, only the damaged section fills with water, which prevents the ship from sinking.

This is it for this article. If you found this article helpful do like it.  
As this is my first article, if you have any suggestions then please put them in the comments.  
Thanks for reading !!

Java

Spring Boot

Microservices

Hystrix

Resilience



**Written by Ritesh Panigrahi**

19 followers · 3 following

Follow

# Responses (1)



Ishu

What are your thoughts?



Kaveri Talari  
Aug 21, 2024




Nice,please more blogs related Microservices



[Reply](#)

## More from Ritesh Panigrahi

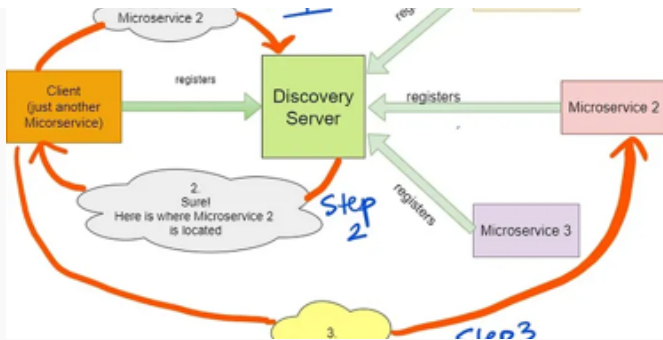

R Ritesh Panigrahi

## Spring Cloud Service Discovery—Netflix Eureka

Here you will understand everything about Spring Cloud Netflix Eureka along with...

Aug 1, 2021



3



1



R Ritesh Panigrahi


## Spring Cloud Config—Part 2

In the previous article, we have seen a basic understanding of the spring cloud config...

Jul 24, 2021



1

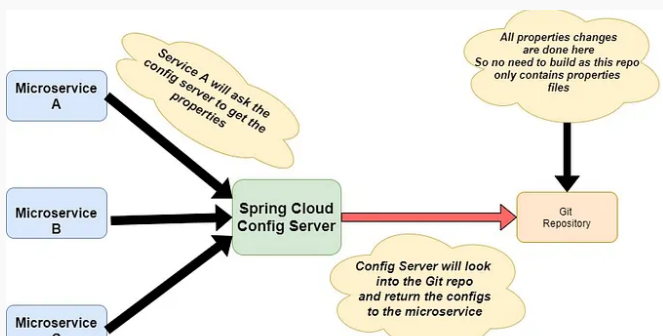

R Ritesh Panigrahi

## Spring Cloud Config—Part 1

Here, we will understand everything about spring cloud config, config server and...

Jul 24, 2021



4



R Ritesh Panigrahi

## Spring Security In-Memory Authentication and Authorization

Hi all, in this article, we will understand how to add Spring Security to a project and...

Sep 21, 2021



4



See all from Ritesh Panigrahi




# Recommended from Medium

 AlgoWing

## What Senior Architects Know About SAGA That Juniors Don't

When I was a junior engineer, I thought the SAGA pattern was magic. Every blog and...

★ Oct 21 🖱️ 145 💬 3  ⋮

 In Stackademic by Shanvika Devi

## Stop Saying 'Immutable Means Can't Change'—Java Interviewe...

The one concept that separates “I know Java” from “I understand Java.”

★ 4d ago 🖱️ 302 💬 8  ⋮



Gaddam.Naveen

## 5 Threads That Saved My Microservice from a 2 AM Outa...

if you are not a medium member then Click here to read free



Oct 21

👏 11



The Latency Gambler

## Docker in 5 Minutes: The Visual Guide Every Developer Wishes...

I spent three months wrestling with Docker before realizing I was thinking about it all...



4d ago

👏 38

💬 2



FullStack With Ram

## Spring Boot Starts Here: Mastering Annotations in the...

In a Spring Boot application, the main class typically contains several key annotations...



Jul 29

👏 1



Agam Kakkar

## Achieving Data Consistency in Microservices: A Practical Guide

One of the biggest challenges when designing microservices is ensuring data...

Aug 25

👏 1



See more recommendations

