

Assignment 1B

Implementation:

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Run, Terminal, Help.
- Title Bar:** • ajax.html - wad ajax prac - Visual Studio Code.
- Explorer:** Shows 1 UNSAVED file: ajax.html. It also lists WAD AJ... (with files ajax.html and data.txt) and a folder named 10K.
- Editor:** The code editor displays the following JavaScript code:

```
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Document</title>
</head>
<body>
    <div id="xyz">
        Welcome to this page <br>
        <button type="button" onclick="load()">Click here</button>
    </div>
    <script>
        function load() {
            var req= new XMLHttpRequest()
            req.onreadystatechange = function(){
                if(this.readyState==4 && this.status==200) {
                    document.getElementById("xyz").innerHTML=this.responseText
                }
            }
            req.open('GET','data.txt',true)
            req.send()
        }
    </script>
</body>
</html>
```

Below the code editor, status bar information includes: Ln 18, Col 81, Spaces: 4, UTF-8, CRLF, HTML, Prettier.

The taskbar at the bottom shows various pinned icons and system status: 37°C, ENG, 12:22, 01-05-2022.

The screenshot shows the Visual Studio Code interface with the following details:



- File Bar:** File, Edit, Selection, View, Go, Run, Terminal, Help.
- Title Bar:** data.txt - wad ajax prac - Visual Studio Code.
- Explorer:** Shows 1 UNSAVED file: data.txt. It also lists WAD AJ... (with files ajax.html and data.txt) and a folder named 10K.
- Editor:** The code editor displays the content of data.txt:

```
This is WAD practical assignment
```

Below the code editor, status bar information includes: Ln 1, Col 33, Spaces: 4, UTF-8, CRLF, Plain Text, Prettier.

The taskbar at the bottom shows various pinned icons and system status: 37°C, ENG, 12:22, 01-05-2022.

Output:

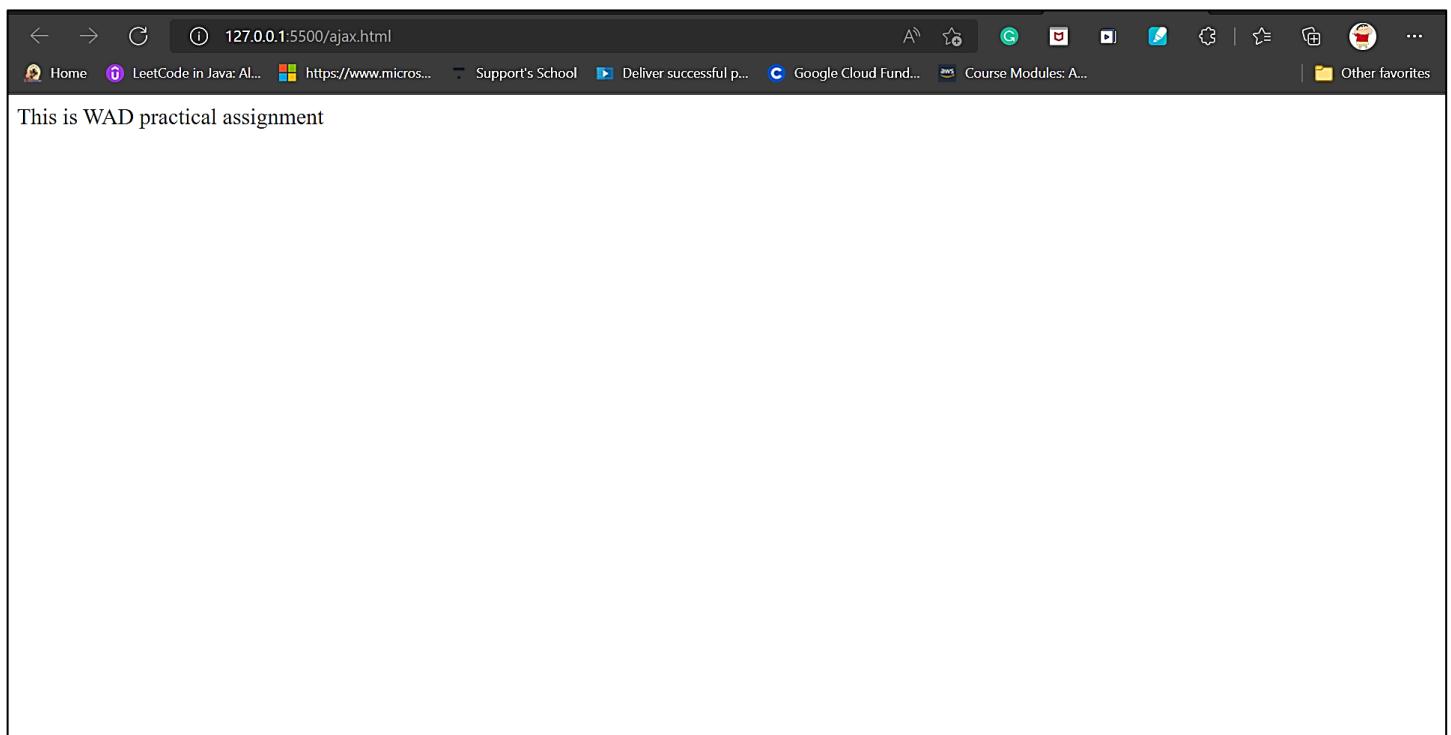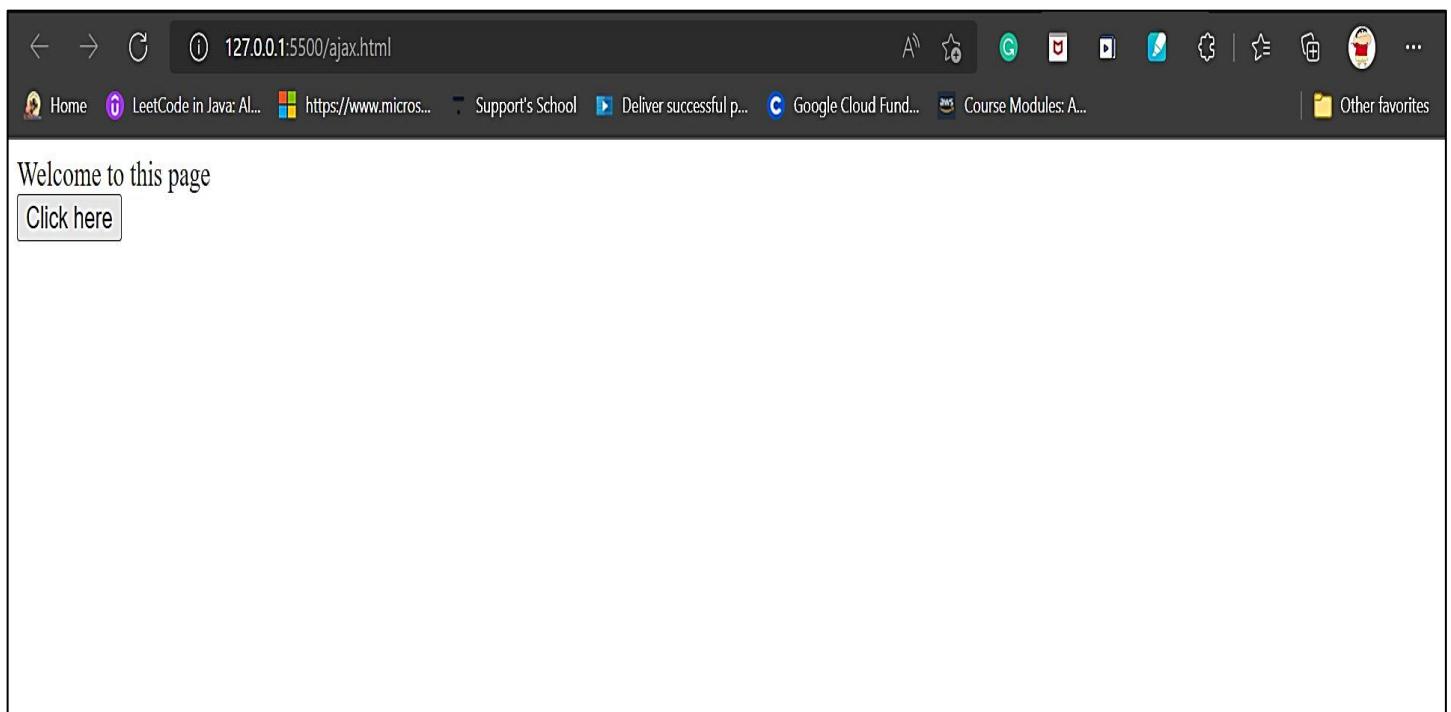

Assignment 2C

Implementation:

```
cmd ngcc
Microsoft Windows [Version 10.0.19043.1645]
(c) Microsoft Corporation. All rights reserved.

C:\WINDOWS\system32>node -v
v16.15.0

C:\WINDOWS\system32>npm install -g typescript
added 1 package, and audited 2 packages in 20s

found 0 vulnerabilities
npm notice
npm notice New minor version of npm available! 8.5.5 -> 8.8.0
npm notice Changelog: https://github.com/npm/cli/releases/tag/v8.8.0
npm notice Run npm install -g npm@8.8.0 to update!
npm notice

C:\WINDOWS\system32>tsc -v
Version 4.6.4

C:\WINDOWS\system32>npm install -g npm
added 1 package, and audited 202 packages in 13s

11 packages are looking for funding
  run `npm fund` for details

found 0 vulnerabilities

C:\WINDOWS\system32>npm -v
8.8.0
```

Type here to search 14:03
01-05-2022

```
cmd ngcc
C:\WINDOWS\system32>cd C:\Users\Admin
The system cannot find the path specified.

C:\WINDOWS\system32>cd..
C:\Windows>cd..
C:\>cd Users

C:\Users>cd Admin
The system cannot find the path specified.

C:\Users>mkdir AngularDemo
C:\Users>cd AngularDemo

C:\Users\AngularDemo>npm install -g @angular/cli
added 196 packages, and audited 197 packages in 36s

24 packages are looking for funding
  run `npm fund` for details

found 0 vulnerabilities

C:\Users\AngularDemo>ng --version
```

Type here to search 14:03
01-05-2022

```
ngcc
Angular CLI: 13.3.4
Node: 16.15.0
Package Manager: npm 8.8.0
OS: win32 x64

Angular:
...
...

Package          Version
-----
@angular-devkit/architect    0.1303.4 (cli-only)
@angular-devkit/core         13.3.4 (cli-only)
@angular-devkit/schematics   13.3.4 (cli-only)
@schematics/angular          13.3.4 (cli-only)

C:\Users\AngularDemo>ng new first.app
? Would you like to add Angular routing? Yes
? Which stylesheet format would you like to use? Sass [ https://sass-lang.com/documentation/syntax#the-indented-syntax ]
CREATE first.app/angular.json (3225 bytes)
CREATE first.app/package.json (1072 bytes)
CREATE first.app/README.md (1063 bytes)
CREATE first.app/tsconfig.json (863 bytes)
CREATE first.app/.editorconfig (274 bytes)
CREATE first.app/.gitignore (548 bytes)
CREATE first.app/.browserslistrc (600 bytes)
CREATE first.app/karma.conf.js (1426 bytes)
CREATE first.app/tsconfig.app.json (287 bytes)
CREATE first.app/tsconfig.spec.json (333 bytes)
CREATE first.app/.vscode/extensions.json (130 bytes)
CREATE first.app/.vscode/launch.json (474 bytes)
```

```
PS C:\ngcc
The file will have its original line endings in your working directory
Successfully initialized git.

C:\Users\AngularDemo>cd first.app

C:\Users\AngularDemo\first.app>ng serve
✓ Browser application bundle generation complete.

Initial Chunk Files | Names      | Raw Size
vendor.js           | vendor     | 1.97 MB |
polyfills.js        | polyfills  | 294.84 kB |
styles.css, styles.js | styles    | 173.68 kB |
main.js             | main       | 50.12 kB |
runtime.js          | runtime    | 6.52 kB |

| Initial Total | 2.49 MB

Build at: 2022-05-01T08:14:14.921Z - Hash: 9304aa5f7e987b16 - Time: 20494ms

** Angular Live Development Server is listening on localhost:4200, open your browser on http://localhost:4200/ **

✓ Compiled successfully.
✓ Browser application bundle generation complete.

Initial Chunk Files | Names      | Raw Size
main.js             | main       | 7.06 kB |
runtime.js          | runtime    | 6.52 kB |

3 unchanged chunks

Build at: 2022-05-01T08:18:47.592Z - Hash: 39e65d225bcb4b78 - Time: 2931ms
| /
```

```
cmd:ngcc
Initial Chunk Files | Names | Raw Size
main.js           | main   | 50.44 kB |
runtime.js        | runtime | 6.52 kB |

3 unchanged chunks

Build at: 2022-05-01T08:23:19.413Z - Hash: 1ed3ffc56b8c1f99 - Time: 2044ms

✓ Compiled successfully.
✓ Browser application bundle generation complete.

Initial Chunk Files | Names | Raw Size
main.js           | main   | 51.00 kB |
runtime.js        | runtime | 6.52 kB |

3 unchanged chunks

Build at: 2022-05-01T08:25:20.855Z - Hash: 7d6aeda764b8aab5 - Time: 839ms

✓ Compiled successfully.
✓ Browser application bundle generation complete.

Initial Chunk Files | Names | Raw Size
main.js           | main   | 8.31 kB |
runtime.js        | runtime | 6.52 kB |

3 unchanged chunks

Build at: 2022-05-01T08:26:35.770Z - Hash: 8315f03d784e3ab5 - Time: 242ms

✓ Compiled successfully.
✓ Browser application bundle generation complete.
```



```
cmd:ngcc
Initial Chunk Files | Names | Raw Size
main.js           | main   | 11.56 kB |
runtime.js        | runtime | 6.52 kB |

3 unchanged chunks

Build at: 2022-05-01T08:29:36.815Z - Hash: db86d030535263cc - Time: 773ms

✓ Compiled successfully.
✓ Browser application bundle generation complete.

Initial Chunk Files | Names | Raw Size
main.js           | main   | 11.58 kB |
runtime.js        | runtime | 6.52 kB |

3 unchanged chunks

Build at: 2022-05-01T08:32:42.935Z - Hash: ce0c18a94c5b3f1a - Time: 1511ms

✓ Compiled successfully.
✓ Browser application bundle generation complete.

Initial Chunk Files | Names | Raw Size
main.js           | main   | 11.59 kB |
runtime.js        | runtime | 6.52 kB |

3 unchanged chunks

Build at: 2022-05-01T08:33:05.341Z - Hash: 5612d6098b083475 - Time: 239ms

✓ Compiled successfully.
```



The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Run, Terminal, Help.
- Title Bar:** • app.component.html - wad ajax prac - Visual Studio Code.
- Left Sidebar:** Includes icons for Explorer, Search, Issues, Pull Requests, and more, with a message: "@category:debuggers No extensions found."
- Code Editor:** Shows the content of paymentform.html. The code is as follows:

```
9 <form action="action_page.php">
10 <div class="container">
11 <h1>Register</h1>
12 <p>Please fill in this form to create an account.</p>
13 <hr>
14 <label for="email"><b>Email</b></label>
15 <input type="text" placeholder="Enter Email" name="email" id="email" required>
16 <br><br>
17 <label for="psw"><b>Password</b></label>
18 <input type="password" placeholder="Enter Password" name="psw" id="psw" required>
19 <br><br>
20 <label for="psw-repeat"><b>Repeat Password</b></label>
21 <input type="password" placeholder="Repeat Password" name="psw-repeat" id="psw-repeat">
22 <hr>
23 <p>By creating an account you agree to our <a href="#">Terms & Privacy</a>.</p>
24 <button type="submit" class="registerbtn">Register</button>
25 </div>
26 <div class="container signin">
27 | <p>Already have an account? <a href="#">Sign in</a>.</p>
28 </div>
29 </form>
30 </body>
31 </html>
32 <router-outlet></router-outlet>
```

Bottom status bar: Ln 4, Col 25, Spaces: 2, UTF-8, LF, HTML, 14:07, 01-05-2022.

Output:



Register

Please fill in this form to create an account.

Email

Password

Repeat Password

By creating an account you agree to our [Terms & Privacy](#).

Already have an account? [Sign in](#).

Assignment 4A:

Implementation:

The screenshot shows a code editor interface with a dark theme. On the left is a sidebar with various icons. The main area displays a file named `app.component.html`. The code itself is a registration form:

```
C: > Users > AngularDemo > first.app > src > app > app.component.html > html > head > meta
9 | <form action="action_page.php">
10|   <div class="container">
11|     <h1>Register</h1>
12|     <p>Please fill in this form to create an account.</p>
13|     <hr>
14|     <label for="email"><b>Email</b></label>
15|     <input type="text" placeholder="Enter Email" name="email" id="email" required>
16|     <br><br>
17|     <label for="psw"><b>Password</b></label>
18|     <input type="password" placeholder="Enter Password" name="psw" id="psw" required>
19|     <br><br>
20|     <label for="psw-repeat"><b>Repeat Password</b></label>
21|     <input type="password" placeholder="Repeat Password" name="psw-repeat" id="psw-repeat" required>
22|     <br>
23|     <p>By creating an account you agree to our <a href="#">Terms & Privacy</a>.</p>
24|     <button type="submit" class="registerbtn">Register</button>
25|   </div>
26|   <div class="container signin">
27|     <p>Already have an account? <a href="#">Sign in</a>.</p>
28|   </div>
29| </form>
30| </body>
31| </html>
```

Output:

The screenshot shows a browser window with the URL `localhost:4200`. The page title is "Register". The content of the page is:

Register

Please fill in this form to create an account.

Email

Password

Repeat Password

By creating an account you agree to our [Terms & Privacy](#).

Already have an account? [Sign in](#).

The right side of the browser window shows the DevTools developer console and element inspector. The element inspector is focused on the `div` element containing the "Repeat Password" input field, showing its CSS styles:

```
element.style {
  user-select: auto;
}
div {
  user agent stylesheet
  display: block;
}
Inherited from form
style attribute {
  user-select: auto;
}
Inherited from body
```

A tooltip in the bottom right corner of the browser says: "View and edit @supports at-rules. The CSS @supports at-rules are now displayed and editable in the element inspector".

Assignment 3A

Implementation:

The screenshot shows the Visual Studio Code interface. The title bar reads "index.html - Visual Studio Code". The left sidebar has icons for File, Edit, Selection, View, Go, Run, Terminal, and Help. The main area has a tab for "index.html" and a terminal window titled "Administrator: Command Prompt - node index.js". The terminal content is as follows:

```
C:\>cd Users\sweety\staticweb
C:\Users\sweety\staticweb>npm init
This utility will walk you through creating a package.json file.
It only covers the most common items, and tries to guess sensible defaults.

See `npm help init` for definitive documentation on these fields
and exactly what they do.

Use `npm install <pkg>` afterwards to install a package and
save it as a dependency in the package.json file.

Press ^C at any time to quit.
package name: (staticweb)
version: (1.0.0)
description:
git repository:
keywords:
author:
license: (ISC)

About to write to C:\Users\sweety\staticweb\package.json:

{
  "name": "staticweb",
  "version": "1.0.0",
  "main": "index.js",
  "scripts": {
    "test": "echo \"Error: no test specified\" && exit 1"
  }
}
```

A status bar at the bottom right says "too many active" and "File enabled".

The screenshot shows a separate terminal window titled "Administrator: Command Prompt - node indexjs". The content is identical to the one in the VS Code terminal:

```
C:\>cd Users\sweety\staticweb
C:\Users\sweety\staticweb>npm init
This utility will walk you through creating a package.json file.
It only covers the most common items, and tries to guess sensible defaults.

See `npm help init` for definitive documentation on these fields
and exactly what they do.

Use `npm install <pkg>` afterwards to install a package and
save it as a dependency in the package.json file.

Press ^C at any time to quit.
package name: (staticweb)
version: (1.0.0)
description:
git repository:
keywords:
author:
license: (ISC)

About to write to C:\Users\sweety\staticweb\package.json:

{
  "name": "staticweb",
  "version": "1.0.0",
  "main": "index.js",
  "scripts": {
    "test": "echo \"Error: no test specified\" && exit 1"
  },
  "author": "",
  "license": "ISC",
  "dependencies": {
    "express": "^4.18.1"
  },
  "devDependencies": {},
  "description": ""
```

File Edit Selection View Go Run Terminal Help index.html - Visual Studio Code

RUN AND DEBUG ... index.html X

VARIABLES C: > Users > sweety > staticweb > public > index.html > html > body

```
1  <!DOCTYPE html>
2  <html lang="en">
3  <head>
4  | <meta charset="UTF-8">
5  | <meta name="viewport" content="width=device-width, initial-scale=1.0">
6  | <title>Document</title>
7  </head>
8  <body>
9  | <div>
10 | | <b> This a Static Web page</b><br><br>
11 | | 
12 | </div>
13 </body>
14 </html>
15
```

WATCH CALL STACK Open i... RUNNING

PROBLEMS OUTPUT TERMINAL DEBUG CONSOLE Filter (e.g. text, lexclude)

LOADED SCRIPTS BREAKPOINTS

Ln 8, Col 7 Spaces: 2 UTF-8 CRLF HTML Prettier 16:18 01-05-2022

Type here to search

Output:

localhost:8080

Home LeetCode in Java: Al... https://www.micros... Support's School Deliver successful p... Google Cloud Fund... Course Modules: A... Best Coupon: The C...

This a Static Web page



Assignment 2B

Implementation:

File Edit Selection View Go Run Terminal Help • FROM node:alpine • Untitled-1 - Visual Studio Code

EXPLORER ...
OPEN EDITOR... 1 UNSAVED
● FROM node:alpine Untitled-1
NO FOLDER OPENED
You have not yet opened a folder.
Open Folder
Opening a folder will close all currently open editors. To keep them open, add a folder instead.
Clone Repository
To learn more about how to use git and source control in VS Code [read our docs.](#)
OUTLINE
TIMELINE

FROM node:alpine Untitled-1

```
1 FROM node:alpine
2 COPY ./app
3 CMD node /hellonode/app.js
```

TERMINAL DEBUG CONSOLE

```
PS C:\> cd hellonode
PS C:\hellonode> docker images
REPOSITORY TAG IMAGE ID CREATED SIZE
node latest 738d733448be 10 days ago 995MB
hello-world latest febd9fea6a5 7 months ago 13.3kB
PS C:\hellonode> docker run node:latest
PS C:\hellonode> docker ps
CONTAINER ID IMAGE COMMAND CREATED STATUS PORTS NAMES
PS C:\hellonode> docker -it -d node:latest
unknown shorthand flag: 'i' in -it
See 'docker --help'.
```

Usage: docker [OPTIONS] COMMAND
A self-sufficient runtime for containers
Options:
--config string Location of client config files (default "C:\\Users\\sweety\\.docker")

Type here to search

Ln 3, Col 27 Spaces: 4 UTF-8 CRLF Dockerfile ✓ Prettier 23:35 01-05-2022

File Edit Selection View Go Run Terminal Help • FROM node:alpine • Untitled-1 - Visual Studio Code

EXPLORER ...
OPEN EDITOR... 1 UNSAVED
● FROM node:alpine Untitled-1
NO FOLDER OPENED
You have not yet opened a folder.
Open Folder
Opening a folder will close all currently open editors. To keep them open, add a folder instead.
Clone Repository
To learn more about how to use git and source control in VS Code [read our docs.](#)
OUTLINE
TIMELINE

FROM node:alpine Untitled-1

```
1 FROM node:alpine
2 COPY ./app
3 CMD node /hellonode/app.js
```

TERMINAL DEBUG CONSOLE

```
--tlscert string Path to TLS certificate file (default "C:\\Users\\sweety\\.docker\\cert.pem")
--tlskey string Path to TLS key file (default "C:\\Users\\sweety\\.docker\\key.pem")
--tlsverify     Use TLS and verify the remote
-v, --version   Print version information and quit
```

Management Commands:
builder Manage builds
buildx* Docker Buildx (Docker Inc., v0.8.2)
compose* Docker Compose (Docker Inc., v2.4.1)
config Manage Docker configs
container Manage containers
context Manage contexts
image Manage images
manifest Manage Docker image manifests and manifest lists
network Manage networks
node Manage Swarm nodes
plugin Manage plugins

Type here to search

Ln 3, Col 27 Spaces: 4 UTF-8 CRLF Dockerfile ✓ Prettier 23:35 01-05-2022

The screenshot shows a Visual Studio Code interface with a dark theme. On the left is the Explorer sidebar, which includes sections for 'OPEN EDITOR' (1 UNSAVED), 'NO FOLDER OPENED', and various help links like 'Open Folder', 'Clone Repository', and 'read our docs'. The main area is a terminal window titled 'FROM node:alpine Untitled-1'. It displays the following command history:

```
1 FROM node:alpine
2 COPY ./app
3 CMD node /hellonode/app.js
```

Below the terminal are tabs for 'PROBLEMS', 'OUTPUT', 'TERMINAL' (which is selected), and 'DEBUG CONSOLE'. To the right of the terminal are icons for 'powershell', a plus sign, a trash can, and a close button. At the bottom of the screen is a taskbar with various icons and status information: Ln 3, Col 27, Spaces: 4, UTF-8, CRLF, Dockerfile, Prettier, 23:36, 01-05-2022.

This screenshot shows the same Visual Studio Code environment after performing additional Docker operations. The terminal output now includes:

```
PS C:\hellonode> docker login
Login with your Docker ID to push and pull images from Docker Hub. If you don't have a Docker ID, head over to https://hub.docker.com to create one.
Username: ishika231
Password:
Login Succeeded
```

Following the login, the user runs a 'push' command:

```
PS C:\hellonode> docker push ishika231/dockerfile
```

The terminal then displays a long list of mounted files from the local library to the Docker image:

```
Using default tag: latest
The push refers to repository [docker.io/ishika231/dockerfile]
adcd0466d8b3: Mounted from library/node
fef4baef48801: Mounted from library/node
9e01c2c7216e: Mounted from library/node
78d9c6989ad1: Mounted from library/node
5bdcc8e2060c: Mounted from library/node
08fa02ce37eb: Mounted from library/node
a037458de4e0: Mounted from library/node
bafdbe68e4ae: Mounted from library/node
a13c519c6361: Mounted from library/node
latest: digest: sha256:7ea173de5a2192a13b5849ca75ffa42611912b7360932620c06837bae160880d size: 2215
PS C:\hellonode>
```

The rest of the interface is identical to the first screenshot, including the Explorer sidebar, tabs, and taskbar.

Output:

docker hub - Google Search × Docker Hub x +

hub.docker.com/repositories

Home LeetCode in Java: Al... https://www.micros... Support's School Deliver successful p... Google Cloud Fund... Course Modules: A... Best Coupon: The C...

Join us for DockerCon on May 9-10th. Preview the agenda and register today.

dockerhub Search for great content (e.g., mysql) Explore Repositories Organizations Help ▾ Upgrade ishika231

ishika231 Search by repository name Create Repository

ishika231 / dockerfile Last pushed: 5 minutes ago Not Scanned 0 0 Public

Tip: Not finding your repository? Try switching namespace via the top left dropdown.

https://hub.docker.com/repository/docker/ishika231/dockerfile

Type here to search

22:34 01-05-2022

Assignment 2A

Implementation:

```
MINGW64:/c/Users/sweety/staticweb/myproject
sweety@LAPTOP-B8FCU8TH MINGW64 ~/staticweb (master)
$ git --version
git version 2.28.0.windows.1

sweety@LAPTOP-B8FCU8TH MINGW64 ~/staticweb (master)
$ git config --global user.name "ishikamgupta"
sweety@LAPTOP-B8FCU8TH MINGW64 ~/staticweb (master)
$ git config --global user.email "ishikamgupta231@gmail.com"

sweety@LAPTOP-B8FCU8TH MINGW64 ~/staticweb (master)
$ mkdir myproject
sweety@LAPTOP-B8FCU8TH MINGW64 ~/staticweb (master)
$ cd myproject

sweety@LAPTOP-B8FCU8TH MINGW64 ~/staticweb/myproject (master)
$ git init
Initialized empty Git repository in C:/Users/sweety/staticweb/myproject/.git/

sweety@LAPTOP-B8FCU8TH MINGW64 ~/staticweb/myproject (master)
$ git status
On branch master

No commits yet

nothing to commit (create/copy files and use "git add" to track)

sweety@LAPTOP-B8FCU8TH MINGW64 ~/staticweb/myproject (master)
$ git add index.html
fatal: pathspec 'index.html' did not match any files

sweety@LAPTOP-B8FCU8TH MINGW64 ~/staticweb/myproject (master)
$ git add index.html

sweety@LAPTOP-B8FCU8TH MINGW64 ~/staticweb/myproject (master)
$ git add --all

sweety@LAPTOP-B8FCU8TH MINGW64 ~/staticweb/myproject (master)
$ git commit -m "First Release"
[master (root-commit) 5b2c3ac] First Release
 3 files changed, 19 insertions(+)
 create mode 100644 img.jpg
 create mode 100644 index.html
 create mode 100644 index.js

sweety@LAPTOP-B8FCU8TH MINGW64 ~/staticweb/myproject (master)
$ git commit -a -m "Updated"
```

```
MINGW64:/c/Users/sweety/staticweb/myproject
$ git commit -a -m "Updated"
On branch master
nothing to commit, working tree clean

sweety@LAPTOP-B8FCU8TH MINGW64 ~/staticweb/myproject (master)
$ git log
commit 5b2c3ac9ebeacc9ebaed3fc84089b536c0ca23b9 (HEAD --> master)
Author: ishikamgupta <ishikamgupta231@gmail.com>
Date:   Sun May 1 23:49:16 2022 +0530

  First Release

sweety@LAPTOP-B8FCU8TH MINGW64 ~/staticweb/myproject (master)
$ git commit -help
usage: git commit [<options>] [--] <pathspec>...
      -q, --quiet           suppress summary after successful commit
      -v, --verbose          show diff in commit message template

Commit message options
  -F, --file <file>      read message from file
  --author <author>       override author for commit
  --date <date>           override date for commit
  -m, --message <message> commit message
  -c, --reedit-message <commit> reuse and edit message from specified commit
  -C, --reuse-message <commit> reuse message from specified commit
  --fixup <commit>        use autosquash formatted message to fixup specified commit
  --squash <commit>        use autosquash formatted message to squash specified commit
  --reset-author          the commit is authored by me now (used with -c/-c/--amend)
  -s, --signoff           add Signed-off-by:
  -t, --template <file>  use specified template file
  -e, --edit              force edit of commit
  --cleanup <mode>        how to strip spaces and #comments from message
  --status                include status in commit message template
  -S, --gpg-sign[=<key-id>] GPG sign commit

Commit contents options
  -a, --all               commit all changed files
  -i, --include            add specified files to index for commit
  --interactive           interactively add files
  -p, --patch              interactively add changes
  -o, --only               commit only specified files
  -n, --no-verify          bypass pre-commit and commit-msg hooks
  --dry-run                show what would be committed
```

```
MINGW64:/c/Users/sweety/staticweb/myproject
sweety@LAPTOP-B8FCU8TH MINGW64 ~/staticweb/myproject (master)
$ git branch hello-world-images

sweety@LAPTOP-B8FCU8TH MINGW64 ~/staticweb/myproject (master)
$ git checkout hello-world-images
Switched to branch 'hello-world-images'

sweety@LAPTOP-B8FCU8TH MINGW64 ~/staticweb/myproject (hello-world-images)
$ git checkout master
Switched to branch 'master'
```

```
MINGW64:/c/Users/sweety/myproject
sweety@LAPTOP-B8FCU8TH MINGW64 ~/myproject (master)
$ git init
Reinitialized existing Git repository in c:/users/sweety/myproject/.git/
sweety@LAPTOP-B8FCU8TH MINGW64 ~/myproject (master)
$ git remote add origin https://github.com/Ishikamgupta/WadPracAssign.git

sweety@LAPTOP-B8FCU8TH MINGW64 ~/myproject (master)
$ git push --set-upstream origin master
error: unknown switch `p'
usage: git push [<options>] [<repository> [<refspec>...]]]

-  
v, --verbose      be more verbose  
-q, --quiet       be more quiet  
--repo <repository> repository  
--all            push all refs  
--mirror         mirror all refs  
-d, --delete     delete refs  
--tags           push tags (can't be used with --all or --mirror)  
-n, --dry-run    dry run  
--porcelain     machine-readable output  
-f, --force      force updates  
--force-with-lease[=<refname>:<expect>]  
                  require old value of ref to be at this value  
--recurse-submodules (check|on-demand|no)  
                     control recursive pushing of submodules  
--thin            use thin pack  
--receive-pack <receive-pack>  
                  receive pack program  
--exec <receive-pack>  
                  receive pack program  
-u, --set-upstream set upstream for git pull/status  
--progress        force progress reporting  
--prune          prune locally removed refs
```

```
MINGW64:/c/Users/sweety/myproject
control recursive pushing of submodules
--thin            use thin pack
--receive-pack <receive-pack>
                  receive pack program
--exec <receive-pack>
                  receive pack program
-  
u, --set-upstream set upstream for git pull/status
--progress        force progress reporting
--prune          prune locally removed refs
--no Verify      bypass pre-push hook
--follow-tags    push missing but relevant tags
--signed[=(yes|no|if-asked)]
                  GPG sign the push
--atomic          request atomic transaction on remote side
-o, --push-option <server-specific>
                  option to transmit
-4, --ipv4        use IPv4 addresses only
-6, --ipv6        use IPv6 addresses only

sweety@LAPTOP-B8FCU8TH MINGW64 ~/myproject (master)
$ git fetch origin

sweety@LAPTOP-B8FCU8TH MINGW64 ~/myproject (master)
$ git merge origin/master
merge: origin/master - not something we can merge

sweety@LAPTOP-B8FCU8TH MINGW64 ~/myproject (master)
$ git pull origin
You asked to pull from the remote 'origin', but did not specify
a branch. Because this is not the default configured remote
for your current branch, you must specify a branch on the command line.

sweety@LAPTOP-B8FCU8TH MINGW64 ~/myproject (master)
$
```

Assignment 4B

Implementation:

The screenshot shows the AWS Management Console Home page. At the top, there are two tabs: "AWS Management Console" and "AWS Management Console". Below the tabs, the URL is "ap-south-1.console.aws.amazon.com/console/home?region=ap-south-1". The main content area is titled "Console Home". It features two columns: "Welcome to AWS" on the left and "AWS Health" on the right. The "Welcome to AWS" column includes sections for "Getting started with AWS" (with a rocket icon), "Training and certification" (with a diploma icon), and "What's new with AWS?" (with a lightbulb icon). The "AWS Health" column displays "Open issues" (0, Past 7 days), "Scheduled changes" (0, Upcoming and past 7 days), and "Other notifications" (0, Past 7 days). A "Go to AWS Health" button is located at the bottom of the "AWS Health" section. The footer contains links for "Feedback", "Unified Settings", "© 2022, Amazon Internet Services Private Ltd. or its affiliates.", "Privacy", "Terms", and "Cookie preferences".

The screenshot shows the "Build a solution" page in the AWS Management Console. At the top, there are two tabs: "AWS Management Console" and "AWS Management Console". Below the tabs, the URL is "ap-south-1.console.aws.amazon.com/console/home?region=ap-south-1". The main content area is titled "Build a solution". It features a grid of nine items under the heading "Start building with simple wizards and automated workflows.". Each item has an icon and a brief description. The items are: "Launch a virtual machine" (With EC2 (2 mins)), "Register a domain" (With Route 53 (3 mins)), "Start a development project" (With CodeStar (5 mins)), "Build a web app" (With AWS App Runner (5 mins)), "Connect an IoT device" (With AWS IoT (5 mins)), "Deploy a serverless microservice" (With API Gateway (2 mins)), "Build using virtual servers" (With Lightsail (2 mins)), "Start migrating to AWS" (With AWS MGN (2 mins)), and "Host a static web app" (With AWS Amplify Console (2 mins)). A "Go to AWS Health" button is located at the top right of the main content area. The footer contains links for "Feedback", "Unified Settings", "© 2022, Amazon Internet Services Private Ltd. or its affiliates.", "Privacy", "Terms", and "Cookie preferences".

Assignment 1A

Implementation:

```
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="UTF-8" />
    <meta name="viewport" content="width=device-width, initial-scale=1.0" />
    <link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/font-awesome/5.15.3/css/all.min.css" />
    <link href="https://cdn.jsdelivr.net/npm/bootstrap@5.0.0-beta3/dist/css/bootstrap.min.css" rel="stylesheet" />
    <link rel="stylesheet" href="Dashboard.css" />
    <title>Dashboard</title>
  </head>
  <body>
    <div class="d-flex" id="wrapper">
      <!-- Sidebar -->
      <div class="bg-white" id="sidebar-wrapper">
        <div class="sidebar-heading text-center py-4 primary-text fs-4 fw-bold text-uppercase border-bottom">
          | | | | class="fas fa-user-secret me-2"><i>Clothing</i></div>
        <div class="list-group list-group-flush my-3">
          <a href="#" class="list-group-item list-group-item-action bg-transparent second-text active">
            | | | | class="fas fa-tachometer-alt me-2"><i>Dashboard</i></a>
          <a href="shopping.html" class="list-group-item list-group-item-action bg-transparent second-text">
            | | | | class="fas fa-tachometer-alt me-2"><i>Home</i></a>
          <a href="#" class="list-group-item list-group-item-action bg-transparent second-text fw-bold">
            | | | | class="fas fa-chart-line me-2"><i>Analytics</i></a>
        </div>
      </div>
      <!-- /sidebar-wrapper -->
      <!-- Page Content -->
      <div id="page-content-wrapper">
        <nav class="navbar navbar-expand-lg navbar-light bg-transparent py-4 px-4">
          <div class="d-flex align-items-center">
            <i class="fas fa-align-left primary-text fs-4 me-3" id="menu-toggle"></i>
            <h2 class="fs-2 m-0">Dashboard</h2>
          </div>
        </nav>
      </div>
    </div>
  </body>
</html>
```

Ln 5, Col 25 Spaces: 2 UTF-8 CRLF HTML ✓ Prettier

Type here to search

06:46 02-05-2022

```
<a href="#" class="list-group-item list-group-item-action bg-transparent second-text fw-bold">
  | | | | class="fas fa-paperclip me-2"><i>Reports</i></a>
<a href="#" class="list-group-item list-group-item-action bg-transparent second-text fw-bold">
  | | | | class="fas fa-shopping-cart me-2"><i>Store Mng</i></a>
<a href="#" class="list-group-item list-group-item-action bg-transparent second-text fw-bold">
  | | | | class="fas fa-gift me-2"><i>Products</i></a>
<a href="#" class="list-group-item list-group-item-action bg-transparent second-text fw-bold">
  | | | | class="fas fa-comment-dots me-2"><i>Chat</i></a>
<a href="#" class="list-group-item list-group-item-action bg-transparent second-text fw-bold">
  | | | | class="fas fa-map-marker-alt me-2"><i>Outlet</i></a>
<a href="#" class="list-group-item list-group-item-action bg-transparent text-danger fw-bold">
  | | | | class="fas fa-power-off me-2"><i>Logout</i></a>
</div>
</div>
<!-- /sidebar-wrapper -->
<!-- Page Content -->
<div id="page-content-wrapper">
  <nav class="navbar navbar-expand-lg navbar-light bg-transparent py-4 px-4">
    <div class="d-flex align-items-center">
      <i class="fas fa-align-left primary-text fs-4 me-3" id="menu-toggle"></i>
      <h2 class="fs-2 m-0">Dashboard</h2>
    </div>
  </nav>
</div>
```

Ln 5, Col 25 Spaces: 2 UTF-8 CRLF HTML ✓ Prettier

Type here to search

06:46 02-05-2022

The screenshot shows the Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Run, Terminal, Help.
- Title Bar:** Dashboard.html - wad assign 1a - Visual Studio Code.
- Sidebar:** A vertical sidebar on the left contains icons for various features: file, search, 10K, navigation, file list, recent files, settings, and help.
- Code Editor:** The main area displays the following HTML code:

```
<button class="navbar-toggler" type="button" data-bs-toggle="collapse" data-bs-target="#navbarSupportedContent" aria-controls="navbarSupportedContent" aria-expanded="false" aria-label="Toggle navigation">
  <span class="navbar-toggler-icon"></span>
</button>

<div class="collapse navbar-collapse" id="navbarSupportedContent">
  <ul class="navbar-nav ms-auto mb-2 mb-lg-0">
    <li class="nav-item dropdown">
      <a class="nav-link dropdown-toggle second-text fw-bold" href="#" id="navbarDropdown" role="button" data-bs-toggle="dropdown" aria-expanded="false">
        <i class="fas fa-user me-2"></i>User
      </a>
      <ul class="dropdown-menu" aria-labelledby="navbarDropdown">
        <li><a class="dropdown-item" href="#">Profile</a></li>
        <li><a class="dropdown-item" href="#">Settings</a></li>
        <li><a class="dropdown-item" href="#">Logout</a></li>
      </ul>
    </li>
  </ul>
</div>
```
- Status Bar:** Shows the current file is master*, line 5, column 25, spaces: 2, encoding: UTF-8, CRLF, HTML, Prettier, and a search bar.
- Bottom Icons:** Includes icons for file operations, search, navigation, and system status.

File Edit Selection View Go Run Terminal Help Dashboard.html - wad assign 1a - Visual Studio Code

Dashboard.html X ...

Dashboard.html > html > head > meta

```
94
95     <div class="col-md-3">
96         <div class="p-3 bg-white shadow-sm d-flex justify-content-around align-items-center rounded border rounded-full secondary-bg p-3">
97             <div>
98                 <h3 class="fs-2">3899</h3>
99                 <p class="fs-5">Delivery</p>
100            </div>
101        </div>
102    </div>
103
104
105    <div class="col-md-3">
106        <div class="p-3 bg-white shadow-sm d-flex justify-content-around align-items-center rounded border rounded-full secondary-bg p-3">
107            <div>
108                <h3 class="fs-2">%25</h3>
109                <p class="fs-5">Increase</p>
110            </div>
111        </div>
112    </div>
113
114
115
116
117    <section class="discover-our-story" id="our-story">
```

x master* ⌂ 0 △ 0 Ln 5, Col 25 Spaces: 2 UTF-8 CRLF HTML ✕ Prettier ⌂ ⌂

Type here to search 0 24°C 2022 06:47 ENG

File Edit Selection View Go Run Terminal Help Dashboard.html - wad assign 1a - Visual Studio Code

Dashboard.html X ...

Dashboard.html > html > head > meta

```
118    <div class="container">
119        <div class="card rounded">
120            <div class="card-body" id="puff">
121                <p style="font-size: large; color: #rgb(10, 10, 10); text-align: center; font-weight:bold">
122                    Profits
123                </p>
124                <svg
125                    class="container"
126                    width="529px"
127                    height="286px"
128                    viewBox="30 27 529 286"
129                    version="1.1"
130                    xmlns="http://www.w3.org/2000/svg"
131                    xmlns:xlink="http://www.w3.org/1999/xlink"
132                >
133                    <!-- Generator: Sketch 3.8.3 (29802) - http://www.bohemiancoding.com/sketch -->
134                    <desc>Created with Sketch.</desc>
135                    <defs></defs>
136                    <g
137                        id="graph-copy"
138                        stroke="none"
139                        stroke-width="1"
140                        fill="none"
141                        fill-rule="evenodd"
```

x master* ⌂ 0 △ 0 Ln 5, Col 25 Spaces: 2 UTF-8 CRLF HTML ✕ Prettier ⌂ ⌂

Type here to search 0 24°C 2022 06:47 ENG

File Edit Selection View Go Run Terminal Help Dashboard.html - wad assign 1a - Visual Studio Code

```
< Dashboard.html > html head meta
145 | id="y_axis"
146 | font-size="11.0833333"
147 | font-family=".HelveticaNeueDeskInterface-Regular, .Helvetica Neue DeskInterface"
148 | fill="black"
149 | opacity="0.4"
150 | font-weight="bold"
151 |
152 | >
153 | <text id="0">
154 | | <tspan x="25.3008249" y="264.333333">0</tspan>
155 | </text>
156 | <text id="200">
157 | | <tspan x="12.7757572" y="232.666667">100</tspan>
158 | </text>
159 | <text id="400">
160 | | <tspan x="12.7757572" y="201">200</tspan>
161 | </text>
162 | <text id="600">
163 | | <tspan x="12.7757572" y="169.333333">300</tspan>
164 | </text>
165 | <text id="800">
166 | | <tspan x="12.7757572" y="137.666667">400</tspan>
167 | </text>
168 | <text id="1000">
```

x master* ⌂ ⊗ 0 △ 0 Ln 5, Col 25 Spaces: 2 UTF-8 CRLF HTML ✅ Prettier ⌂ 🔍

Type here to search

File Edit Selection View Go Run Terminal Help Dashboard.html - wad assign 1a - Visual Studio Code

```
< Dashboard.html > html head meta
169 | | <tspan x="6.51322328" y="106">500</tspan>
170 | </text>
171 | <text id="1200">
172 | | <tspan x="6.51322328" y="74.3333333">600</tspan>
173 | </text>
174 | <text id="1400">
175 | | <tspan x="6.51322328" y="42.6666667">700</tspan>
176 | </text>
177 | <text id="1600">
178 | | <tspan x="6.51322328" y="11">800</tspan>
179 | </text>
180 | </g>
181 | <g
182 | | id="GRAPHS"
183 | | transform="translate(64.000000, 16.000000)"
184 | | stroke-linecap="round"
185 | | stroke-width="8"
186 | | stroke-linejoin="round"
187 | >
188 |
189 | | <polyline
190 | | | id="PayPal"
191 | | | stroke="#c74256"
192 | | | points="2.04739336 180 53.273159 180 99.2985782 91 137.175355 47 219.077488 47 :
```

x master* ⌂ ⊗ 0 △ 0 Ln 5, Col 25 Spaces: 2 UTF-8 CRLF HTML ✅ Prettier ⌂ 🔍

Type here to search

The screenshot shows a Visual Studio Code interface with the following details:

- File Bar:** File, Edit, Selection, View, Go, Run, Terminal, Help.
- Title Bar:** Dashboard.html - wad assign 1a - Visual Studio Code.
- Tree View:** A sidebar on the left displays a hierarchical tree structure of the HTML document:
 - Dashboard.html
 - html
 - head
 - meta
- Code Editor:** The main area shows the source code of the dashboard.html file, starting from line 217. The code consists of a series of `<tspan>` and `<text>` elements with specific x and y coordinates.

```
217 | <tspan x="158.115298" y="11">5</tspan>
218 | </text>
219 | <text id="6">
220 |   <tspan x="197.733619" y="11">6</tspan>
221 | </text>
222 | <text id="7">
223 |   <tspan x="237.351939" y="11">7</tspan>
224 | </text>
225 | <text id="8">
226 |   <tspan x="276.97026" y="11">8</tspan>
227 | </text>
228 | <text id="9">
229 |   <tspan x="316.58858" y="11">9</tspan>
230 | </text>
231 | <text id="10">
232 |   <tspan x="359.229833" y="11">10</tspan>
233 | </text>
234 | <text id="11">
235 |   <tspan x="400.036703" y="11">11</tspan>
236 | </text>
237 | <text id="12">
238 |   <tspan x="438.466474" y="11">12</tspan>
239 | </text>
240 | </g>
```
- Search Bar:** "Type here to search" at the bottom left.
- Bottom Status Bar:** Shows file path (master*), line/col (Ln 5, Col 25), encoding (UTF-8), and date/time (02-05-2022 06:48).

File Edit Selection View Go Run Terminal Help Dashboard.html - wad assign 1a - Visual Studio Code

Dashboard.html X

Dashboard.html > html > head > meta

```
241 |           <g  
242 |             id="grid"  
243 |             transform="translate(46.618321, 4.750000)"  
244 |             stroke="black"  
245 |             stroke-linecap="square"  
246 |             opacity="0.0800000057"  
247 |           >  
248 |           <path  
249 |             d="M0.396183206,1.1875 L478.991396,1.1875"  
250 |             id="Line"  
251 |           ></path>  
252 |           <path  
253 |             d="M0.396183206,32.8541667 L478.991396,32.8541667"  
254 |             id="Line"  
255 |           ></path>  
256 |           <path  
257 |             d="M0.396183206,64.5208333 L478.991396,64.5208333"  
258 |             id="Line"  
259 |           ></path>  
260 |           <path  
261 |             d="M0.396183206,96.1875 L478.991396,96.1875"  
262 |             id="Line"  
263 |           ></path>  
264 |           <path
```

x master* ⌂ ⌂ 0 △ 0 Ln 5, Col 25 Spaces: 2 UTF-8 CRLF HTML ✅ Prettier ⌂ ⌂

Type here to search 0 24°C ENG 06:48 02-05-2022

File Edit Selection View Go Run Terminal Help Dashboard.html - wad assign 1a - Visual Studio Code

Dashboard.html X

Dashboard.html > html > head > meta

```
265 |           <path  
266 |             d="M0.396183206,127.854167 L478.991396,127.854167"  
267 |             id="Line"  
268 |           ></path>  
269 |           <path  
270 |             d="M0.396183206,159.520833 L478.991396,159.520833"  
271 |             id="Line"  
272 |           ></path>  
273 |           <path  
274 |             d="M0.396183206,191.1875 L478.991396,191.1875"  
275 |             id="Line"  
276 |           ></path>  
277 |           <path  
278 |             d="M0.396183206,222.854167 L478.991396,222.854167"  
279 |             id="Line"  
280 |           ></path>  
281 |           <path  
282 |             d="M0.396183206,254.520833 L478.991396,254.520833"  
283 |             id="Line"  
284 |           ></path>  
285 |         </g>  
286 |       </svg>  
287 |     </div>  
288 |   </div>
```

x master* ⌂ ⌂ 0 △ 0 Ln 5, Col 25 Spaces: 2 UTF-8 CRLF HTML ✅ Prettier ⌂ ⌂

Type here to search 0 24°C ENG 06:48 02-05-2022

File Edit Selection View Go Run Terminal Help Dashboard.html - wad assign 1a - Visual Studio Code

Dashboard.html X

```
<!-- Dashboard.html -->
<html>
  <head>
    <meta>
      </meta>
    <path
      d="M0.396183206,191.1875 L478.991396,191.1875"
      id="Line"
    ></path>
    <path
      d="M0.396183206,222.854167 L478.991396,222.854167"
      id="Line"
    ></path>
    <path
      d="M0.396183206,254.520833 L478.991396,254.520833"
      id="Line"
    ></path>
  </g>
  </svg>
</div>
</div>
</div>
</body>
</html>
```

master* 0 △ 0 Ln 5, Col 25 Spaces: 2 UTF-8 CRLF HTML ✅ Prettier 06:48 02-05-2022

File Edit Selection View Go Run Terminal Help Dashboard.css - wad assign 1a - Visual Studio Code

Dashboard.css X

```
# Dashboard.css > :root
:root {
  --main-bg-color: #84b7fa;
  --main-text-color: #1a1a1a;
  --second-text-color: #bbbec5;
  --second-bg-color: #clefde;
}

.primary-text {
  color: var(--main-text-color);
}

.secondary-text {
  color: var(--second-text-color);
}

.primary-bg {
  background-color: var(--main-bg-color);
}

.secondary-bg {
  background-color: var(--second-bg-color);
}

.rounded-full {
  border-radius: 100%;
```

master* 0 △ 0 Ln 1, Col 1 Spaces: 2 UTF-8 CRLF CSS ✅ Prettier 06:48 02-05-2022

File Edit Selection View Go Run Terminal Help Dashboard.css - wad assign 1a - Visual Studio Code

EXPLORER ... # Dashboard.css X

OPEN EDITORS # Dashboard.css > :root

Dashboard.css

WAD ASSIGN 1A

Dashboard.css

Dashboard.html

```
27 #wrapper {  
28   overflow-x: hidden;  
29   background-image: linear-gradient(  
30     to right,  
31     □#343838,  
32     □#98989e,  
33     □#b1b1b8,  
34     □#edebf5,  
35     □#9b9ba5  
36   );  
37 }  
38 svg {  
39   margin: 0 auto;  
40   text-align: center;  
41   width: 100%;  
42   padding-top: 40px;  
43 }  
44 polyline {  
45   stroke-dasharray: 1000;  
46   stroke-dashoffset: 1000;  
47   animation: dash 5s ease-in forwards;  
48   animation-iteration-count: 10;  
49   animation-direction: alternate;  
50 }
```

master* 0 0 △ 0

Ln 1, Col 1 Spaces: 2 UTF-8 CRLF CSS ✓ Prettier

Type here to search

0 24°C 24°C 06:48 02-05-2022

File Edit Selection View Go Run Terminal Help Dashboard.css - wad assign 1a - Visual Studio Code

EXPLORER ... # Dashboard.css X

OPEN EDITORS # Dashboard.css > :root

Dashboard.css

WAD ASSIGN 1A

Dashboard.css

Dashboard.html

```
53 @keyframes dash {  
54   to {  
55     | stroke-dashoffset: 0;  
56   }  
57 }  
58 #our-story{  
59   | padding-top: 50px;  
60 }  
61  
62 #puff {  
63   height: 100%;  
64   background: -moz-linear-gradient(  
65     | -45deg,  
66     | □#6b6e6e 0%,  
67     | □#8eb0dd 100%  
68   ); /* FF3.6-15 */  
69   background: -webkit-linear-gradient(  
70     | -45deg,  
71     | □#727374 0%,  
72     | □#8eb0dd 100%  
73   ); /* Chrome10-25,Safari5.1-6 */  
74   background: linear-gradient(  
75     | 135deg,  
76     | □#484849 0%,
```

master* 0 0 △ 0

Ln 1, Col 1 Spaces: 2 UTF-8 CRLF CSS ✓ Prettier

Type here to search

0 24°C 24°C 06:48 02-05-2022

File Edit Selection View Go Run Terminal Help Dashboard.css - wad assign 1a - Visual Studio Code

EXPLORER ... # Dashboard.css X

OPEN EDITORS # Dashboard.css > :root

WAD ASSIGN 1A # Dashboard.css

Dashboard.html

```
82 #sidebar-wrapper {  
83 min-height: 100vh;  
84 margin-left: -15rem;  
85 -webkit-transition: margin 0.25s ease-out;  
86 -moz-transition: margin 0.25s ease-out;  
87 -o-transition: margin 0.25s ease-out;  
88 transition: margin 0.25s ease-out;  
89 }  
90  
91 #sidebar-wrapper .sidebar-heading {  
92 padding: 0.875rem 1.25rem;  
93 font-size: 1.2rem;  
94 }  
95  
96 #sidebar-wrapper .list-group {  
97 width: 15rem;  
98 }  
99  
100 #page-content-wrapper {  
101 min-width: 100vw;  
102 }  
103  
104 #wrapper.toggled #sidebar-wrapper {  
105 margin-left: 0;
```

master* 0 △ 0

Ln 1, Col 1 Spaces: 2 UTF-8 CRLF CSS ⚡ Prettier 🔍

Type here to search

06:49 02-05-2022

File Edit Selection View Go Run Terminal Help Dashboard.css - wad assign 1a - Visual Studio Code

EXPLORER ... # Dashboard.css X

OPEN EDITORS # Dashboard.css > :root

WAD ASSIGN 1A # Dashboard.css

Dashboard.html

```
104 #wrapper.toggled #sidebar-wrapper {  
105 margin-left: 0;  
106 }  
107  
108 #menu-toggle {  
109 cursor: pointer;  
110 }  
111  
112 .list-group-item {  
113 border: none;  
114 padding: 20px 30px;  
115 }  
116  
117 .list-group-item.active {  
118 background-color: transparent;  
119 color: var(--main-text-color);  
120 font-weight: bold;  
121 border: none;  
122 }  
123  
124 @media (min-width: 768px) {  
125 #sidebar-wrapper {  
126 margin-left: 0;  
127 }
```

master* 0 △ 0

Ln 1, Col 1 Spaces: 2 UTF-8 CRLF CSS ⚡ Prettier 🔍

Type here to search

06:49 02-05-2022

File Edit Selection View Go Run Terminal Help Dashboard.css - wad assign 1a - Visual Studio Code

EXPLORER ... # Dashboard.css X

OPEN EDITORS # Dashboard.css > ↗ :root

Dashboard.css > ↗ :root

WAD ASSIGN 1A

Dashboard.css

Dashboard.html

114 padding: 20px 30px;

115 }

116

117 .list-group-item.active {

118 background-color: transparent;

119 color: var(--main-text-color);

120 font-weight: bold;

121 border: none;

122 }

123

124 @media (min-width: 768px) {

125 #sidebar-wrapper {

126 | margin-left: 0;

127 }

128

129 #page-content-wrapper {

130 | min-width: 0;

131 | width: 100%;

132 }

133

134 #wrapper.toggled #sidebar-wrapper {

135 | margin-left: -15rem;

136 }

137 }

master* 0 0 △ 0

Ln 1, Col 1 Spaces: 2 UTF-8 CRLF CSS ✓ Prettier ⌂ ⌂

24°C ENG 06:49 02-05-2022

Output:

