

DATABASE MANAGEMENT SYSTEM

CS23332

EXERCISE 4

WRITING BASIC SQL SELECT STATEMENTS

ISHWARYA L
241801098

2. Show the structure of departments the table. Select all the data from it.

Language: SQL Rows: 10 Clear Command Find Tables

1 DESC DEPARTMENT;

Results Explain Describe Saved SQL History

Object Type: TABLE Object: DEPARTMENT

Table	Column	Data Type	Length	Precision	Scale	Primary Key	Nullable	Default	Comment
DEPARTMENT	DEPT_ID	NUMBER	-	6	0	1	-	-	-
	DEPT_NAME	VARCHAR2	20	-	-	-	-	-	-
	MANAGER_ID	NUMBER	-	6	0	-	✓	-	-
	LOCATION_ID	NUMBER	-	4	0	-	✓	-	-


1 DESC DEPARTMENT;
2 SELECT * FROM DEPARTMENT;

Results Explain Describe Saved SQL History

DEPT_ID	DEPT_NAME	MANAGER_ID	LOCATION_ID
10	Development	1001	101
20	Human Resources	1003	102
30	Sales	1004	103
40	Finance	-	104

4 rows returned in 0.03 seconds Download


3. Create a query to display the last name, job code, hire date, and employee number for each employee, with employee number appearing first.

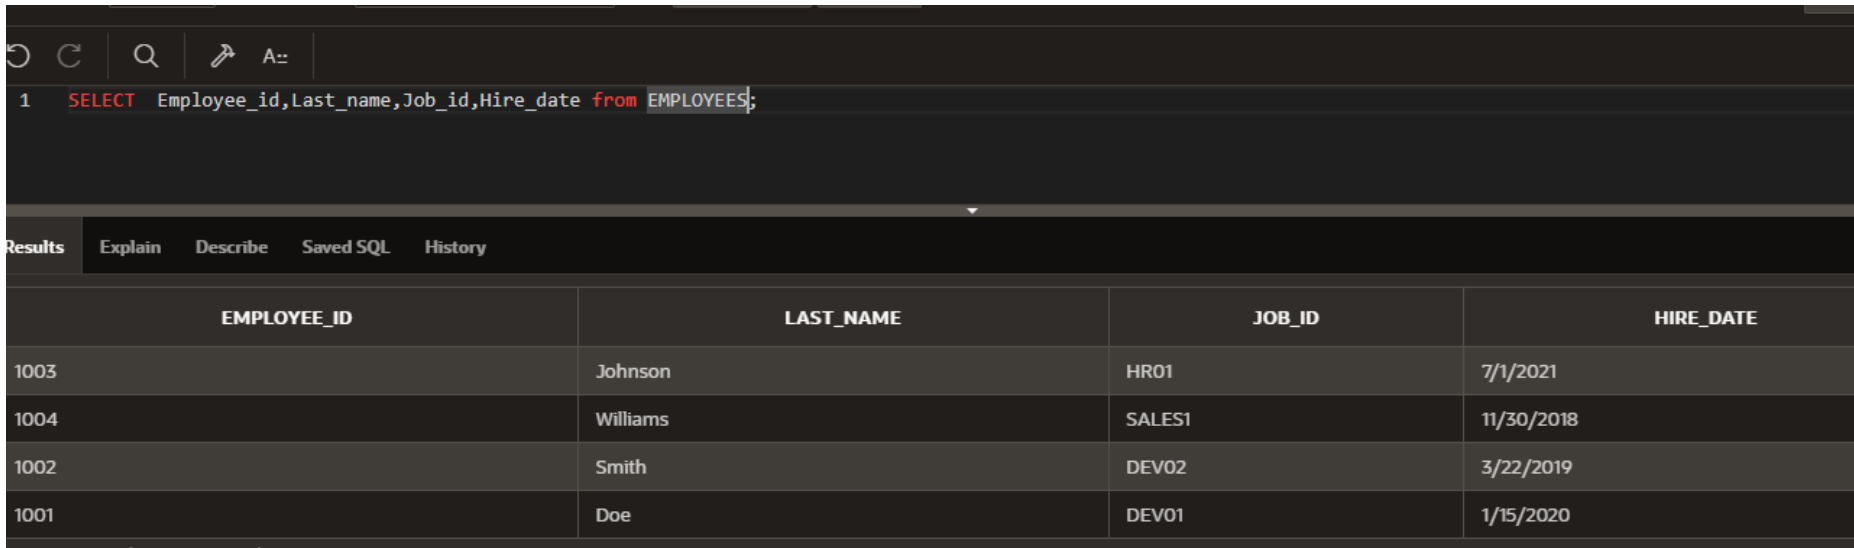

The screenshot shows a SQL IDE interface. At the top, there is a toolbar with icons for undo, redo, search, and a command palette. Below the toolbar, a SQL query is entered in a text area: `1 SELECT Employee_id, Last_name, Job_id, Hire_date from EMPLOYEES;`. The query is highlighted. Below the query area, there is a tabbed interface with four tabs: 'Results', 'Explain', 'Describe', and 'History'. The 'Results' tab is selected, and it displays a table with four columns: 'EMPLOYEE_ID', 'LAST_NAME', 'JOB_ID', and 'HIRE_DATE'. The table contains four rows of data.

EMPLOYEE_ID	LAST_NAME	JOB_ID	HIRE_DATE
1003	Johnson	HR01	7/1/2021
1004	Williams	SALES1	11/30/2018
1002	Smith	DEV02	3/22/2019
1001	Doe	DEV01	1/15/2020

4. Provide an alias STARTDATE for the hire date.

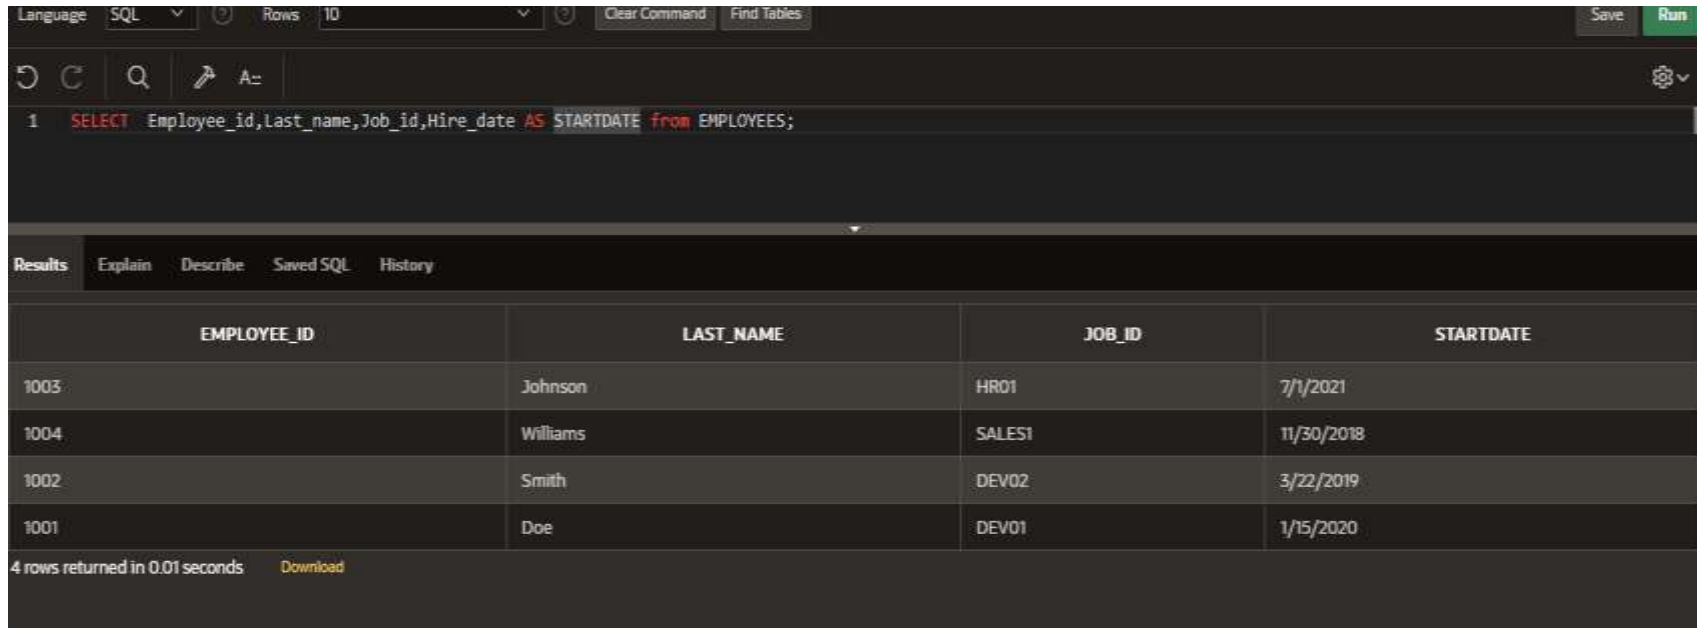


The screenshot shows a SQL IDE interface. At the top, there's a toolbar with 'Language' set to 'SQL', 'Rows' set to '10', and buttons for 'Clear Command' and 'Find Tables'. Below the toolbar is a command area with a SQL query: `1 SELECT Employee_id, Last_name, Job_id, Hire_date AS STARTDATE from EMPLOYEES;`. The query is executed, and the results are displayed in a table below. The table has four columns: 'EMPLOYEE_ID', 'LAST_NAME', 'JOB_ID', and 'STARTDATE'. There are four rows of data. At the bottom of the results area, it says '4 rows returned in 0.01 seconds' and there is a 'Download' link.

EMPLOYEE_ID	LAST_NAME	JOB_ID	STARTDATE
1003	Johnson	HR01	7/1/2021
1004	Williams	SALES1	11/30/2018
1002	Smith	DEV02	3/22/2019
1001	Doe	DEV01	1/15/2020

4 rows returned in 0.01 seconds [Download](#)

5. Create a query to display unique job codes from the employee table.

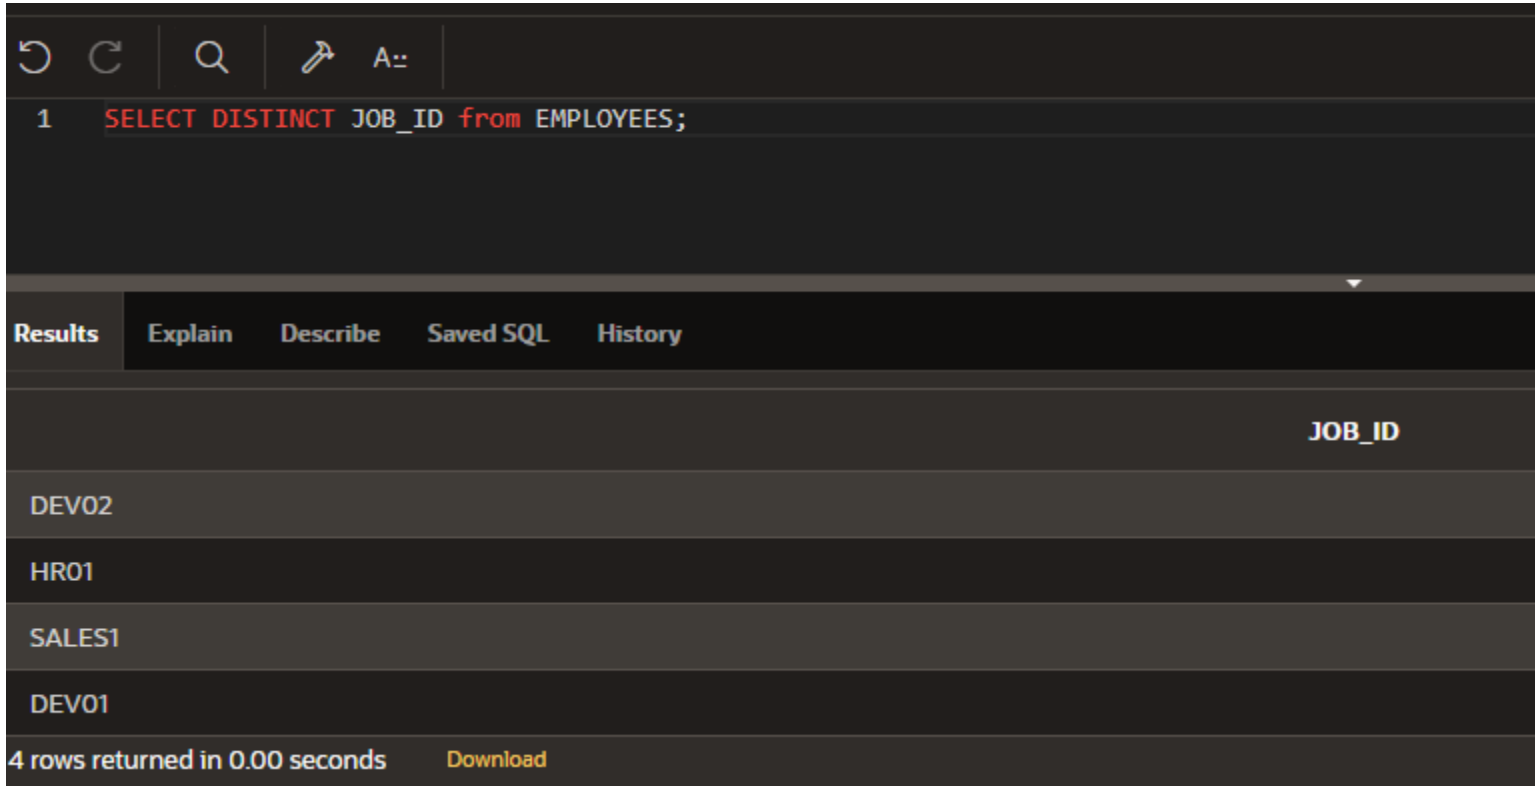

The screenshot shows a SQL IDE interface. At the top, there is a toolbar with icons for undo, redo, search, and a command prompt. Below the toolbar, a SQL query is entered in a text area:


```
1 SELECT DISTINCT JOB_ID from EMPLOYEES;
```

Below the query editor, there is a tabbed interface with four tabs: "Results", "Explain", "Describe", and "History". The "Results" tab is currently selected. The results are displayed in a table with a single column header "JOB_ID". The table contains four rows of data:

JOB_ID
DEV02
HR01
SALES1
DEV01

At the bottom of the interface, a status bar indicates "4 rows returned in 0.00 seconds" and provides a "Download" link.

6. Display the last name concatenated with the job ID , separated by a comma and space, and name the column EMPLOYEE and TITLE.

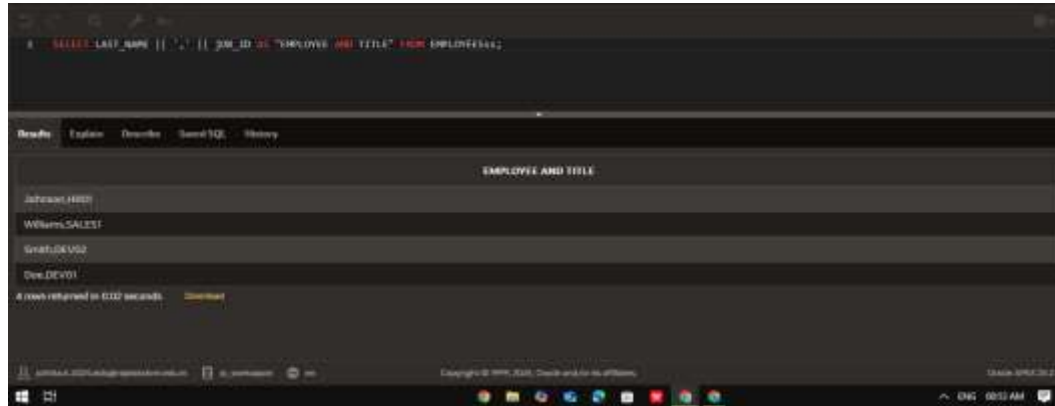


The screenshot shows a SQL query execution interface. The query entered is: `SELECT LAST_NAME || ',' || JOB_ID AS "EMPLOYEE AND TITLE" FROM EMPLOYEES;`. The results are displayed in a table with the title "EMPLOYEE AND TITLE". The table contains four rows of data. Below the table, it states "4 rows returned in 0.127 seconds." and there is a "Download" button. The interface includes tabs for "Results", "Explain", "Describe", "Save SQL", and "History". The bottom of the window shows a Windows taskbar with the time 10:51 AM.

```
SELECT LAST_NAME || ',' || JOB_ID AS "EMPLOYEE AND TITLE" FROM EMPLOYEES;
```

EMPLOYEE AND TITLE
Johnston,HRER
Williams,SALES
Gietz,SK US2
Doe,DEV01

4 rows returned in 0.127 seconds. [Download](#)

7. Create a query to display all the data from the employees table. Separate each column by a comma. Name the column THE_OUTPUT

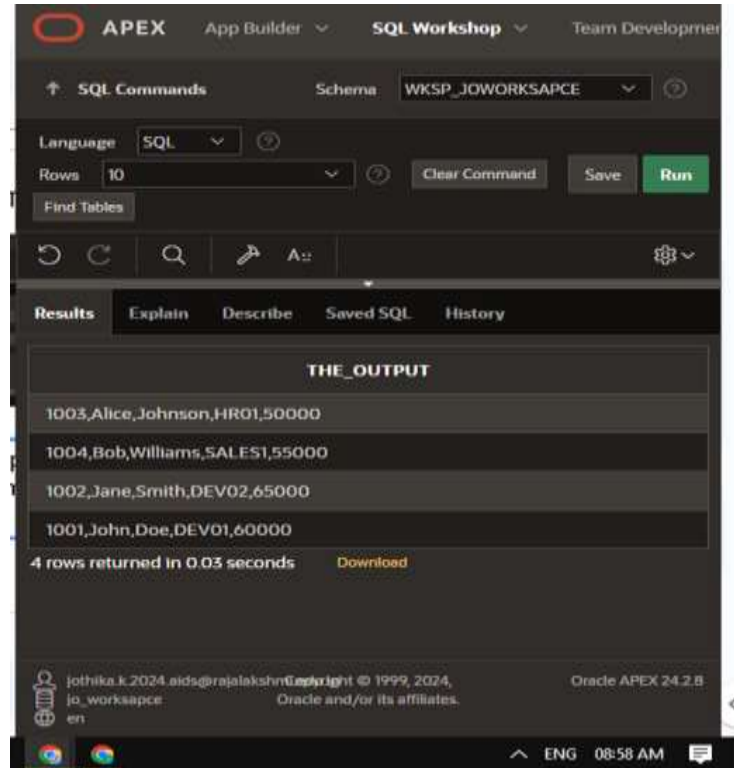

The screenshot shows the Oracle APEX SQL Workshop interface. At the top, the navigation bar includes 'APEX', 'App Builder', 'SQL Workshop', and 'Team Developer'. Below this, the 'SQL Commands' section is active, showing the schema 'WKSP_JOWORKSPACE'. The 'Language' is set to 'SQL', and the 'Rows' limit is '10'. There are buttons for 'Clear Command', 'Save', and 'Run'. A 'Find Tables' button is also present. Below the command area, there are icons for refresh, undo, redo, search, and a settings icon. The 'Results' tab is selected, displaying a table titled 'THE_OUTPUT'. The table contains four rows of employee data. Below the table, it states '4 rows returned in 0.03 seconds' and provides a 'Download' link. At the bottom, there is a footer with copyright information and the Oracle APEX version '24.2.8'.

THE_OUTPUT					
1003	Alice	Johnson	HR01	50000	
1004	Bob	Williams	SALES1	55000	
1002	Jane	Smith	DEV02	65000	
1001	John	Doe	DEV01	60000	

4 rows returned in 0.03 seconds [Download](#)

jothika.k.2024.aids@rajalakshmi Copyright © 1999, 2024, Oracle and/or its affiliates. Oracle APEX 24.2.8