

DATABASE MANAGEMENT SYSTEM


CS23332

EXERCISE 10

USING THE SET OPERATORS

ISHWARYA L
241801098

1. Create MY_EMPLOYEE table with the following structure

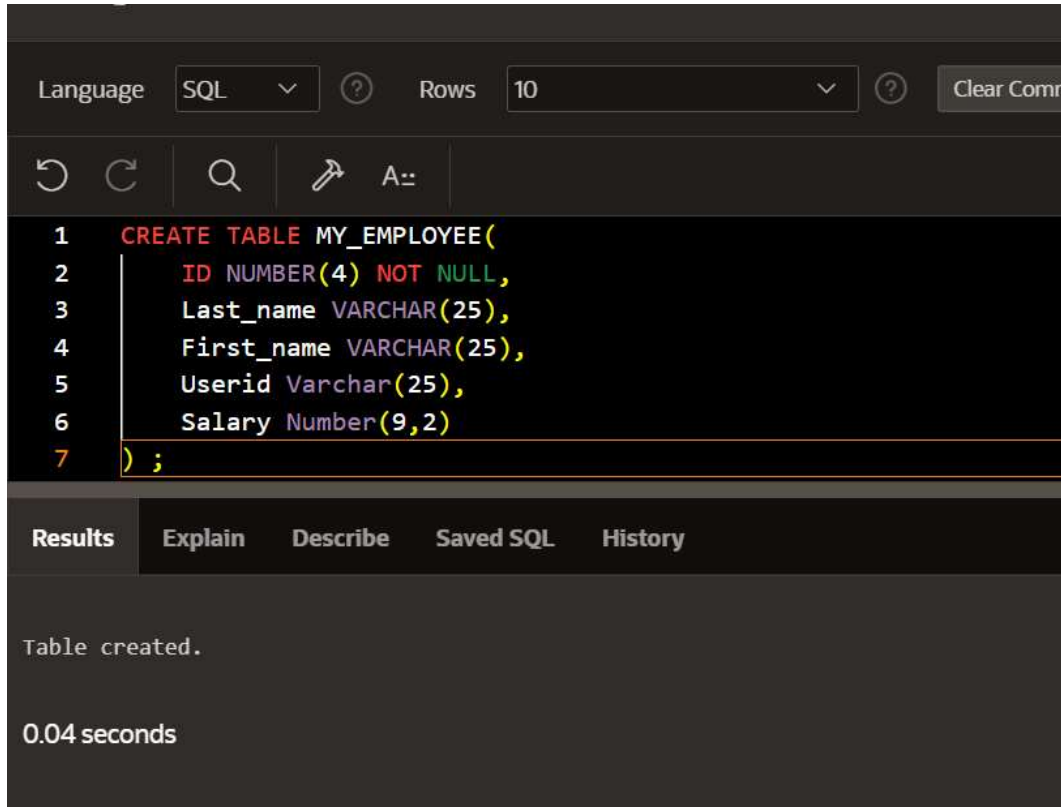


The screenshot shows a SQL IDE interface. At the top, there is a toolbar with a 'Language' dropdown set to 'SQL', a 'Rows' dropdown set to '10', and a 'Clear Command' button. Below the toolbar is a command area with icons for undo, redo, search, and a 'Run' button (a green play icon). The main area displays the following SQL code:

```
1 CREATE TABLE MY_EMPLOYEE(  
2     ID NUMBER(4) NOT NULL,  
3     Last_name VARCHAR(25),  
4     First_name VARCHAR(25),  
5     Userid Varchar(25),  
6     Salary Number(9,2)  
7 );
```

Below the code editor, there is a tabbed interface with five tabs: 'Results', 'Explain', 'Describe', 'Saved SQL', and 'History'. The 'Results' tab is selected and shows the message 'Table created.' and the execution time '0.04 seconds'.

2. Add the first and second rows data to MY_EMPLOYEE table from the following sampled data.
3. Display the table with values.

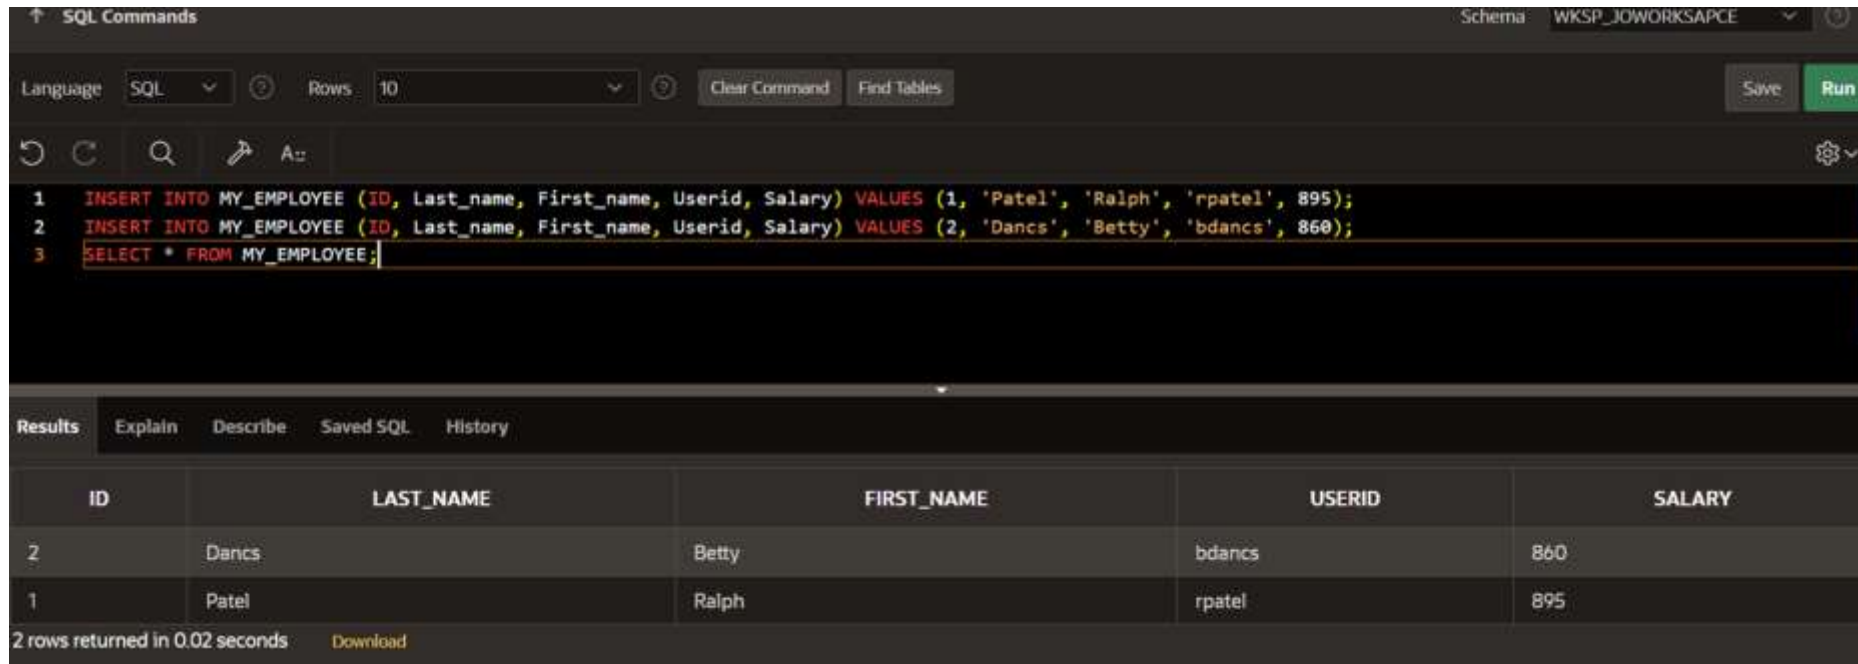

The screenshot shows a SQL IDE interface. At the top, the 'SQL Commands' tab is active, and the schema is set to 'WKSP_JOWORKSPACE'. The language is set to 'SQL' and the number of rows to display is set to '10'. The SQL commands entered are:


```
1 INSERT INTO MY_EMPLOYEE (ID, Last_name, First_name, Userid, Salary) VALUES (1, 'Patel', 'Ralph', 'rpatel', 895);
2 INSERT INTO MY_EMPLOYEE (ID, Last_name, First_name, Userid, Salary) VALUES (2, 'Dancs', 'Betty', 'bdancs', 860);
3 SELECT * FROM MY_EMPLOYEE;
```

The 'Results' tab is selected, showing the output of the SQL commands. The results are displayed in a table with the following columns: ID, LAST_NAME, FIRST_NAME, USERID, and SALARY. The table contains two rows of data:

ID	LAST_NAME	FIRST_NAME	USERID	SALARY
2	Dancs	Betty	bdancs	860
1	Patel	Ralph	rpatel	895

At the bottom, it indicates '2 rows returned in 0.02 seconds' and provides a 'Download' link.

4. Populate the next two rows of data from the sample data. Concatenate the first letter of the first_name with the first seven characters of the last_name to produce Userid.

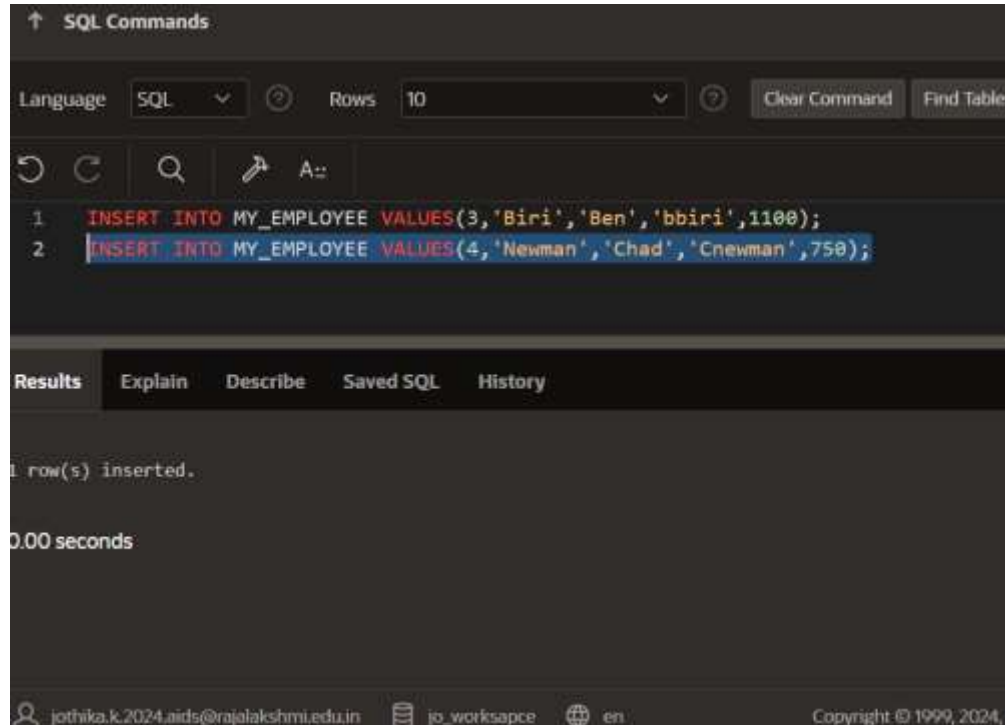

The screenshot shows a SQL command interface with a dark theme. At the top, there's a 'SQL Commands' header. Below it, a 'Language' dropdown is set to 'SQL', and a 'Rows' dropdown is set to '10'. There are buttons for 'Clear Command' and 'Find Tables'. The command area contains two SQL statements: `1 INSERT INTO MY_EMPLOYEE VALUES(3,'Biri','Ben','bbiri',1100);` and `2 INSERT INTO MY_EMPLOYEE VALUES(4,'Newman','Chad','Cnewman',750);`. Below the command area, there's a 'Results' tab selected, showing '1 row(s) inserted.' and '0.00 seconds'. The footer contains a user email 'jothika.k.2024.aids@rajalakshmi.edu.in', a workspace name 'jo_worksapce', a language 'en', and a copyright notice 'Copyright © 1999, 2024,'.

```
↑ SQL Commands

Language SQL Rows 10 Clear Command Find Tables

1 INSERT INTO MY_EMPLOYEE VALUES(3,'Biri','Ben','bbiri',1100);
2 INSERT INTO MY_EMPLOYEE VALUES(4,'Newman','Chad','Cnewman',750);


Results Explain Describe Saved SQL History

1 row(s) inserted.

0.00 seconds

jothika.k.2024.aids@rajalakshmi.edu.in jo_worksapce en Copyright © 1999, 2024,
```

5. Make the data additions permanent.

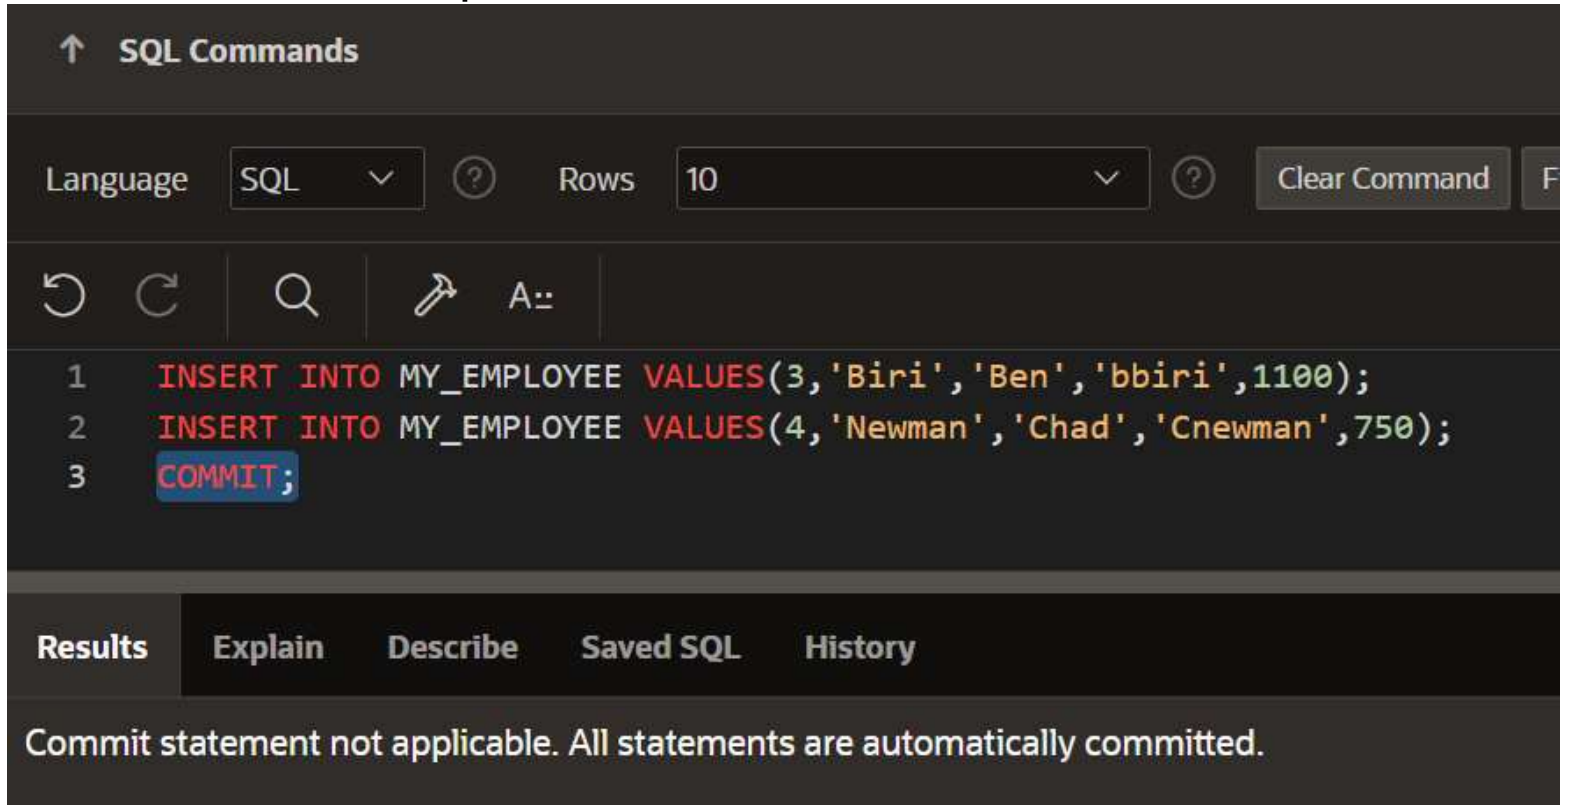


The screenshot shows a SQL command interface with a dark theme. At the top, there's a header "SQL Commands" with an upward arrow. Below it, there are controls for "Language" (set to "SQL" with a dropdown arrow and a help icon) and "Rows" (set to "10" with a dropdown arrow and a help icon). A "Clear Command" button is on the right. Below these controls is a toolbar with icons for undo, redo, search, and a keyboard shortcut "A::". The main area contains three lines of SQL code:

```
1  INSERT INTO MY_EMPLOYEE VALUES(3,'Biri','Ben','bbiri',1100);
2  INSERT INTO MY_EMPLOYEE VALUES(4,'Newman','Chad','Cnewman',750);
3  COMMIT;
```

Below the code is a tabbed interface with "Results" selected, and other tabs for "Explain", "Describe", "Saved SQL", and "History". At the bottom, a message states: "Commit statement not applicable. All statements are automatically committed."

6. Change the last name of employee 3 to Drexler.

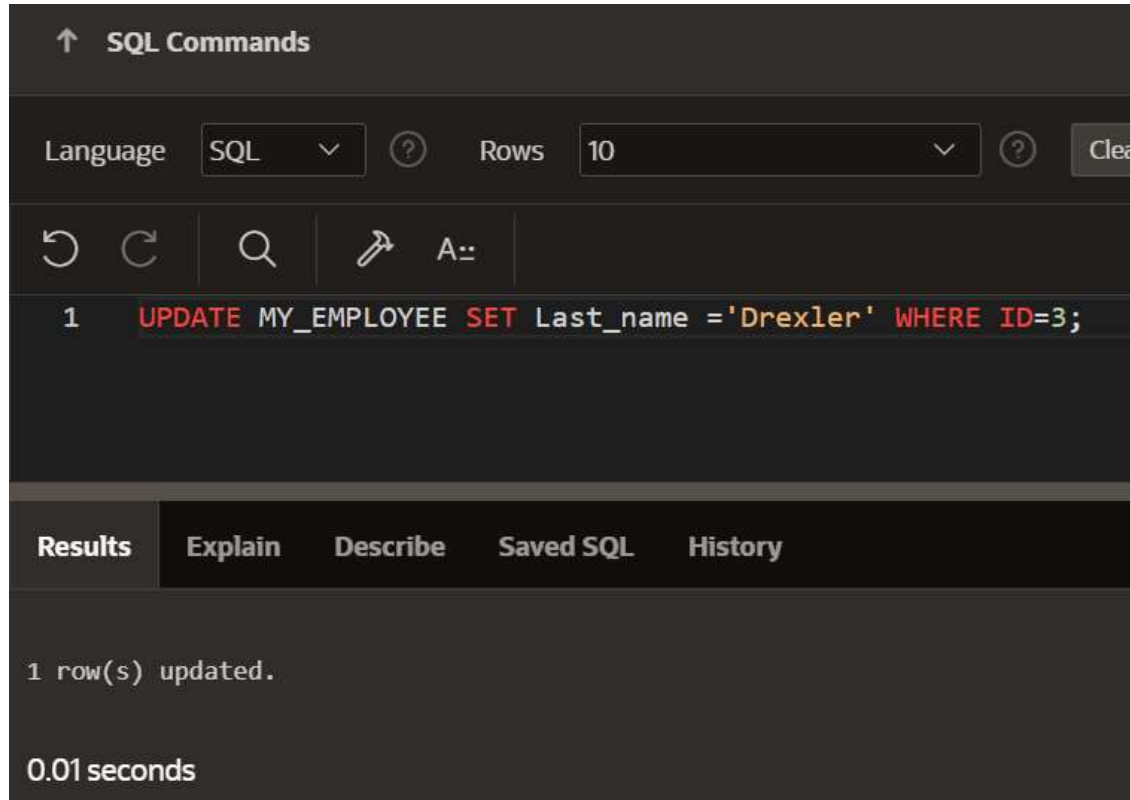

The screenshot shows a SQL command interface with a dark theme. At the top, there's a section titled "SQL Commands" with an upward arrow. Below this, there are controls for "Language" (set to "SQL") and "Rows" (set to "10"). A toolbar contains icons for undo, redo, search, and a save icon, along with a text input field containing "A:". The main area displays a single SQL command: `1 UPDATE MY_EMPLOYEE SET Last_name = 'Drexler' WHERE ID=3;`. Below the command, there's a tabbed interface with "Results" selected, showing the output: "1 row(s) updated." and "0.01 seconds". Other tabs include "Explain", "Describe", "Saved SQL", and "History".

↑ SQL Commands

Language SQL Rows 10 Clear

↶ ↷ 🔍 📌 A::


```
1 UPDATE MY_EMPLOYEE SET Last_name = 'Drexler' WHERE ID=3;
```

Results Explain Describe Saved SQL History

1 row(s) updated.

0.01 seconds

7. Change the salary to 1000 for all the employees with a salary less than 900.

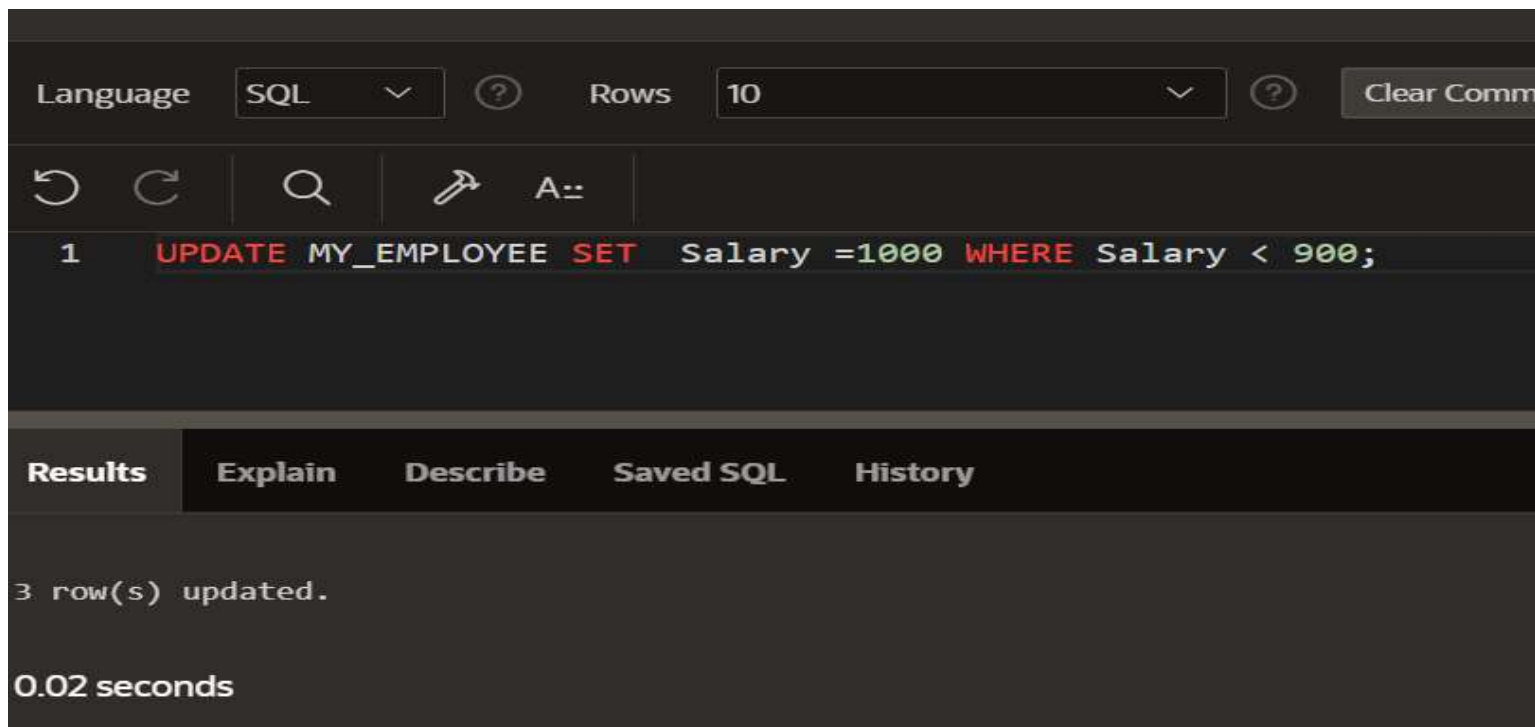

The screenshot shows a SQL IDE interface. At the top, there is a toolbar with 'Language' set to 'SQL' and 'Rows' set to '10'. Below the toolbar is a search bar and a 'Clear Comm' button. The main area displays a SQL statement: `1 UPDATE MY_EMPLOYEE SET Salary =1000 WHERE Salary < 900;`. Below the statement is a tabbed interface with 'Results', 'Explain', 'Describe', 'Saved SQL', and 'History'. The 'Results' tab is active, showing '3 row(s) updated.' and '0.02 seconds'.

Language SQL Rows 10 Clear Comm

↶ ↷ 🔍 🛠 A::


```
1 UPDATE MY_EMPLOYEE SET Salary =1000 WHERE Salary < 900;
```

Results Explain Describe Saved SQL History

3 row(s) updated.

0.02 seconds

8. Delete Betty dancs from MY_EMPLOYEE table.

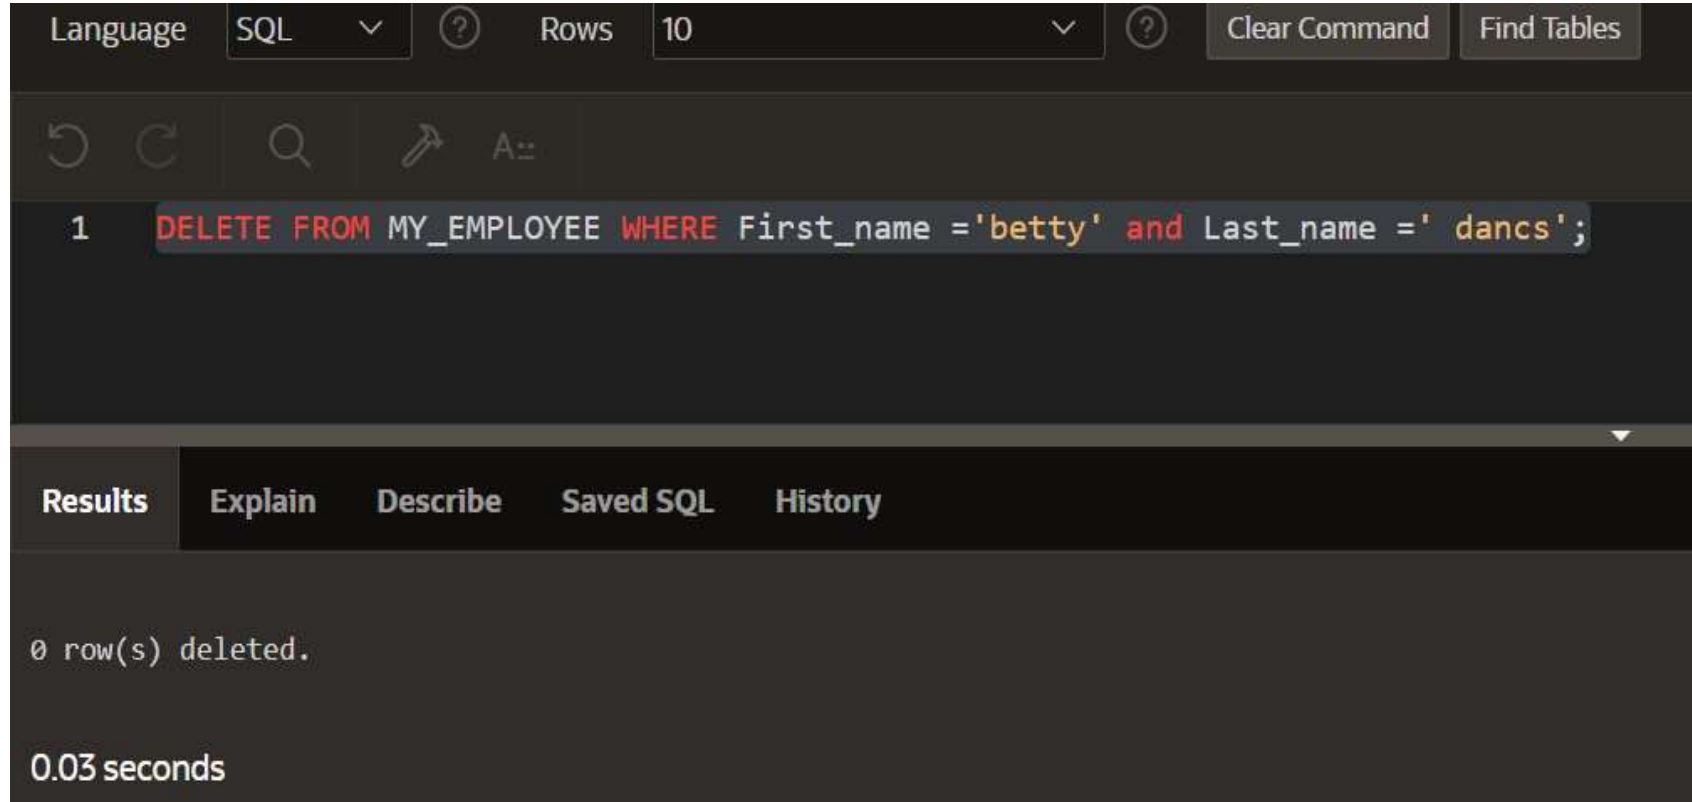

The screenshot shows a SQL client interface with a dark theme. At the top, there are controls for 'Language' (set to SQL), 'Rows' (set to 10), and buttons for 'Clear Command' and 'Find Tables'. Below these are icons for undo, redo, search, and a toolbar. The main text area contains a SQL command: `1 DELETE FROM MY_EMPLOYEE WHERE First_name ='betty' and Last_name =' dancs';`. Below the command area is a tabbed interface with 'Results' selected, showing '0 row(s) deleted.' and '0.03 seconds'.

Language SQL Rows 10 Clear Command Find Tables

1 `DELETE FROM MY_EMPLOYEE WHERE First_name ='betty' and Last_name =' dancs';`

Results Explain Describe Saved SQL History

0 row(s) deleted.

0.03 seconds

9. Empty the fourth row of the emp table.

Language

SQL

?

Rows

10









A::

1 **DELETE FROM MY_EMPLOYEE WHERE ID=4;**

Results

Explain

Describe

Saved SQL

History

1 row(s) deleted.

0.00 seconds