

DATABASE MANAGEMENT SYSTEM


CS23332

EXERCISE 7

DISPLAYING DATA FROM MULTIPLE TABLES

ISHWARYA L
241801098

1. Create MY_EMPLOYEE table with the following structure

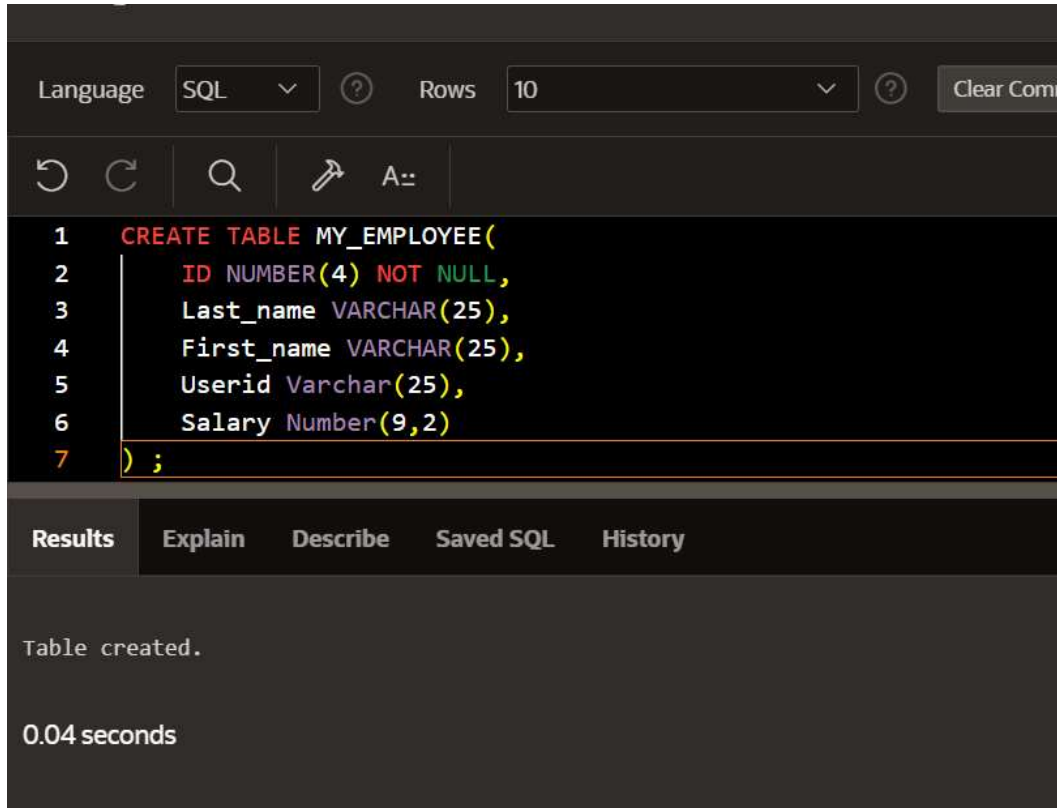


The screenshot shows a SQL IDE interface. At the top, there is a toolbar with a 'Language' dropdown set to 'SQL', a 'Rows' dropdown set to '10', and a 'Clear Command' button. Below the toolbar is a command area with icons for undo, redo, search, and a prompt 'A:'. The main editor area contains the following SQL code:

```
1 CREATE TABLE MY_EMPLOYEE(  
2     ID NUMBER(4) NOT NULL,  
3     Last_name VARCHAR(25),  
4     First_name VARCHAR(25),  
5     Userid Varchar(25),  
6     Salary Number(9,2)  
7 );
```

Below the editor, there is a tabbed interface with 'Results' selected. The 'Results' tab shows the message 'Table created.' and the execution time '0.04 seconds'. Other tabs include 'Explain', 'Describe', 'Saved SQL', and 'History'.

2. Add the first and second rows data to MY_EMPLOYEE table from the following sampled data.
3. Display the table with values.

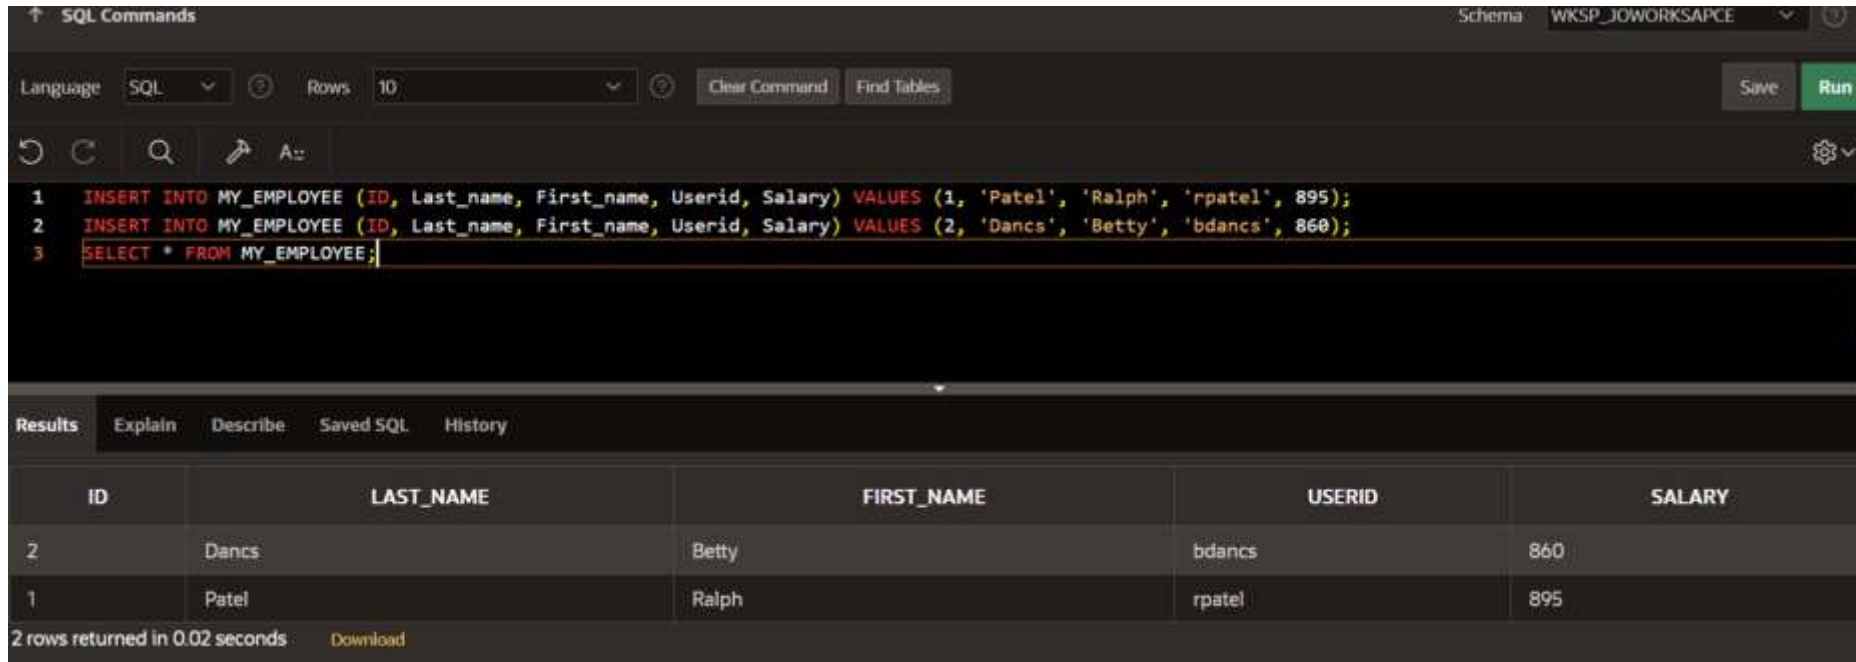

The screenshot shows a SQL IDE interface. At the top, the 'SQL Commands' tab is active, showing the schema 'WKSP_JOWORKSPACE'. The language is set to 'SQL' and the number of rows to display is '10'. The SQL commands entered are:


```
1 INSERT INTO MY_EMPLOYEE (ID, Last_name, First_name, Userid, Salary) VALUES (1, 'Patel', 'Ralph', 'rpatel', 895);
2 INSERT INTO MY_EMPLOYEE (ID, Last_name, First_name, Userid, Salary) VALUES (2, 'Dancs', 'Betty', 'bdancs', 860);
3 SELECT * FROM MY_EMPLOYEE;
```

Below the commands, the 'Results' tab is active, displaying the output of the SQL commands. The results are shown in a table with the following columns: ID, LAST_NAME, FIRST_NAME, USERID, and SALARY. The table contains two rows of data:

ID	LAST_NAME	FIRST_NAME	USERID	SALARY
2	Dancs	Betty	bdancs	860
1	Patel	Ralph	rpatel	895

At the bottom, it indicates '2 rows returned in 0.02 seconds' and provides a 'Download' link.

4. Populate the next two rows of data from the sample data. Concatenate the first letter of the first_name with the first seven characters of the last_name to produce Userid.

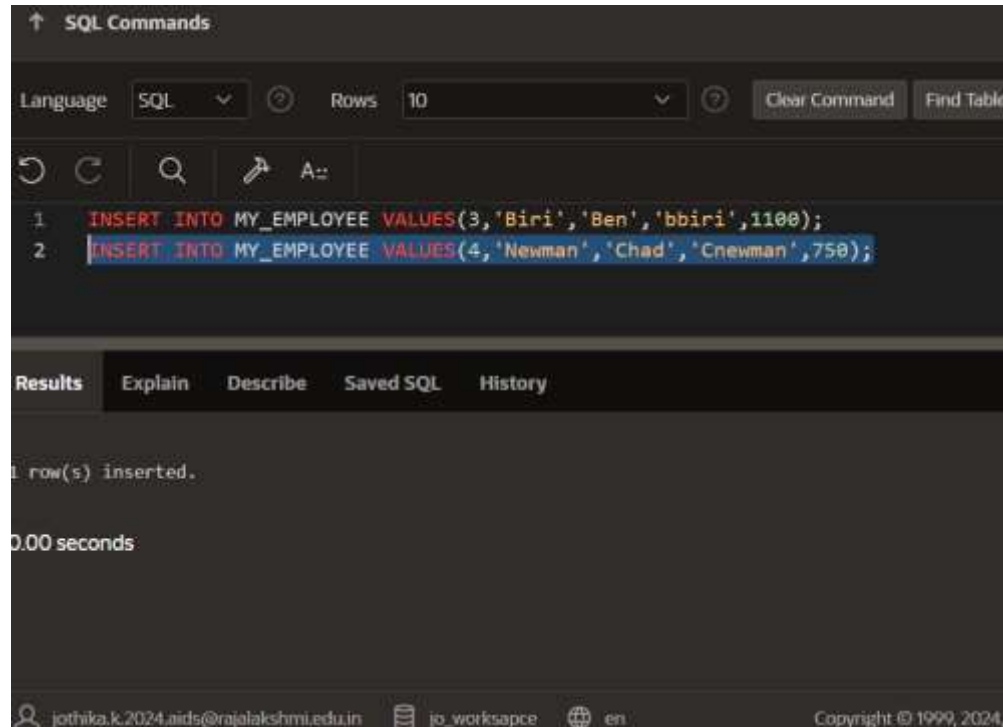

The screenshot shows a SQL command window with the following content:

```
SQL Commands

Language: SQL Rows: 10 Clear Command Find Tables

1 INSERT INTO MY_EMPLOYEE VALUES(3,'Biri','Ben','bbiri',1100);
2 INSERT INTO MY_EMPLOYEE VALUES(4,'Newman','Chad','Cnewman',750);

Results Explain Describe Saved SQL History

1 row(s) inserted.

0.00 seconds
```

The footer of the window displays the email address `jothika.k.2024.aids@rajalakshmi.edu.in`, the workspace name `jo_worksapce`, the language `en`, and the copyright notice `Copyright © 1999, 2024,`.

5. Make the data additions permanent.

↑ SQL Commands

Language SQL ? Rows 10 ? Clear Command F

 A::

1 INSERT INTO MY_EMPLOYEE VALUES(3,'Biri','Ben','bbiri',1100);

2 INSERT INTO MY_EMPLOYEE VALUES(4,'Newman','Chad','Cnewman',750);

3 COMMIT;

Results

Explain


Describe

Saved SQL

History

Commit statement not applicable. All statements are automatically committed.

6. Change the last name of employee 3 to Drexler.

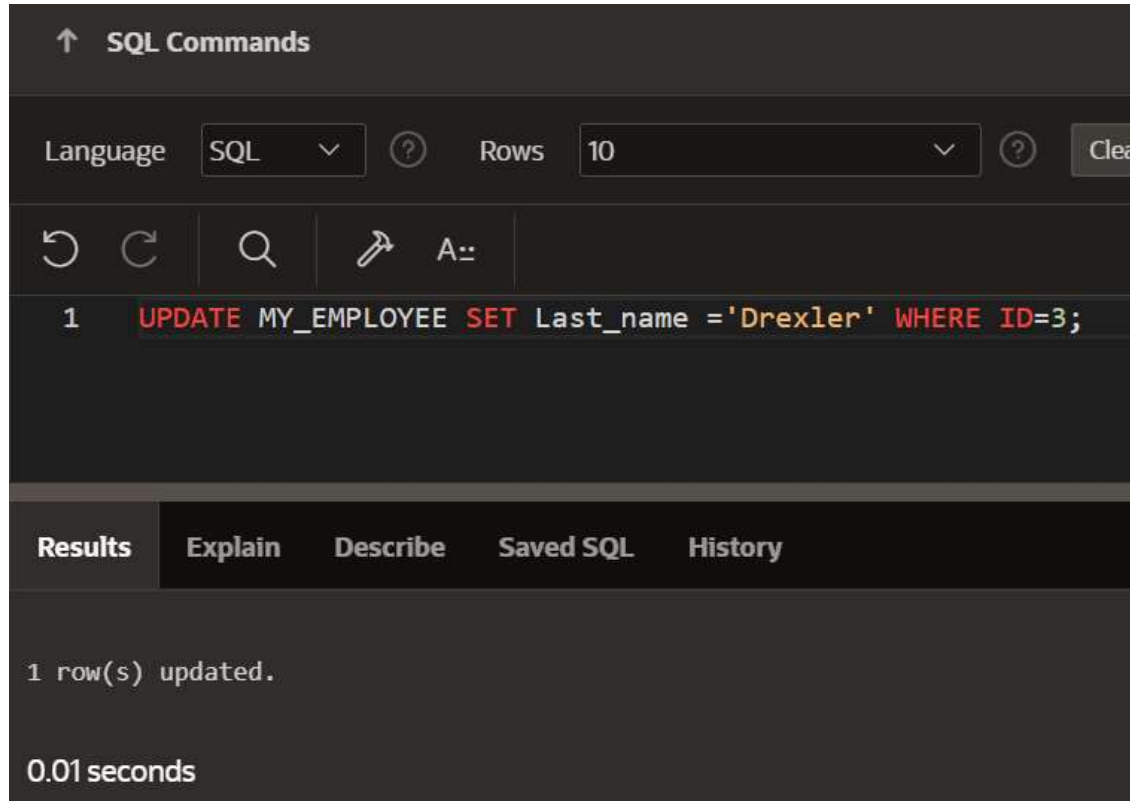

The screenshot shows a SQL command interface with a dark theme. At the top, there's a header "SQL Commands" with an upward arrow. Below it, there are controls for "Language" (set to "SQL" with a dropdown arrow and a help icon) and "Rows" (set to "10" with a dropdown arrow and a help icon). A "Clear" button is on the right. Below these are icons for undo, redo, search, and a save icon, followed by a text input field containing "A:". The main area displays a single SQL command: `1 UPDATE MY_EMPLOYEE SET Last_name = 'Drexler' WHERE ID=3;`. At the bottom, there's a tabbed interface with "Results" selected, showing the output: "1 row(s) updated." and "0.01 seconds". Other tabs include "Explain", "Describe", "Saved SQL", and "History".

↑ SQL Commands

Language SQL ? Rows 10 ? Clear

↶ ↷ 🔍 📌 A::


```
1 UPDATE MY_EMPLOYEE SET Last_name = 'Drexler' WHERE ID=3;
```

Results Explain Describe Saved SQL History

1 row(s) updated.

0.01 seconds

7. Change the salary to 1000 for all the employees with a salary less than 900.

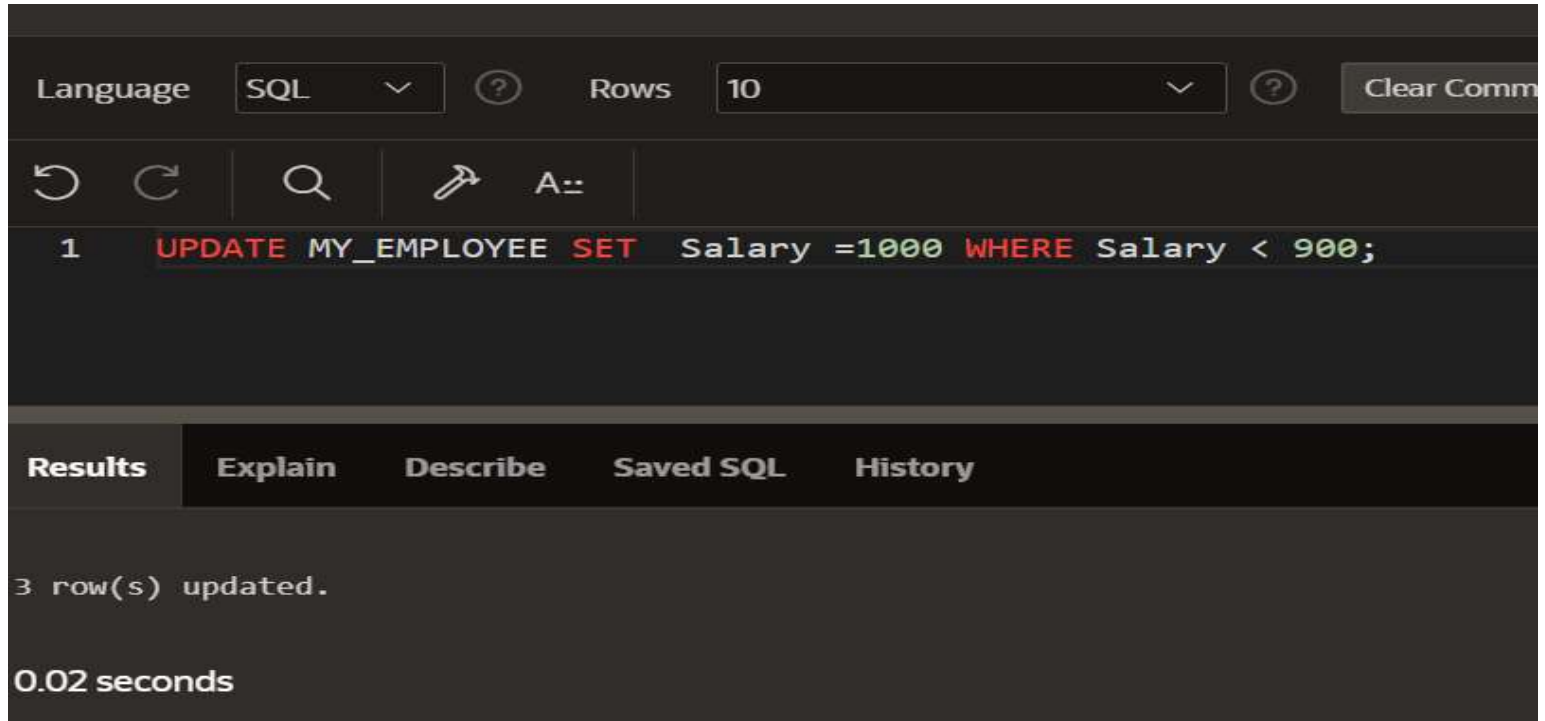

The screenshot shows a SQL query execution interface. At the top, there are controls for 'Language' (set to 'SQL') and 'Rows' (set to '10'). Below these are icons for undo, redo, search, and a 'Run' button (represented by a lightning bolt icon). The SQL query entered is: `1 UPDATE MY_EMPLOYEE SET Salary =1000 WHERE Salary < 900;`. Below the query, there is a tabbed interface with 'Results' selected. The 'Results' tab shows the message '3 row(s) updated.' and the execution time '0.02 seconds'.

Language SQL ? Rows 10 ? Clear Comm

↶ ↷ 🔍 ⚡ A::


1 `UPDATE MY_EMPLOYEE SET Salary =1000 WHERE Salary < 900;`

Results Explain Describe Saved SQL History

3 row(s) updated.

0.02 seconds

8. Delete Betty dancs from MY _EMPLOYEE table.

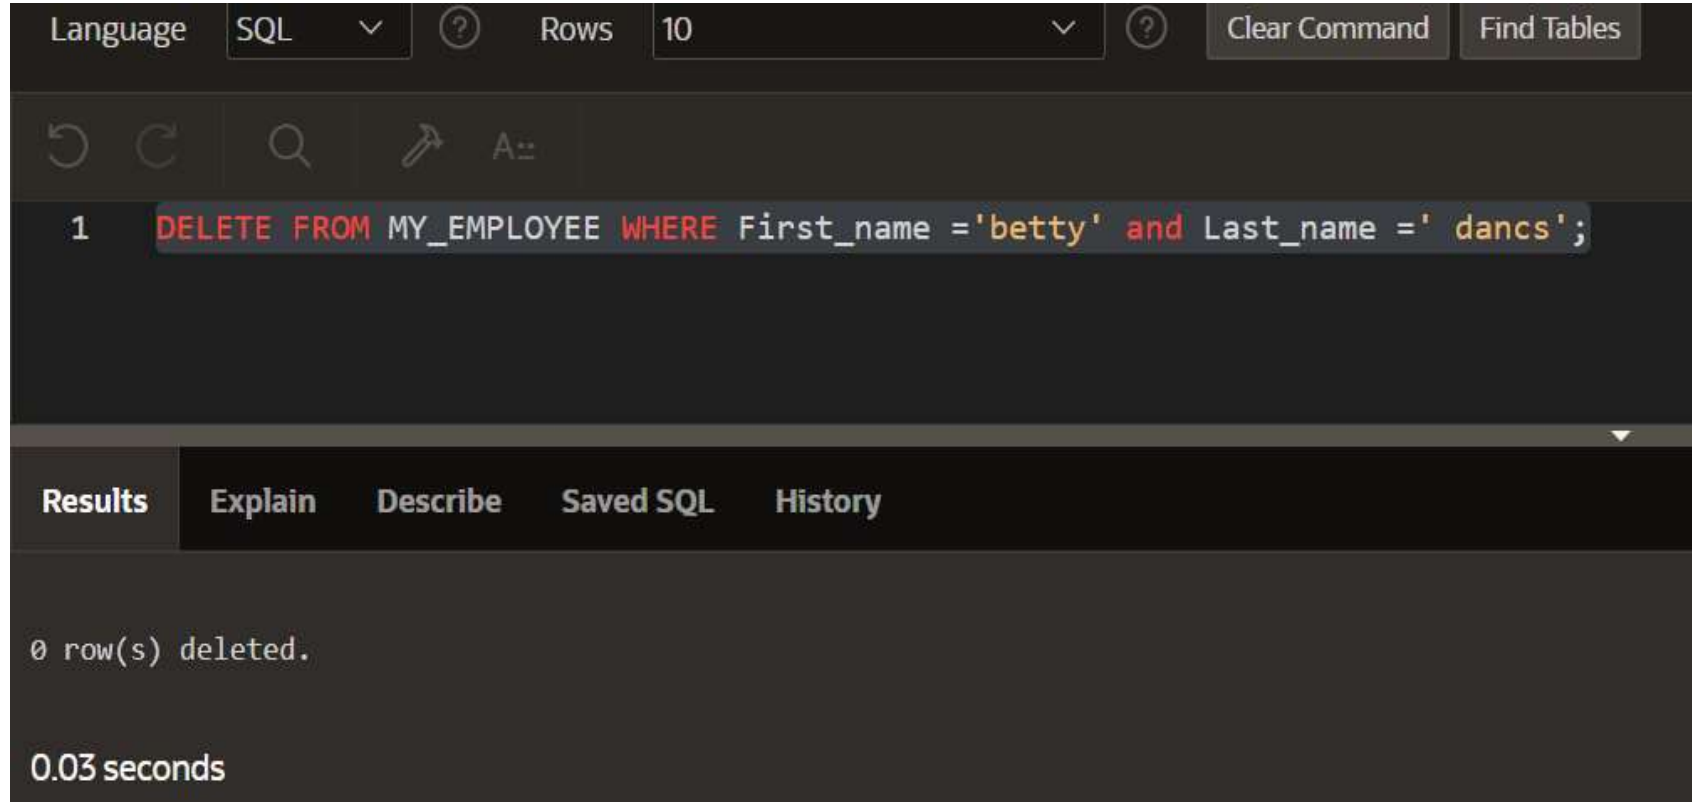

The screenshot shows a SQL client interface with a dark theme. At the top, there are controls for 'Language' (set to SQL), 'Rows' (set to 10), and buttons for 'Clear Command' and 'Find Tables'. Below these are icons for undo, redo, search, and a toolbar. The main area contains a single SQL command: `1 DELETE FROM MY_EMPLOYEE WHERE First_name ='betty' and Last_name =' dancs';`. Below the command area is a tabbed interface with 'Results' selected, followed by 'Explain', 'Describe', 'Saved SQL', and 'History'. The 'Results' tab shows the message '0 row(s) deleted.' and the execution time '0.03 seconds'.

Language SQL Rows 10 Clear Command Find Tables

1 `DELETE FROM MY_EMPLOYEE WHERE First_name ='betty' and Last_name =' dancs';`

Results Explain Describe Saved SQL History

0 row(s) deleted.

0.03 seconds

9. Empty the fourth row of the emp table.

Language SQL ? Rows 10

    A::

1 **DELETE FROM MY_EMPLOYEE WHERE ID=4;**

Results Explain Describe Saved SQL History

1 row(s) deleted.

0.00 seconds