


API to Update Customer Address in Oracle TCA R12 (HZ_LOCATION_V2PUB.UPDATE_LOCATION)

IN [API](#) , [API TO UPDATE CUSTOMER ADDRESS IN ORACLE TCA R12](#) , [AR QUERIES](#) , [CUSTOMER API](#) , [HZ_LOCATION_V2PUB.UPDATE_LOCATION](#) - ON 7:10:00 PM - NO COMMENTS

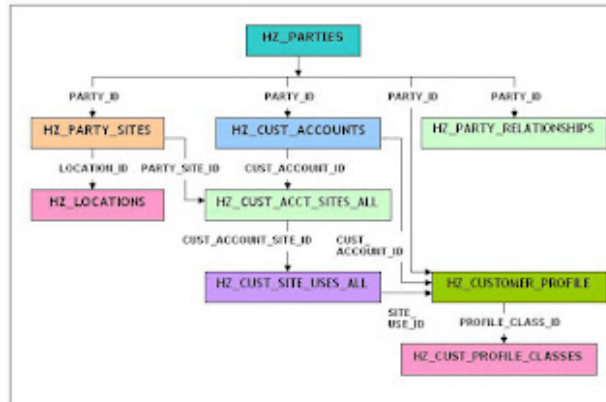

With the help of the below script, we can update the existing customer address stored in the table "HZ_LOCATIONS".

API: HZ_LOCATION_V2PUB.UPDATE_LOCATION

Test Instance: R12.1.3

Script:

```
SET SERVEROUTPUT ON;
DECLARE
p_location_rec      HZ_LOCATION_V2PUB.LOCATION_REC_TYPE;
p_object_version_number NUMBER;
x_return_status      VARCHAR2(2000);
x_msg_count          NUMBER;
x_msg_data           VARCHAR2(2000);

BEGIN
-- Setting the Context --
mo_global.init('AR');
fnd_global.apps_initialize ( user_id    => 1318
                             ,resp_id    => 50559
                             ,resp_appl_id => 222);
mo_global.set_policy_context('S',204);
fnd_global.set_nls_context('AMERICAN');
```

```

-- Initializing the Mandatory API parameters
p_location_rec.location_id := 28195; -- HZ_LOCATIONS.LOCATION_ID
p_location_rec.address2    := FND_API.G_MISS_CHAR;
p_location_rec.address1    := 'test Oracle Apps 1';
p_object_version_number   := 1;

DBMS_OUTPUT.PUT_LINE('Calling the API hz_location_v2pub.update_location');

hz_location_v2pub.update_location
(
    p_init_msg_list      => FND_API.G_TRUE,
    p_location_rec       => p_location_rec,
    p_object_version_number => p_object_version_number,
    x_return_status      => x_return_status,
    x_msg_count          => x_msg_count,
    x_msg_data           => x_msg_data
);

IF x_return_status = fnd_api.g_ret_sts_success THEN
    COMMIT;
    DBMS_OUTPUT.PUT_LINE('Creation of Location is Successful ');
    DBMS_OUTPUT.PUT_LINE('Output information ....');
    DBMS_OUTPUT.PUT_LINE('New Address1: ' || p_location_rec.address1);
ELSE
    DBMS_OUTPUT.put_line ('Creation of Location failed:' || x_msg_data);
    ROLLBACK;
    FOR i IN 1 .. x_msg_count
    LOOP
        x_msg_data := oe_msg_pub.get( p_msg_index => i, p_encoded => 'F');
        dbms_output.put_line( i || ' ' || x_msg_data);
    END LOOP;
END IF;
DBMS_OUTPUT.PUT_LINE('Completion of API');
END;
/

```

TAGS [API](#) , [API TO UPDATE CUSTOMER ADDRESS IN ORACLE TCA R12](#) , [AR QUERIES](#) , [CUSTOMER API](#) , [HZ_LOCATION_V2PUB.UPDATE_LOCATION](#)

Newer Post

Home

Older Post

[View mobile version](#)